



| <b>TEST REPORT</b><br><b>Total Radiated Power (TRP) Test</b><br><b>Measured in Antenna Full-anechoic Room (A-FAR)</b>                                                                                                             |                                                                                                                         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Report Reference No. .... :                                                                                                                                                                                                       | EMC-24-TRP-6876-102                                                                                                     |
| Date of issue:..... :                                                                                                                                                                                                             | 20 May 2025                                                                                                             |
| Total number pages: .....                                                                                                                                                                                                         | 16                                                                                                                      |
| Applicant's name..... :                                                                                                                                                                                                           | Signify Netherlands B.V.                                                                                                |
| Contact person .....                                                                                                                                                                                                              | Claudia Mutter                                                                                                          |
| Address .....                                                                                                                                                                                                                     | High Tech Campus 7, 5656 AE Eindhoven, The Netherlands                                                                  |
| Copy to (internally) .....                                                                                                                                                                                                        |                                                                                                                         |
| Copy to (externally) .....                                                                                                                                                                                                        |                                                                                                                         |
| <b>General disclaimer:</b><br>The test results presented in this report only relate to the object tested.<br>This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory. |                                                                                                                         |
| <b>Testing location:</b>                                                                                                                                                                                                          |                                                                                                                         |
| Tested by .....                                                                                                                                                                                                                   | J. van der Merwe<br><a href="mailto:jaco.van.der.merwe@signify.com">jaco.van.der.merwe@signify.com</a> +31 (0)611882384 |
| Reviewed by .....                                                                                                                                                                                                                 |                                                                                                                         |
| Testing location/ address .....                                                                                                                                                                                                   | Signify Netherlands B.V., EMC & wireless connectivity lab<br>High Tech Campus 26, 5656 AE Eindhoven, The Netherlands    |
| Date of receipt of test item .....                                                                                                                                                                                                | 13-Aug-2024                                                                                                             |
| Date(s) of performance of tests...                                                                                                                                                                                                | 14-Aug-2024                                                                                                             |
| <b>General remarks:</b><br>A cross ☒ in a rectangular shape means that this option is applied.                                                                                                                                    |                                                                                                                         |

**Table of Contents:**

|                                             |    |
|---------------------------------------------|----|
| Description of DUT .....                    | 3  |
| Summary of test configuration .....         | 3  |
| Test configuration .....                    | 3  |
| DUT specific configurations .....           | 3  |
| DUT specific configurations pictures .....  | 4  |
| TRP from A-FAR measurement system.....      | 5  |
| Calculated Ranges .....                     | 5  |
| Luminaire-to-luminaire range.....           | 5  |
| Luminaire-to-gateway range.....             | 6  |
| BLE-to-mobile phone range.....              | 6  |
| Antenna pattern results .....               | 7  |
| Reference System.....                       | 14 |
| Appendix 1: TRP Measurement Procedure ..... | 14 |
| References .....                            | 16 |

**Description of DUT**

|                                 |                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Model / Type reference .....    | Final horticulture luminaire TLF20 4160 3.6 RWLB 277-400V WC2 QB SP luminaire, 12NC929003965044 tested for total radiated power (TRP). |
| Supplementary information ..... | ---                                                                                                                                    |

**Summary of test configuration****Test configuration**


Testing is performed in a fully-anechoic (antenna) room. TRP is calculated based on 3D radiation pattern measurement on a grid with 15° increments in both azimuth and elevation angles. Measured EIRP data are processed towards TRP in line with the procedure outlines in [1].

**DUT specific configurations**

|                           |                                                                                       |                                                               |
|---------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------|
| Test distance             | <input type="checkbox"/>                                                              | 3 m                                                           |
| :                         | <input checked="" type="checkbox"/>                                                   | 4.56 m                                                        |
| :                         | <input type="checkbox"/>                                                              | Other:                                                        |
| Supplementary information | The test distance should be larger than 2.5×maximum luminaire dimension as described. |                                                               |
| Transmitted power         | 0, 4, and 10 dBm                                                                      |                                                               |
| Communication type        | <input type="checkbox"/>                                                              | GPRS 2G                                                       |
| :                         | <input type="checkbox"/>                                                              | Other:                                                        |
| Communication channels    | <input checked="" type="checkbox"/>                                                   | Zigbee Channels 11, 18 and 26 and BLE channels 27, 38, and 39 |
| :                         | <input type="checkbox"/>                                                              | Wi-Fi                                                         |
| :                         | <input type="checkbox"/>                                                              | Other:                                                        |
| Operating modes           | No.                                                                                   | Operating mode of test item                                   |
| :                         | 1                                                                                     | Zigbee channels 11, 18, and 26 at 0dBm transmit power         |
| :                         | 2                                                                                     | Zigbee channels 11, 18, and 26 at 4dBm transmit power         |
| :                         | 3                                                                                     | Zigbee channels 11, 18, and 26 at 10dBm transmit power        |
| :                         | 4                                                                                     | BLE channels 37, 38, and 39 at 0dBm transmit power            |

**DUT specific configurations pictures**

Measurements with modules mounted in luminaire

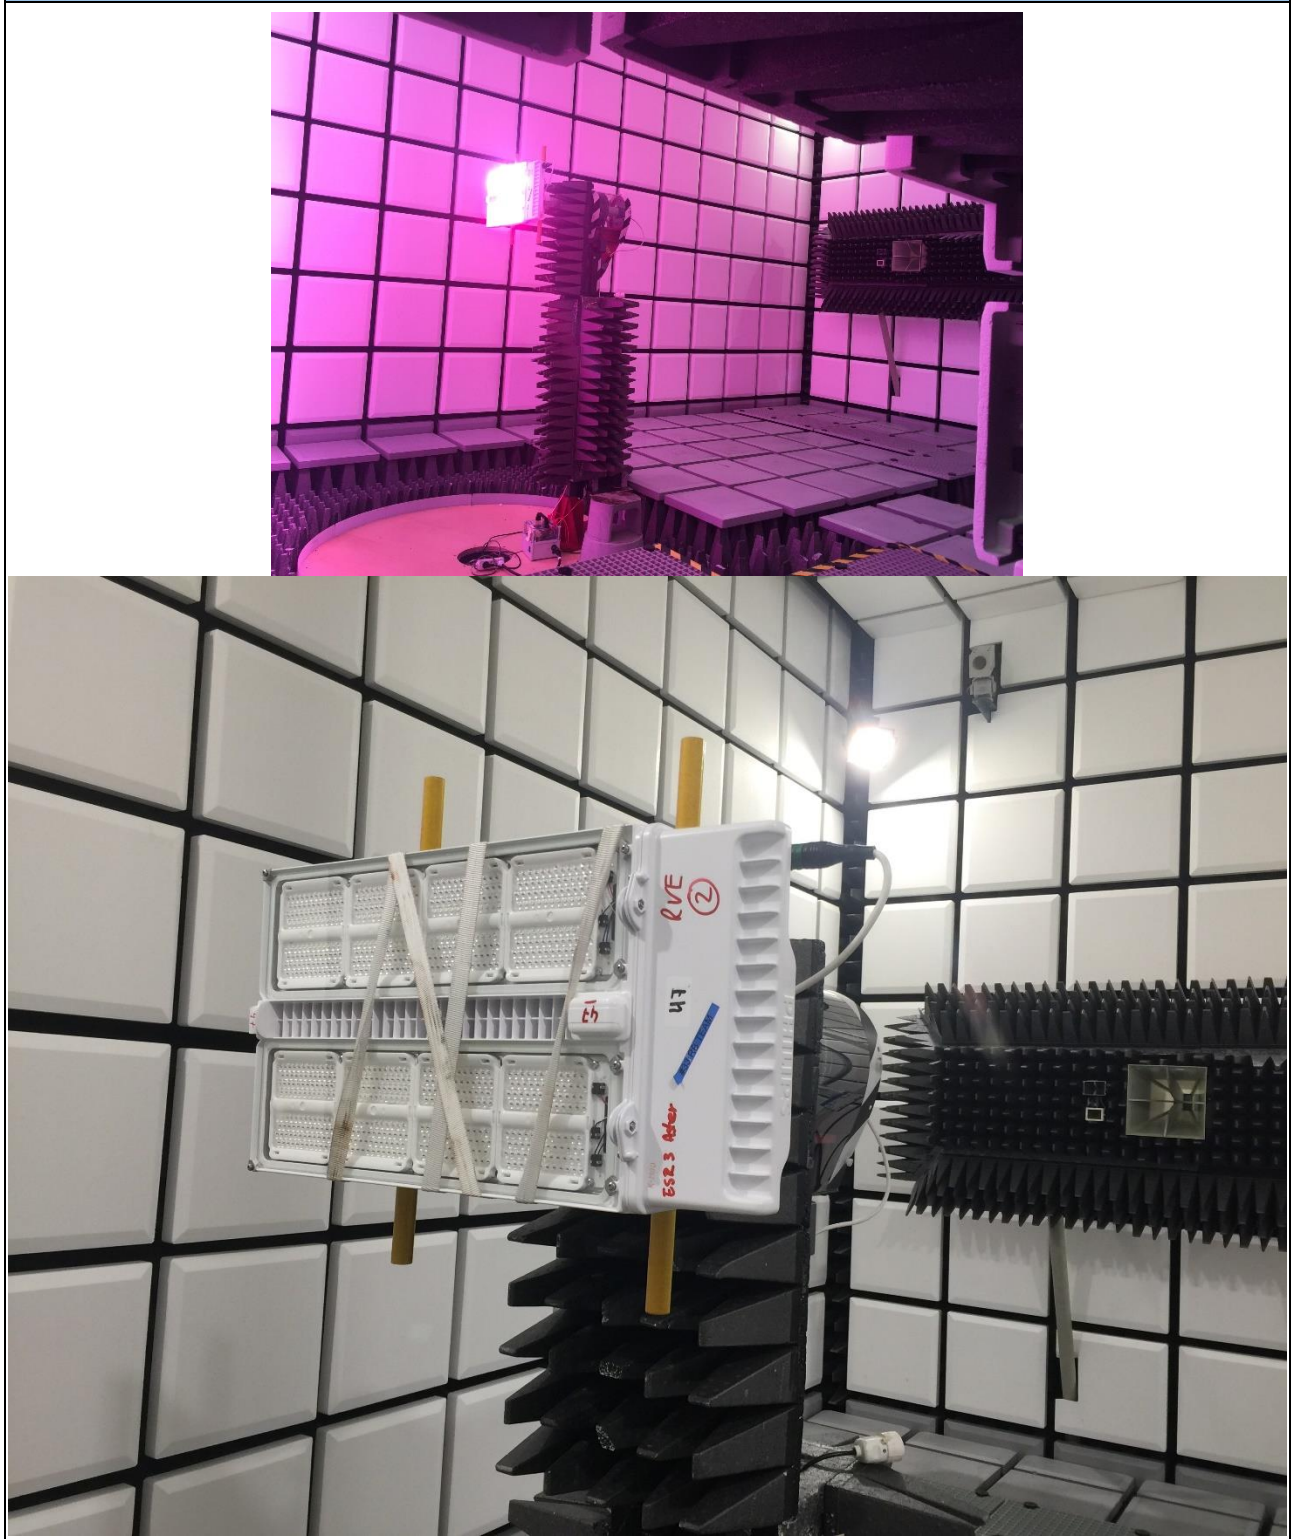

**TRP from A-FAR measurement system**

| Measurement # / Configuration                               | P <sub>TX</sub> | CH | MHz  | TRP      | EIRP <sub>4dirs,min</sub> | EIRP <sub>alldirs,min</sub> | EIRP <sub>hem,min</sub> | Gain <sub>effective</sub> |
|-------------------------------------------------------------|-----------------|----|------|----------|---------------------------|-----------------------------|-------------------------|---------------------------|
| 1a-c Zigbee channels 11, 18, and 26 at 0dBm transmit power  | 0 dBm           | 11 | 2405 | -3.2 dBm | -10.1 dBm                 | -13.2 dBm                   | -10.8 dBm               | +5.3 dBi                  |
|                                                             |                 | 18 | 2440 | -3.6 dBm | -10.8 dBm                 | -12.0 dBm                   | -10.8 dBm               | +4.9 dBi                  |
|                                                             |                 | 26 | 2480 | -4.0 dBm | -9.2 dBm                  | -12.3 dBm                   | -12.2 dBm               | +4.1 dBi                  |
| 2a-c Zigbee channels 11, 18, and 26 at 4dBm transmit power  | 4 dBm           | 11 | 2405 | +0.0 dBm | -7.2 dBm                  | -9.2 dBm                    | -7.4 dBm                | +4.0 dBi                  |
|                                                             |                 | 18 | 2440 | -0.2 dBm | -7.4 dBm                  | -8.6 dBm                    | -7.5 dBm                | +4.0 dBi                  |
|                                                             |                 | 26 | 2480 | +0.1 dBm | -4.8 dBm                  | -8.6 dBm                    | -8.1 dBm                | +4.0 dBi                  |
| 3a-c Zigbee channels 11, 18, and 26 at 10dBm transmit power | 10 dBm          | 11 | 2405 | +2.6 dBm | -3.6 dBm                  | -5.9 dBm                    | -3.9 dBm                | +0.0 dBi                  |
|                                                             |                 | 18 | 2440 | +2.8 dBm | -4.1 dBm                  | -5.3 dBm                    | -4.3 dBm                | +0.5 dBi                  |
|                                                             |                 | 26 | 2480 | +3.8 dBm | -0.9 dBm                  | -4.6 dBm                    | -4.1 dBm                | +1.3 dBi                  |
| 4a-c BLE channels 37, 38, and 39 at 0dBm transmit power     | 0 dBm           | 37 | 2402 | -2.3 dBm | -9.0 dBm                  | -10.9 dBm                   | -9.5 dBm                | +6.2 dBi                  |
|                                                             |                 | 38 | 2426 | -3.5 dBm | -9.8 dBm                  | -12.2 dBm                   | -12.1 dBm               | +5.2 dBi                  |
|                                                             |                 | 39 | 2480 | -4.7 dBm | -9.7 dBm                  | -13.3 dBm                   | -12.8 dBm               | +3.5 dBi                  |

The definitions for the listed minimum EIRP values is given in the next section.

**Calculated Ranges**

In the table in the previous section we listed a number of minimum EIRP values needed for range calculations. The minimum EIRP will result in the maximum range that can be guaranteed. The specific EIRP used is determined by the use scenario, or more specifically, the relative positions of the two radios that will occur in typical installations. The most general expression for range calculation is

$$R = \left( \frac{c}{4\pi f} \right) \cdot \sqrt{\frac{EIRP_{radio1}(\Omega_{radio1-radio2})}{P_{TX,radio1,m}} \cdot \frac{EIRP_{radio2}(\Omega_{radio2-radio1})}{P_{TX,radio2,m}} \cdot \frac{P_{TX,radio1/radio2}}{S_{radio2/radio1}}}$$

where the  $m$  in  $P_{TX,radio1,m}$  refers to the value of the transmit power level of the radio (1 in this case) during the EIRP measurement.

Three scenarios are of interest to use:

1. Luminaire-to-luminaire communication where the two radios hangs at the same height parallel to ground. In this case the EIRP (pattern) values in the plane parallel to the ground is of interest for  $\Omega$  in the above expression. Patterns measured in an anechoic chamber can have very deep dips (minimum values) that does not occur outside the chamber as they are negated by close-range reflections in typical installations. For this reason it is typical to average patterns over a small angle – we chose a typical value of 30°. A figure showing this averaging effect is included in the “Antenna pattern results” section below. This averaged value in the horizontal plane is listed as EIRP\*\*<sub>alldirs,min</sub> in the table in the previous section. Another simplification can be to only consider the four directions normal to the luminaire in the horizontal plane as these will be the directions to the nearest luminaires in a grid. These values are listed as EIRP<sub>4dirs,min</sub>.
2. Another scenario of interest concerns the communication between an overhead luminaire and a gateway mounted below against a wall. In these the luminaire radiation in directions covered by the bottom hemisphere of the luminaire and the top hemisphere of the gateway is of interest. The bottom hemisphere minimum EIRP values of the luminaire is listed above as EIRP<sub>hem,min</sub>.
3. The final scenario of interest concerns the BLE commissioning of the luminaires and therefore again concerns the bottom hemisphere pattern of the luminaire, i.e. EIRP<sub>hem,min</sub>.

**Luminaire-to-luminaire range**

| Transmit power level | 4 Directions minimum range |       | All directions minimum range |       |
|----------------------|----------------------------|-------|------------------------------|-------|
| 0 dBm                | CH 11                      | 173 m | CH 11                        | 85 m  |
|                      | CH 18                      | 145 m | CH 18                        | 110 m |
|                      | CH 26                      | 206 m | CH 26                        | 101 m |
| 4 dBm                | CH 11                      | 212 m | CH 11                        | 134 m |
|                      | CH 18                      | 364 m | CH 18                        | 152 m |
|                      | CH 26                      | 472 m | CH 26                        | 149 m |

|        |       |       |       |       |
|--------|-------|-------|-------|-------|
| 10 dBm | CH 11 | 244 m | CH 11 | 143 m |
|        | CH 18 | 214 m | CH 18 | 162 m |
|        | CH 26 | 440 m | CH 26 | 188 m |

### Luminaire-to-gateway range

From the measurement report for the gateway we get the minimum EIRP values over the top hemisphere listed in the table below.

|                                |          |                                                                                     |  |
|--------------------------------|----------|-------------------------------------------------------------------------------------|--|
| Minimum EIRP in top hemisphere |          |  |  |
| CH11                           | CH18     | CH25                                                                                |  |
| -2 dBm                         | -6.5 dBm | -5 dBm                                                                              |  |

From these we can calculate the minimum luminaire-to-gateway ranges for the three channels listed in the table below.

### Top hemisphere of gateway and bottom hemisphere of luminaire



| Transmit power level | 0 dBm | 4 dBm | 10 dBm |
|----------------------|-------|-------|--------|
| Ch11                 | 161 m | 238 m | 356 m  |
| Ch18                 | 95 m  | 138 m | 200 m  |
| Ch 26                | 94 m  | 151 m | 239 m  |

### BLE-to-mobile phone range

Range is calculated for the mobile phone as transmitter and the luminaire as receiver. It is assumed that the mobile phone transmits 0 dBm. The luminaire receiver has a sensitivity of -96 dBm.


| BLE transmit power level | 0 dBm |
|--------------------------|-------|
| Ch 37                    | 210 m |
| Ch 38                    | 153 m |
| Ch 39                    | 139 m |

## Antenna pattern results

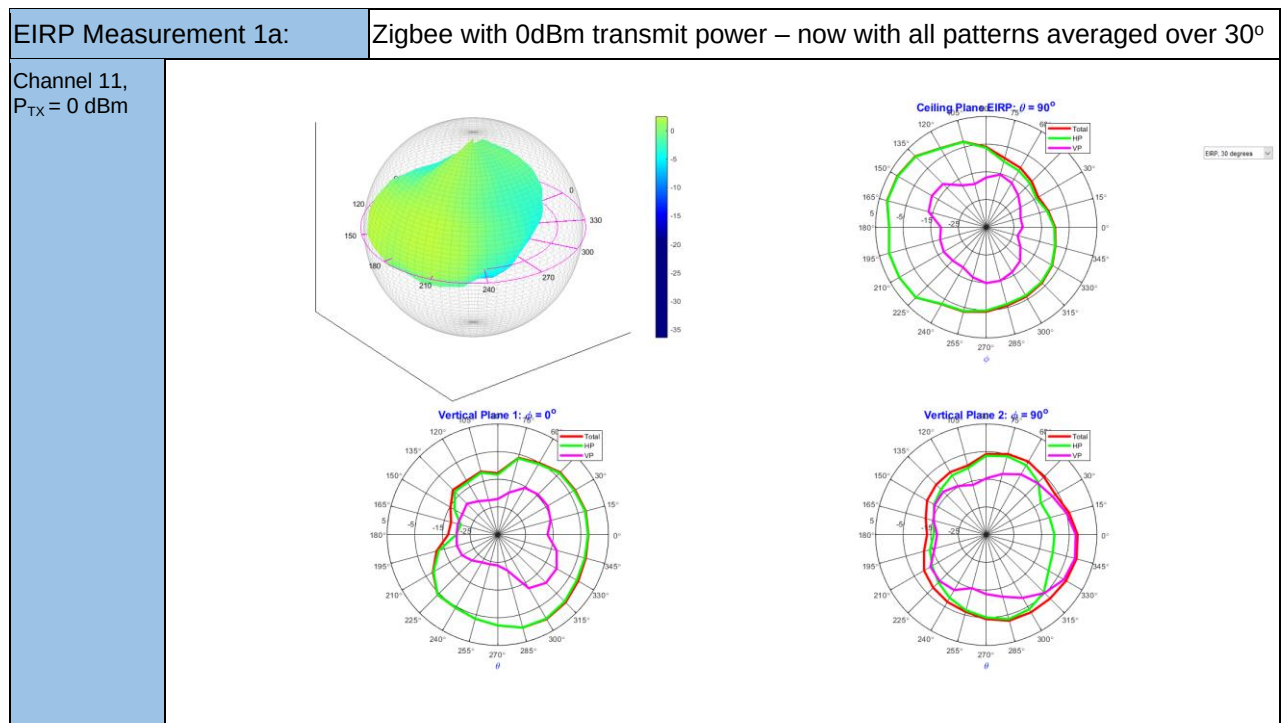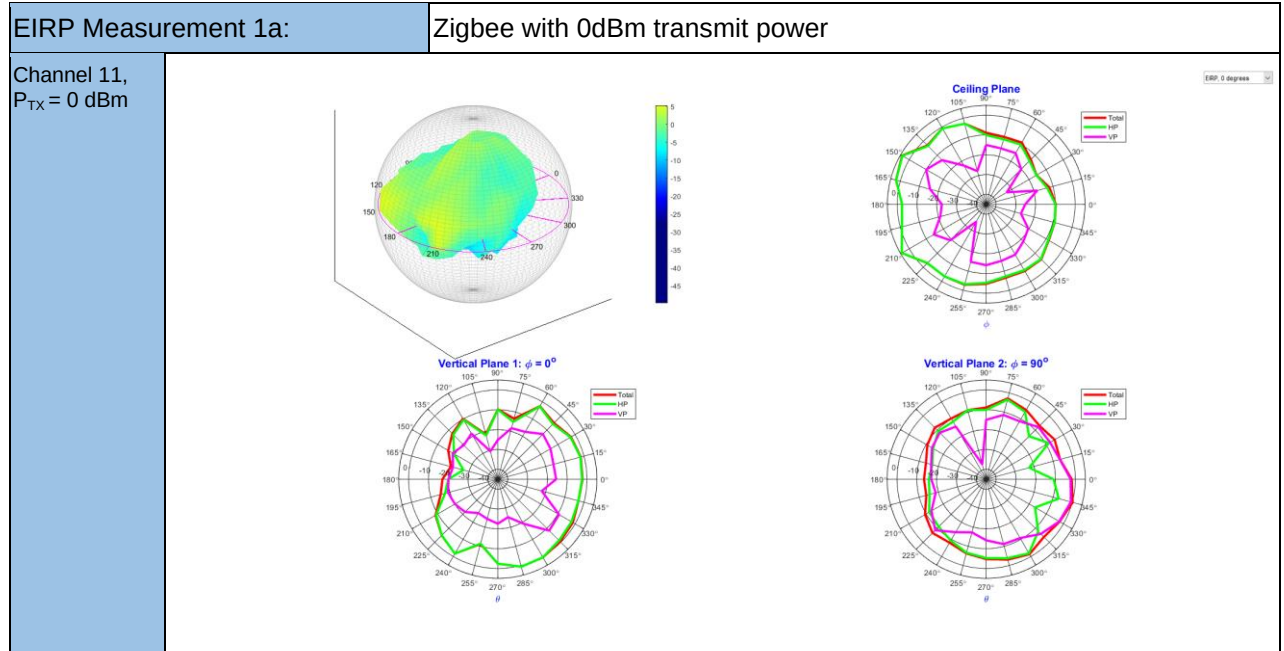


## EIRP Measurement 1b:

Zigbee with 0dBm transmit power

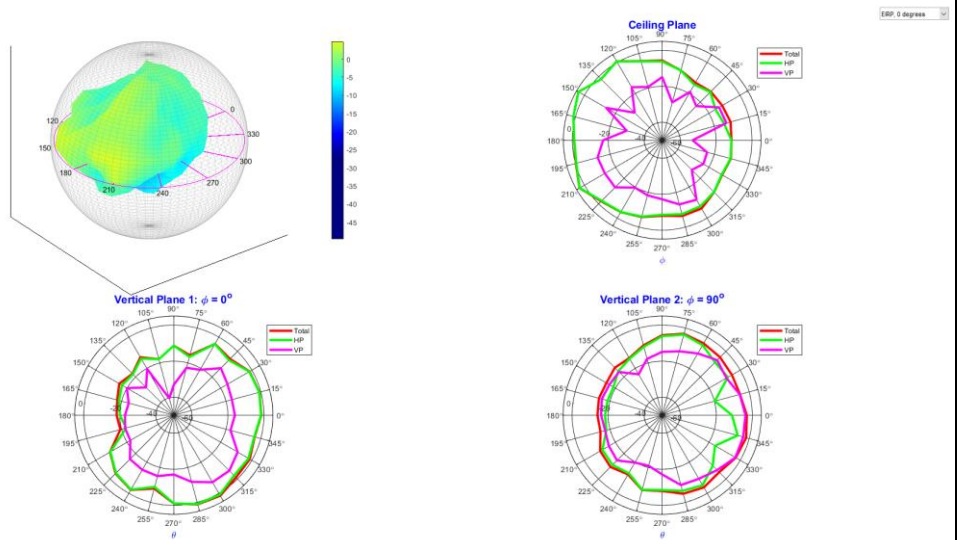Channel 18,  
 $P_{TX} = 0 \text{ dBm}$ 


## EIRP Measurement 1c:

Zigbee with 0dBm transmit power

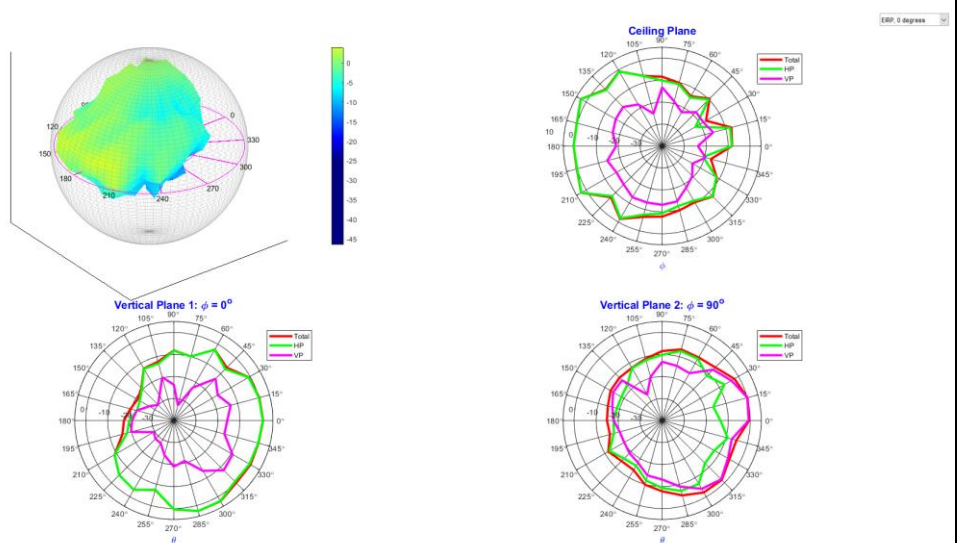Channel 26,  
 $P_{TX} = 0 \text{ dBm}$ 


## EIRP Measurement 2a:

Zigbee with 4dBm transmit power

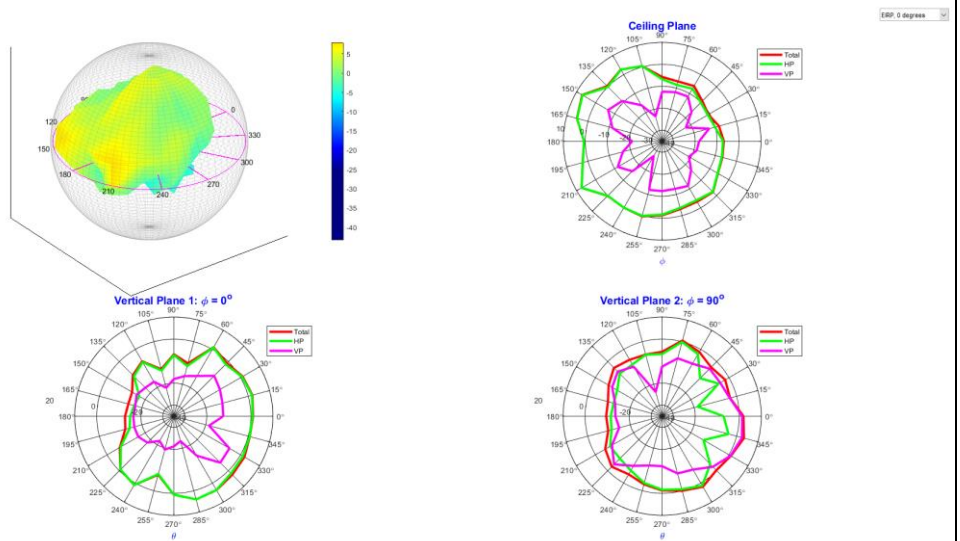Channel 11,  
 $P_{TX} = 4 \text{ dBm}$ 


## EIRP Measurement 2b:

Zigbee with 4dBm transmit power

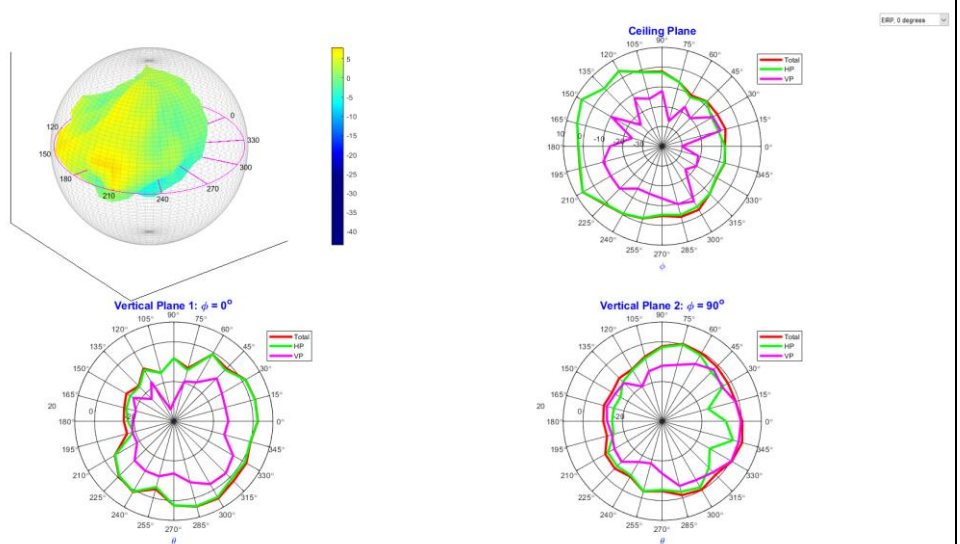Channel 18,  
 $P_{TX} = 4 \text{ dBm}$ 


## EIRP Measurement 2c:

Zigbee with 4dBm transmit power

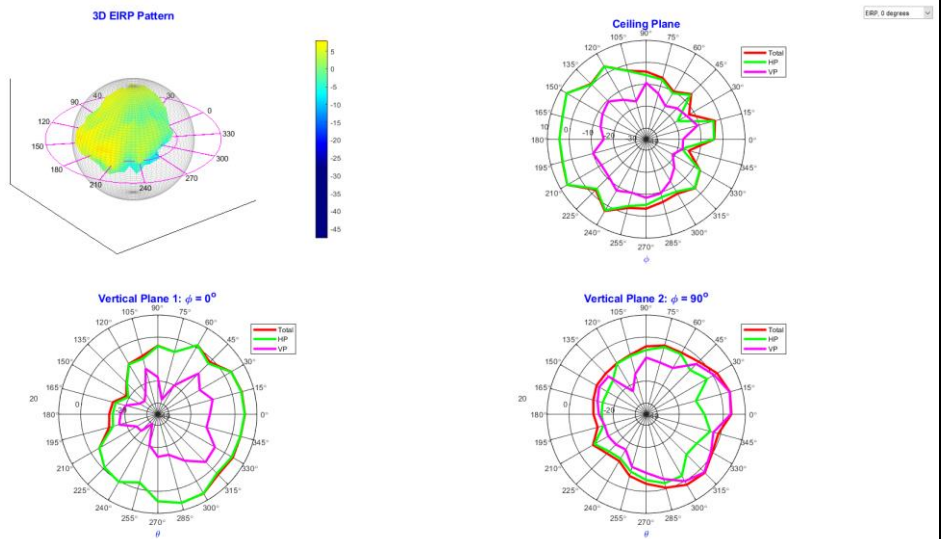Channel 26,  
 $P_{TX} = 4 \text{ dBm}$ 


## EIRP Measurement 3a:

Zigbee with 10dBm transmit power

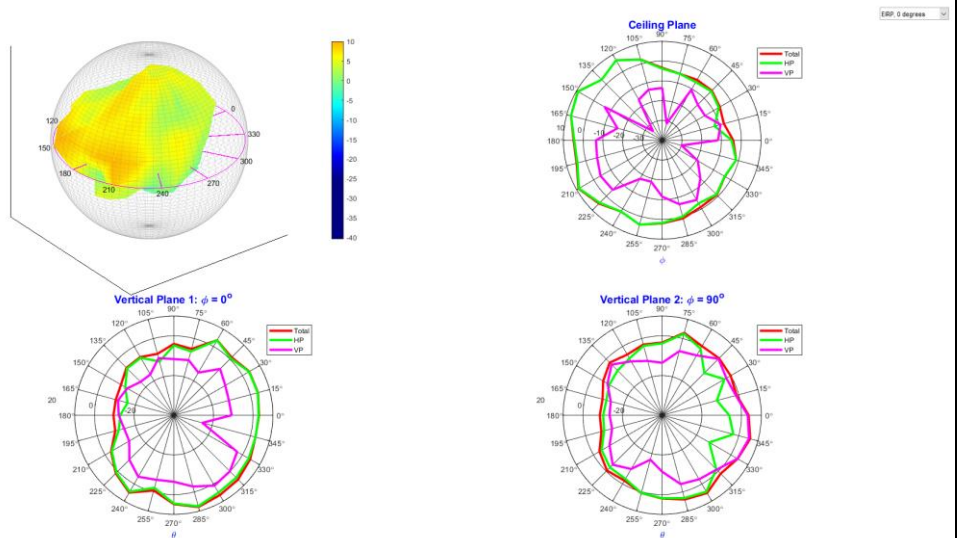Channel 11,  
 $P_{TX} = 10 \text{ dBm}$ 


## EIRP Measurement 3b:



Zigbee with 10dBm transmit power

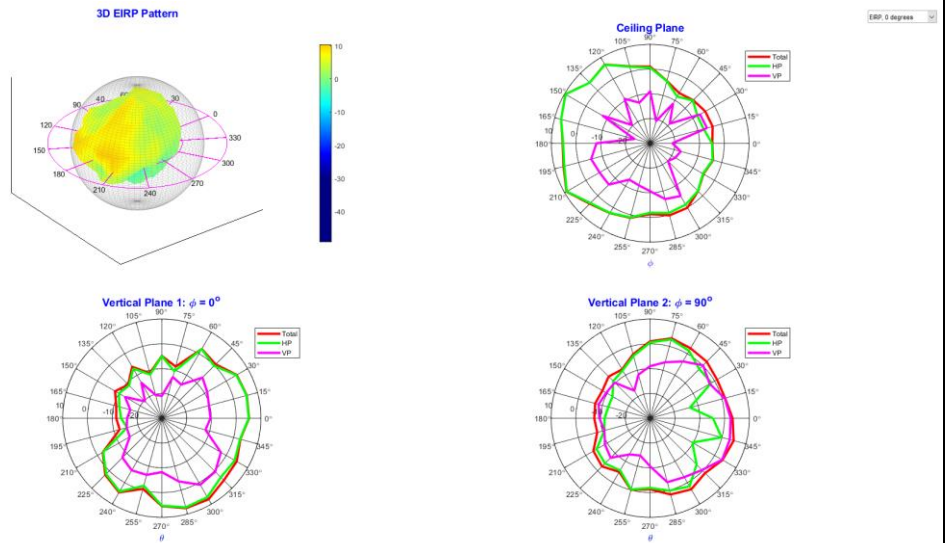
Channel 18,  
 $P_{TX} = 10 \text{ dBm}$ 

## EIRP Measurement 3c:


Zigbee with 10dBm transmit power

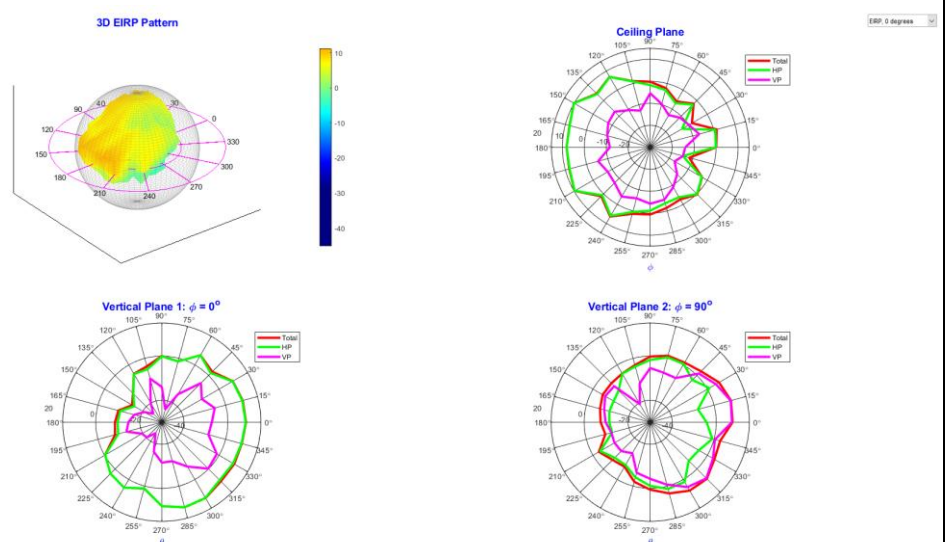Channel 26,  
 $P_{TX} = 10 \text{ dBm}$ 

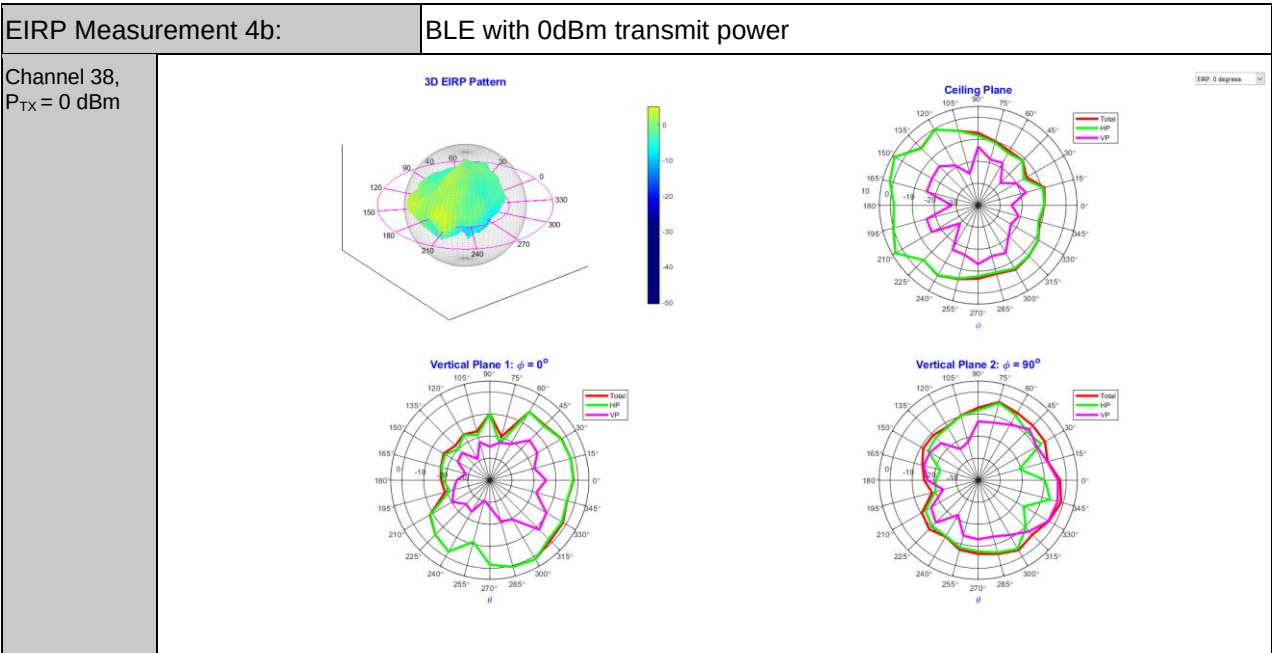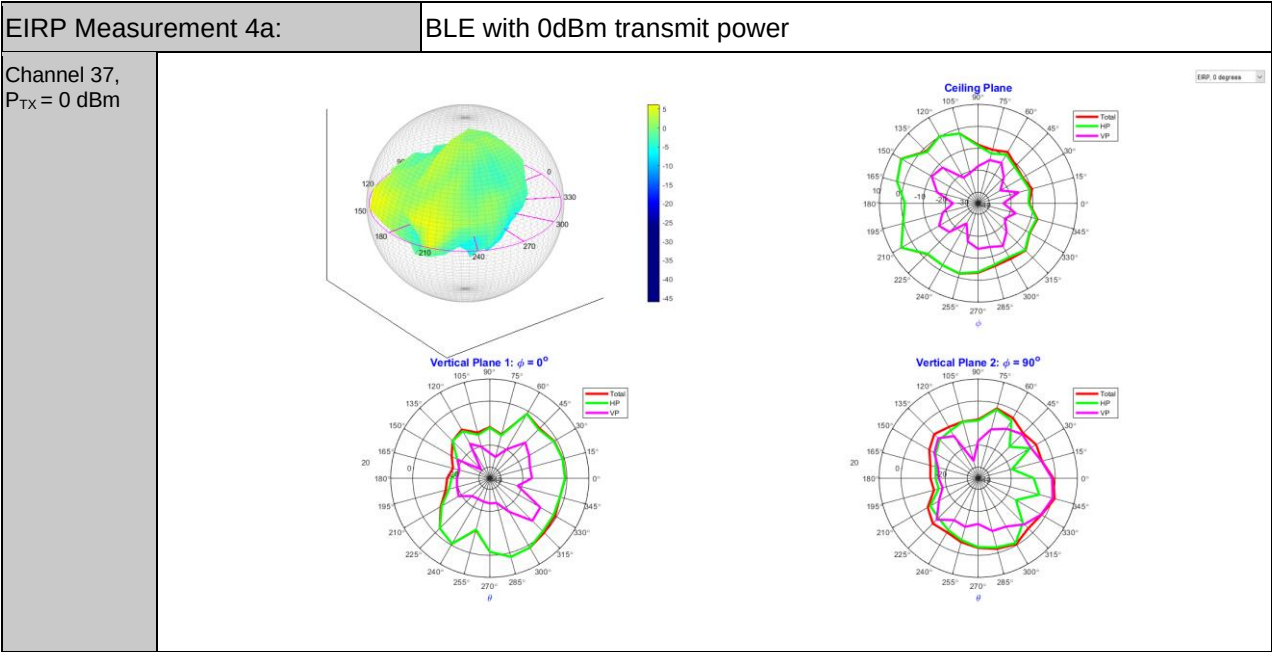

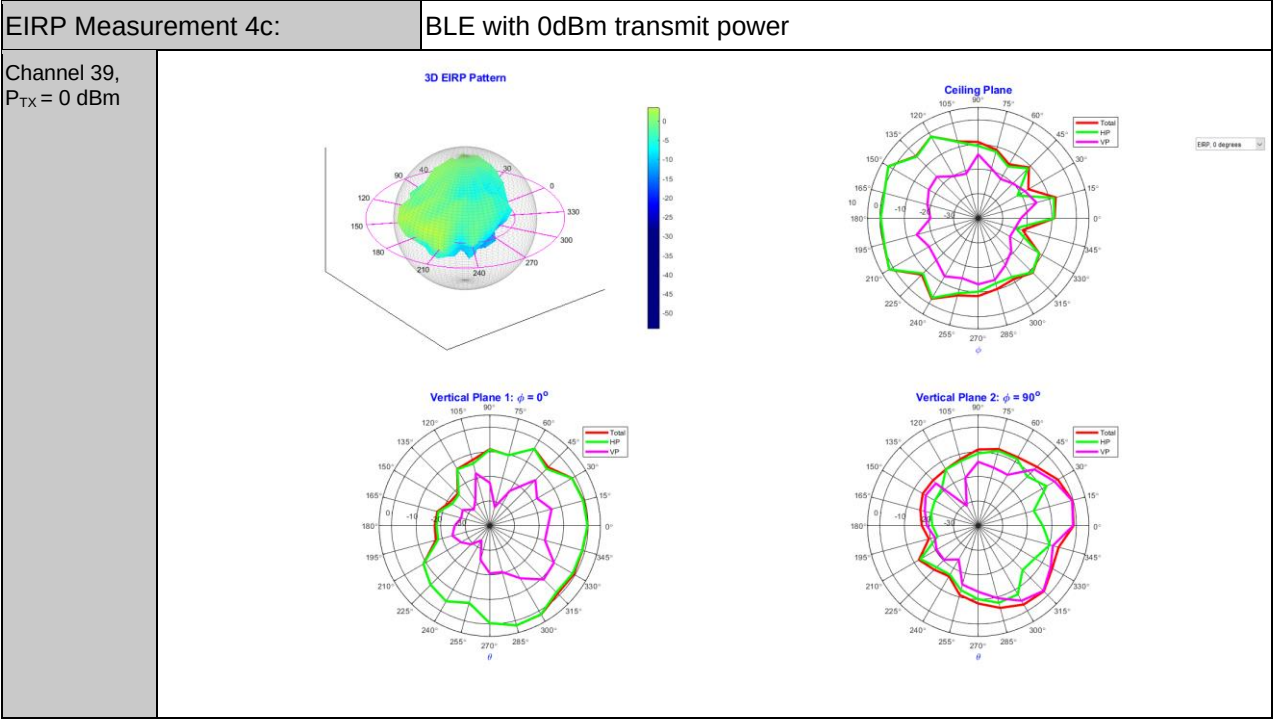


## Reference System

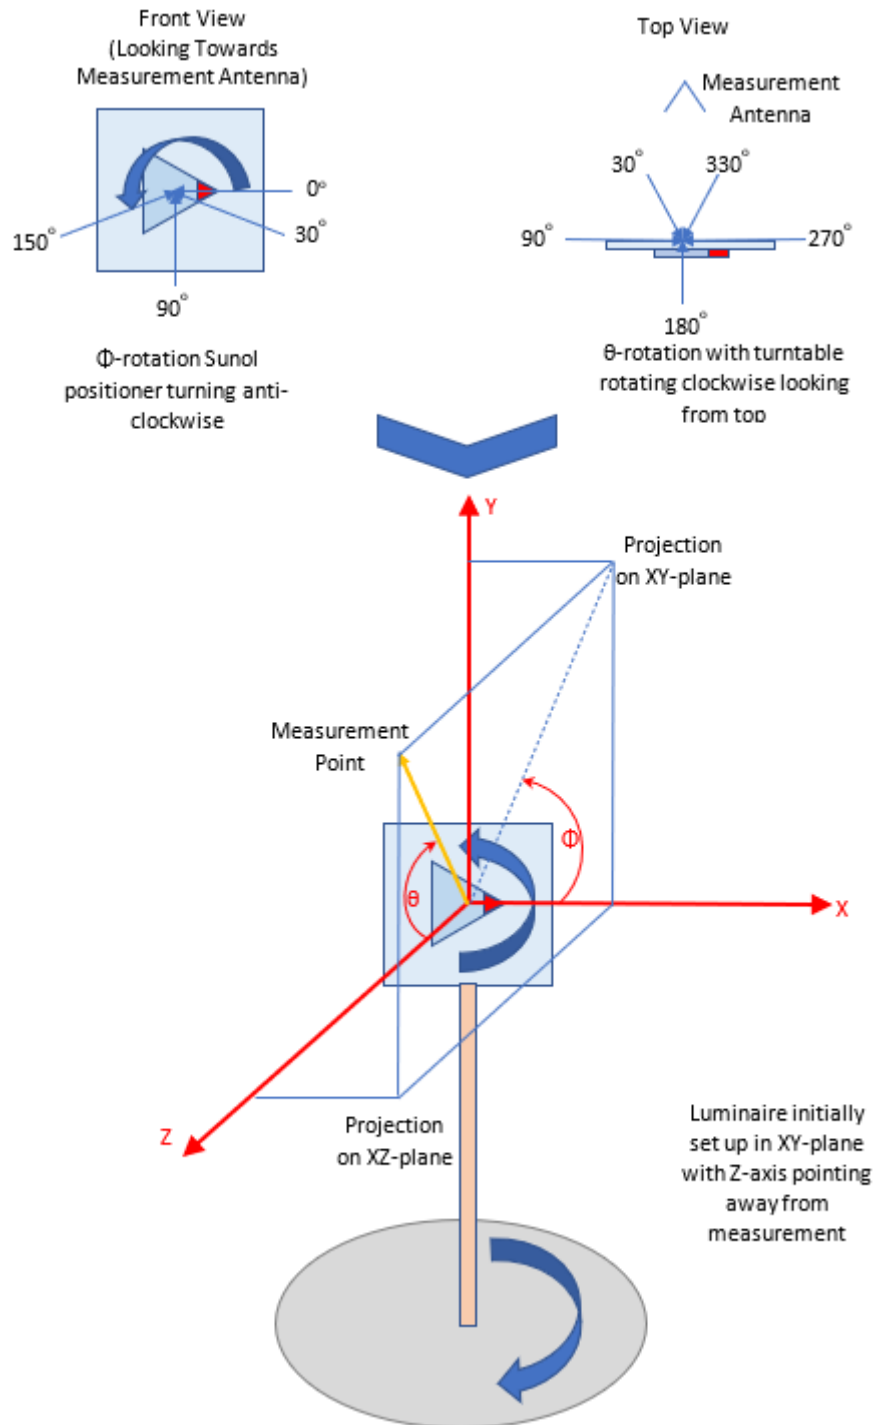

### Appendix 1: TRP Measurement Procedure

First measure the effective isotropic radiated power (EIRP):

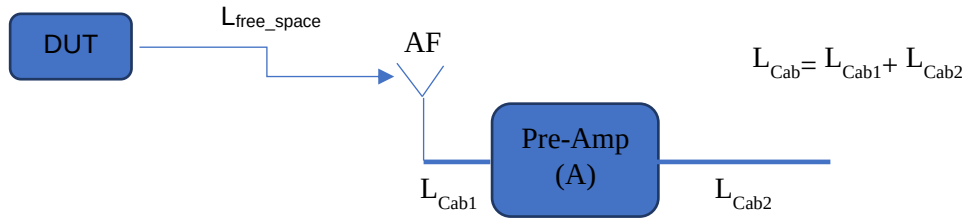

$$EIRP_{dBm} = P_{meas,dBm} + L_{free-space,dB} - G_{dB} - (A_{dB} - L_{Cab,dB})$$

with

- $P_{meas,dBm}$  are the measurement power values.
- $G_{dB}$  is the antenna gain obtained for the appropriate polarization using.
- $A_{dB} - L_{Cab,dB}$  is the fixed loss/gain factor of all cables, preamplifier, and switches connected between the antenna connector and the connector of the spectrum analyser.
- $L_{free-space,dB}$  is the free-space path loss at the measurement distance  $d_{meas}$

$$L_{free-space,dB} = 20 \cdot \log_{10} \left( \frac{4\pi d_{meas}}{\lambda} \right)$$

The TRP is then calculated from the EIRP measured for the two polarizations as follows:

$$TRP = \frac{1}{4\pi} \int_{\theta=0}^{\pi} \int_{\phi=0}^{2\pi} (EiRP_{\theta}(\theta, \phi) + EiRP_{\phi}(\theta, \phi)) \sin(\theta) d\phi d\theta \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} (EiRP_{\theta}(\theta_i, \phi_j) + EiRP_{\phi}(\theta_i, \phi_j)) \sin(\theta_i)$$

or

$$TRP \cong \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [EiRP_{\theta}(\theta_i, \phi_j) + EiRP_{\phi}(\theta_i, \phi_j)] \sin(\theta_i)$$

**References**

|     |                                                                                                                                                                                                                                                      |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [1] | Test Plan for Wireless Device Over-the-Air Performance: Method of Measurement for Radiated RF Power and Receiver Performance. Revision 3.3.2, September 2014,<br><a href="http://www.ctia.org/certification">http://www.ctia.org/certification</a> . |
|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|