

Al back plate, T:3mm, Bead blast anodized black
Text printing: Light gray, Pantone Cool Gray 2C
T=3mm ALU. 黑色陽極噴砂

Pantone Cool Gray 2C


240.00

6.50

6.50

87.00

SPA1200DSP

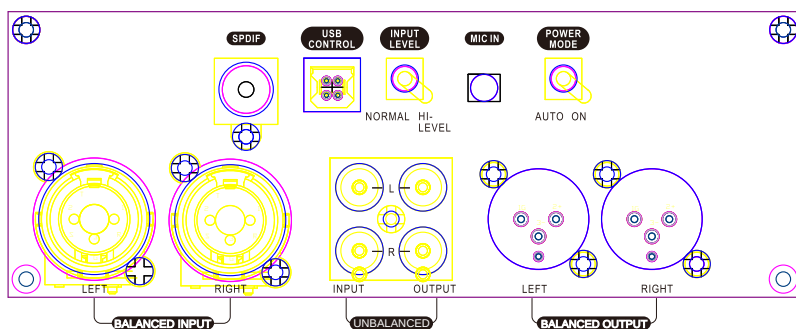

274.00

87.00


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



FCC ID: 2AF3C-SPA



Serial Number





WARNING TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.



CAUTION TO REDUCE THE RISK OF FIRE, REPLACE WITH ONLY THE SAME TYPE AND RATING OF FUSE.

POWER CONSUMPTION
115V: 110-120VAC-50/60Hz 220W
230V: 220-240VAC-50/60Hz 220W



6.50