



Product Service

**Choose certainty.
Add value.**

Report On

Limited FCC and Industry Canada Testing of the
ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz)
In accordance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and
Industry Canada RSS-119

COMMERCIAL-IN-CONFIDENCE

FCC ID: 2AF3I-BSTETRA421
IC: 20543-BSTETRA421

Document 75932976 Report 02 Issue 1

December 2015



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

Limited FCC and Industry Canada Testing of the
ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz)
In accordance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and
Industry Canada RSS-119

Document 75932976 Report 02 Issue 1

December 2015

PREPARED FOR

ETELM SAS
Avenue des deux lacs
PA Villejust
Courtaboeuf Cedex
91971
France

PREPARED BY


Natalie Bennett
Senior Administrator, Project Support

APPROVED BY


Matthew Russell
Authorised Signatory

DATED

16 December 2015

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and Industry Canada RSS-119. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);


J Tuckwell





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 8
1.5	Test Conditions 8
1.6	Deviations from the Standard 8
1.7	Modification Record 8
2	TEST DETAILS 9
2.1	Transmitter Unwanted Emissions 10
3	TEST EQUIPMENT USED 15
3.1	Test Equipment Used 16
3.2	Measurement Uncertainty 17
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 18
4.1	Accreditation, Disclaimers and Copyright 19



Product Service

SECTION 1

REPORT SUMMARY

Limited FCC and Industry Canada Testing of the
ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz)
In accordance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and Industry Canada RSS-119



1.1 INTRODUCTION

The information contained in this report is intended to show the verification of Limited FCC and Industry Canada Testing of the ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz) to the requirements of FCC 47 CFR Part 90, FCC 47 CFR Part 2 and Industry Canada RSS-119..

Objective	To perform Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	ETELM SAS
Model Number(s)	NetisB25
Serial Number(s)	0351
Number of Samples Tested	1
Test Specification/Issue/Date	FCC 47 CFR Part 90 (2014) FCC 47 CFR Part 2 (2014) Industry Canada RSS-119 (Issue 11, 2011)
Incoming Release Date	Application Form 14 August 2015
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	7883 16 July 2015
Start of Test	19 August 2015
Finish of Test	19 August 2015
Name of Engineer(s)	J Tuckwell
Related Document(s)	ANSI C63.4: 2009



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and Industry Canada RSS-119 is shown below.

Section	Specification Clause			Test Description	Result	Comments/Base Standard
	Part 90	Part 2	RSS-119			
Tetra						
2.1	90.210 (c)(3)	2.1051	5.8	Transmitter Unwanted Emissions	Pass	



1.3 APPLICATION FORM

EQUIPMENT DESCRIPTION	
Model Name/Number	NetisB25
Part Number	292
Hardware Version	1
Software Version	9.05e
FCC ID (if applicable)	2AF3I-BSTETRA421
Industry Canada ID (if applicable)	20543-BSTETRA421
Technical Description (Please provide a brief description of the intended use of the equipment)	Tetra Base Station which can work in stand-alone mode or which can be connected to others Base Station to create a Tetra Network.

POWER SOURCE	
☐ AC mains	State voltage
AC supply frequency (Hz)	
VAC	
Max Current	
Hz	
☐ Single phase	☐ Three phase
And / Or	
☒ External DC supply	
Nominal voltage	48 V Max Current 15 A
Extreme upper voltage	55.2 V
Extreme lower voltage	40.8 V
Battery	
☐ Nickel Cadmium	☐ Lead acid (Vehicle regulated)
☐ Alkaline	☐ Leclanche
☐ Lithium	☐ Other Details :
Volts nominal.	
End point voltage as quoted by equipment manufacturer	V

FREQUENCY INFORMATION	
Frequency Range	421 to 425 MHz
Channel Spacing (where applicable)	5
Receiver Frequency Range (if different)	426 to 430 MHz
Channel Spacing (if different)	
Test Frequencies*	Bottom 421 MHz Channel Number (if applicable) 840
	Middle 423 MHz Channel Number (if applicable) 920
	Top 425 MHz Channel Number (if applicable) 1000
Intermediate Frequencies	23.3 MHz
Highest Internally Generated Frequency :	TX freq+23.3 MHz



Product Service

POWER CHARACTERISTICS			
Maximum TX power	25	W	
Minimum TX power		W (if variable)	
Is transmitter intended for :			
Continuous duty		☒ Yes	☐ No
Intermittent duty		☐ Yes	☒ No
If intermittent state DUTY CYCLE			
Transmitter ON		seconds	
Transmitter OFF		seconds	

ANTENNA CHARACTERISTICS			
☒ Antenna connector		State impedance	50 Ohm
☐ Temporary antenna connector		State impedance	Ohm
☐ Integral antenna	Type	State impedance	dBi
☐ External antenna	Type	State impedance	dBi

MODULATION CHARACTERISTICS			
☐ Amplitude		☐ Frequency	
☒ Phase		☐ Other (please provide details):	
Can the transmitter operate un-modulated?			☐ Yes ☐ No

CLASS OF EMISSION USED	
ITU designation or Class of Emission:	
1	
(if applicable) 2	
(if applicable) 3	
If more than three classes of emission, list separately:	

BATTERY POWER SUPPLY	
Model name/number	Identification/Part number
Manufacturer	Country of Origin

ANCILLARIES (If applicable)	
Model name/number	Identification/Part number
Manufacturer	Country of Origin

EXTREME CONDITIONS					
Extreme test voltages (Max)	55.2	V	Extreme test voltages (Mix)	40.8	V
Nominal DC Voltage	48	V	DC Maximum Current	15	A
Maximum temperature	55	°C	Minimum temperature	-10	°C

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature:

Name: VELTZ

Position held: Tests Manager

Date: 14/08/15



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz). A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 48 VDC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

Industry Canada Company Address Code
IC2932B-1 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

Limited FCC and Industry Canada Testing of the
ETELM SAS NetisB25 (421.000 MHz to 425.000 MHz)
In accordance with FCC 47 CFR Part 90, FCC 47 CFR Part 2 and Industry Canada RSS-119



Product Service

2.1 TRANSMITTER UNWANTED EMISSIONS**2.1.1 Specification Reference**

FCC 47 CFR Part 90, Clause 90.210 (c)(3)
FCC 47 CFR Part 2, Clause 2.1051
Industry Canada RSS-119, Clause 5.8

2.1.2 Equipment Under Test and Modification State

NetisB25 S/N: 0351 - Modification State 0

2.1.3 Date of Test

19 August 2015

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The test was performed in accordance with ANSI C63.10, Clause 6.3, 6.5, and 6.6

Remarks

All final measurements were assessed against the emission limits in Industry Canada RSS-119, Clause 5.8.10 and FCC 47 CFR Part 90, Clause 90.210 (c)(3)

2.1.6 Environmental Conditions

Ambient Temperature	19.3°C
Relative Humidity	54.0%

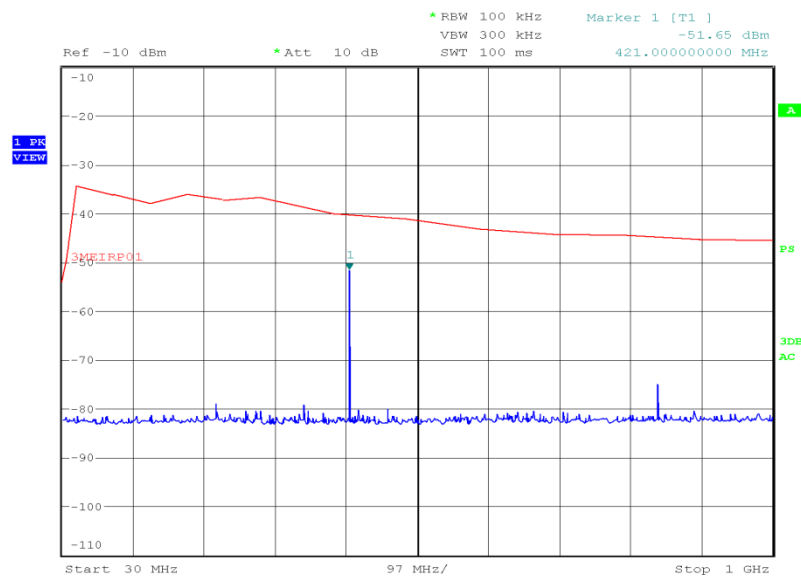


2.1.7 Test Results

Radiated

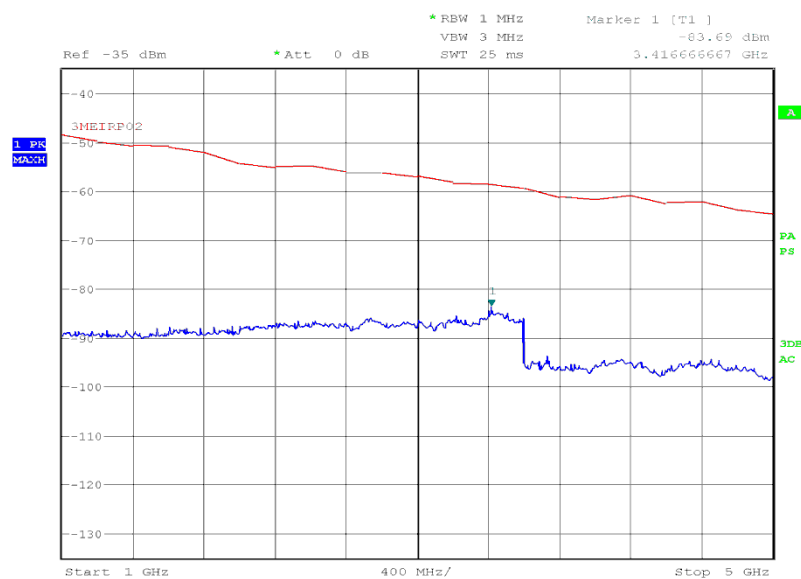
421.000 MHz

30 MHz to 1 GHz



Date: 19.AUG.2015 11:58:59

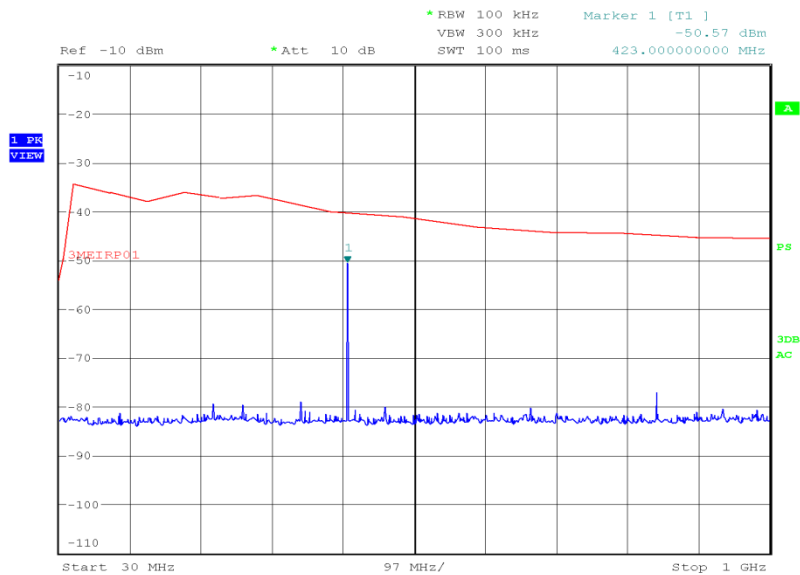
1 GHz to 5 GHz



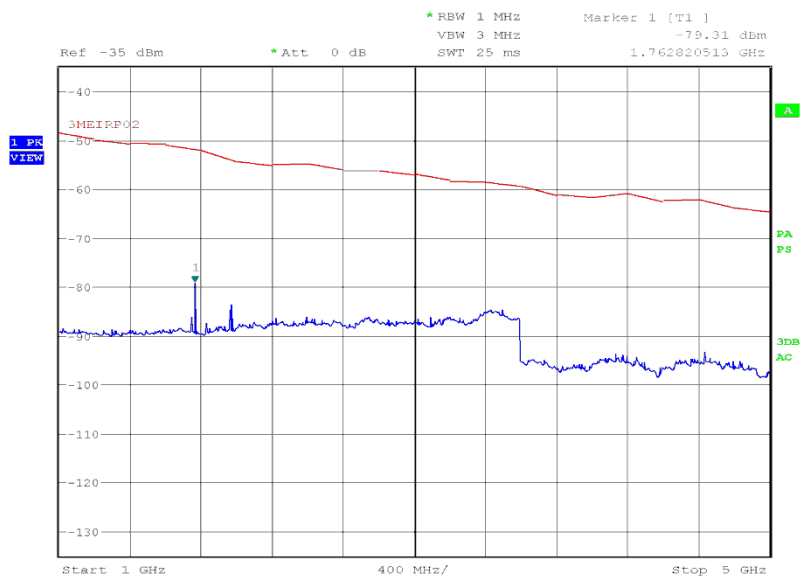
Date: 19.AUG.2015 16:35:01



Product Service

423.000 MHz30 MHz to 1 GHz

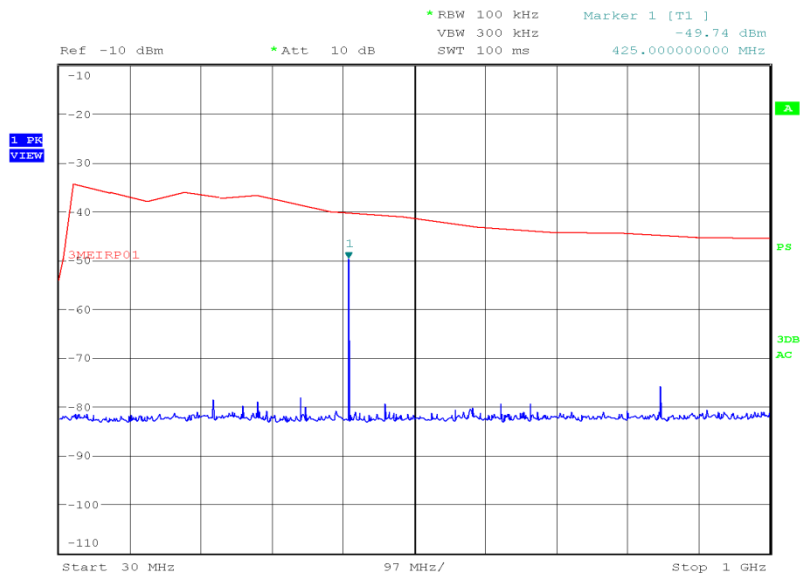
Date: 19.AUG.2015 12:09:50

1 GHz to 5 GHz

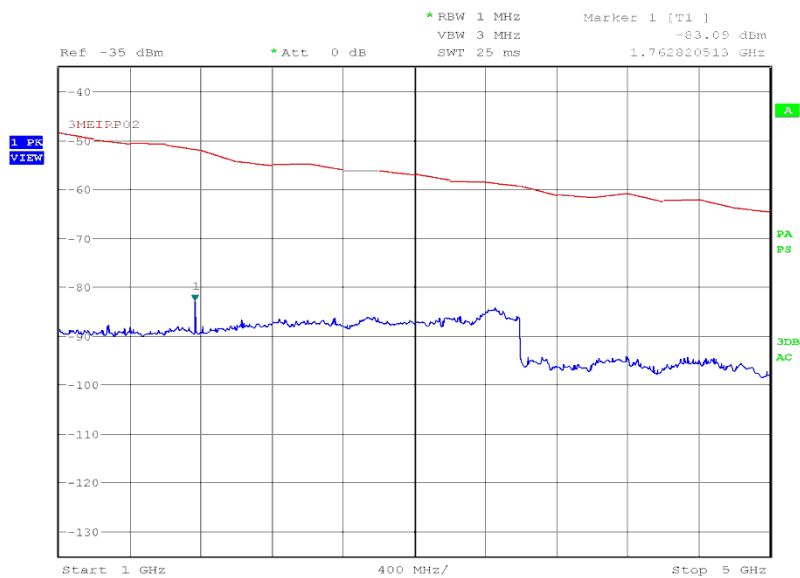
Date: 19.AUG.2015 16:23:08



Product Service

425.000 MHz30 MHz to 1 GHz

Date: 19.AUG.2015 12:19:09

1 GHz to 5 GHz

Date: 19.AUG.2015 16:11:28



Product Service

Remarks

EIRP 01 limit line refers to a -13 dBm limit line which has been derived from -57 dBc from the customers declared power of 44 dBm using a Bilog antenna between 30 MHz and 1 GHz

EIRP 02 limit line refers to a -13 dBm limit line which has been derived from -57 dBc from the customers declared power of 44 dBm using a Double Ridge Guide (DRG) antenna between 1 GHz and 5 GHz, 48 V DC Supply

FCC 47 CFR Part 90, Limit Clause 90.210 (c)(3)

On any frequency removed from the center of the authorized bandwidth by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

Industry Canada RSS-119, Limit Clause 5.8.10Emission Mask Y

Displacement Frequency, f_d (kHz)	Minimum Attenuation (dB)
$12.375 < f_d \leq 13.975$	Whichever is the lesser attenuation: $30 + 16.67(f_d - 12.375)$ or $55 + 10\log_{10}(p)$
$f_d > 13.975$	Whichever is the lesser attenuation: 57 or $55 + 10\log_{10}(p)$



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - Transmitter Spurious Emissions					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	29-Apr-2016
Screened Room (5)	Rainford	Rainford	1545	0	20-Dec-2017
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	11-Jun-2017
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	27-Oct-2015
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
50 ohm load	Delta Ohm	06 150 011	Not serialised	-	TU

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Transmitter Unwanted Emissions	Radiated: 30 MHz to 1 GHz: ± 5.1 dB Radiated: 1 GHz to 40 GHz: ± 6.3 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2015 TÜV SÜD Product Service