

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Square Inc.

POS Terminal

SPD1-XX

FCC ID: 2AF3K-SPD1

Prepared for : Square Inc.
1455 Market St. Suite 600 San Francisco, California United
States 94103

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Kefeng Road, Science & Technology Park,
Nanshan District, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F18213
Date of Test : Sep.18~29, 2018
Date of Report : Oct.12, 2018

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. SUMMARY OF STANDARDS AND RESULTS.....	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details.....	2-3
2.3. Block Diagram of connection between EUT and simulators	2-3
2.4. Test information.....	2-3
2.5. Test Facility	2-4
2.6. Measurement Uncertainty (95% confidence levels, k=2).....	2-4
3. POWER LINE CONDUCTED EMISSION TEST.....	3-1
3.1. Test Equipments	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-2
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Power Line Conducted Emission Test Results	3-2
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipments	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit Standard:	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Emission Test Results.....	4-4
5. CONDUCTED SPURIOUS EMISSIONS.....	5-1
5.1. Test Equipments	5-1
5.2. Limit.....	5-1
5.3. Test Procedure	5-1
5.4. Test result.....	5-1
6. 20 DB BANDWIDTH TEST	6-1
6.1. Test Equipments	6-1
6.2. Limit.....	6-1
6.3. Test Procedure	6-1
6.4. Test Results.....	6-1
7. CARRIER FREQUENCY SEPARATION TEST	7-1
7.1. Test Equipments	7-1
7.2. Limit.....	7-1
7.3. Test Procedure	7-1
7.4. Test Results.....	7-1
8. NUMBER OF HOPPING FREQUENCY TEST	8-1
8.1. Test Equipments	8-1
8.2. Limit.....	8-1

8.3.	Test Procedure	8-1
8.4.	Test Results.....	8-1
9.	DWELL TIME	9-1
9.1.	Test Equipments	9-1
9.2.	Limit.....	9-1
9.3.	Test Procedure	9-1
9.4.	Test Results.....	9-1
10.	MAXIMUM PEAK OUTPUT POWER TEST	10-1
10.1.	Test Equipments	10-1
10.2.	Limit.....	10-1
10.3.	Test Procedure	10-1
10.4.	Test Results.....	10-1
11.	BAND EDGE COMPLIANCE TEST	11-1
11.1.	Test Equipments	11-1
11.2.	Limit.....	11-1
11.3.	Test Procedure	11-1
11.4.	Test Results.....	11-1
12.	ANTENNA REQUIREMENT	12-1
12.1.	Standard Applicable.....	12-1
12.2.	Antenna Connected Construction	12-1
13.	DEVIATION TO TEST SPECIFICATIONS.....	13-1
14.	PHOTOGRAPH OF TEST	14-1
14.1.	Photos of Power Line Conducted Emission Test	14-1
14.2.	Photos of Radiated Emission Test	14-2
15.	PHOTOS OF EUT	15-1

TEST REPORT CERTIFICATION

Applicant : Square Inc.
Manufacturer : Square Inc.
Product : POS Terminal
FCC ID : 2AF3K-SPD1
(A) Model No. : SPD1-XX
(B) Serial No. : N/A
(C) Test Voltage : DC 20V From Adapter Input AC 120V/60Hz

Tested for comply with:
FCC CRF 47 Part 15 Subpart C

Test procedure used:
ANSI C63.10: 2013

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to confirm comply with all the FCC Part 15 Subpart C requirements. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed full responsibility for the accuracy and completeness of these tests. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC and IC requirements. This report contains data that are not covered by the NVLAP accreditation.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.


This report applies to above tested sample only. This report shall not be reproduced in part without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : Sep.18~29, 2018 Report of date: Oct.12, 2018

Prepared by : Monica Liu Reviewed by : Sunny Lu
Monica Liu / Assistant Sunny Lu / Deputy Manager

Approved & Authorized Signer :

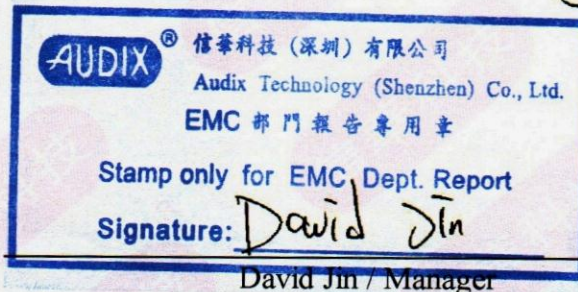

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT has been tested according to the applicable standards as referenced below.

EMISSION		
Description of Test Item	Standard	Results
Power Line Conducted Emission Test	FCC Part 15: 15.207 ANSI C63.10 2013	PASS
Radiated Emission Test	FCC Part 15 15.209 FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Conducted Spurious Emissions	FCC Part 15: 15.247(d) ANSI C63.10 2013	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1) ANSI C63.10 2013	PASS
20dB Bandwidth Test	FCC Part 15 15.205 FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Number Of Hopping Frequency Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii) ANSI C63.10 2013	PASS
Maximum Peak Output Power Test	FCC Part 15 15.247(b)(1) ANSI C63.10 2013	PASS
Band Edge Compliance Test	FCC Part 15 15.247(d) ANSI C63.10 2013	PASS
Antenna Requirement	FCC Part 15 : 15.203	PASS

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Product : POS Terminal

Model No. : SPD1-XX

FCC ID : 2AF3K-SPD1

Radio : IEEE802.11 a/b/g/n/ac; Bluetooth V3.0+EDR; Bluetooth V4.2; NFC

Operation : IEEE 802.11a:
Frequency 5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE 802.11ac VHT20:
5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE 802.11ac VHT40:
5190MHz—5230MHz; 5270MHz—5310MHz
5510MHz—5670MHz; 5755MHz—5795MHz
IEEE 802.11ac VHT80: 5210MHz, 5290MHz; 5530MHz—5610MHz;
5775MHz
IEEE 802.11b: 2412MHz—2462MHz
IEEE 802.11g: 2412MHz—2462MHz
IEEE802.11nHT20: 2412MHz—2462MHz;
5180MHz—5240MHz; 5260MHz—5320MHz
5500MHz—5700MHz; 5745MHz—5825MHz
IEEE802.11nHT40:
5190MHz—5230MHz; 5270MHz—5310MHz
5510MHz—5670MHz; 5755MHz—5795MHz
Bluetooth : 2402-2480MHz
NFC: 13.56MHz


Modulation : IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
Technology IEEE 802.11a/g: OFDM(64QAM, 16QAM, QPSK, BPSK)
IEEE 802.11ac VHT20, VHT40, VHT80: OFDM(16QAM, 64QAM,
256QAM, QPSK, BPSK)
IEEE 802.11n HT20, HT40: OFDM (64QAM, 16QAM,QPSK,BPSK)
Bluetooth V3.0+EDR: GFSK, $\pi/4$ DQPSK,8-DPSK
Bluetooth V4.2:GFSK
NFC: ASK

Antenna	: PIFA Antenna, Bluetooth: 1.99dBi WIFI 2.4GHz: ANT 0:1.99dBi; ANT 1: 4.06dBi WIFI 5GHz:
Assembly Gain	Band 1: ANT 0: 3.07dBi; ANT 1: 5.05dBi Band 2: ANT 0: 3.07dBi; ANT 1: 5.05dBi Band 3: ANT 0: 3.38dBi; ANT 1: 6.18dBi Band 4: ANT 0: 2.96dBi; ANT 1: 6.58dBi
Applicant	: Square Inc. 1455 Market St. Suite 600 San Francisco, California United States 94103
Manufacturer	: Square Inc. 1455 Market St. Suite 600 San Francisco, California United States 94103
Factory	: Fu Tai Hua Industry (ShenZhen) Co., Ltd. 5/F, Building 11, G Area, No. 2, 2 nd Donghuan Road, Longhua District, Shenzhen, Guangdong Province, P.R. China
Rechargeable Li-ion Battery	: Manufacturer: Getac Technology(Kunshan) Co., Ltd. M/N: 2ICR19/66; Output: DC 7.2V, 3135mAh(22.57Wh).
Power Adapter	: Manufacturer: Dongguan Fuqiang Electronics Co., Ltd., M/N: SWD4-01; Input: 100-240V~, 50/60Hz, 1.4A; Output: 5V dc, 3.0A; 9V dc, 3.0A; 15V dc, 3.0A; 20V dc, 3.0A; Cable: Unshielded, Detachable, 1.2m
Accessory Hub	: Manufacturer: Square, Inc., M/N: SHD3-01; Cable: Unshielded, Detachable, 1.25m
Power Cable	: Unshielded, Detachable, 1.3m
Date of Test	: Sep.18~29, 2018
Date of Receipt	: Sep.15, 2018
Sample Type	: Prototype production

2.2. Tested Supporting System Details

[None]

2.3. Block Diagram of connection between EUT and simulators



(EUT: POS Terminal)

2.4. Test information

A special software was used to control EUT work in Continuous TX mode(GFSK, $\pi/4$ DQPSK, 8-DPSK Modulation), and select test channel.

Tested mode, channel, and data rate information			
Mode	data rate (Mbps)	Channel	Frequency (MHz)
Tx Mode GFSK modulation	1	Low :CH 0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
Tx Mode 8-DPSK modulation	3	Low :CH 0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

Note: $\pi/4$ DQPSK modulation is same type modulation with 8-DPSK, and according exploratory test, 8-DPSK will have worse emissions, so the final test were only performed with GFSK and 8-DPSK modulation.

2.5. Test Facility

Site Description

Name of Firm

Audix Technology (Shenzhen) Co., Ltd.

: No. 6, Kefeng Road, Science & Technology Park,
Nanshan District , Shenzhen, Guangdong, China

EMC Lab.

Certificated by Industry Canada

: Registration Number: IC 5183A-1
Valid Date: May.07, 2020

Certificated by DAkkS, Germany

: Registration No: D-PL-12151-01-00
Valid Date: Dec.07, 2021

Accredited by NVLAP, USA

: NVLAP Code: 200372-0
Valid Date: Mar.31, 2019

Certificated by FCC USA.

: Designation No.: CN5022
Valid Date: Mar.31, 2019

2.6. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.6dB (150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	4.0dB(30~200MHz, Polarization: H)
	4.0dB(30~200MHz, Polarization: V)
	4.4dB(200M~1GHz, Polarization: H)
	4.4dB(200M~1GHz, Polarization: V)
Uncertainty for Radiation Emission test in 3m chamber	5.0dB (1~6GHz, Distance: 3m)
	5.4dB (6~18GHz, Distance: 3m)
	5.4dB (Above 18GHz, Distance: 3m)
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for Conduction Spurious emission test	2.0dB
Uncertainty for Output power test	0.8dB
Uncertainty for Bandwidth test	83 kHz
Uncertainty for DC power test	0.1 %
Uncertainty for test site temperature and humidity	0.6°C
	3%


3. POWER LINE CONDUCTED EMISSION TEST

3.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	1# Shielding Room	AUDIX	N/A	N/A	May.17,18	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCI	100842	Apr.23,18	1 Year
3.	L.I.S.N.#1	Rohde & Schwarz	ENV216	102160	Jan.12,18	1 Year
4.	L.I.S.N.#2	Kyoritsu	K NW-403D	8-1750-2	Apr.23,18	1 Year
5.	Terminator	Hubersuhner	50Ω	No.1	Apr.23,18	1 Year
6.	Terminator	Hubersuhner	50Ω	No.2	Apr.23,18	1 Year
7.	RF Cable	Fujikura	RG55/U	No.2	Apr.23,18	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397223	Apr.23,18	1 Year
9.	Test Software	AUDIX	e3	6.100913a	N/A	N/A

Note: N/A means Not applicable.

3.2. Block Diagram of Test Setup

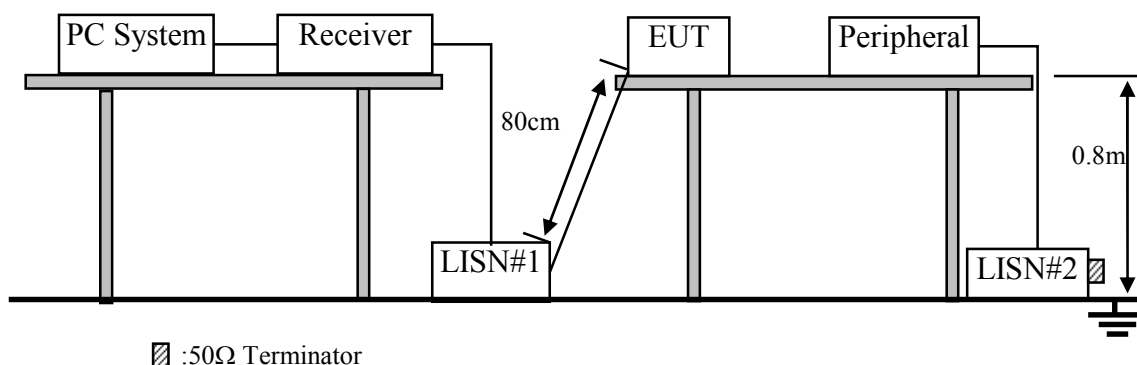

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4.Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1.POS Terminal (EUT)

Model No. : SPD1-01
Serial No. : N/A

3.4.2. Support Equipment: As Tested Supporting System Details, in Section 2.2.

3.5.Operating Condition of EUT

3.5.1. Setup the EUT and simulator as shown as Section 3.2.

3.5.2. Turn on the power of all equipments.

3.5.3. PC run test software to control EUT work in BT 3.0 Tx mode.

3.6.Test Procedure


The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power Via PC connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.

The bandwidth of test receiver (R & S ESCI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

3.7.Power Line Conducted Emission Test Results


PASS. (All emissions not reported below are too low against the prescribed limits.)

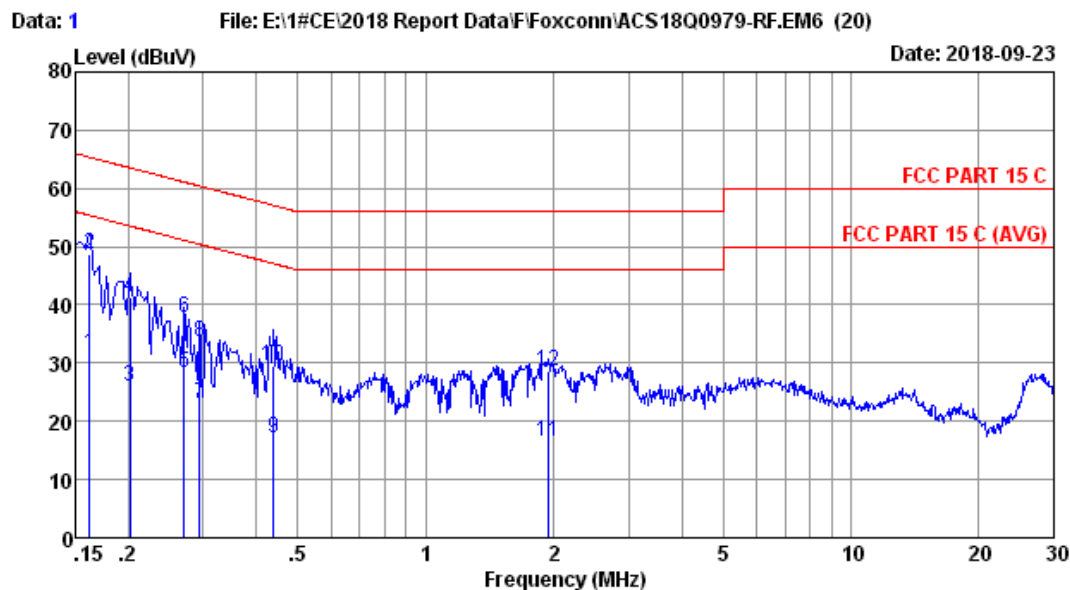

Site no :1# CE Data No :1
 Dis./Lisn :2018 LISN ENV216-L
 Limit :FCC PART 15 C
 Env./Ins. :21.0°C/55% Engineer :Apple
 EUT :POS Terminal M/N:SPD1-01
 Power Rating :AC 120V/60Hz
 Test Mode :BT3.0

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.162	9.56	0.19	21.70	31.45	55.36	23.91	Average
2	0.162	9.56	0.19	38.90	48.65	65.36	16.71	QP
3	0.202	9.50	0.19	16.20	25.89	53.53	27.64	Average
4	0.202	9.50	0.19	31.70	41.39	63.53	22.14	QP
5	0.270	9.20	0.19	18.90	28.29	51.12	22.83	Average
6	0.270	9.20	0.19	28.25	37.64	61.12	23.48	QP
7	0.294	9.05	0.19	13.90	23.14	50.41	27.27	Average
8	0.294	9.05	0.19	24.53	33.77	60.41	26.64	QP
9	0.438	9.51	0.19	7.30	17.00	47.10	30.10	Average
10	0.438	9.51	0.19	19.90	29.60	57.10	27.50	QP
11	1.949	9.49	0.13	6.90	16.52	46.00	29.48	Average
12	1.949	9.49	0.13	19.06	28.68	56.00	27.32	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

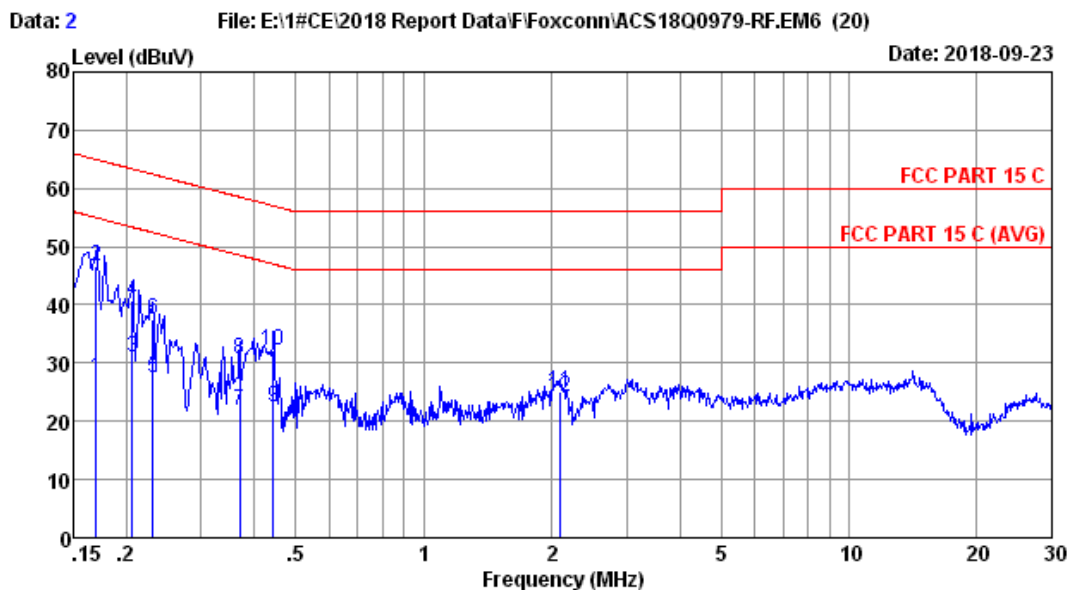

Site no :1# CE Data No :2
 Dis./Lisn :2018 LISN ENV216-N
 Limit :FCC PART 15 C
 Env./Ins. :21.0°C/55% Engineer :Apple
 EUT :POS Terminal M/N:SPD1-01
 Power Rating :AC 120V/60Hz
 Test Mode :BT3.0

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.170	9.48	0.19	17.80	27.47	54.96	27.49	Average
2	0.170	9.48	0.19	37.00	46.67	64.96	18.29	QP
3	0.206	9.47	0.19	21.40	31.06	53.36	22.30	Average
4	0.206	9.47	0.19	31.00	40.66	63.36	22.70	QP
5	0.230	9.46	0.19	17.80	27.45	52.44	24.99	Average
6	0.230	9.46	0.19	27.71	37.36	62.44	25.08	QP
7	0.369	9.43	0.19	12.10	21.72	48.52	26.80	Average
8	0.369	9.43	0.19	21.16	30.78	58.52	27.74	QP
9	0.442	9.40	0.19	12.90	22.49	47.02	24.53	Average
10	0.442	9.40	0.19	22.71	32.30	57.02	24.72	QP
11	2.099	9.36	0.14	15.60	25.10	46.00	20.90	Average
12	2.099	9.36	0.14	14.61	24.11	56.00	31.89	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipments

Frequency range: 30~1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	3#Chamber	AUDIX	N/A	N/A	Jun.19,18	1 Year
2.	Signal Analyzer	Rohde & Schwarz	FSV30	104051	Apr.23,18	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR7	101547	Apr.23,18	1 Year
4.	Amplifier	HP	8447D	2648A04738	Apr.23,18	1 Year
5.	Tri-log-Broadband Antenna	Schwarzbeck	VULB 9168	710	Aug.22,18	1 Year
6.	Loop Antenna	Chase	HLA6120	1062	Oct.17,17	1 Year
7.	RF Cable	SPUMA	CFD400NL-LW	No.3	Sep.02,18	1 Year
8.	Coaxial Switch	Anritsu	MP59B	6201397222	Apr.23,18	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A



Note: N/A means Not applicable.

Frequency range: above 1000MHz

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	RF Chamber	AUDIX	N/A	N/A	May.17,18	1 Year
2.	EMC Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
3.	Horn Antenna	ETS	3115	9510-4580	Dec.01,17	1 Year
4.	Amplifier	Agilent	8449B	3008A00863	Apr.23,18	1 Year
5.	Amplifier	EMCI	EMC184040SE	980507	Jul.07,18	1 Year
6.	RF Cable	Hubersuhner	EMC102-KM-KM-3500	170702	Oct.15,17	1 Year
7.	RF Cable	Hubersuhner	N/A	No.5	Oct.15,17	1 Year
8.	Horn Antenna	ETS	3116	00060089	Dec.03,17	1 Year
9.	Test Software	AUDIX	e3	6.2009-5-21a(n)	N/A	N/A

Note: N/A means Not applicable.

4.2. Block Diagram of Test Setup

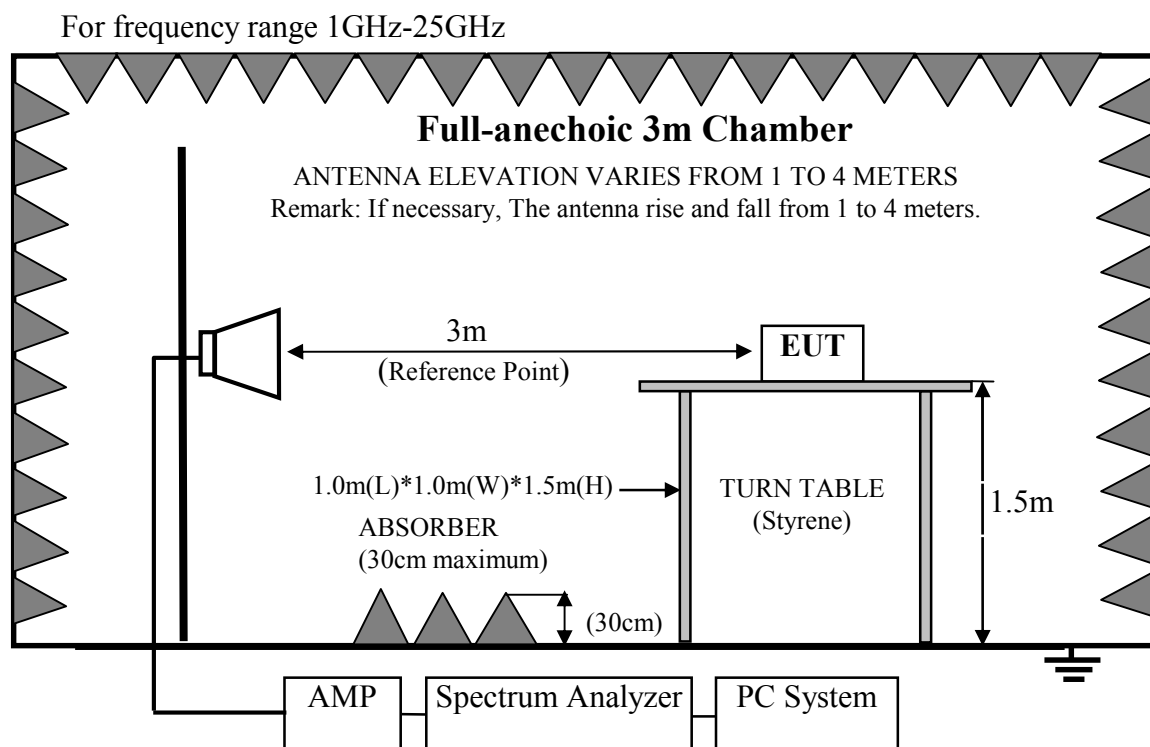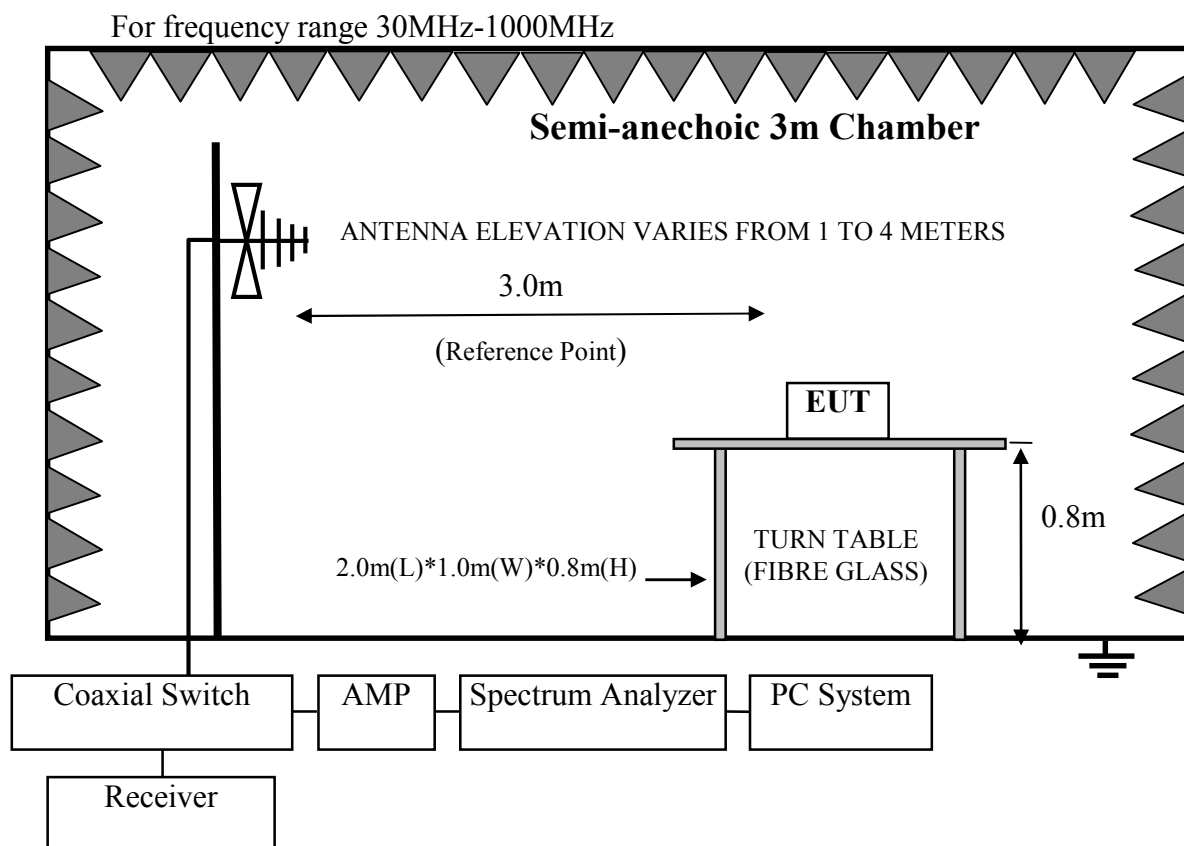

4.3. Radiated Emission Limit Standard:

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V/m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000MHz	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V/m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.
 - (4) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.4.1. POS Terminal (EUT)

Model No. : SPD1-01
Serial No. : N/A

4.5. Operating Condition of EUT

4.5.1. Setup the EUT and simulator as shown as Section 4.2.

4.5.2. Turn on the power of all equipments.

4.5.3. Let EUT work in BT 3.0 Tx mode.

4.6. Test Procedure

Frequency below 30MHz:

The EUT setup on the turn table which has 0.8 m height to the ground. The turn table rotated 360 degrees and antenna fixed to 1 m to find the maximum emission level. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013 regulation.

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground for frequency 30MHz~1000MHz, 1.5 meter high above ground for frequency above 1GHz and put the absorbing with 2.4m(L)*2.4m(W)*0.3m(H) on the ground . The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna for frequency 30MHz~1000MHz, and the Horn antenna is used as receiving antenna for frequency above 1GHz. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.10-2013 on radiated emission Test.

This test was performed with EUT in X, Y, Z position, and the worse case was found when EUT in X position as the test photo indicated.

The bandwidth of the EMI test receiver (R&S ESR7) is set at 120kHz for frequency range from 30MHz to 1000MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz

This device is pulse Modulated, a duty cycle factor was used to calculated average level based measured peak level.

The frequency range from 30MHz to 10th harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

4.7.Radiated Emission Test Results



PASS.

All the emissions from 30MHz to 25GHz were comply with the 15.209 Limit.

Note 1: The duty cycle factor for calculate average level is -15.10dB, and average limit is 20dB below peak limit, so if peak measured level comply with average limit, the average level was deemed to comply with average limit.

Note 2: The emissions (9kHz~30MHz) not reported for there is no emission be found.

Duty cycle factor = $20\log(\text{Dwell time}/100\text{ms}) = -15.10\text{dB}$

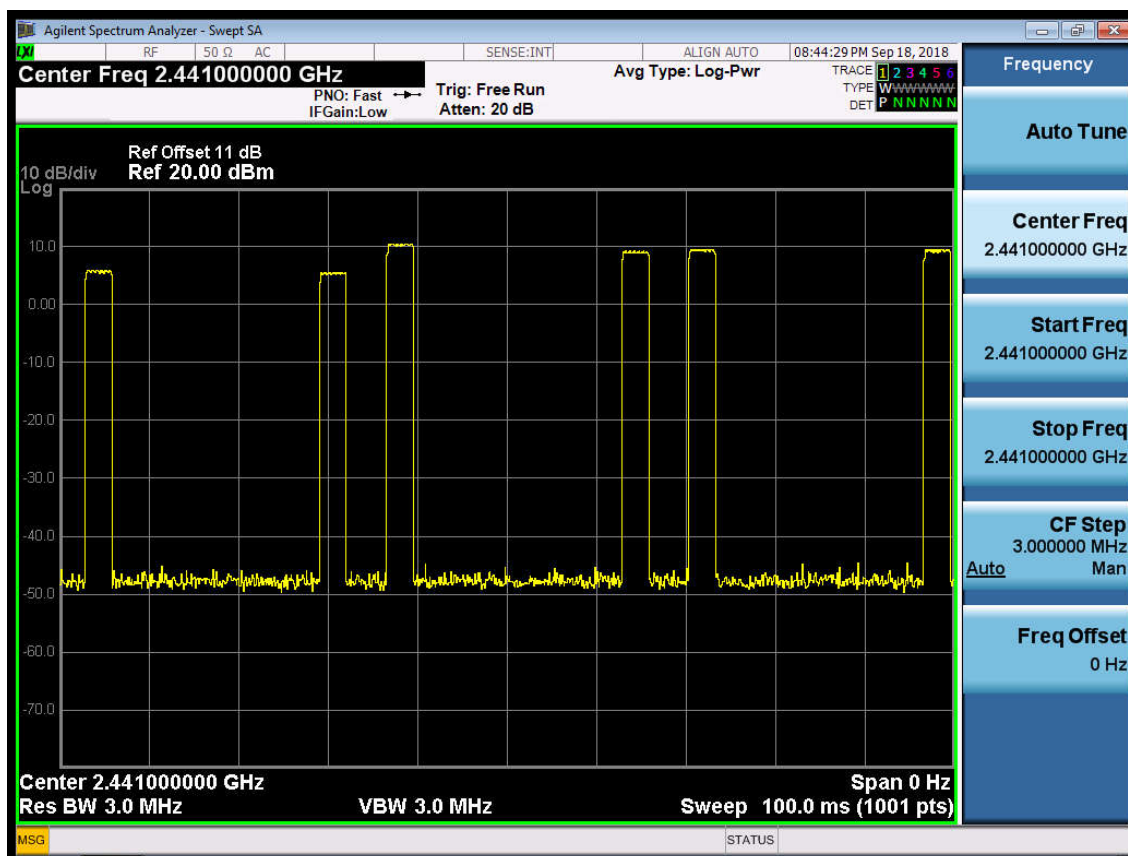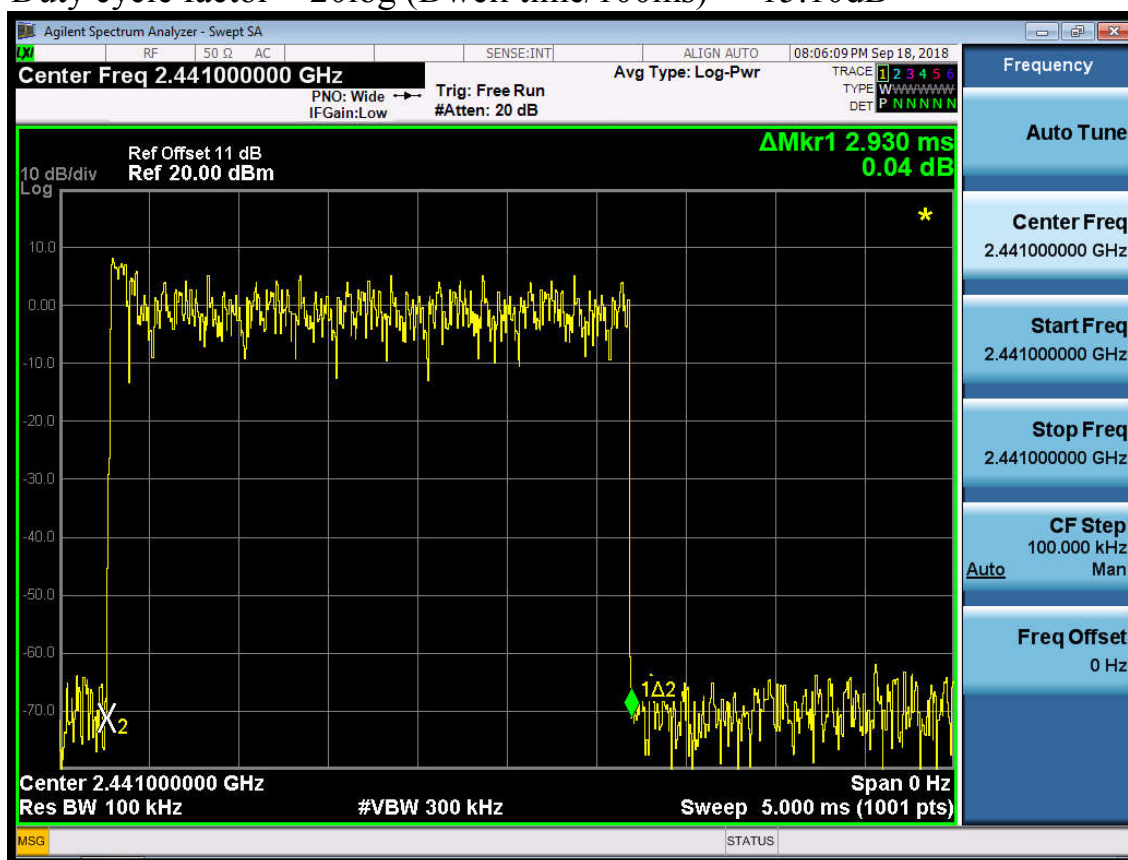


Frequency: 30MHz~1GHz

Data: 3

File: E:\2018 Report Data\F\FOXCONN\ACS18Q0979-rf.EM6 (20)


Date: 2018-09-29

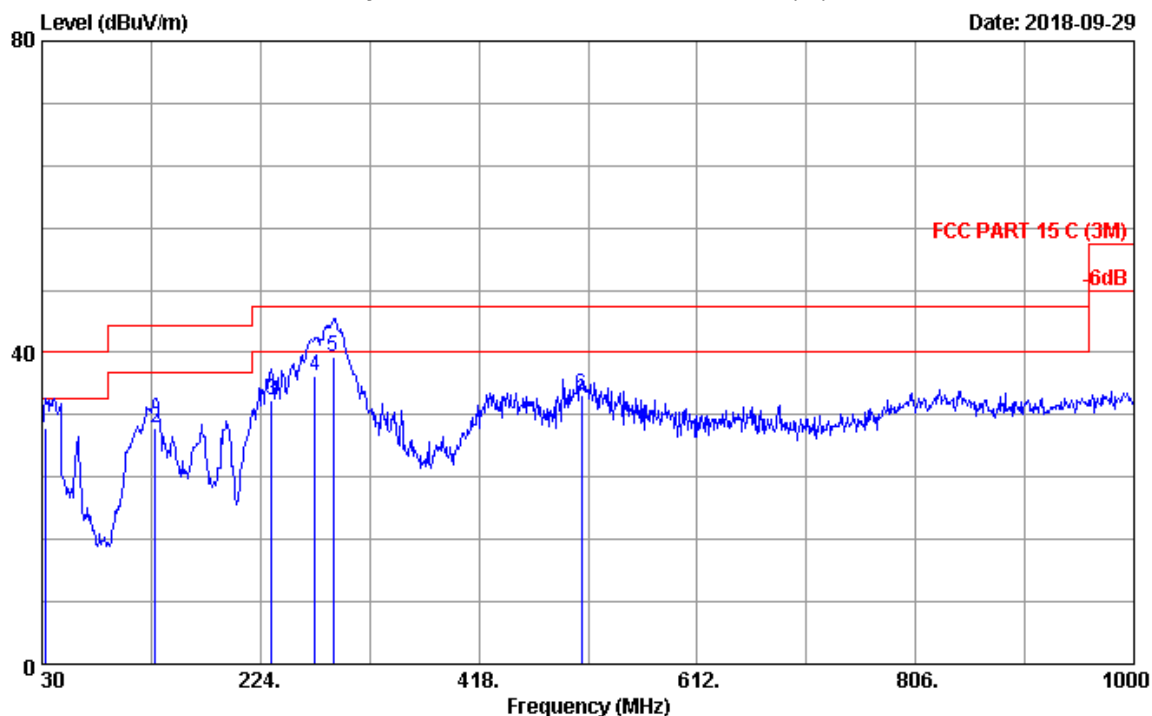

Site no. : 3m Chamber Data no. : 3
 Dis. / Ant. : 3m 2018 VULB 9168-710 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.7C/52% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC 120V/60Hz
 Test Mode : BT3.0 Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	32.910	19.34	0.61	10.25	30.20	40.00	9.80	QP
2	130.880	18.02	1.26	10.92	30.20	43.50	13.30	QP
3	233.700	17.74	1.94	14.28	33.96	46.00	12.04	QP
4	272.500	18.94	2.25	15.77	36.96	46.00	9.04	QP
5	288.990	19.58	2.38	17.39	39.35	46.00	6.65	QP
6	509.180	24.07	3.42	7.11	34.60	46.00	11.40	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

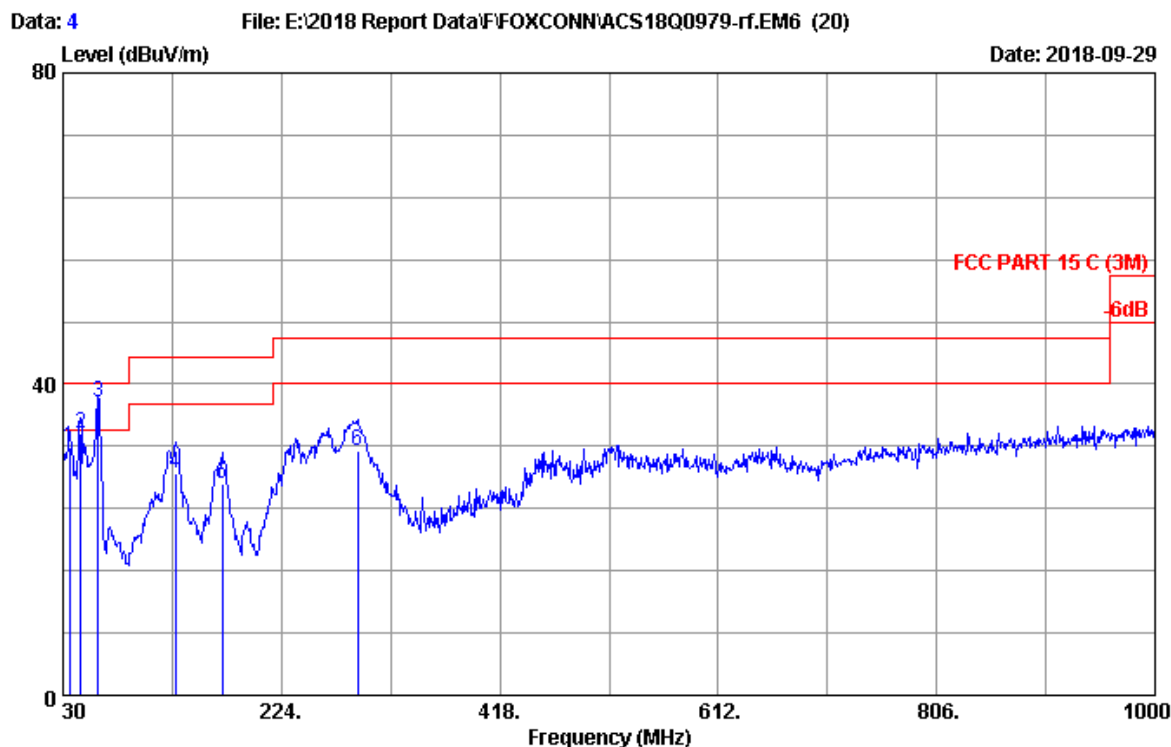

Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2018 VULB 9168-710 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C (3M)
 Env. / Ins. : 22.7C/52% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC 120V/60Hz
 Test Mode : BT3.0 Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	35.820	19.58	0.63	11.76	31.97	40.00	8.03	QP
2	45.520	20.12	0.72	12.84	33.68	40.00	6.32	QP
3	61.040	19.56	0.81	17.20	37.57	40.00	2.43	QP
4	129.910	17.90	1.25	9.38	28.53	43.50	14.97	QP
5	171.620	19.06	1.50	6.53	27.09	43.50	16.41	QP
6	291.900	19.64	2.41	9.28	31.33	46.00	14.67	QP


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Frequency: 1GHz~18GHz


Data: 1

File: F:\2018 Report\Foxconn\ACS18Q0979-BT.EM6 (48)

Date: 2018-09-24

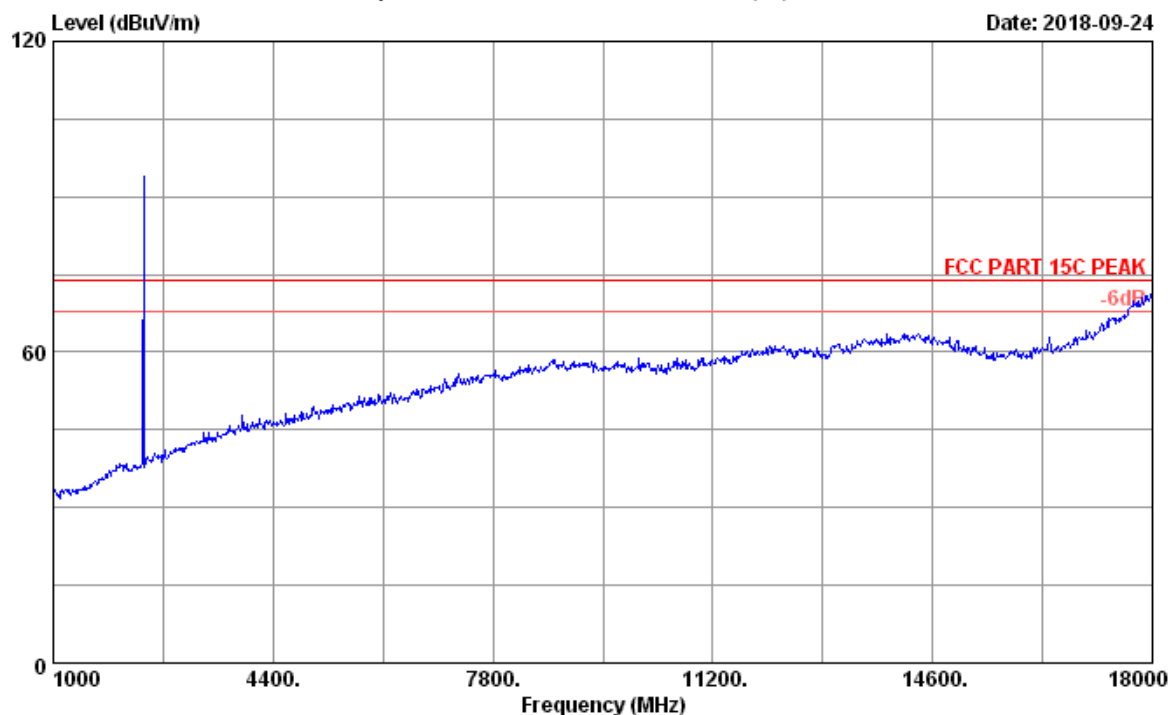

Site no.	: 3m Chamber	Data no.	: 1
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2402MHz Tx Mode		

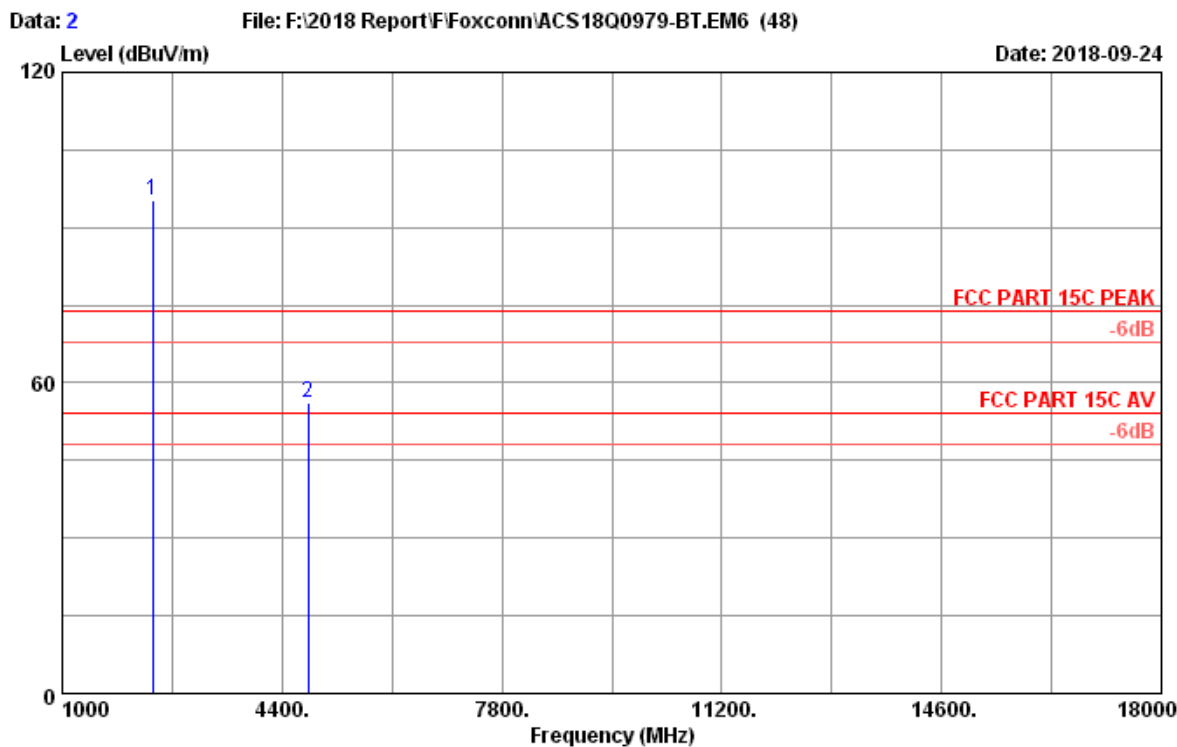


Site no. : 3m Chamber Data no. : 2
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.79	10.28	89.90	32.56	95.41	74.00	-21.41	Peak
2	4804.00	32.62	14.54	39.65	30.79	56.02	74.00	17.98	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4804.00	56.02	-15.10	40.92	54	Pass

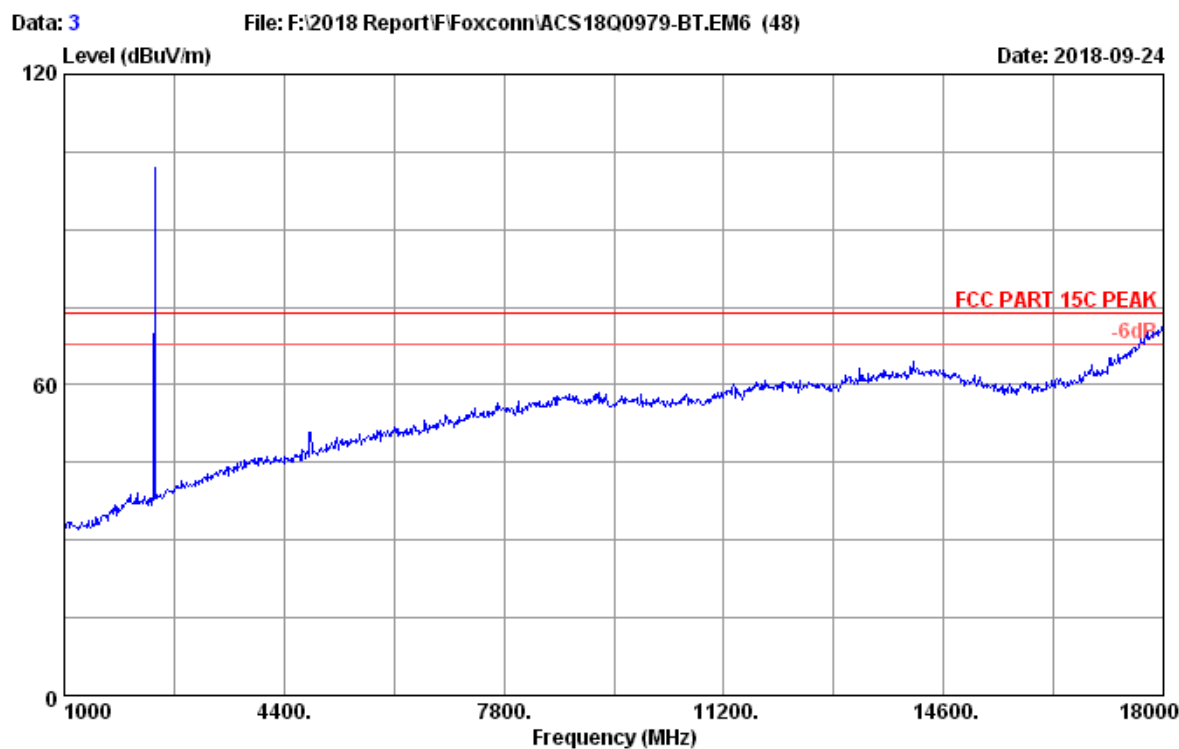

Site no.	: 3m Chamber	Data no.	: 3
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2402MHz Tx Mode		

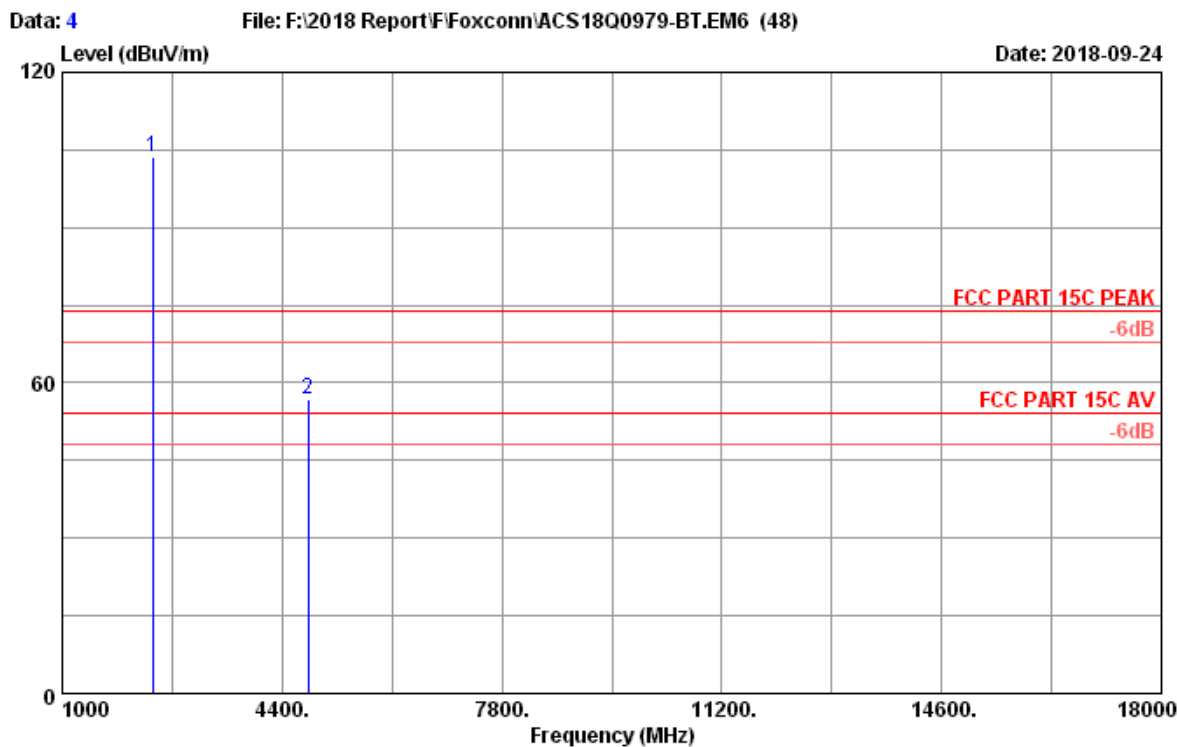


Site no. : 3m Chamber Data no. : 4
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.79	10.28	97.96	32.56	103.47	74.00	-29.47	Peak
2	4804.00	32.62	14.54	40.35	30.79	56.72	74.00	17.28	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4804.00	56.72	-15.10	41.62	54	Pass

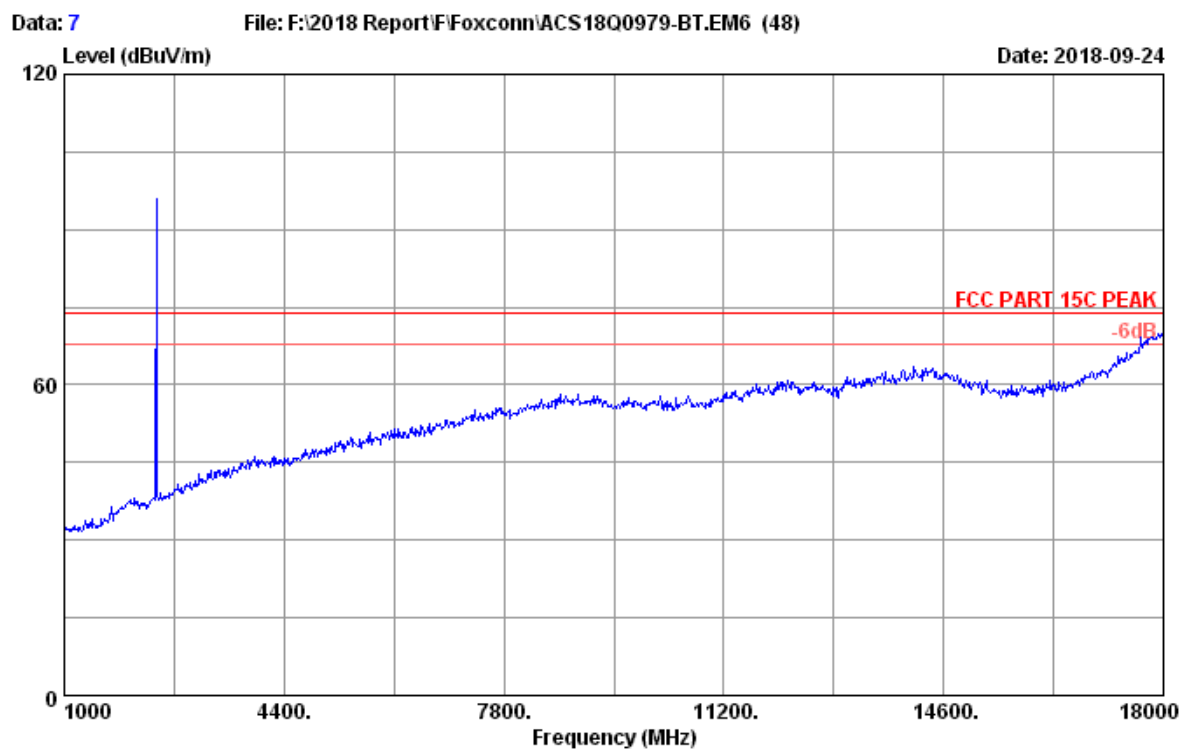

Site no.	: 3m Chamber	Data no.	: 7
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2441MHz Tx Mode		

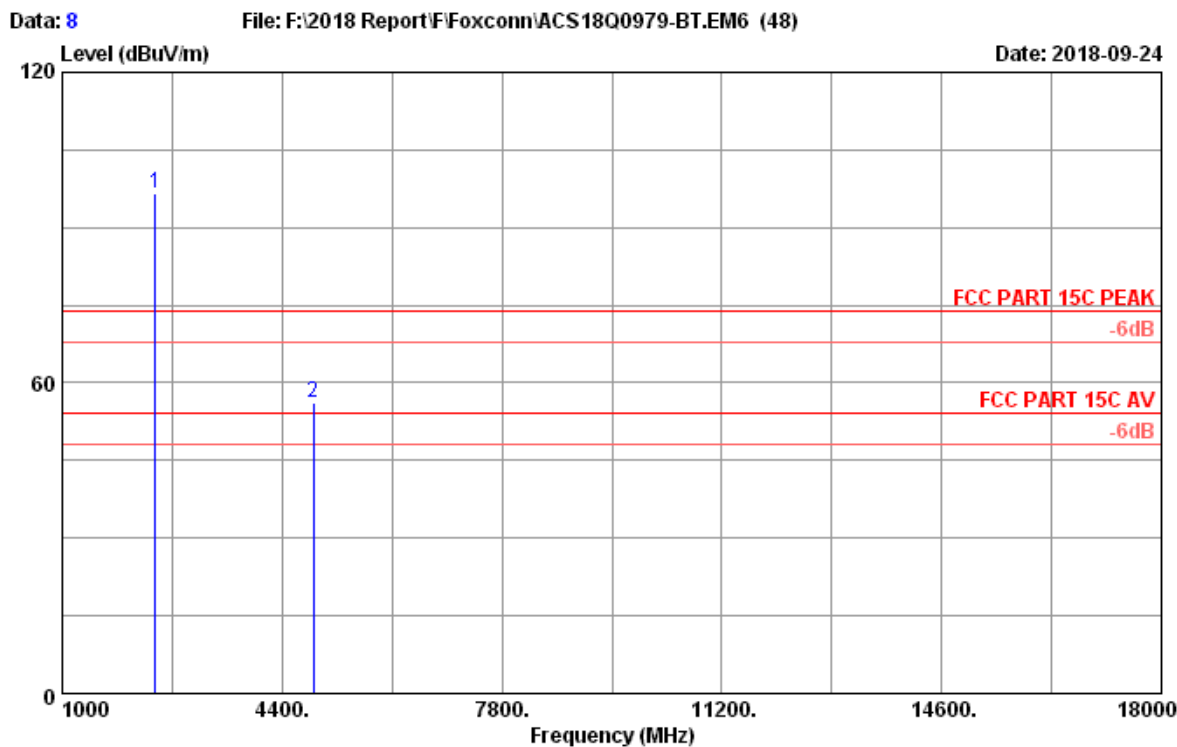


Site no. : 3m Chamber Data no. : 8
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.04	10.38	90.59	32.51	96.50	74.00	-22.50	Peak
2	4882.00	32.76	14.63	39.62	30.74	56.27	74.00	17.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4882.00	56.27	-15.10	41.17	54	Pass

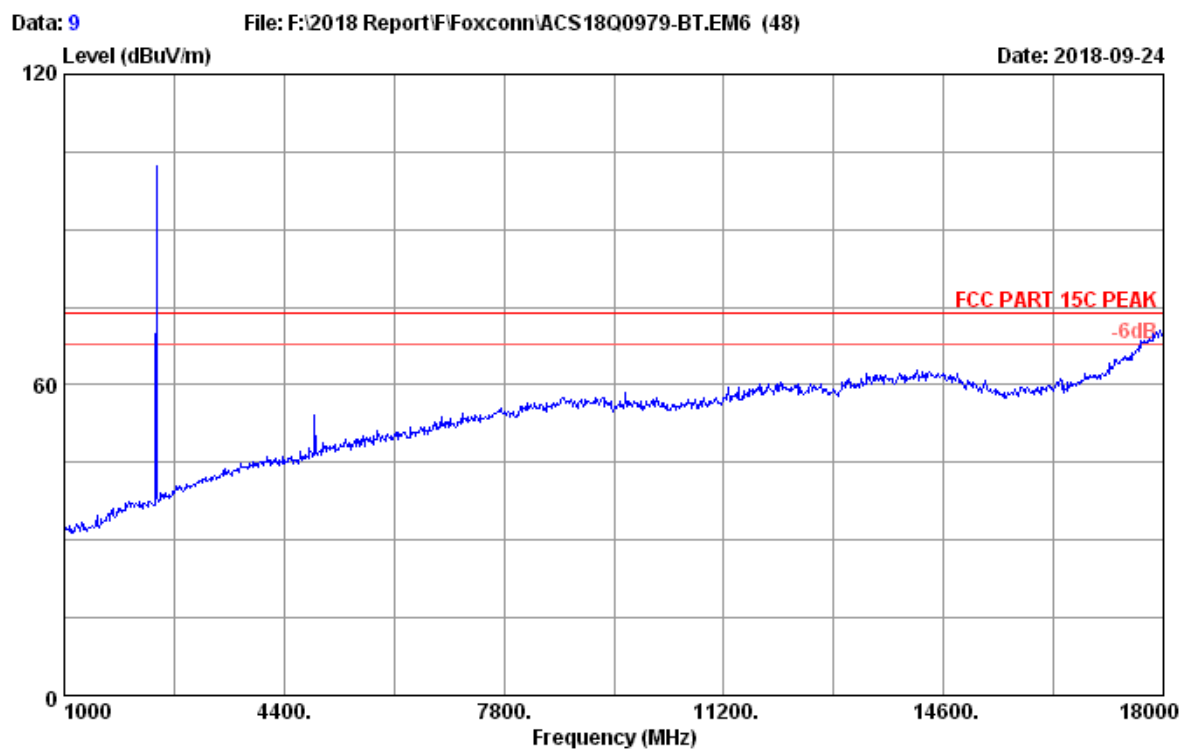

Site no.	: 3m Chamber	Data no.	: 9
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2441MHz Tx Mode		

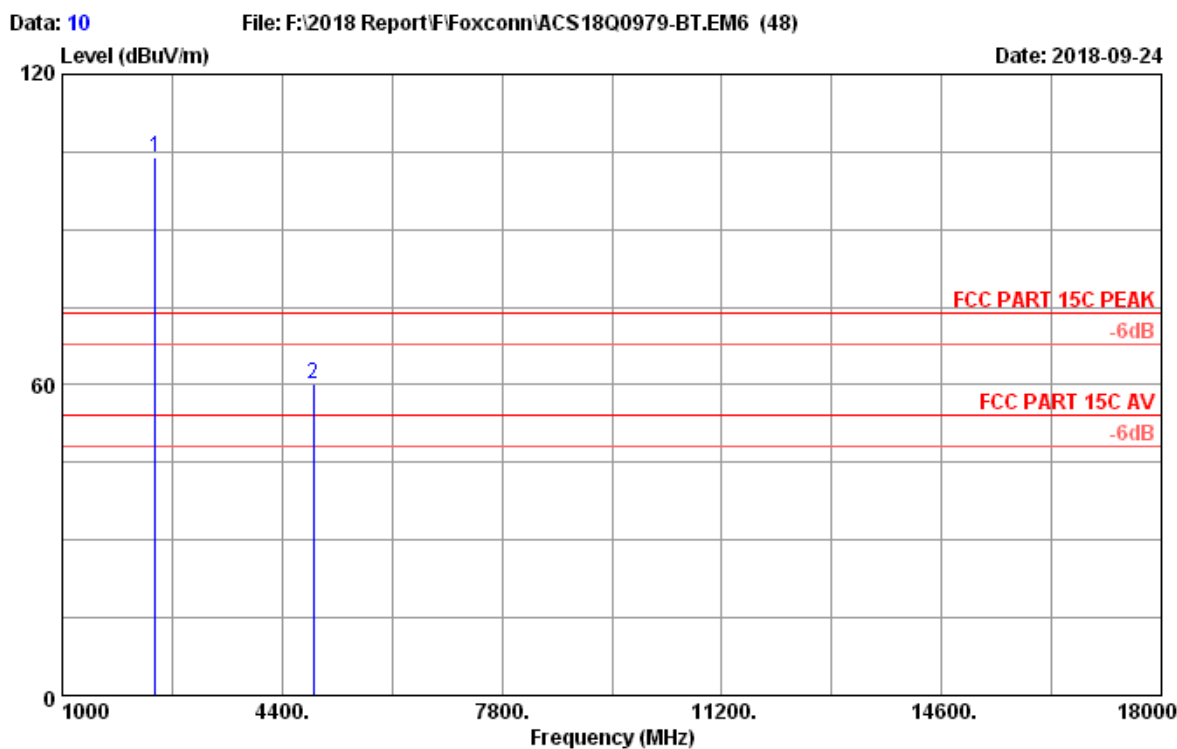


Site no. : 3m Chamber Data no. : 10
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2441MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.04	10.38	98.12	32.51	104.03	74.00	-30.03	Peak
2	4882.00	32.76	14.63	43.62	30.74	60.27	74.00	13.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4882.00	60.27	-15.10	45.17	54	Pass

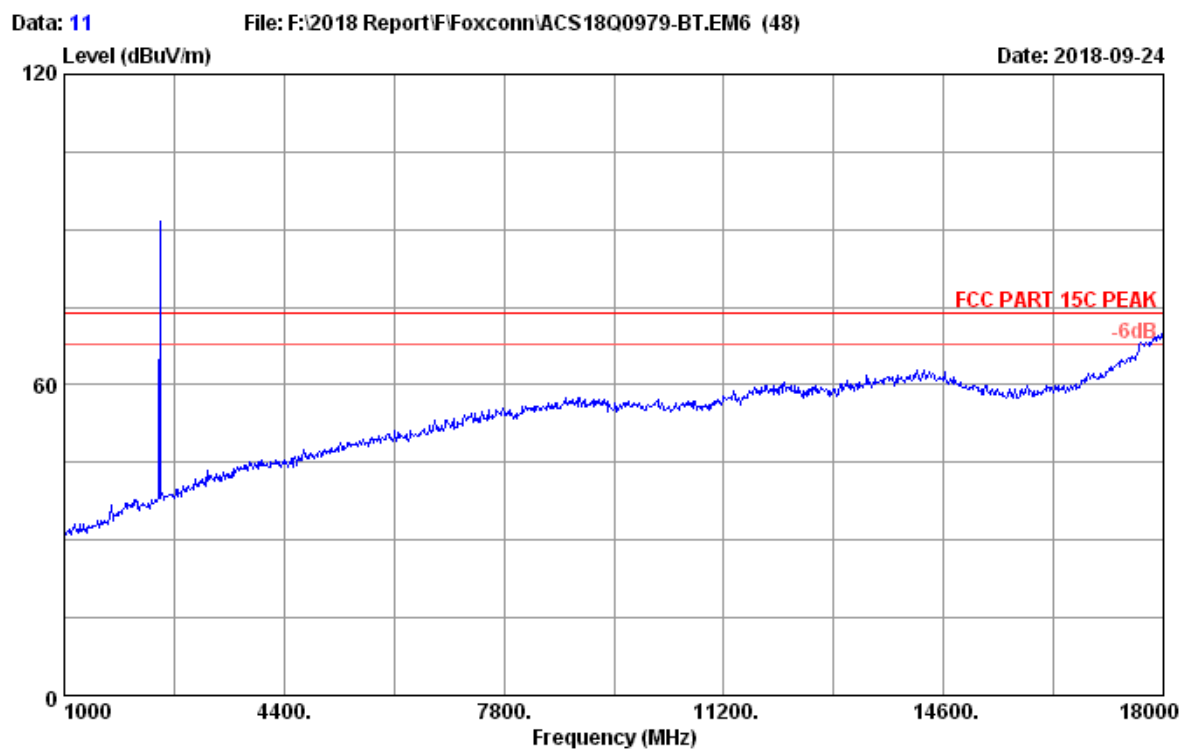

Site no.	: 3m Chamber	Data no.	: 11
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2480MHz Tx Mode		

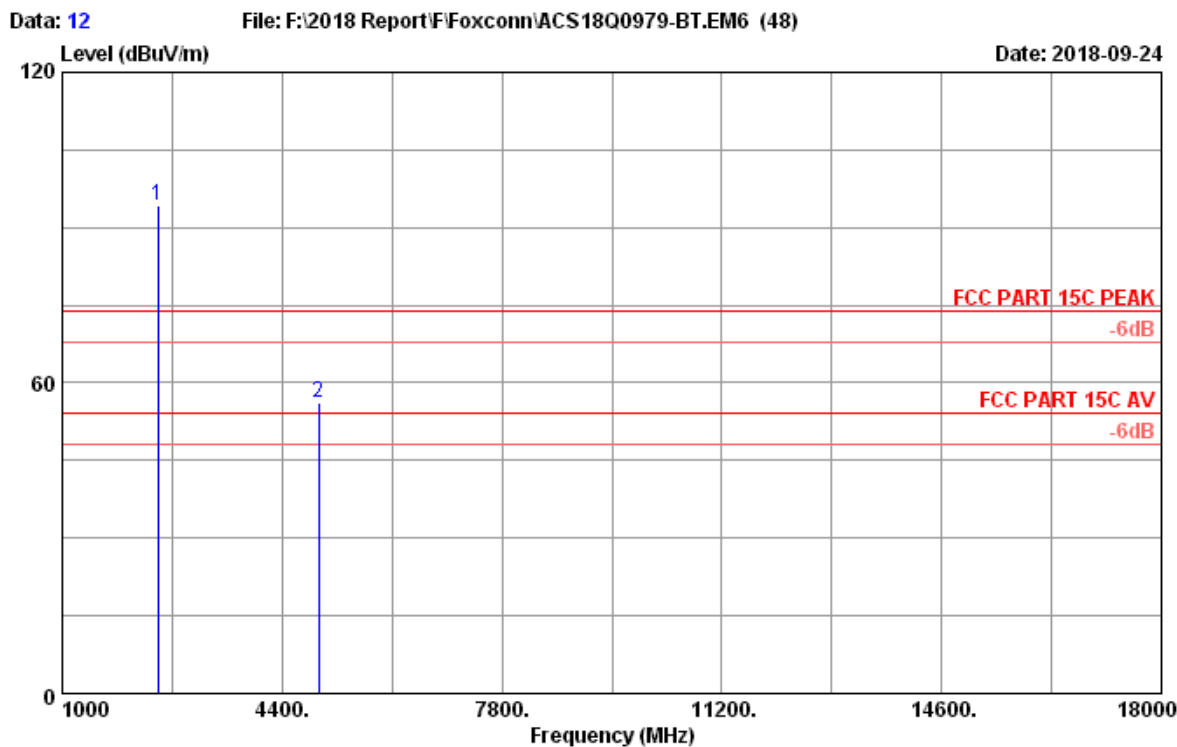


Site no. : 3m Chamber Data no. : 12
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.21	10.45	87.94	32.48	94.12	74.00	-20.12	Peak
2	4960.00	32.93	14.75	39.13	30.70	56.11	74.00	17.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4960.00	56.11	-15.10	41.01	54	Pass

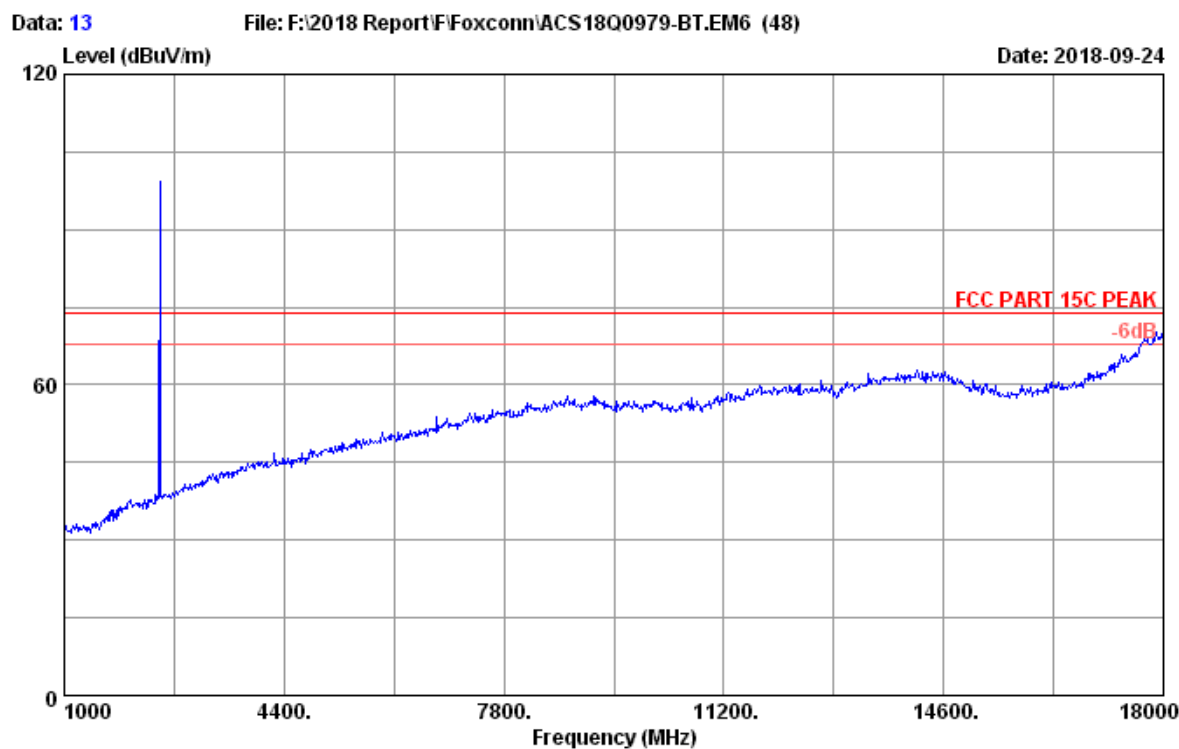

Site no.	: 3m Chamber	Data no.	: 13
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 GFSK 2480MHz Tx Mode		

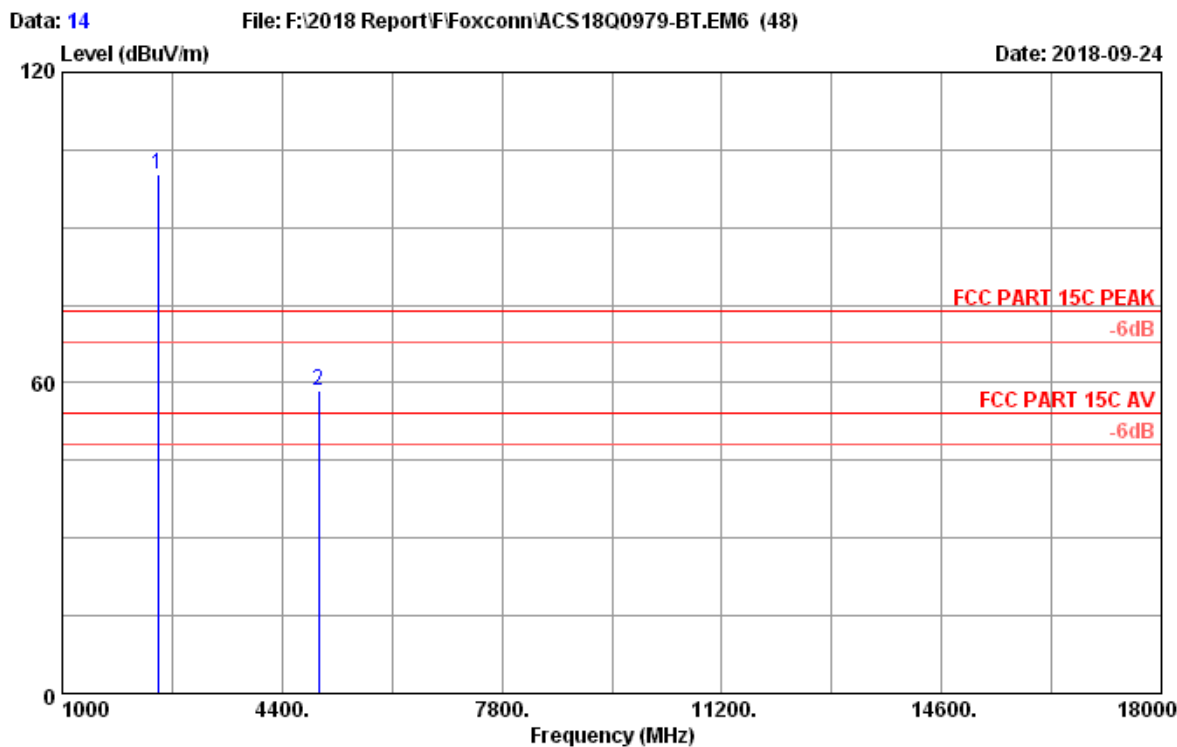


Site no. : 3m Chamber Data no. : 14
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.21	10.45	94.25	32.48	100.43	74.00	-26.43	Peak
2	4960.00	32.93	14.75	41.59	30.70	58.57	74.00	15.43	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4960.00	58.57	-15.10	43.47	54	Pass

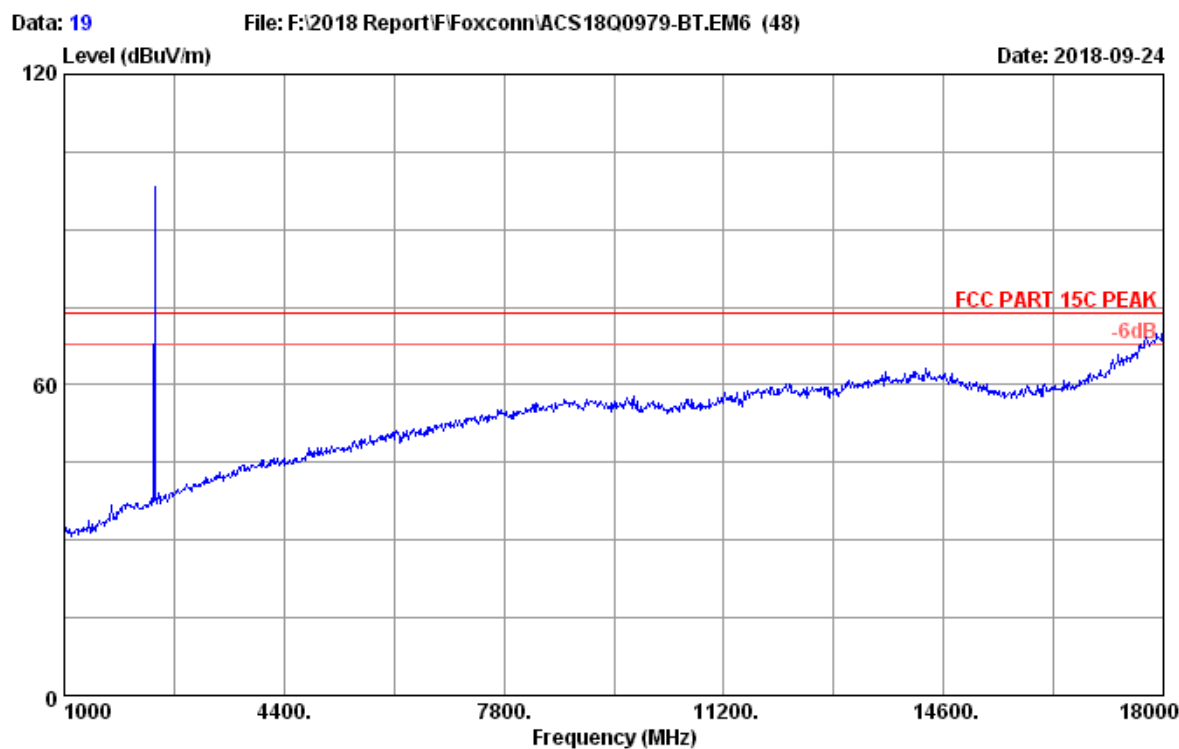

Site no.	: 3m Chamber	Data no.	: 19
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2402MHz Tx Mode		

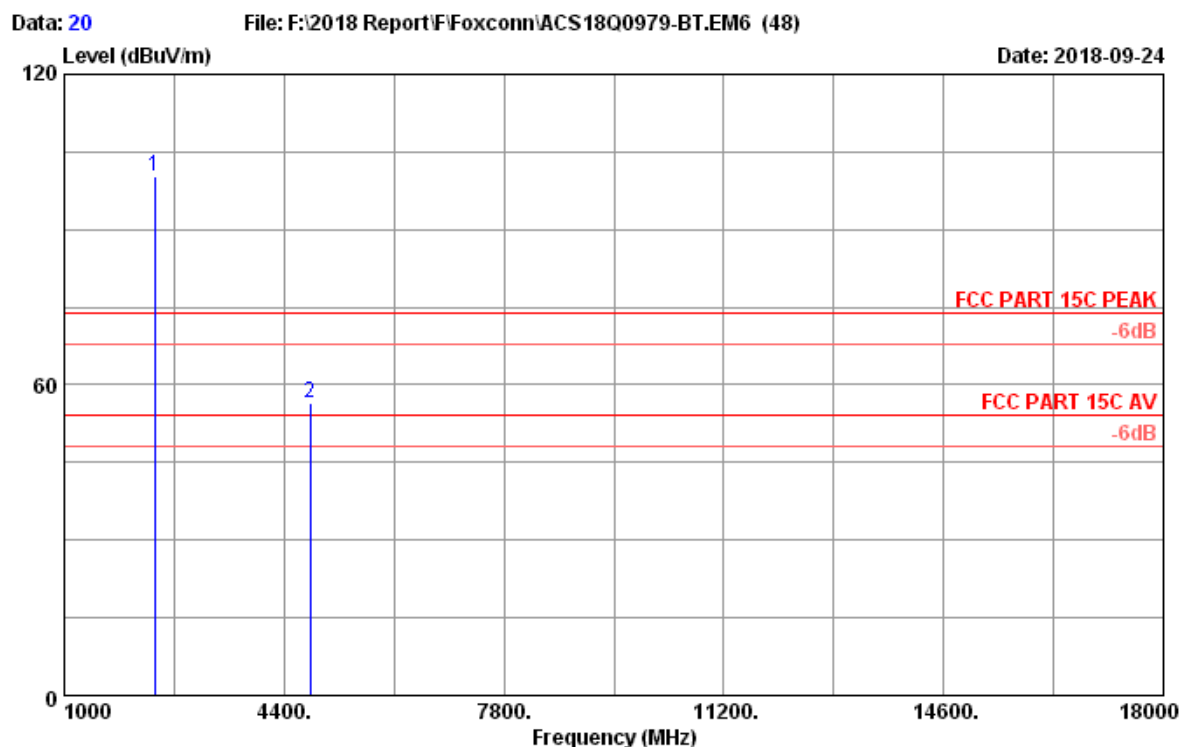


Site no. : 3m Chamber Data no. : 20
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.79	10.28	94.71	32.56	100.22	74.00	-26.22	Peak
2	4804.00	32.62	14.54	40.15	30.79	56.52	74.00	17.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4804.00	56.52	-15.10	41.42	54	Pass

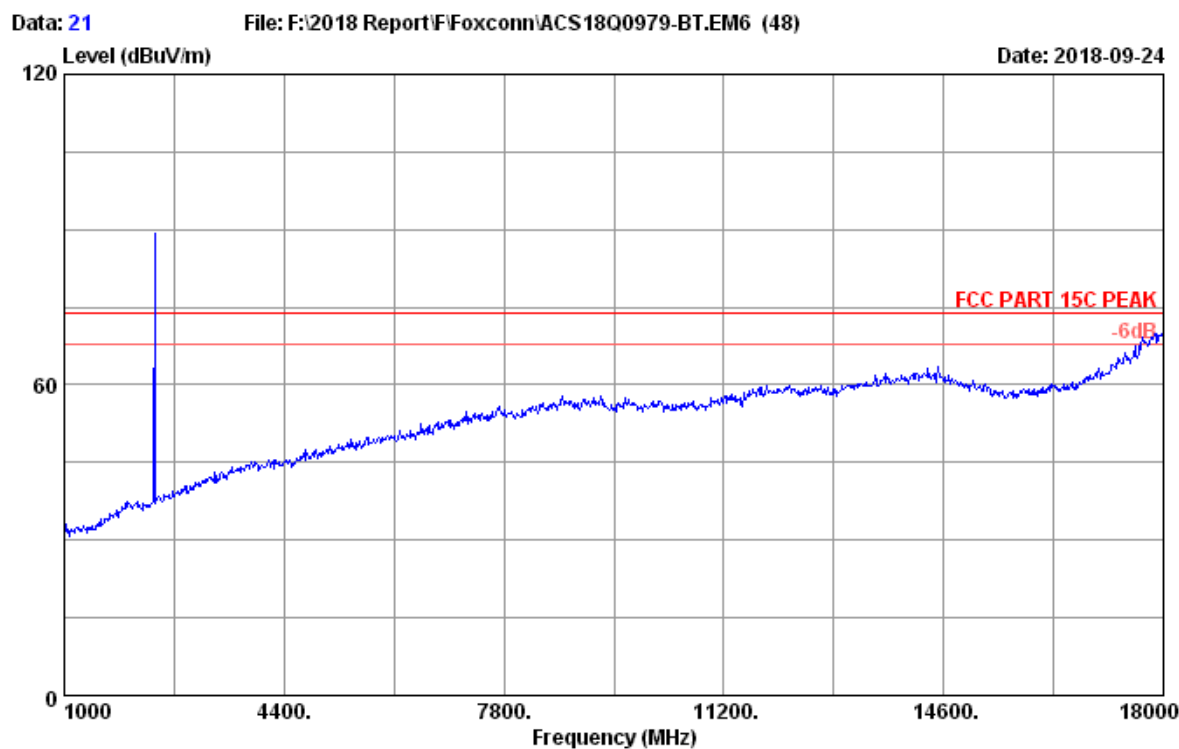

Site no.	: 3m Chamber	Data no.	: 21
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2402MHz Tx Mode		

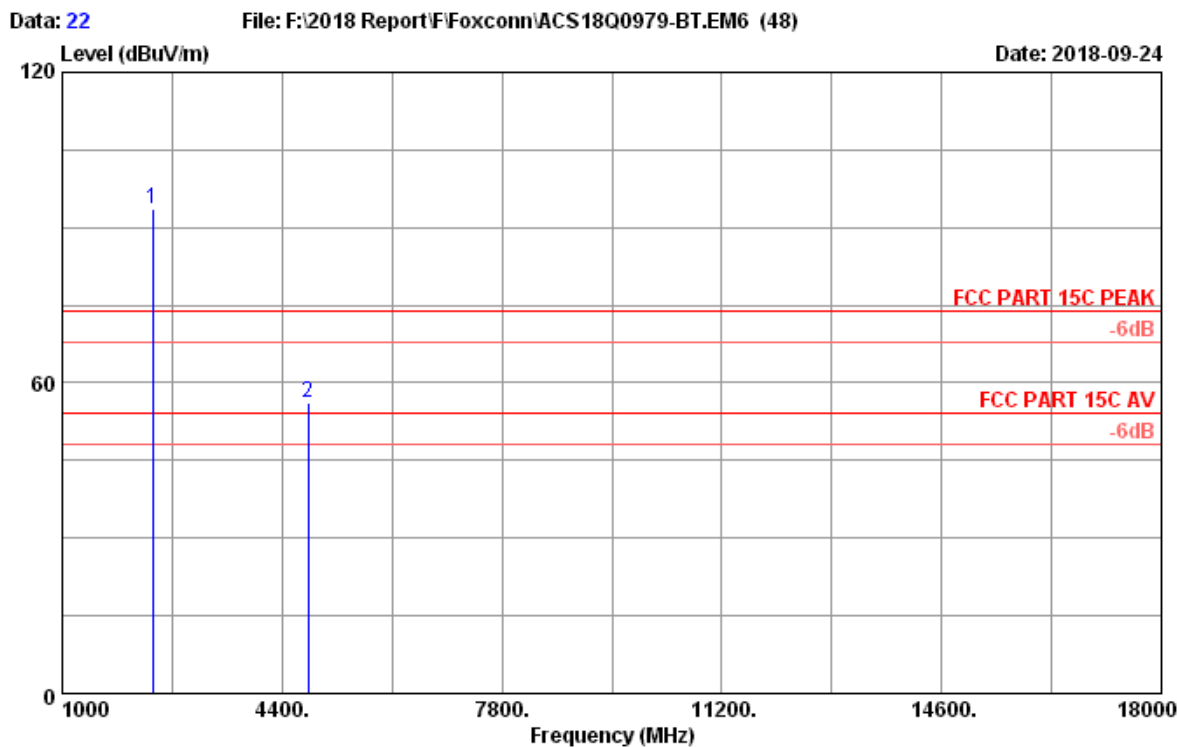


Site no. : 3m Chamber Data no. : 22
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2402.00	27.79	10.28	88.09	32.56	93.60	74.00	-19.60	Peak
2	4804.00	32.62	14.54	39.85	30.79	56.22	74.00	17.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4804.00	56.22	-15.10	41.12	54	Pass

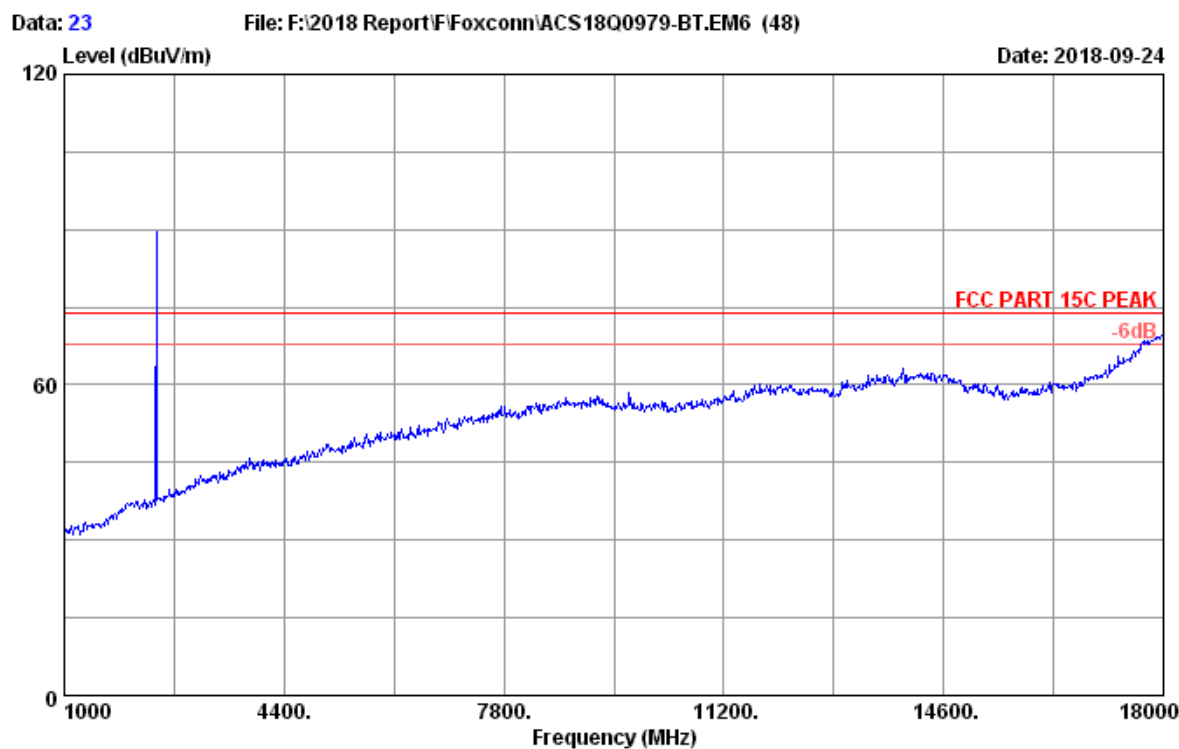

Site no.	: 3m Chamber	Data no.	: 23
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2441MHz Tx Mode		

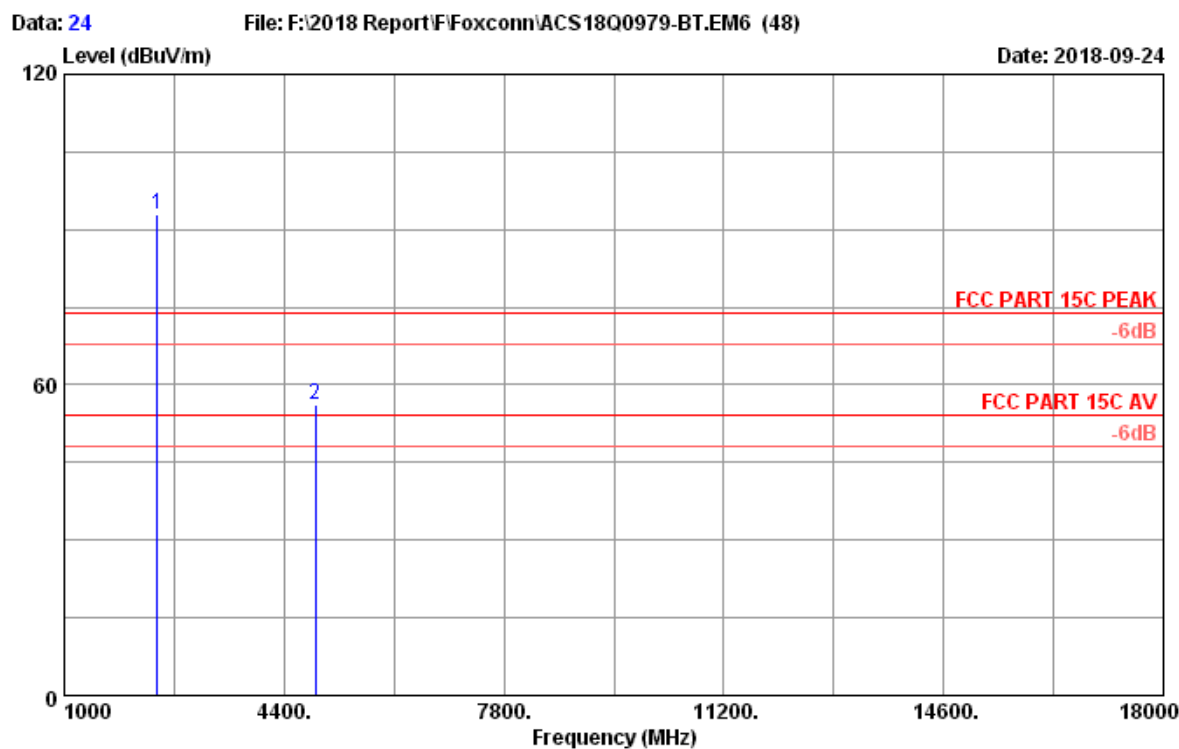


Site no. : 3m Chamber Data no. : 24
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.04	10.38	87.15	32.51	93.06	74.00	-19.06	Peak
2	4882.00	32.76	14.63	39.57	30.74	56.22	74.00	17.78	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4882.00	56.22	-15.10	41.12	54	Pass

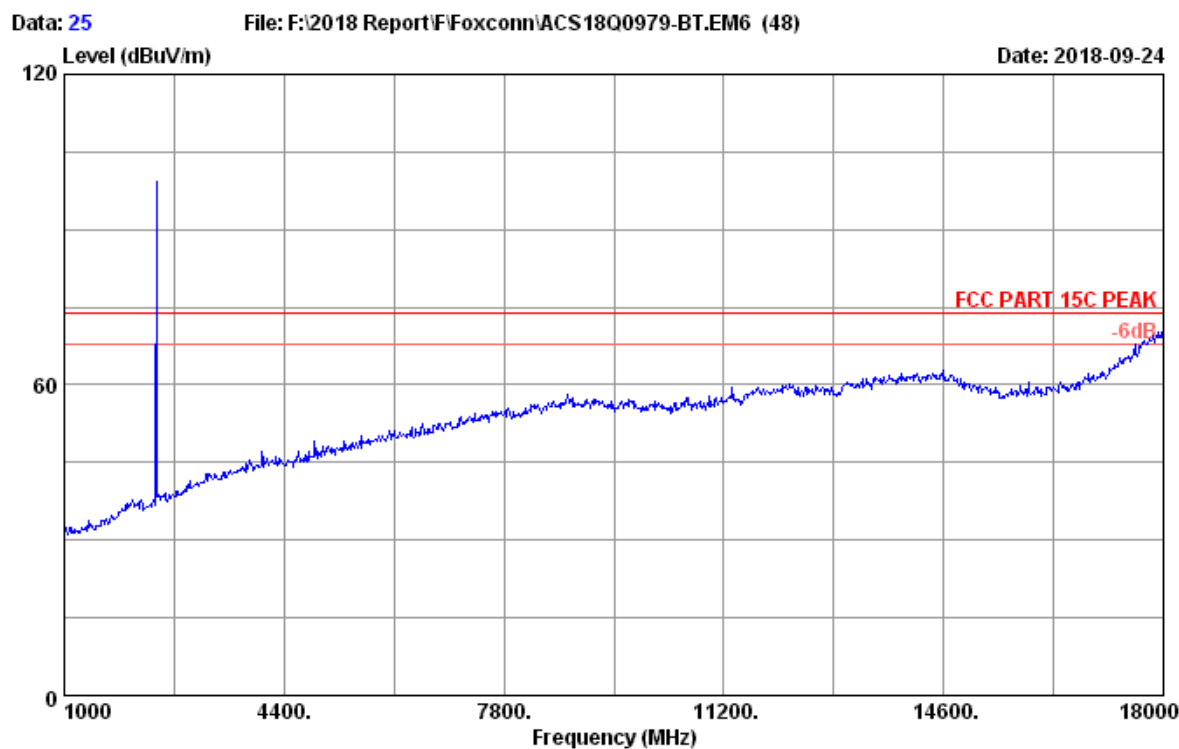

Site no.	: 3m Chamber	Data no.	: 25
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2441MHz Tx Mode		

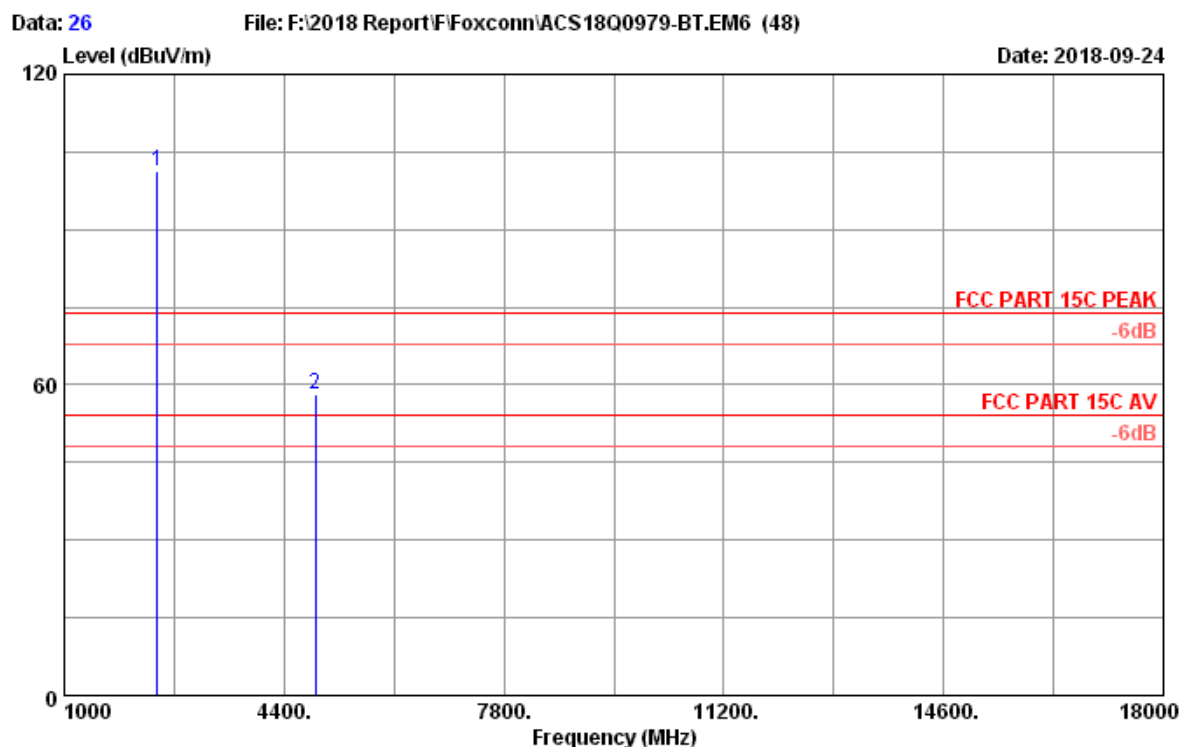


Site no. : 3m Chamber Data no. : 26
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2441MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2441.00	28.04	10.38	95.42	32.51	101.33	74.00	-27.33	Peak
2	4882.00	32.76	14.63	41.38	30.74	58.03	74.00	15.97	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4882.00	58.03	-15.10	42.93	54	Pass

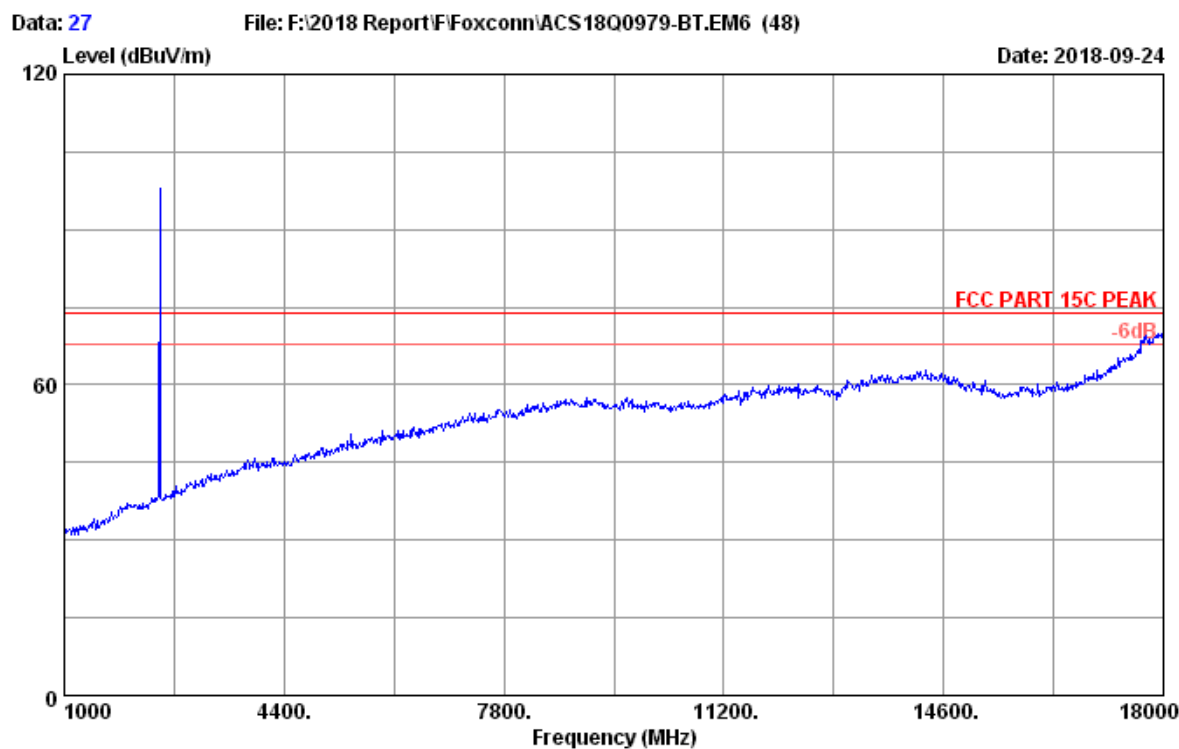

Site no.	: 3m Chamber	Data no.	: 27
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: VERTICAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2480MHz Tx Mode		

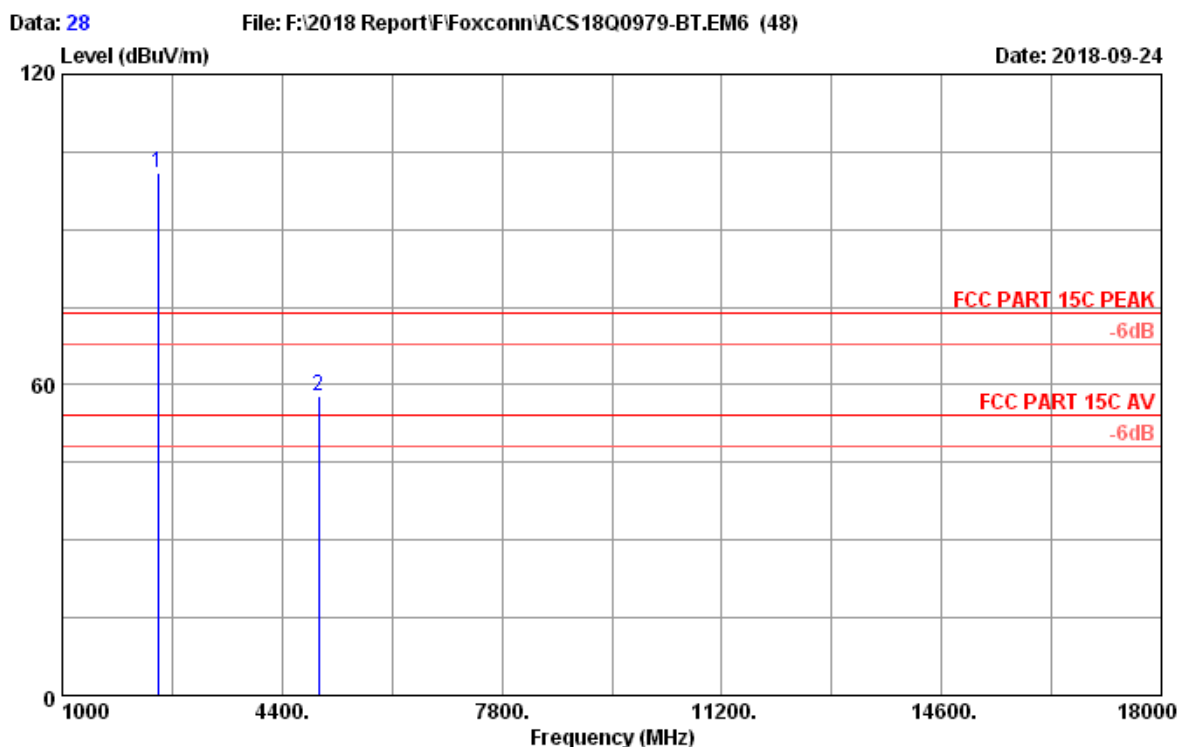


Site no. : 3m Chamber Data no. : 28
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.21	10.45	94.76	32.48	100.94	74.00	-26.94	Peak
2	4960.00	32.93	14.75	40.88	30.70	57.86	74.00	16.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4960.00	57.86	-15.10	42.76	54	Pass

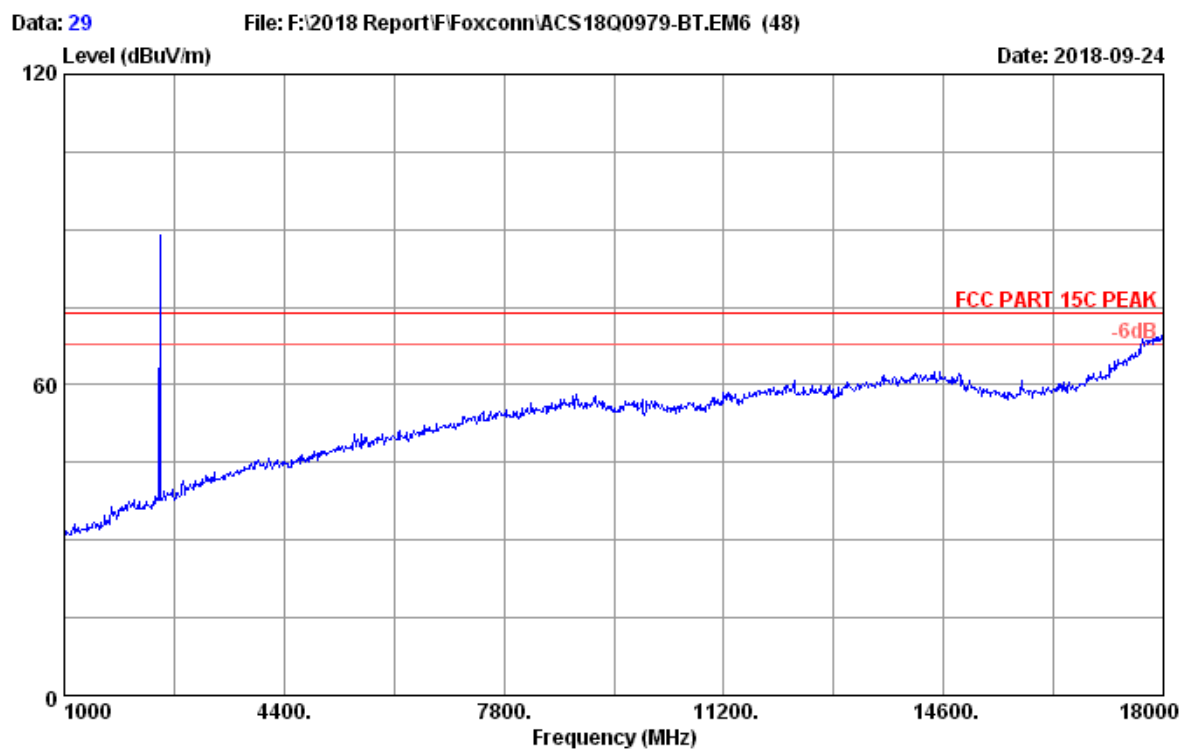

Site no.	: 3m Chamber	Data no.	: 29
Dis. / Ant.	: 3m 2017 3115(4580)	Ant. pol.	: HORIZONTAL
Limit	: FCC PART 15C PEAK		
Env. / Ins.	: 23.4°C/52.9%	Engineer	: Lynn
EUT	: POS Terminal M/N:SPD1-01		
Power rating	: AC120V/60Hz		
Test Mode	: BT3.0 8-DPSK 2480MHz Tx Mode		

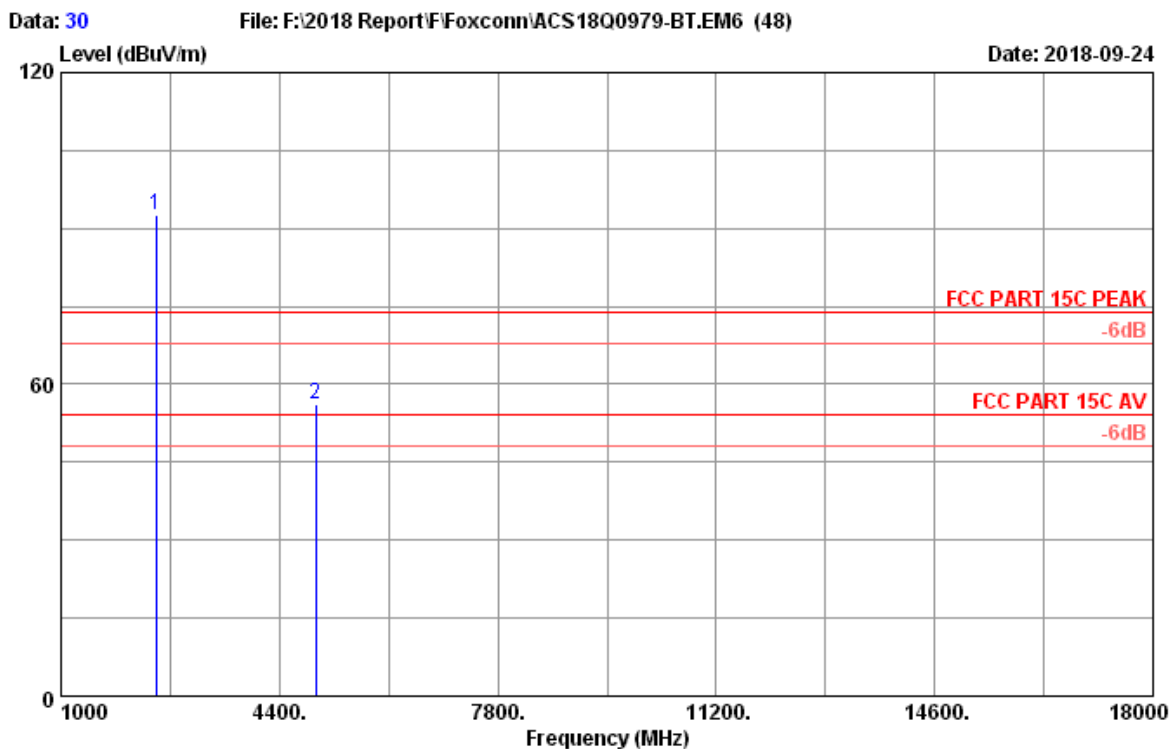

Site no. : 3m Chamber Data no. : 30
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	28.21	10.45	86.58	32.48	92.76	74.00	-18.76	Peak
2	4960.00	32.93	14.75	39.13	30.70	56.11	74.00	17.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.

2. The emission levels that are 20dB below the official
 limit are not reported.

Frequency (MHz)	Peak level (dBuV/m)	Duty cycle factor (dB)	AV level (dBuV/m)	Limit (dBuV/m)	Conclusion
4960.00	56.11	-15.10	41.01	54	Pass

5. CONDUCTED SPURIOUS EMISSIONS

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Attenuator	Agilent	8491B	MY39262165	Oct.14,17	1 Year
3.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

5.2. Limit

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

5.3. Test Procedure

The transmitter output was connected to a spectrum analyzer, The resolution bandwidth is set to 100 kHz, The video bandwidth is set to 300 kHz and measure all the emissions With peak detector.


5.4. Test result

PASS (The testing data was attached in the next pages.)


Hopping off

GFSK


2402MHz(30MHz – 1GHz)

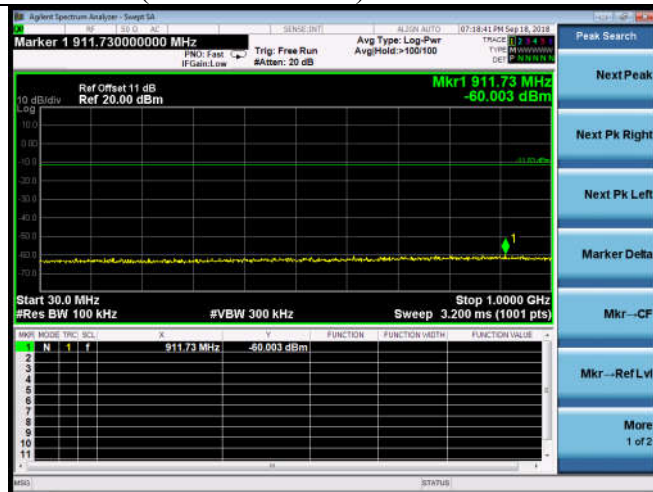


2402MHz(10GHz – 26GHz)

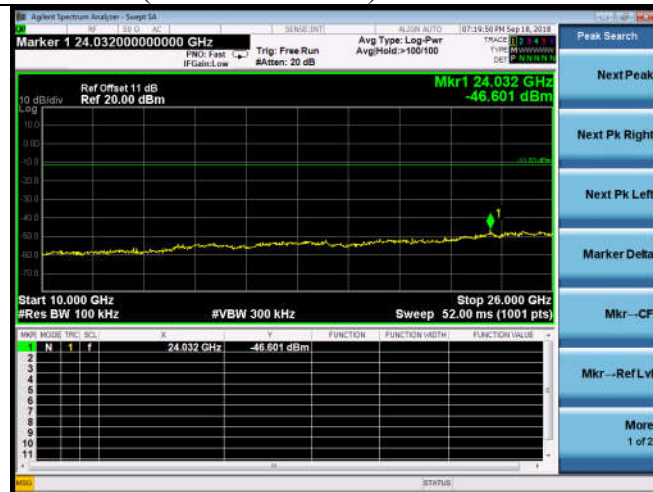


2402MHz(1GHz – 10GHz)

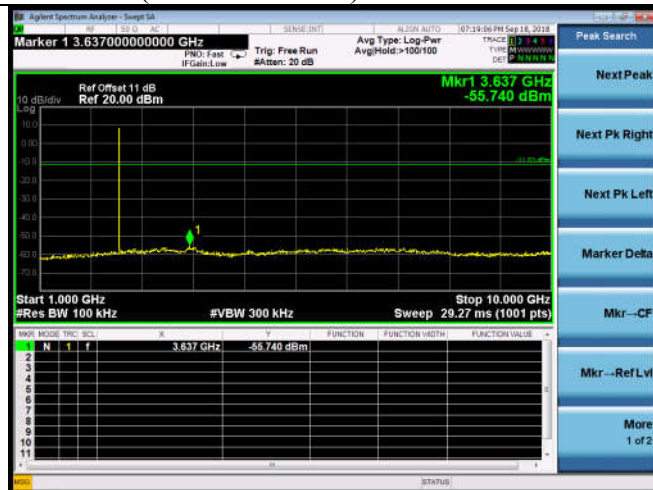


2441(30MHz – 1GHz)

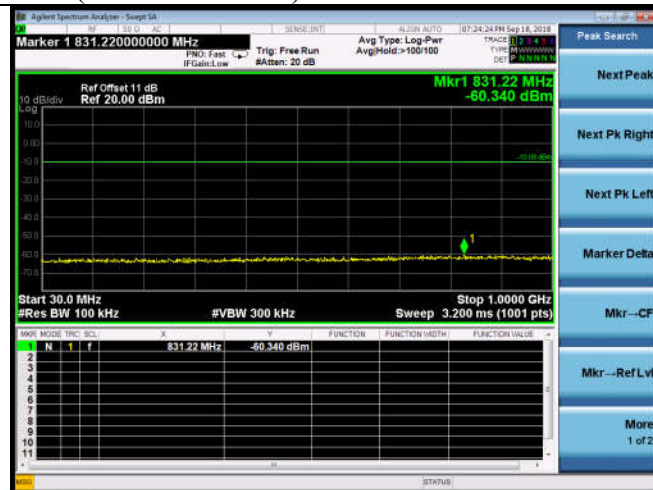


2402MHz(2.3GHz – 2.4GHz)

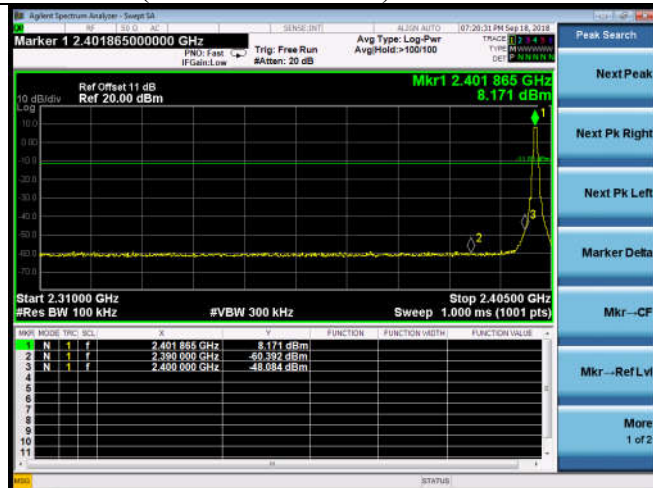


2441(1GHz – 10GHz)

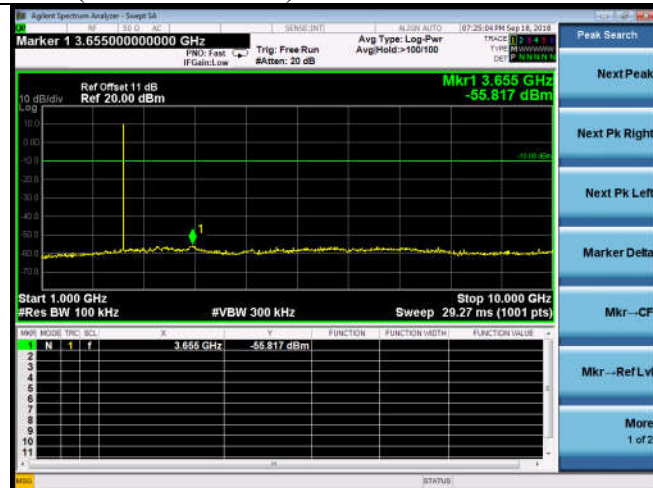


2441(10GHz – 26GHz)

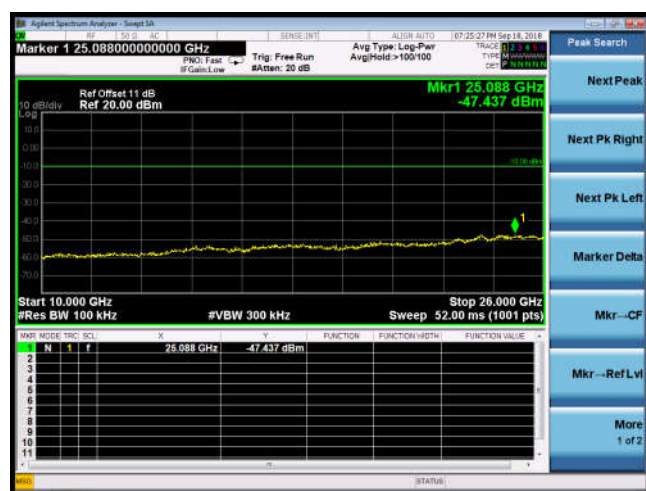


2480MHz(2.4GHz – 2.5GHz)

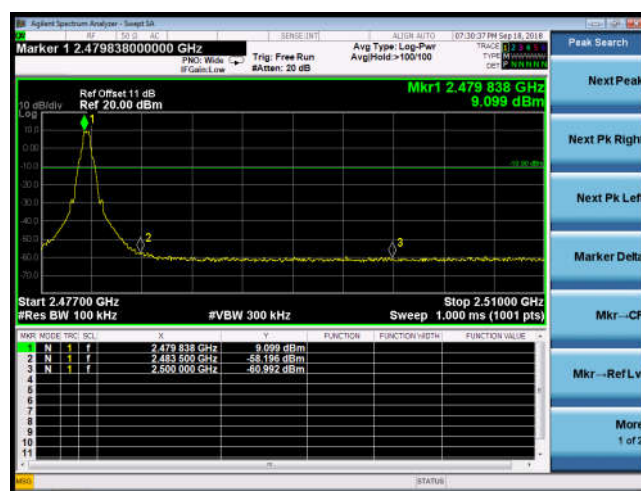

2480MHz(30MHz – 1GHz)

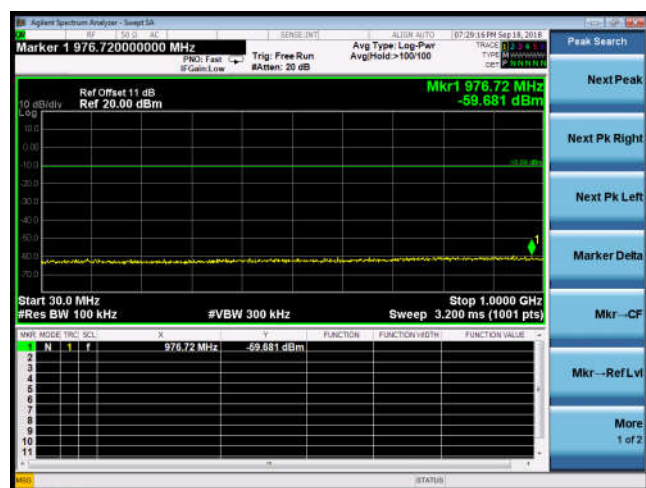


2480MHz(10GHz – 26GHz)

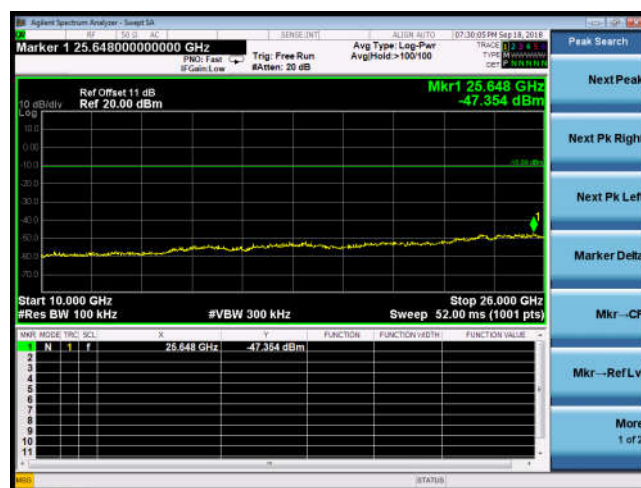


8-DPSK


2480MHz(1GHz – 10GHz)

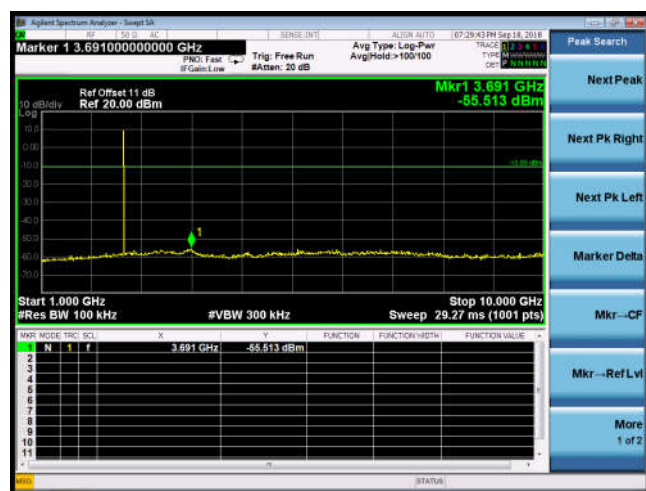


2402MHz(30MHz – 1GHz)

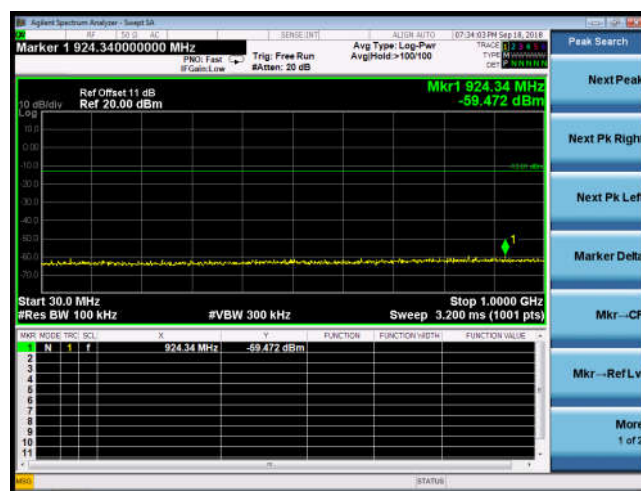


2402MHz(1GHz – 10GHz)

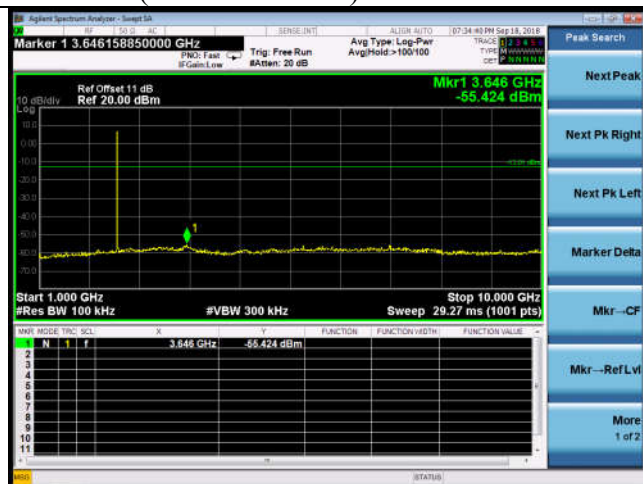


2441MHz (30MHz – 1GHz)

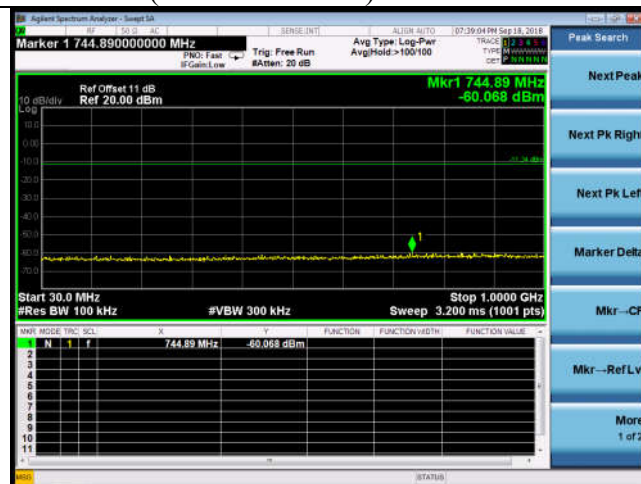


2402MHz(2.3GHz – 2.4GHz)

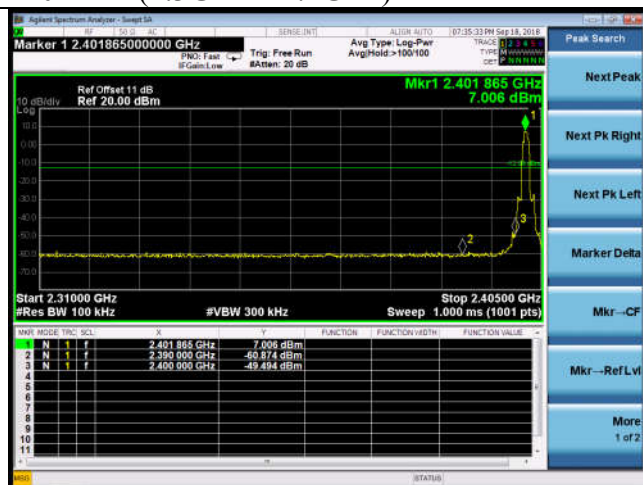


2441MHz(1GHz – 10GHz)

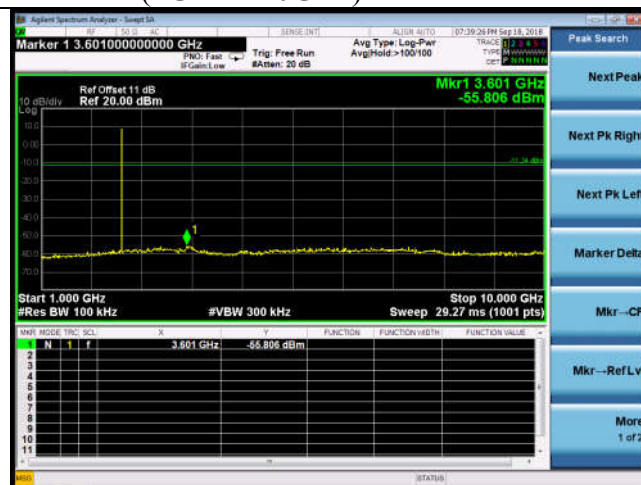


2402MHz(10GHz – 26GHz)

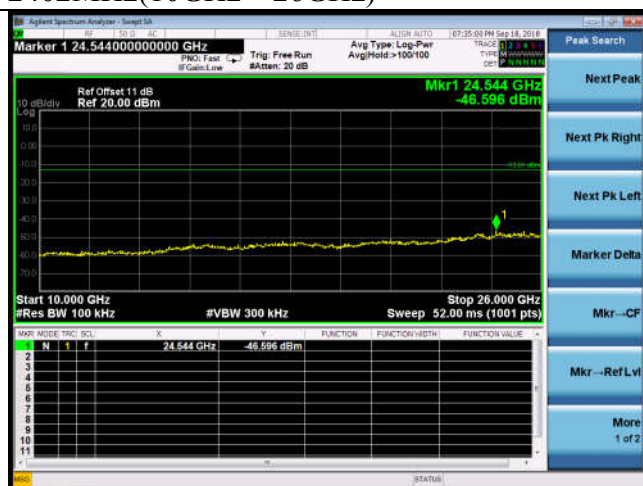


2441MHz(10GHz – 26GHz)

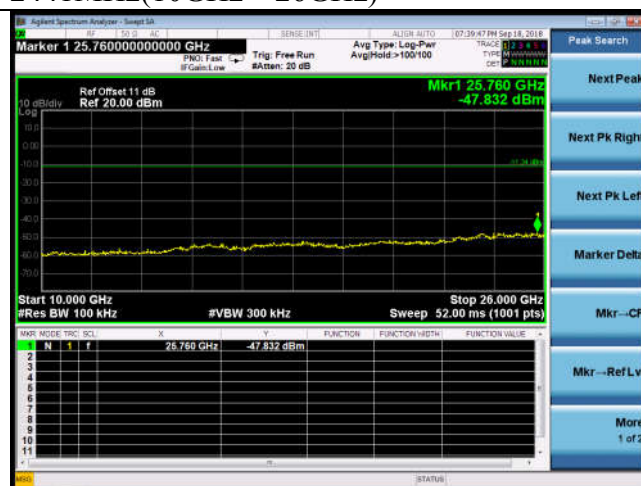

2480MHz(30MHz – 1GHz)

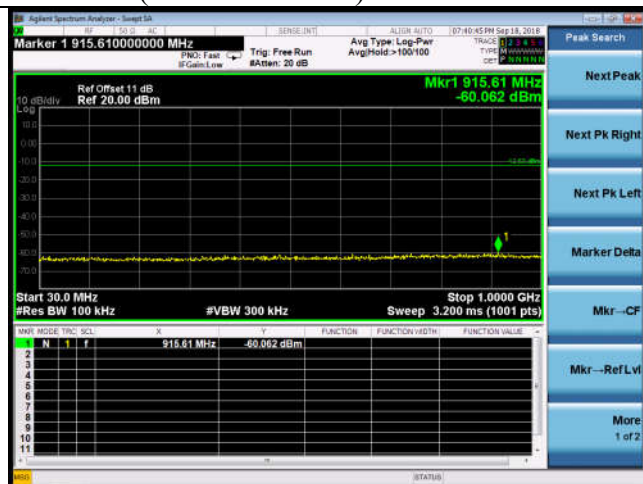


2480MHz(10GHz – 26GHz)

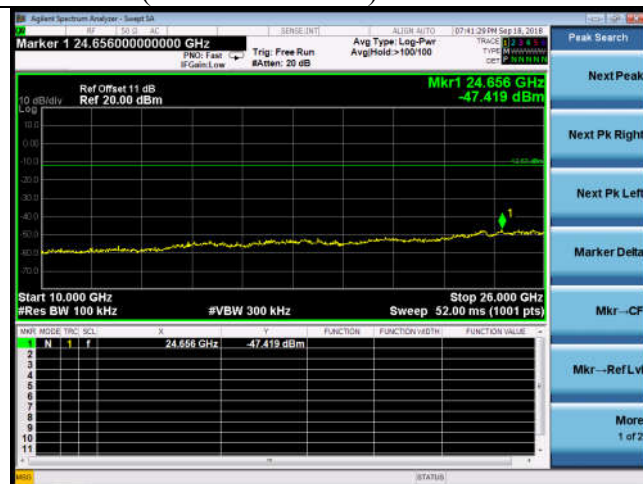


Hopping on


2480MHz(1GHz – 10GHz)

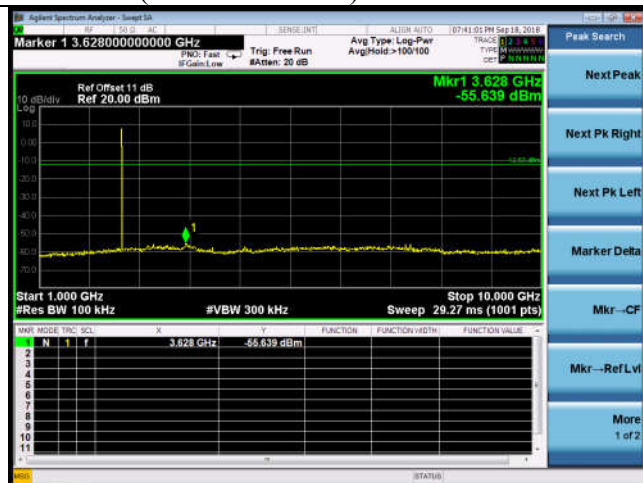


GFSK(2.3GHz – 2.4GHz)

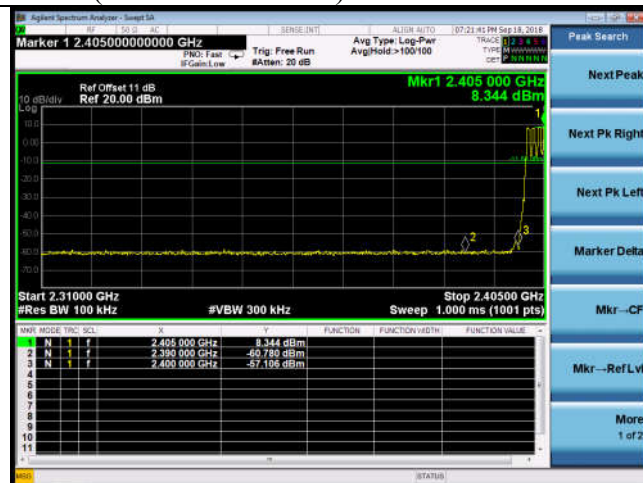


2480MHz(2.4GHz – 2.5GHz)

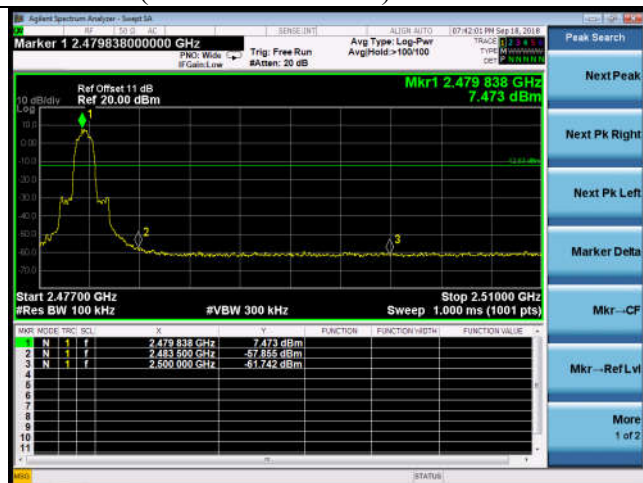


(2.4GHz – 2.5GHz)

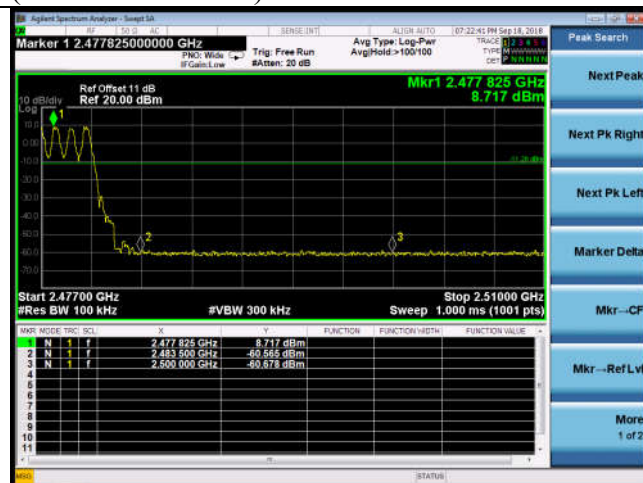

8-DPSK(2.3GHz – 2.4GHz)

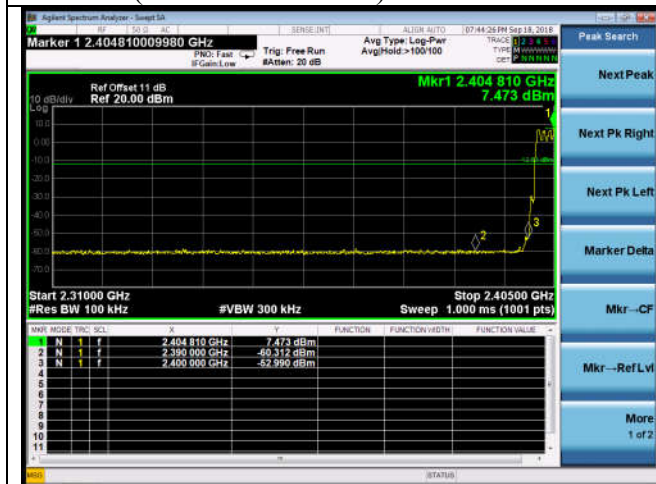

(2.4GHz – 2.5GHz)

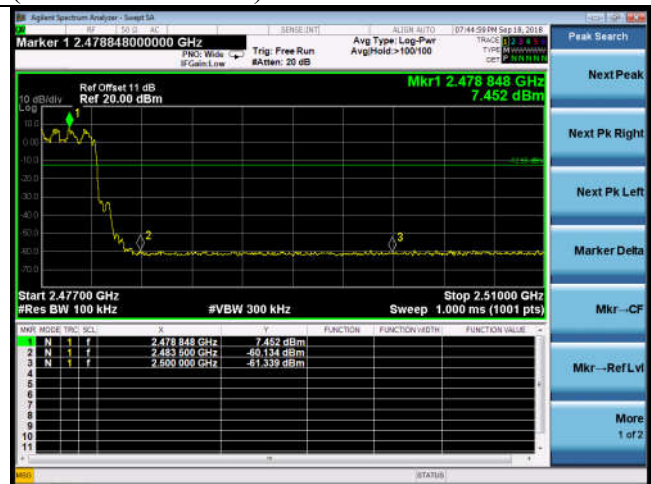

6. 20 DB BANDWIDTH TEST

6.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Attenuator (20dB)	Agilent	8491B	MY39262165	Oct.14,17	1 Year
3.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

6.2. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

6.3. Test Procedure

1. Connect the antenna port of the EUT to the spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel with test software.
3. Setting of SA is following as: RBW: 30kHz / VBW: 100kHz
Sweep Mode: Continuous sweep
Detect mode: Positive peak
Trace mode: Max hold.
4. Use the occupied bandwidth function of the SA measure the 20dB bandwidth directly.

6.4. Test Results

EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-18	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C

Test Mode	Frequency (MHz)	20dB bandwidth (kHz)	Limit (KHz)
GFSK	2402	936.0	N/A
	2441	933.3	N/A
	2480	934.6	N/A
8-DPSK	2402	1225	N/A
	2441	1242	N/A
	2480	1243	N/A
Conclusion : PASS			


GFSK

2402MHz




8-DPSK


2402MHz

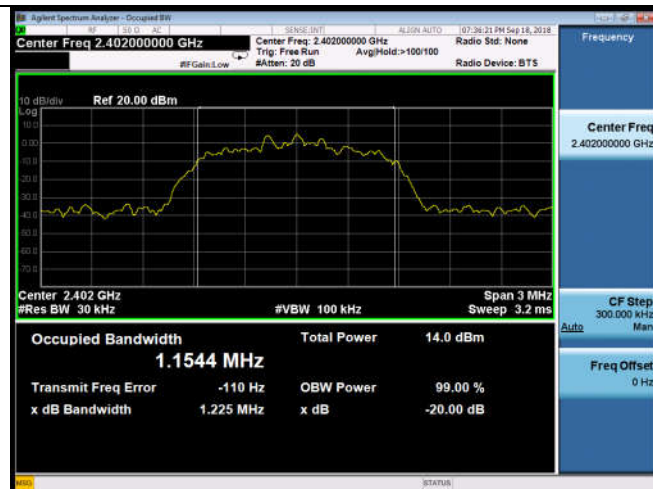

2441MHz

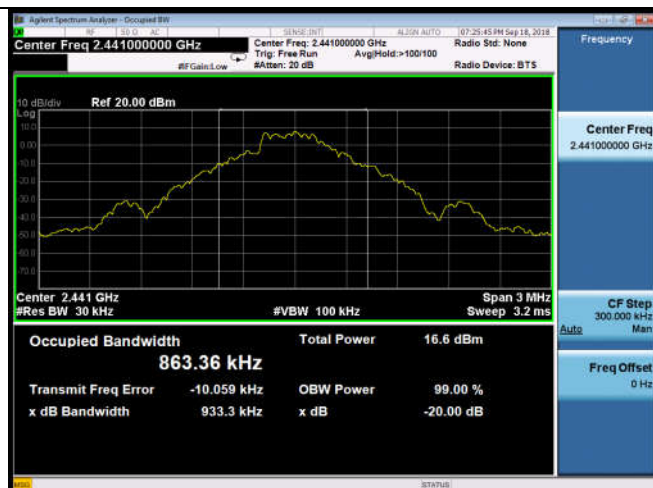


2441MHz

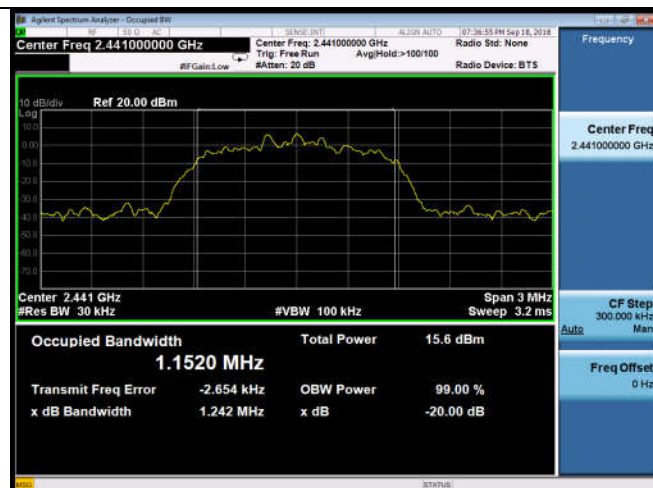

2480MHz



2480MHz

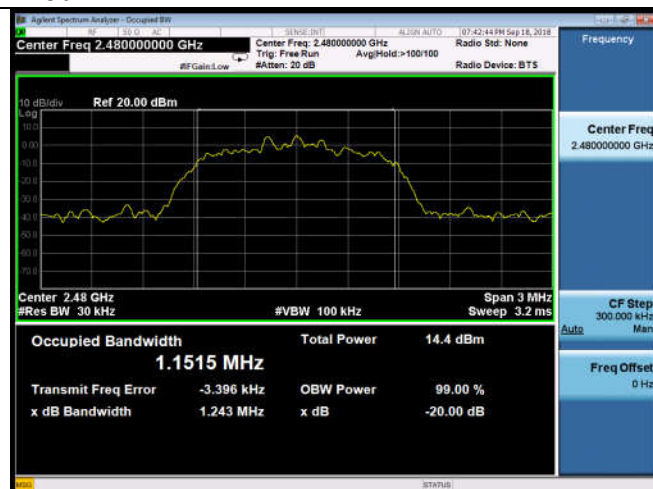

7. CARRIER FREQUENCY SEPARATION TEST

7.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

7.2. Limit


Frequency hopping systems shall have hopping channel carrier frequency separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.3. Test Procedure

1. Connect the antenna port of the EUT to the Spectrum analyzer.
2. Let the EUT transmit at Low/ Mid/ High channel.
3. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz.Span:5MHz
4. Use the mark Delta function of the SA measure out the channel separation.

7.4. Test Results.

EUT: POS Terminal			
M/N: SPD1-01			
Test Date: 2018-9-18		Pressure: 102.2±1.0kpa	Humidity: 52.1±3.0%
Tested By: Lynn		Test site: RF site	Temperature:21.8±0.6 °C
Test Mode	Channel separation	Limit(KHz)	Conclusion
GFSK	1.0MHz	624.000	PASS
8-DPSK	1.0MHz	828.667	PASS

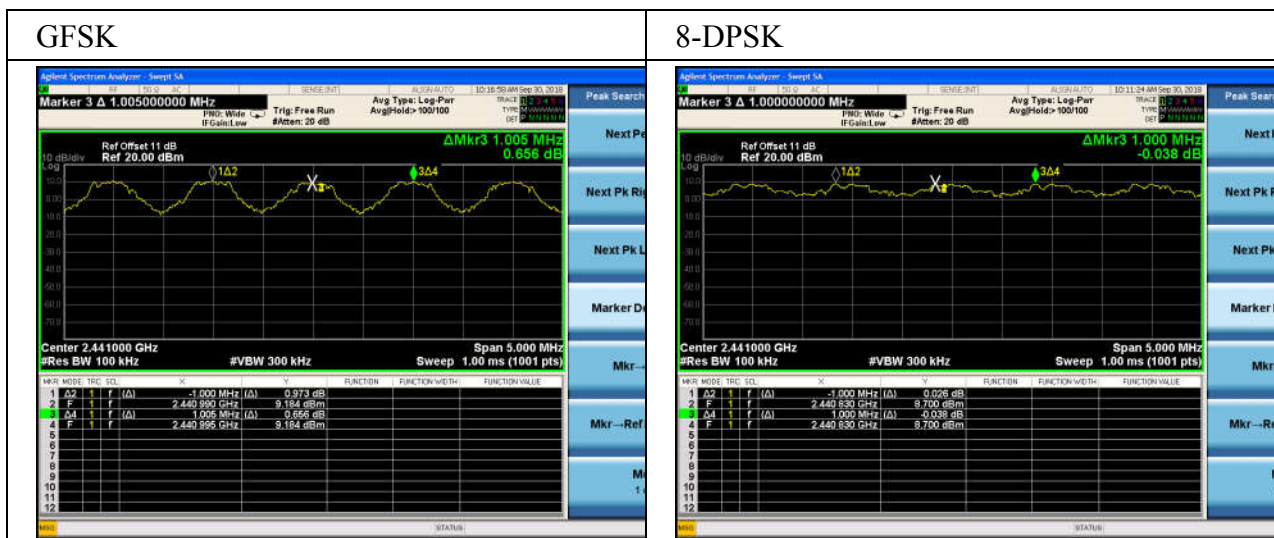

8. NUMBER OF HOPPING FREQUENCY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

8.2. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels


8.3. Test Procedure

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as: RBW: 100kHz / VBW: 300kHz
Start frequency: 2400MHz
Stop frequency: 2483.5MHz
And waiting for the hopping trace until stability, count out the number of the hopping.

8.4. Test Results

EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-18	Pressure: 101.4±1.0 kpa	Humidity: 51.4±3.0%
Tested by: Lynn	Test site: RF Site	Temperature: 23.4±0.6℃

Test Mode	Number of channel	Limit	Conclusion
GFSK	79	≥15	PASS
8-DPSK	79	≥15	PASS

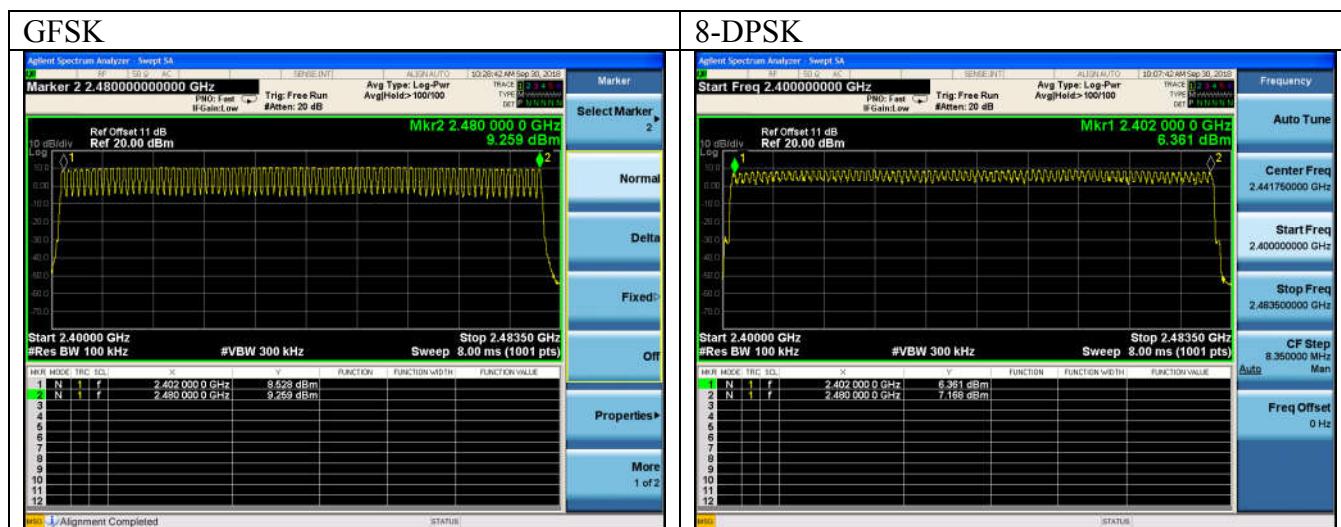

9. DWELL TIME

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

9.2. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

9.3. Test Procedure

1. Connect the antenna of the EUT to Spectrum analyzer and let the EUT working at hopping mode.
2. Setting of SA is following as:
RBW: 100kHz / VBW: 100kHz
Sweep Mode: Single
Detect mode: Positive peak
Trace mode: Auto
Span: 0Hz
Sweep time: 5s and big enough to measure one hopping signal
3. Use below formula calculate the Dwell time
Dwell time=Hopping number per second*0.4*channel number*Pulse bandwidth per hopping.

9.4. Test Results



EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-18	Pressure: 101.4±1.0kpa	Humidity: 51.4±3.0%
Tested by: Lynn	Test site: RF Site	Temperature: 23.4±0.6℃

Mode		dwell time	Limit	Conclusion
GFSK	DH1	49 hops/5s*0.4*79channels* 0.413 ms =127.898ms	≤400ms	PASS
	DH3	25 hops/5s*0.4*79channels* 1.683 ms =265.914ms	≤400ms	PASS
	DH5	19 hops/5s*0.4*79channels* 2.965 ms =356.037ms	≤400ms	PASS
8-DPSK	3-DH1	49 hops/5s*0.4*79channels* 0.420 ms =130.066ms	≤400ms	PASS
	3-DH3	20 hops/5s*0.4*79channels* 1.674 ms =211.594ms	≤400ms	PASS
	3-DH5	21 hops/5s*0.4*79channels* 2.930 ms =388.870ms	≤400ms	PASS



Note: All the lower levels were signaled from receiver and should not be considered in here.

GFSK



DH 1

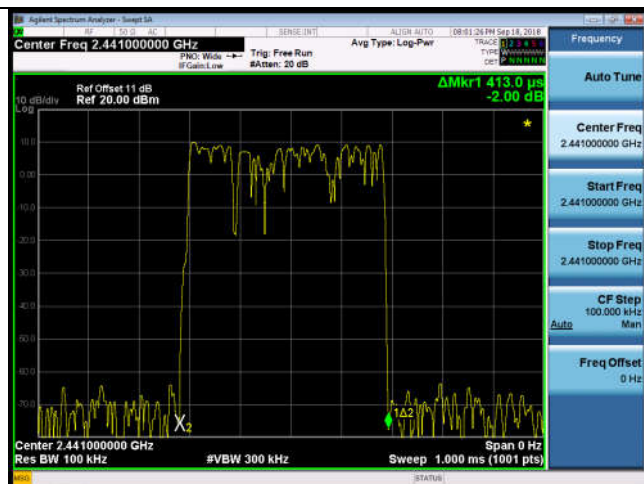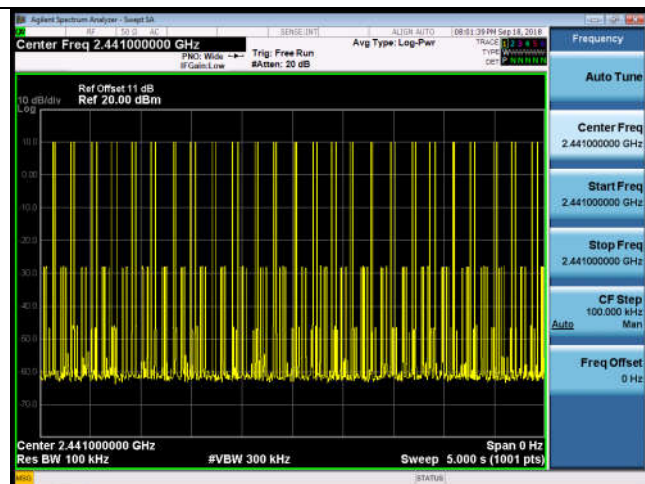

DH 3

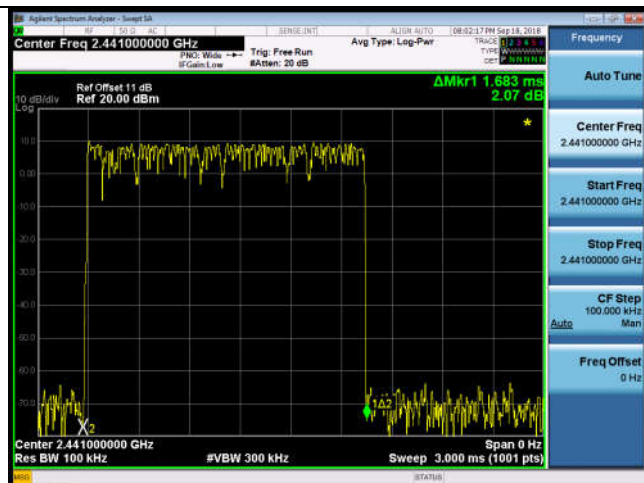
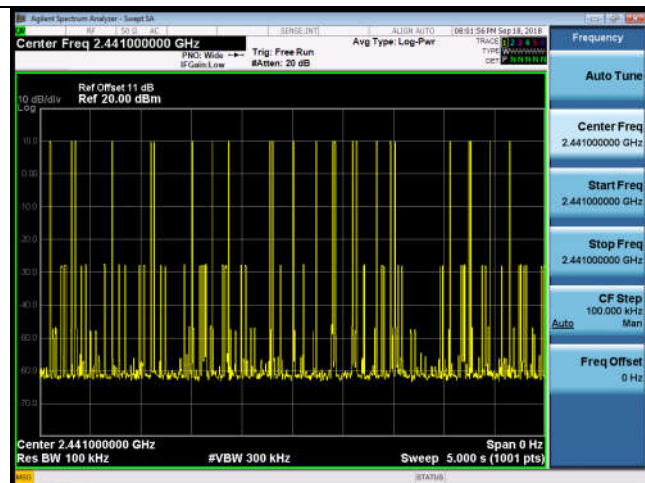


DH 5

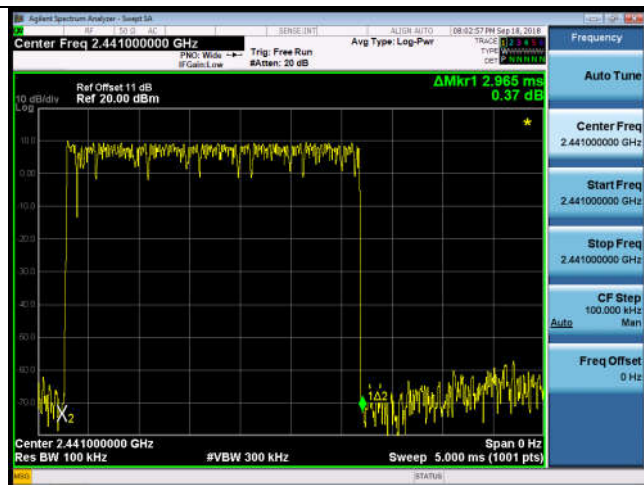
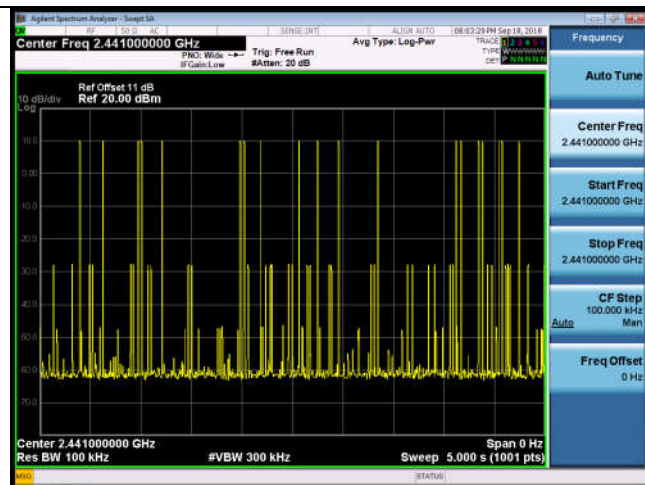


8-DPSK


3DH 1

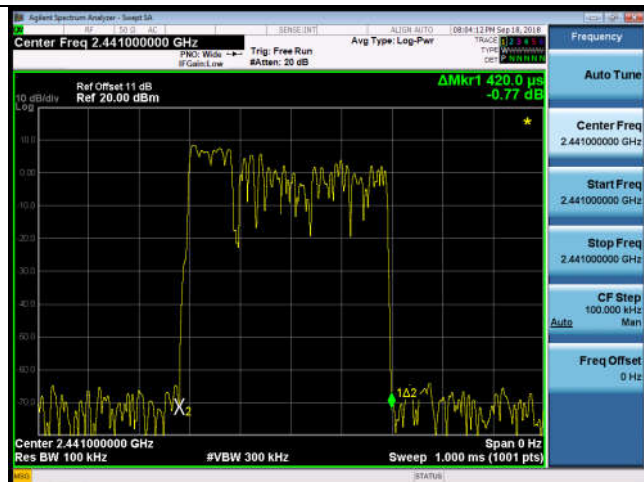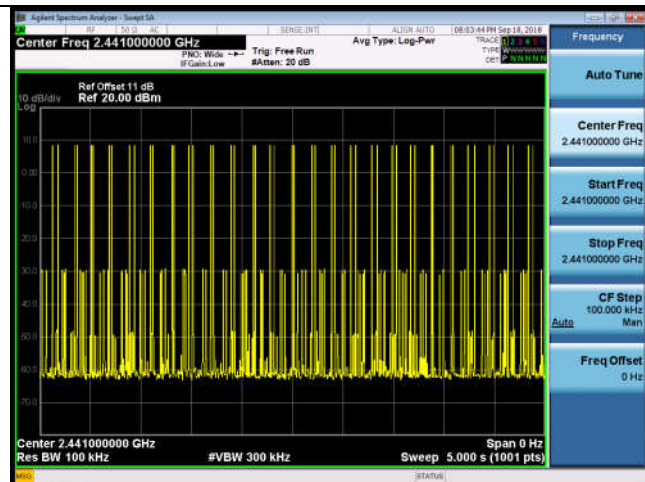

3DH 3

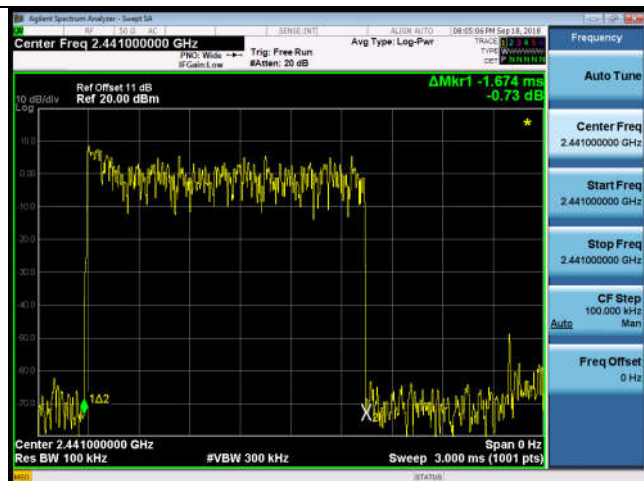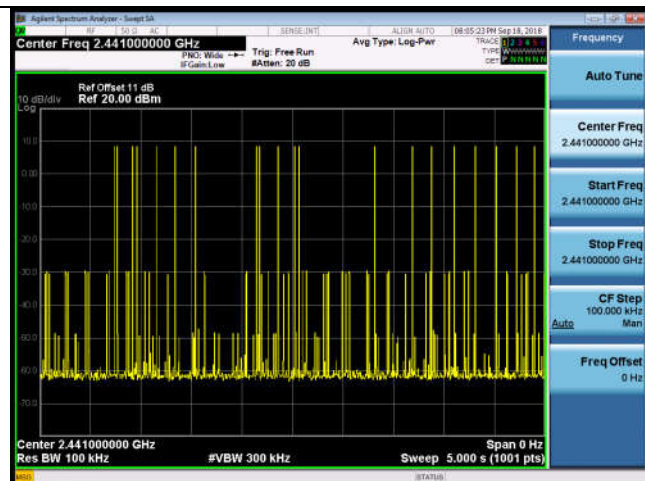

3DH 5

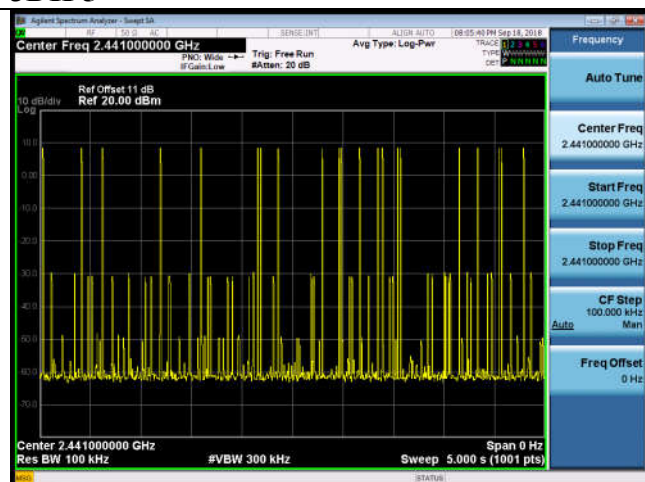

10. MAXIMUM PEAK OUTPUT POWER TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Power meter	Anritsu	ML2487A	6K00002472	Apr.23,18	1 Year
3.	Power sensor	Anritsu	MA2491A	033005	Apr.23,18	1 Year
4.	Attenuator (20dB)	Agilent	8491B	MY39262165	Oct.14,17	1 Year
5.	RF Cable	Hubersuhner	141	NO.1	Oct.14,17	1 Year

10.2. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.3. Test Procedure

Connected the EUT's antenna port to Power Sensor, and use power meter to test peak output power directly.

10.4. Test Results

EUT: POS Terminal		
M/N: SPD1-01		
Test date: 2018-09-18	Pressure: 102.1±1.0 kpa	Humidity: 51.1±3.0%
Tested by: Lynn	Test site: RF site	Temperature: 22.8±0.6 °C

Test Mode	Frequency (MHz)	Peak output Power (dBm)	Limit (dBm)
GFSK	2402	8.490	21
	2441	10.201	21
	2480	9.390	21
8-DPSK	2402	8.831	21
	2441	10.641	21
	2480	9.429	21
Conclusion: PASS			

11.BAND EDGE COMPLIANCE TEST

11.1.Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Sep.08,18	1 Year
2.	Amplifier	HP	8449B	3008A02495	Apr.23.18	1 Year
3.	Horn Antenna	ETS	3115	9510-4580	Dec.01,17	1 Year
4.	RF Cable	Hubersuhner	RF Cable	No.5	Oct.15,17	1 Year

11.2.Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

11.3.Test Procedure

For upper band emissions that are up to two bandwidths(2MHz) away (2483.5MHz to 2485.5MHz) from the band-edge use below produce:

1. Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 100KHz and with a video bandwidth 300KHz. Record the peak levels of the fundamental emission and the relevant band-edge emission, Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement, it is only a relative measurement to determine the amount by which the emission drops at the band edge relative to the highest fundamental emission level.
2. Subtract the delta measured in step (1) from the maximum field strengths measured in clause 4 .The resultant field strengths are then used to determine band-edge compliance as required by Section 15.205


For emissions above two bandwidths away from the band-edge use below produce:

1. The EUT is placed on a insulating material (up to 12mm thick) worked at highest radiated power.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upperband-edges of the emission:
 - (a) PEAK: RBW=1MHz ;VBW=3MHz, PK detector, Sweep=AUTO
 - (b) This is pulse Modulation device a duty cycle factor was used to calculate average level based measured peak level.

11.4.Test Results

Pass (The testing data was attached in the next pages.)


Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

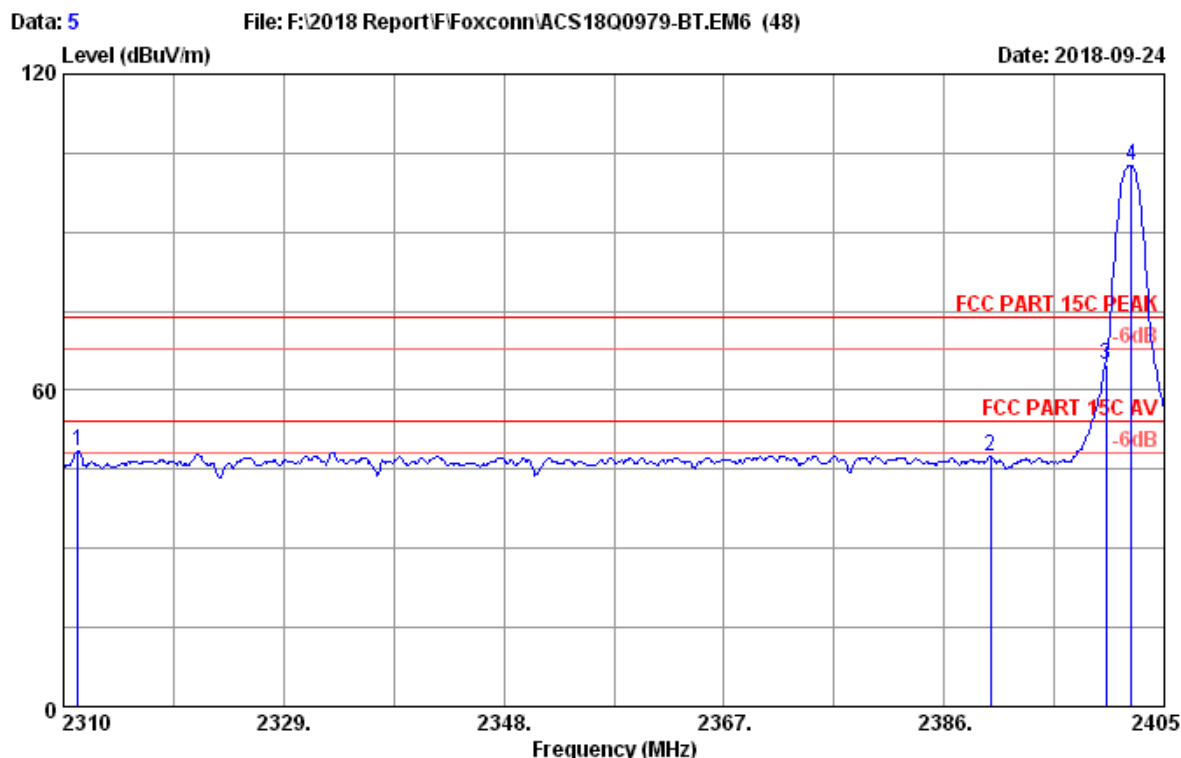

Site no. : 3m Chamber Data no. : 5
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2311.24	27.36	10.11	43.77	32.63	48.61	74.00	25.39	Peak
2	2390.00	27.79	10.28	41.92	32.56	47.43	74.00	26.57	Peak
3	2400.00	27.79	10.28	59.38	32.56	64.89	74.00	9.11	Peak
4	2402.15	27.79	10.28	97.06	32.56	102.57	74.00	-28.57	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

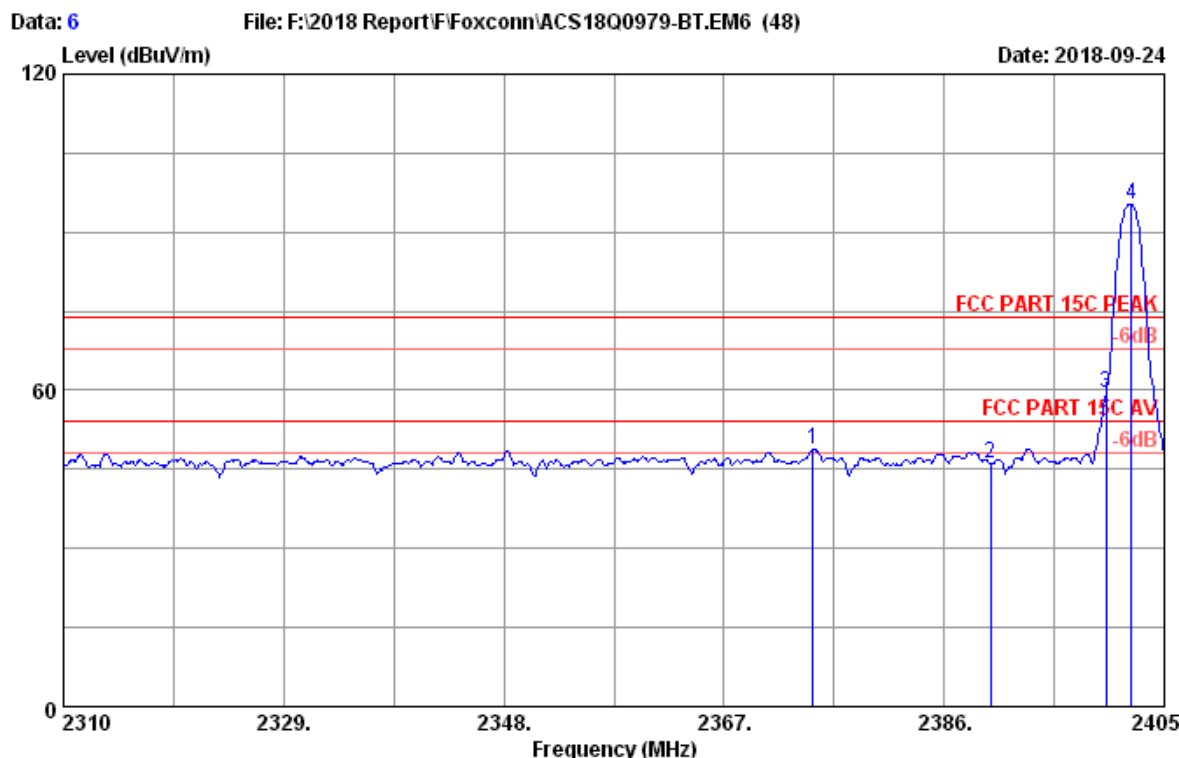

Site no. : 3m Chamber Data no. : 6
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2374.70	27.70	10.25	43.34	32.58	48.71	74.00	25.29	Peak
2	2390.00	27.79	10.28	40.49	32.56	46.00	74.00	28.00	Peak
3	2400.00	27.79	10.28	53.85	32.56	59.36	74.00	14.64	Peak
4	2402.15	27.79	10.28	89.74	32.56	95.25	74.00	-21.25	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

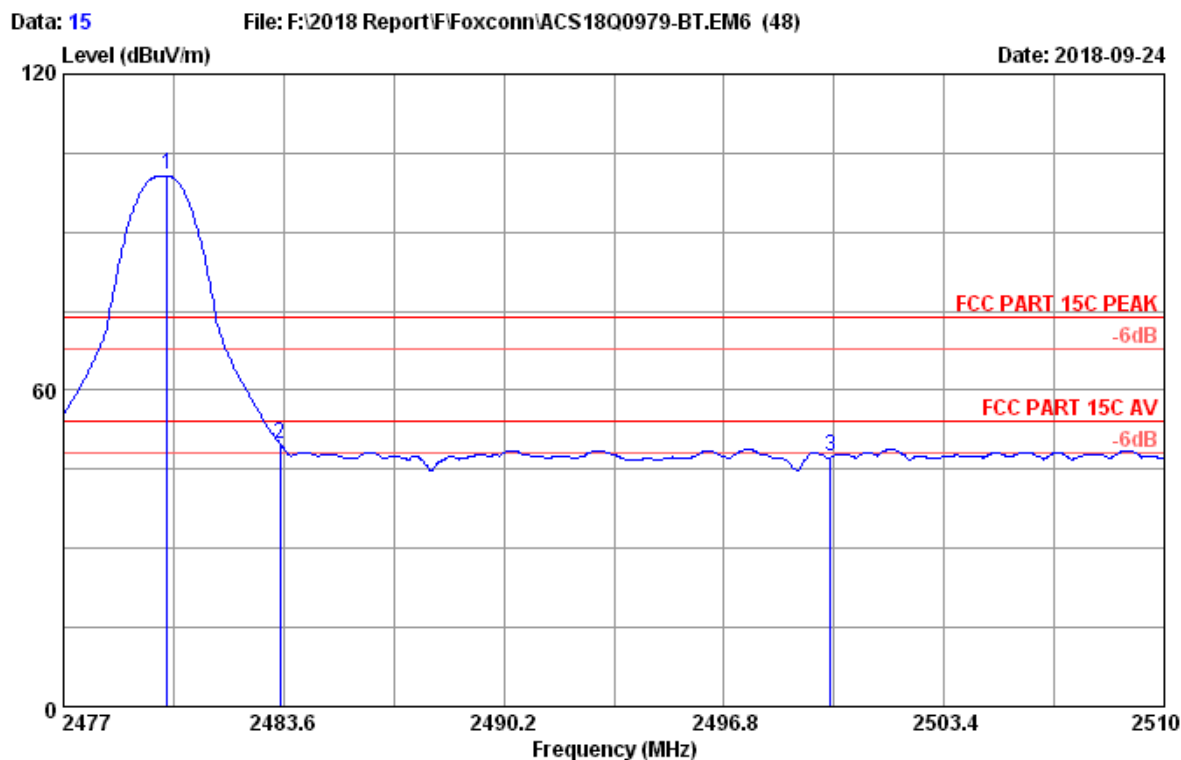

Site no. : 3m Chamber Data no. : 15
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.10	28.21	10.45	94.61	32.48	100.79	74.00	-26.79	Peak
2	2483.50	28.21	10.45	43.79	32.48	49.97	74.00	24.03	Peak
3	2500.00	28.30	10.48	41.11	32.46	47.43	74.00	26.57	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 16

File: F:\2018 Report\Foxconn\ACS18Q0979-BT.EM6 (48)

Date: 2018-09-24

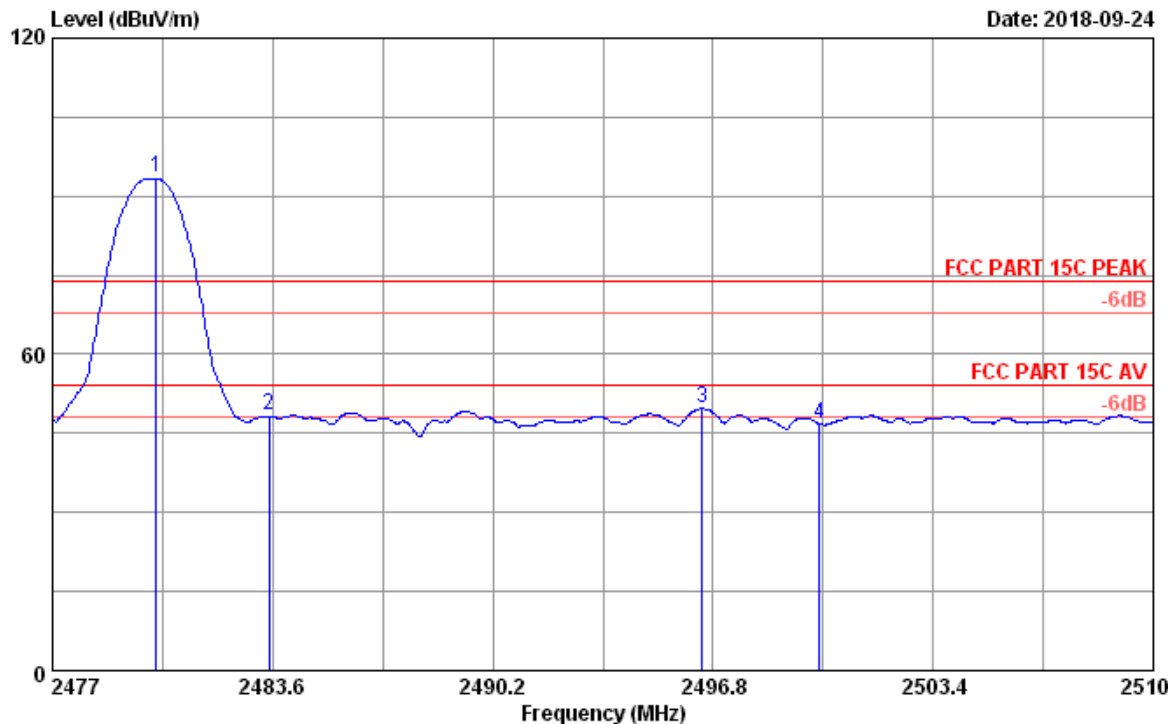

Site no. : 3m Chamber Data no. : 16
 Dis. / Ant. : 3m 2017 3115 (4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 GFSK 2480MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.10	28.21	10.45	87.25	32.48	93.43	74.00	-19.43	Peak
2	2483.50	28.21	10.45	42.15	32.48	48.33	74.00	25.67	Peak
3	2496.47	28.30	10.48	43.37	32.46	49.69	74.00	24.31	Peak
4	2500.00	28.30	10.48	40.53	32.46	46.85	74.00	27.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 17

File: F:\2018 Report\Foxconn\ACS18Q0979-BT.EM6 (48)


Date: 2018-09-24

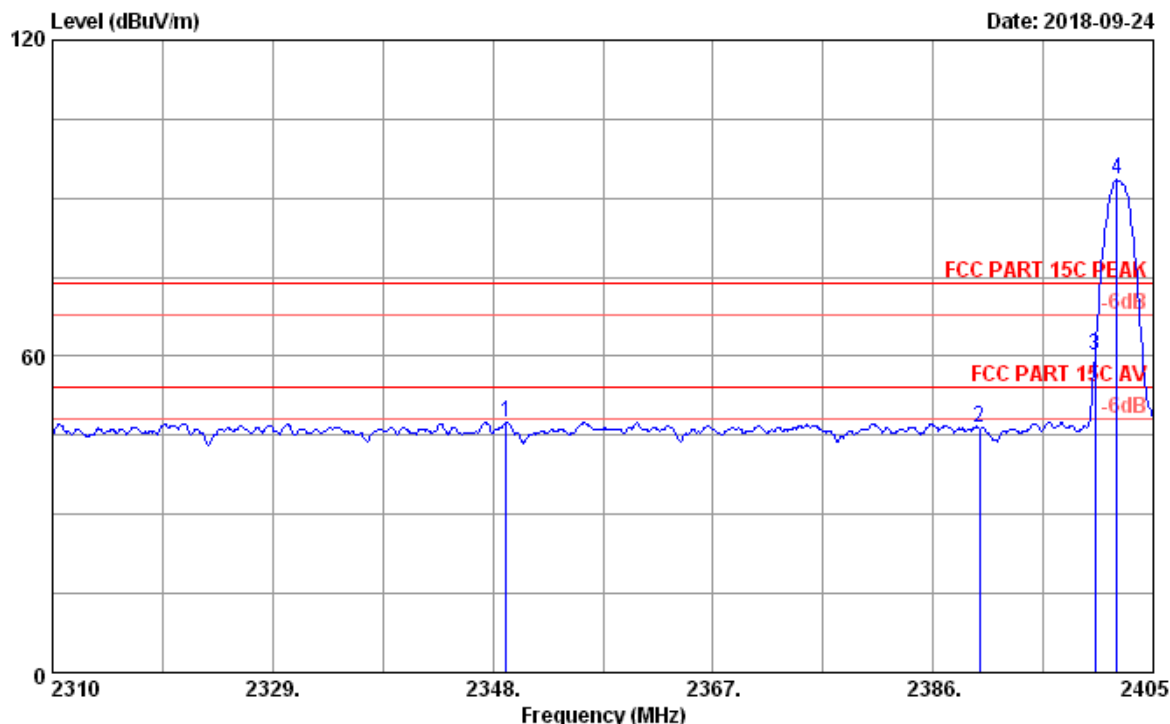

Site no. : 3m Chamber Data no. : 17
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2349.14	27.53	10.18	42.37	32.61	47.47	74.00	26.53	Peak
2	2390.00	27.79	10.28	40.89	32.56	46.40	74.00	27.60	Peak
3	2400.00	27.79	10.28	54.82	32.56	60.33	74.00	13.67	Peak
4	2401.87	27.79	10.28	87.95	32.56	93.46	74.00	-19.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

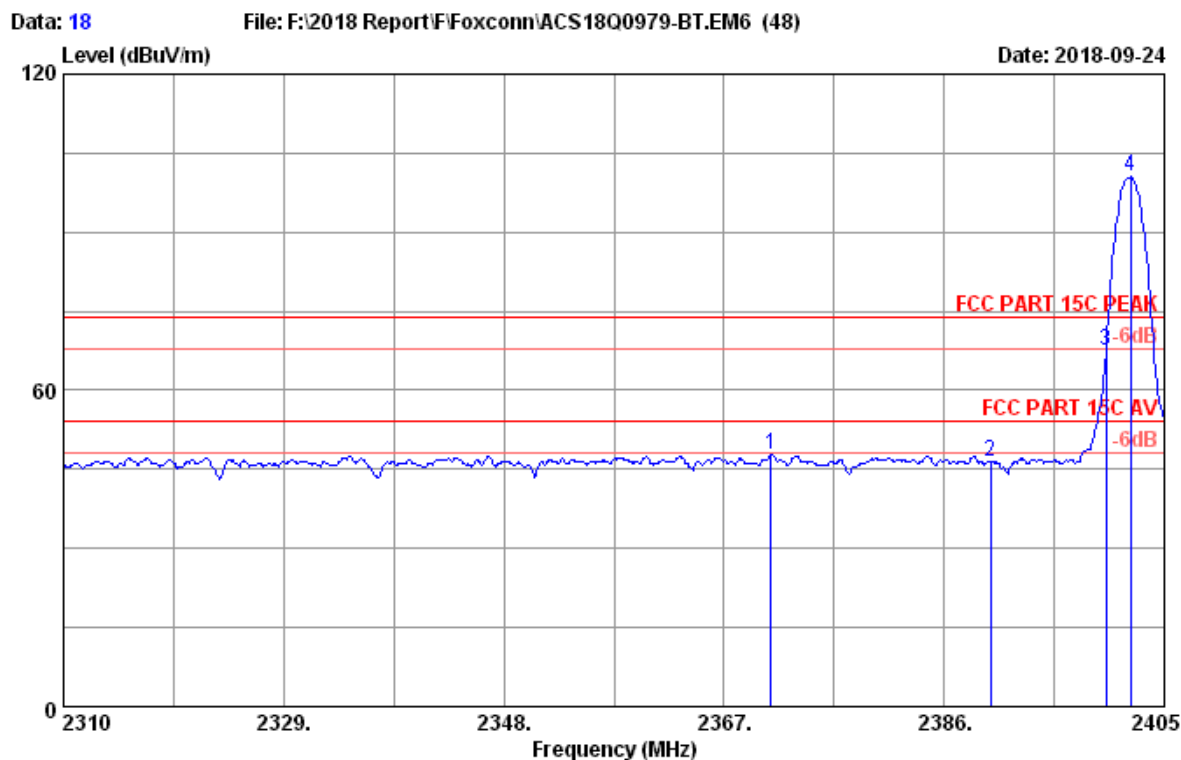

Site no. : 3m Chamber Data no. : 18
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2402MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2371.09	27.70	10.25	42.35	32.58	47.72	74.00	26.28	Peak
2	2390.00	27.79	10.28	40.96	32.56	46.47	74.00	27.53	Peak
3	2400.00	27.79	10.28	62.16	32.56	67.67	74.00	6.33	Peak
4	2402.06	27.79	10.28	94.95	32.56	100.46	74.00	-26.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

Data: 31

File: F:\2018 Report\Foxconn\ACS18Q0979-BT.EM6 (48)


Date: 2018-09-24

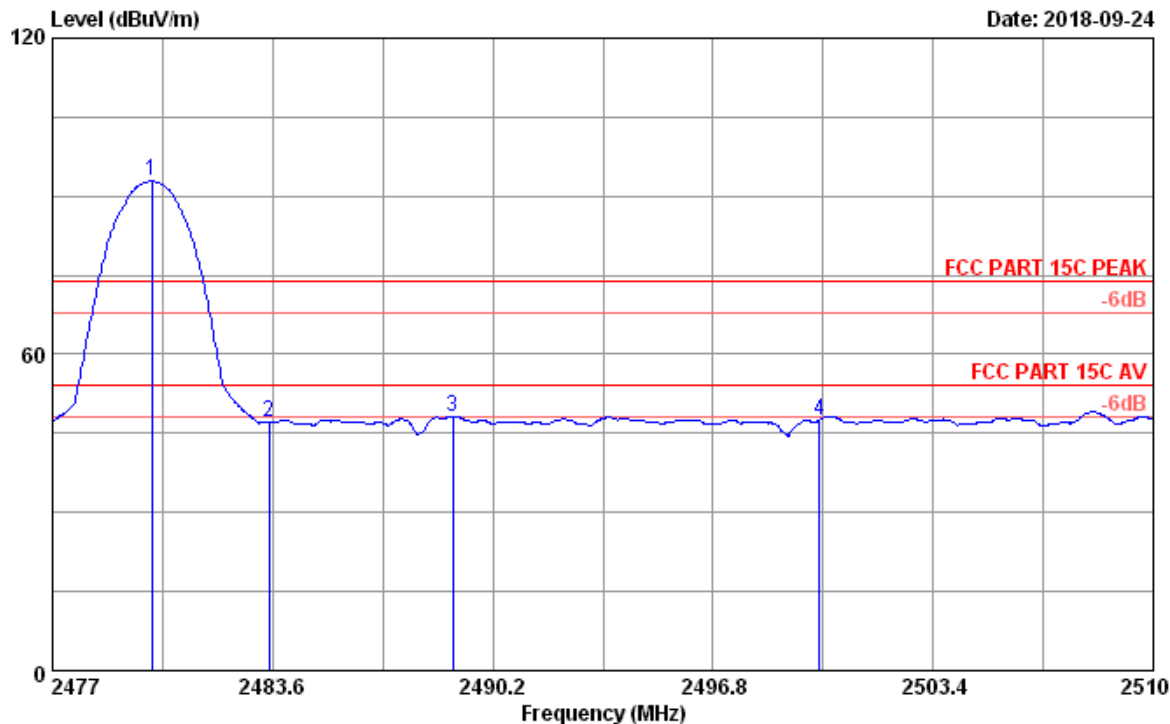

Site no. : 3m Chamber Data no. : 31
 Dis. / Ant. : 3m 2017 3115(4580) Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.21	10.45	86.72	32.48	92.90	74.00	-18.90	Peak
2	2483.50	28.21	10.45	40.88	32.48	47.06	74.00	26.94	Peak
3	2489.01	28.30	10.48	41.90	32.46	48.22	74.00	25.78	Peak
4	2500.00	28.30	10.48	41.26	32.46	47.58	74.00	26.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

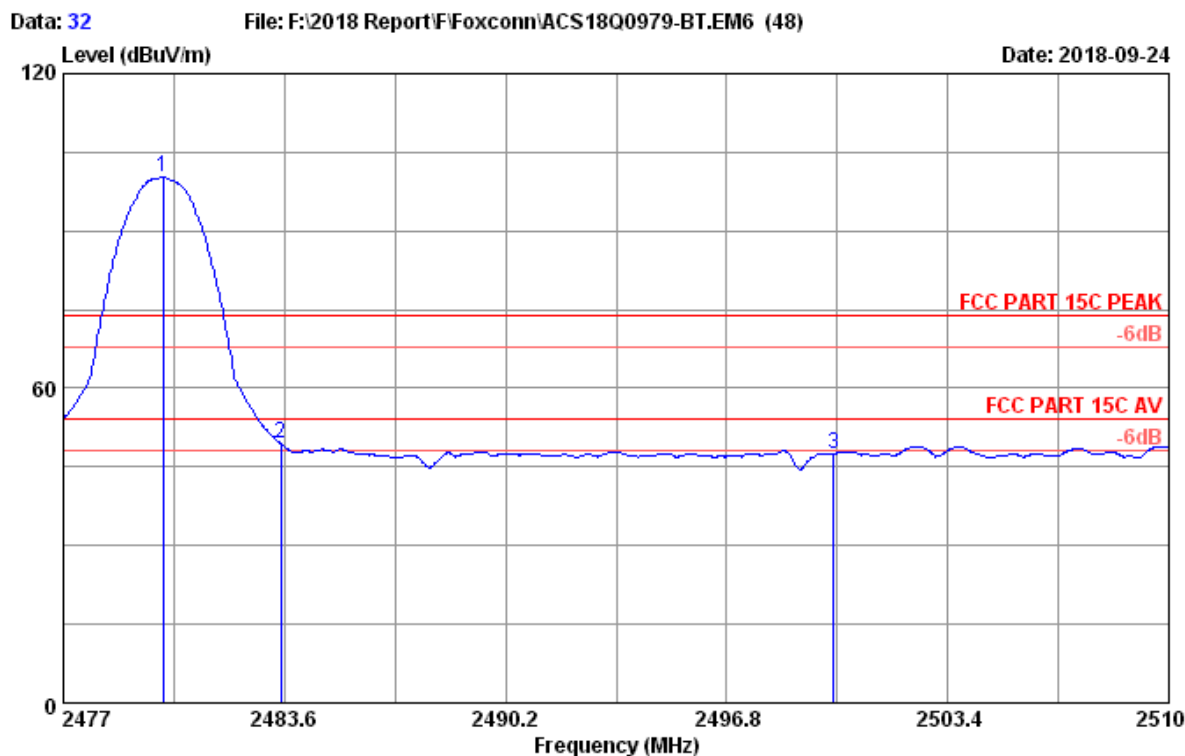

Site no. : 3m Chamber Data no. : 32
 Dis. / Ant. : 3m 2017 3115 (4580) Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : 23.4°C/52.9% Engineer : Lynn
 EUT : POS Terminal M/N:SPD1-01
 Power rating : AC120V/60Hz
 Test Mode : BT3.0 8-DPSK 2480MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Amp factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.97	28.21	10.45	94.08	32.48	100.26	74.00	-26.26	Peak
2	2483.50	28.21	10.45	43.18	32.48	49.36	74.00	24.64	Peak
3	2500.00	28.30	10.48	41.20	32.46	47.52	74.00	26.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading
 -Amp factor.
 2. The emission levels that are 20dB below the official
 limit are not reported.

12. ANTENNA REQUIREMENT

12.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

12.2. Antenna Connected Construction

The antennas used for this product are PIFA antenna that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.99Bi

13.DEVIATION TO TEST SPECIFICATIONS

[NONE]