


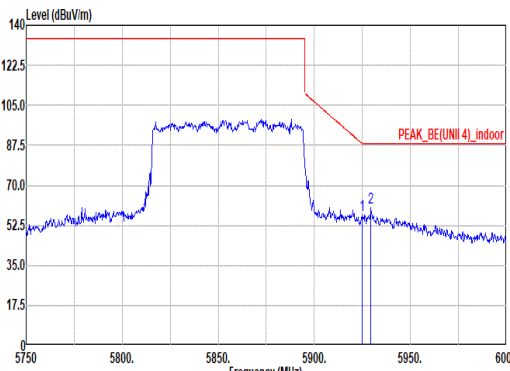




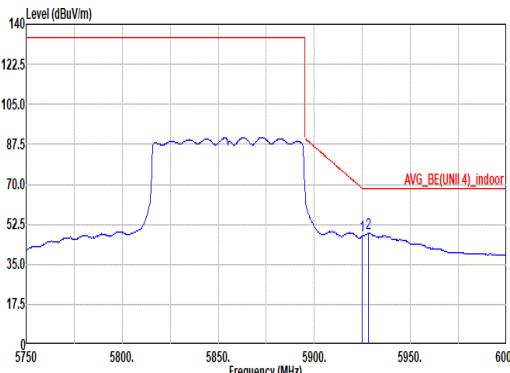


Mode	90																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																			
ANT	1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5925.00</td><td>56.87</td><td>88.20 -31.33</td><td>49.96</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>300</td><td>189 PEAK</td></tr><tr><td>2 5929.50</td><td>60.34</td><td>88.20 -27.86</td><td>53.45</td><td>34.28</td><td>8.99</td><td>36.38</td><td>0.00</td><td>300</td><td>189 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5925.00	56.87	88.20 -31.33	49.96	34.30	8.99	36.38	0.00	300	189 PEAK	2 5929.50	60.34	88.20 -27.86	53.45	34.28	8.99	36.38	0.00	300	189 PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5925.00	56.87	88.20 -31.33	49.96	34.30	8.99	36.38	0.00	300	189 PEAK																																											
2 5929.50	60.34	88.20 -27.86	53.45	34.28	8.99	36.38	0.00	300	189 PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5925.00</td><td>47.58</td><td>68.20 -20.62</td><td>40.67</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>300</td><td>189 AVERAGE</td></tr><tr><td>2 5928.00</td><td>48.55</td><td>68.20 -19.65</td><td>41.65</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>300</td><td>189 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5925.00	47.58	68.20 -20.62	40.67	34.30	8.99	36.38	0.00	300	189 AVERAGE	2 5928.00	48.55	68.20 -19.65	41.65	34.29	8.99	36.38	0.00	300	189 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																											
1 5925.00	47.58	68.20 -20.62	40.67	34.30	8.99	36.38	0.00	300	189 AVERAGE																																											
2 5928.00	48.55	68.20 -19.65	41.65	34.29	8.99	36.38	0.00	300	189 AVERAGE																																											


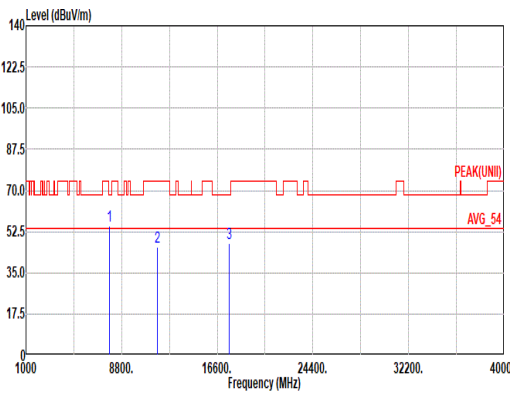


Mode	90																																																																																																																																																		
	Harmonic																																																																																																																																																		
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																																																																																																		
ANT	1+2																																																																																																																																																		
Pol.	Horizontal							Vertical																																																																																																																																											
Peak Avg																																																																																																																																																			
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL							Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 VERTICAL																																																																																																																																											
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7803.00</td><td>54.97</td><td>68.20</td><td>-13.23</td><td>67.06</td><td>36.91</td><td>10.31</td><td>60.18</td><td>0.87</td><td>100</td><td>124</td><td>Peak</td></tr><tr><td>2</td><td>11710.00</td><td>46.11</td><td>74.00</td><td>-27.89</td><td>51.06</td><td>38.62</td><td>12.72</td><td>58.02</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>17565.00</td><td>47.47</td><td>68.20</td><td>-20.73</td><td>51.15</td><td>38.83</td><td>15.66</td><td>59.10</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7803.00	54.97	68.20	-13.23	67.06	36.91	10.31	60.18	0.87	100	124	Peak	2	11710.00	46.11	74.00	-27.89	51.06	38.62	12.72	58.02	0.93	--	--	PEAK	3	17565.00	47.47	68.20	-20.73	51.15	38.83	15.66	59.10	0.93	--	--	PEAK	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7803.00</td><td>58.10</td><td>68.20</td><td>-10.10</td><td>70.19</td><td>36.91</td><td>10.31</td><td>60.18</td><td>0.87</td><td>100</td><td>45</td><td>Peak</td></tr><tr><td>2</td><td>11710.00</td><td>45.81</td><td>74.00</td><td>-28.19</td><td>51.56</td><td>38.62</td><td>12.72</td><td>58.02</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>17565.00</td><td>48.50</td><td>68.20</td><td>-19.70</td><td>52.18</td><td>38.83</td><td>15.66</td><td>59.10</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7803.00	58.10	68.20	-10.10	70.19	36.91	10.31	60.18	0.87	100	45	Peak	2	11710.00	45.81	74.00	-28.19	51.56	38.62	12.72	58.02	0.93	--	--	PEAK	3	17565.00	48.50	68.20	-19.70	52.18	38.83	15.66	59.10	0.93	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1	7803.00	54.97	68.20	-13.23	67.06	36.91	10.31	60.18	0.87	100	124	Peak																																																																																																																																							
2	11710.00	46.11	74.00	-27.89	51.06	38.62	12.72	58.02	0.93	--	--	PEAK																																																																																																																																							
3	17565.00	47.47	68.20	-20.73	51.15	38.83	15.66	59.10	0.93	--	--	PEAK																																																																																																																																							
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																							
1	7803.00	58.10	68.20	-10.10	70.19	36.91	10.31	60.18	0.87	100	45	Peak																																																																																																																																							
2	11710.00	45.81	74.00	-28.19	51.56	38.62	12.72	58.02	0.93	--	--	PEAK																																																																																																																																							
3	17565.00	48.50	68.20	-19.70	52.18	38.83	15.66	59.10	0.93	--	--	PEAK																																																																																																																																							



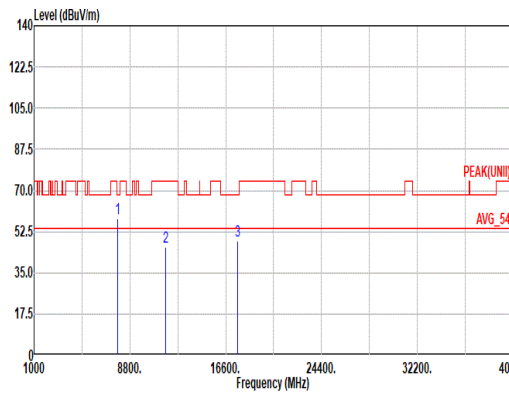


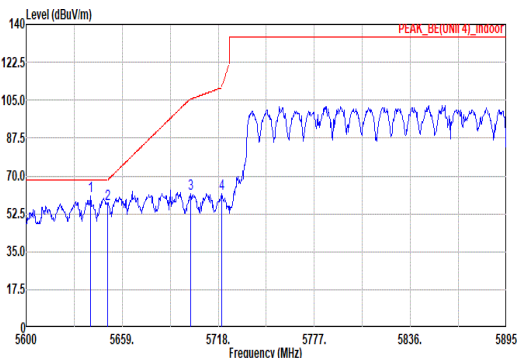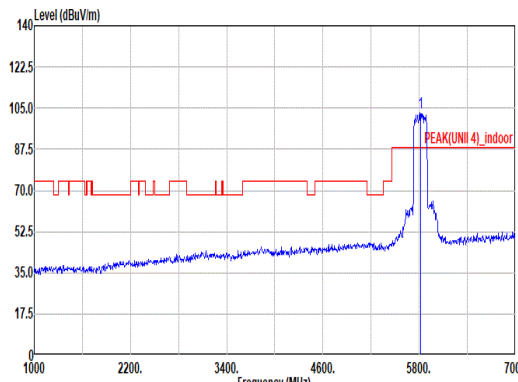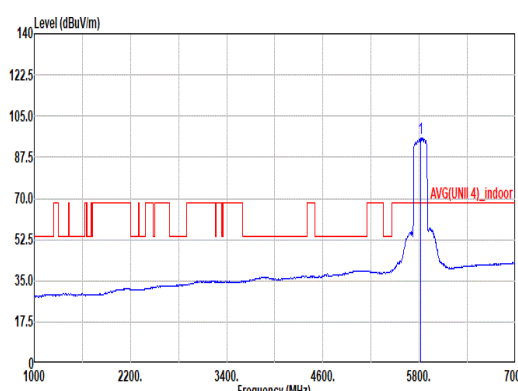Mode	91																																																																																																																																								
	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Full RU_5815MHz																																																																																																																																								
ANT	1+2																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5639.53</td><td>60.76</td><td>68.20</td><td>-7.44</td><td>55.16</td><td>33.24</td><td>8.67</td><td>36.31</td><td>0.00</td><td>100</td><td>134</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>57.31</td><td>68.31</td><td>-11.00</td><td>51.64</td><td>33.30</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>134</td><td>PEAK</td></tr><tr><td>3</td><td>5700.89</td><td>61.96</td><td>105.45</td><td>-43.49</td><td>55.85</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100</td><td>134</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>61.91</td><td>110.95</td><td>-49.04</td><td>55.74</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>134</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5639.53	60.76	68.20	-7.44	55.16	33.24	8.67	36.31	0.00	100	134	PEAK	2	5650.15	57.31	68.31	-11.00	51.64	33.30	8.69	36.32	0.00	100	134	PEAK	3	5700.89	61.96	105.45	-43.49	55.85	33.70	8.74	36.33	0.00	100	134	PEAK	4	5720.07	61.91	110.95	-49.04	55.74	33.74	8.76	36.33	0.00	100	134	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>102.84</td><td>-----</td><td>-----</td><td>96.20</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>100</td><td>134</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	102.84	-----	-----	96.20	34.13	8.87	36.36	0.00	100	134	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5639.53	60.76	68.20	-7.44	55.16	33.24	8.67	36.31	0.00	100	134	PEAK																																																																																																																													
2	5650.15	57.31	68.31	-11.00	51.64	33.30	8.69	36.32	0.00	100	134	PEAK																																																																																																																													
3	5700.89	61.96	105.45	-43.49	55.85	33.70	8.74	36.33	0.00	100	134	PEAK																																																																																																																													
4	5720.07	61.91	110.95	-49.04	55.74	33.74	8.76	36.33	0.00	100	134	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5815.00	102.84	-----	-----	96.20	34.13	8.87	36.36	0.00	100	134	PEAK																																																																																																																													
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>95.63</td><td>-----</td><td>-----</td><td>88.99</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>100</td><td>134</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5815.00	95.63	-----	-----	88.99	34.13	8.87	36.36	0.00	100	134	AVERAGE																																																																																		
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5815.00	95.63	-----	-----	88.99	34.13	8.87	36.36	0.00	100	134	AVERAGE																																																																																																																													

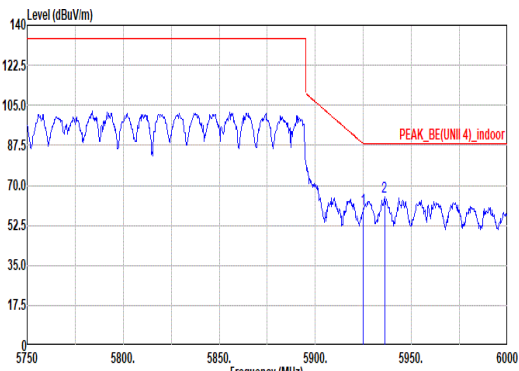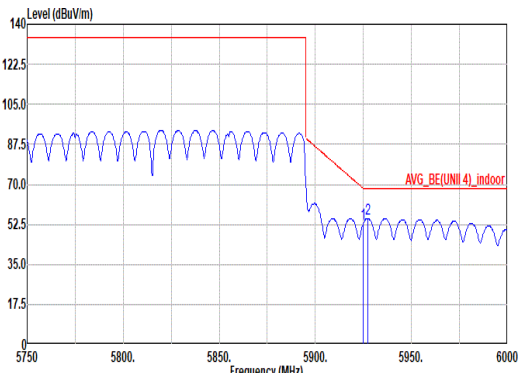

Mode	91																																																									
	Band Edge - R																																																									
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Full RU_5815MHz																																																									
ANT	1+2																																																									
Pol.	Horizontal	Fundamental																																																								
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5925.00</td><td>59.44</td><td>88.20</td><td>-28.76</td><td>52.53</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>100</td><td>134</td><td>PEAK</td></tr><tr><td>2</td><td>5936.00</td><td>64.85</td><td>88.20</td><td>-23.35</td><td>57.97</td><td>34.26</td><td>9.00</td><td>36.38</td><td>0.00</td><td>100</td><td>100</td><td>134</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB/m	dB	dB	dB	cm	deg		1	5925.00	59.44	88.20	-28.76	52.53	34.30	8.99	36.38	0.00	100	100	134	PEAK	2	5936.00	64.85	88.20	-23.35	57.97	34.26	9.00	36.38	0.00	100	100	134	PEAK	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB/m	dB	dB	dB	cm	deg																																														
1	5925.00	59.44	88.20	-28.76	52.53	34.30	8.99	36.38	0.00	100	100	134	PEAK																																													
2	5936.00	64.85	88.20	-23.35	57.97	34.26	9.00	36.38	0.00	100	100	134	PEAK																																													
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5925.00</td><td>52.83</td><td>68.20</td><td>-15.37</td><td>45.92</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>100</td><td>134</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.25</td><td>55.12</td><td>68.20</td><td>-13.08</td><td>48.22</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>100</td><td>134</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB/m	dB	dB	dB	cm	deg		1	5925.00	52.83	68.20	-15.37	45.92	34.30	8.99	36.38	0.00	100	100	134	AVERAGE	2	5927.25	55.12	68.20	-13.08	48.22	34.29	8.99	36.38	0.00	100	100	134	AVERAGE	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB/m	dB	dB	dB	cm	deg																																														
1	5925.00	52.83	68.20	-15.37	45.92	34.30	8.99	36.38	0.00	100	100	134	AVERAGE																																													
2	5927.25	55.12	68.20	-13.08	48.22	34.29	8.99	36.38	0.00	100	100	134	AVERAGE																																													

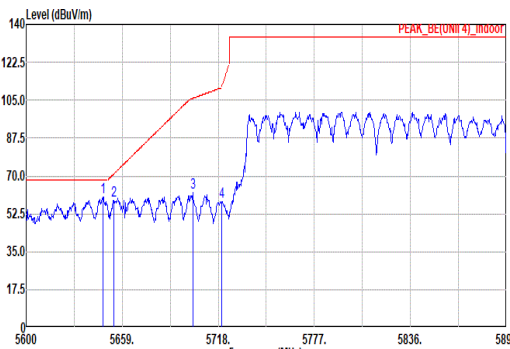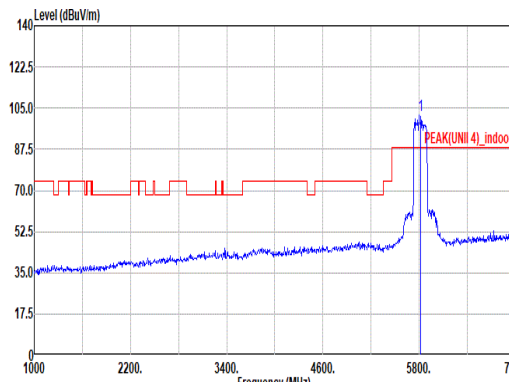
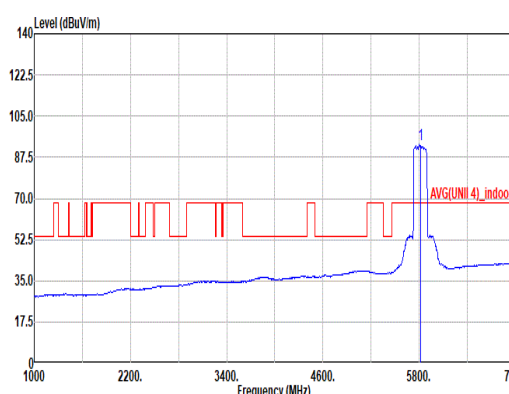


	91																																																																																																																																							
Mode	Band Edge - L																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Full RU_5815MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																																		
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5647.20</td><td>60.20</td><td>68.20</td><td>-8.00</td><td></td><td>54.56</td><td>33.28</td><td>8.68</td><td>36.32</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>2</td><td>5653.69</td><td>58.67</td><td>70.94</td><td>-12.27</td><td></td><td>52.97</td><td>33.33</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>3</td><td>5702.37</td><td>62.13</td><td>105.86</td><td>-43.73</td><td></td><td>56.02</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>58.28</td><td>110.95</td><td>-52.67</td><td></td><td>52.11</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5647.20	60.20	68.20	-8.00		54.56	33.28	8.68	36.32	0.00	100	216	PEAK	2	5653.69	58.67	70.94	-12.27		52.97	33.33	8.69	36.32	0.00	100	216	PEAK	3	5702.37	62.13	105.86	-43.73		56.02	33.70	8.74	36.33	0.00	100	216	PEAK	4	5720.07	58.28	110.95	-52.67		52.11	33.74	8.76	36.33	0.00	100	216	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5815.00</td><td>102.16</td><td>-----</td><td>-----</td><td></td><td>95.52</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>100</td><td>216</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	102.16	-----	-----		95.52	34.13	8.87	36.36	0.00	100	216	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5647.20	60.20	68.20	-8.00		54.56	33.28	8.68	36.32	0.00	100	216	PEAK																																																																																																																											
2	5653.69	58.67	70.94	-12.27		52.97	33.33	8.69	36.32	0.00	100	216	PEAK																																																																																																																											
3	5702.37	62.13	105.86	-43.73		56.02	33.70	8.74	36.33	0.00	100	216	PEAK																																																																																																																											
4	5720.07	58.28	110.95	-52.67		52.11	33.74	8.76	36.33	0.00	100	216	PEAK																																																																																																																											
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5815.00	102.16	-----	-----		95.52	34.13	8.87	36.36	0.00	100	216	PEAK																																																																																																																											
Avg	Blank					 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5815.00</td><td>92.75</td><td>-----</td><td>-----</td><td></td><td>86.11</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>100</td><td>216</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	92.75	-----	-----		86.11	34.13	8.87	36.36	0.00	100	216	AVERAGE																																																																																				
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																											
1	5815.00	92.75	-----	-----		86.11	34.13	8.87	36.36	0.00	100	216	AVERAGE																																																																																																																											






Mode	91																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Full RU_5815MHZ																																																			
ANT	1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5919.75</td><td>59.60</td><td>92.04</td><td>-32.44</td><td>52.68</td><td>34.32</td><td>8.98</td><td>36.38</td><td>0.00 100 216 PEAK</td></tr><tr><td>2</td><td>5953.75</td><td>61.54</td><td>88.20</td><td>-26.66</td><td>54.71</td><td>34.28</td><td>9.02</td><td>36.39</td><td>0.00 100 216 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5919.75	59.60	92.04	-32.44	52.68	34.32	8.98	36.38	0.00 100 216 PEAK	2	5953.75	61.54	88.20	-26.66	54.71	34.28	9.02	36.39	0.00 100 216 PEAK	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5919.75	59.60	92.04	-32.44	52.68	34.32	8.98	36.38	0.00 100 216 PEAK																																											
2	5953.75	61.54	88.20	-26.66	54.71	34.28	9.02	36.39	0.00 100 216 PEAK																																											
Avg	Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5925.00</td><td>48.03</td><td>68.20</td><td>-20.17</td><td>41.12</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00 100 216 AVERAGE</td></tr><tr><td>2</td><td>5955.25</td><td>52.11</td><td>68.20</td><td>-16.09</td><td>45.28</td><td>34.28</td><td>9.02</td><td>36.39</td><td>0.00 100 216 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5925.00	48.03	68.20	-20.17	41.12	34.30	8.99	36.38	0.00 100 216 AVERAGE	2	5955.25	52.11	68.20	-16.09	45.28	34.28	9.02	36.39	0.00 100 216 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5925.00	48.03	68.20	-20.17	41.12	34.30	8.99	36.38	0.00 100 216 AVERAGE																																											
2	5955.25	52.11	68.20	-16.09	45.28	34.28	9.02	36.39	0.00 100 216 AVERAGE																																											

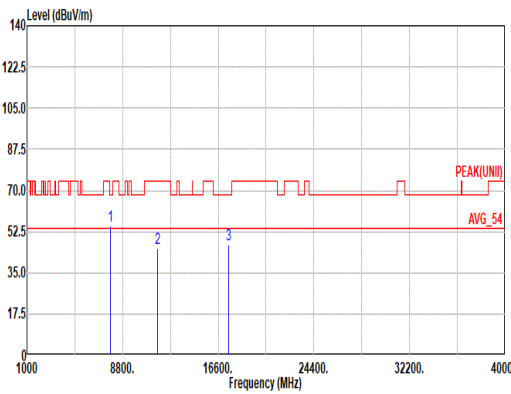
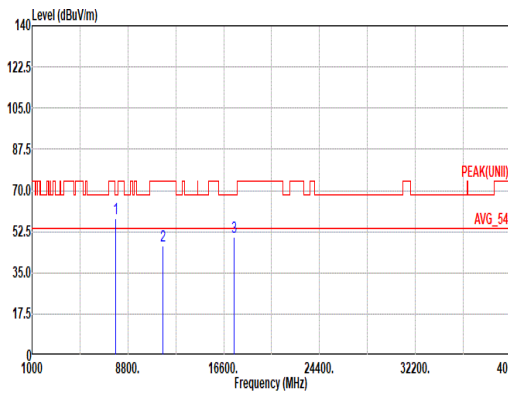


		91																																																																																	
Mode	Harmonic																																																																																		
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Full RU_5815MHz																																																																																		
ANT	1+2																																																																																		
Pol.	Horizontal																																																																																		
Peak Avg																																																																																			
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL																																																																																		
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7803.00</td><td>55.00</td><td>68.20</td><td>-13.20</td><td></td><td>67.09</td><td>36.91</td><td>10.31</td><td>60.18</td><td>0.87</td><td>100</td><td>125</td><td>Peak</td></tr><tr><td>2</td><td>11630.00</td><td>45.69</td><td>74.00</td><td>-28.31</td><td></td><td>51.63</td><td>38.53</td><td>12.67</td><td>58.07</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>17445.00</td><td>46.93</td><td>68.20</td><td>-21.27</td><td></td><td>51.12</td><td>38.50</td><td>15.59</td><td>59.22</td><td>0.94</td><td>--</td><td>--</td><td>PEAK</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7803.00	55.00	68.20	-13.20		67.09	36.91	10.31	60.18	0.87	100	125	Peak	2	11630.00	45.69	74.00	-28.31		51.63	38.53	12.67	58.07	0.93	--	--	PEAK	3	17445.00	46.93	68.20	-21.27		51.12	38.50	15.59	59.22	0.94	--	--	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	7803.00	55.00	68.20	-13.20		67.09	36.91	10.31	60.18	0.87	100	125	Peak																																																																						
2	11630.00	45.69	74.00	-28.31		51.63	38.53	12.67	58.07	0.93	--	--	PEAK																																																																						
3	17445.00	46.93	68.20	-21.27		51.12	38.50	15.59	59.22	0.94	--	--	PEAK																																																																						
Peak Avg																																																																																			
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 VERTICAL																																																																																		
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7803.00</td><td>58.33</td><td>68.20</td><td>-9.87</td><td></td><td>70.42</td><td>36.91</td><td>10.31</td><td>60.18</td><td>0.87</td><td>100</td><td>43</td><td>Peak</td></tr><tr><td>2</td><td>11630.00</td><td>46.27</td><td>74.00</td><td>-27.73</td><td></td><td>52.21</td><td>38.53</td><td>12.67</td><td>58.07</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>17445.00</td><td>50.25</td><td>68.20</td><td>-17.95</td><td></td><td>54.44</td><td>38.50</td><td>15.59</td><td>59.22</td><td>0.94</td><td>--</td><td>--</td><td>PEAK</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7803.00	58.33	68.20	-9.87		70.42	36.91	10.31	60.18	0.87	100	43	Peak	2	11630.00	46.27	74.00	-27.73		52.21	38.53	12.67	58.07	0.93	--	--	PEAK	3	17445.00	50.25	68.20	-17.95		54.44	38.50	15.59	59.22	0.94	--	--	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	7803.00	58.33	68.20	-9.87		70.42	36.91	10.31	60.18	0.87	100	43	Peak																																																																						
2	11630.00	46.27	74.00	-27.73		52.21	38.53	12.67	58.07	0.93	--	--	PEAK																																																																						
3	17445.00	50.25	68.20	-17.95		54.44	38.50	15.59	59.22	0.94	--	--	PEAK																																																																						

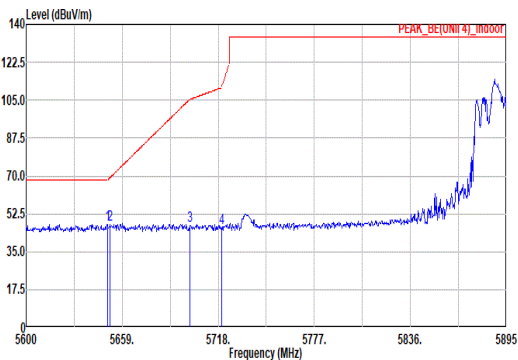
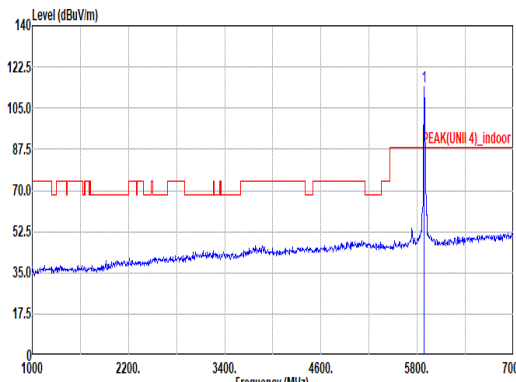
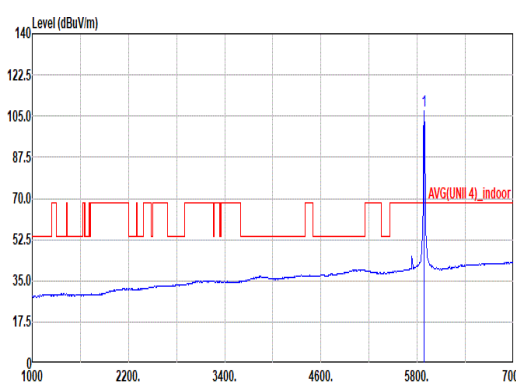


Mode	92																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5649.86</td><td>47.77</td><td>68.20</td><td>-20.43</td><td>42.11</td><td>33.30</td><td>8.68</td><td>36.32</td><td>0.00</td><td>100 307 PEAK</td></tr><tr><td>2 5651.63</td><td>47.42</td><td>69.41</td><td>-21.99</td><td>41.74</td><td>33.31</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100 307 PEAK</td></tr><tr><td>3 5700.60</td><td>46.88</td><td>105.37</td><td>-58.49</td><td>40.77</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100 307 PEAK</td></tr><tr><td>4 5720.07</td><td>46.22</td><td>110.95</td><td>-64.73</td><td>40.05</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100 307 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5649.86	47.77	68.20	-20.43	42.11	33.30	8.68	36.32	0.00	100 307 PEAK	2 5651.63	47.42	69.41	-21.99	41.74	33.31	8.69	36.32	0.00	100 307 PEAK	3 5700.60	46.88	105.37	-58.49	40.77	33.70	8.74	36.33	0.00	100 307 PEAK	4 5720.07	46.22	110.95	-64.73	40.05	33.74	8.76	36.33	0.00	100 307 PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>113.96</td><td>-----</td><td>-----</td><td>107.05</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>100 307 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5885.00	113.96	-----	-----	107.05	34.34	8.94	36.37	0.00	100 307 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5649.86	47.77	68.20	-20.43	42.11	33.30	8.68	36.32	0.00	100 307 PEAK																																																																																																															
2 5651.63	47.42	69.41	-21.99	41.74	33.31	8.69	36.32	0.00	100 307 PEAK																																																																																																															
3 5700.60	46.88	105.37	-58.49	40.77	33.70	8.74	36.33	0.00	100 307 PEAK																																																																																																															
4 5720.07	46.22	110.95	-64.73	40.05	33.74	8.76	36.33	0.00	100 307 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5885.00	113.96	-----	-----	107.05	34.34	8.94	36.37	0.00	100 307 PEAK																																																																																																															
Avg	Blank					 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>107.00</td><td>-----</td><td>-----</td><td>100.09</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>100 307 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5885.00	107.00	-----	-----	100.09	34.34	8.94	36.37	0.00	100 307 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1 5885.00	107.00	-----	-----	100.09	34.34	8.94	36.37	0.00	100 307 AVERAGE																																																																																																															

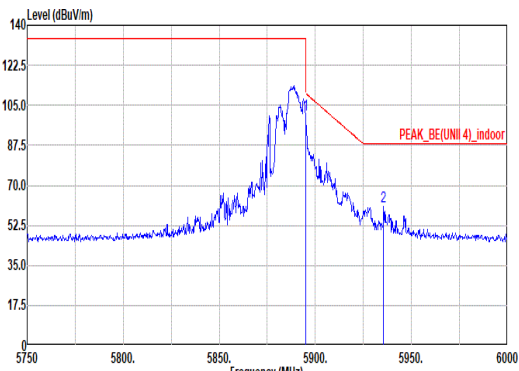
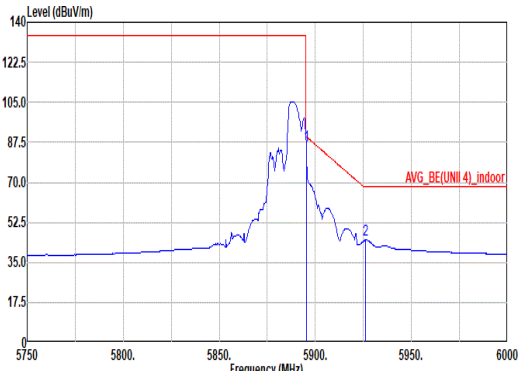


Mode	92																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																										
ANT	1+2																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.00</td><td>100.04</td><td>110.20</td><td>-9.36</td><td>93.88</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>100</td><td>307</td><td>PEAK</td></tr><tr><td>2</td><td>5935.50</td><td>60.63</td><td>88.20</td><td>-27.57</td><td>53.75</td><td>34.26</td><td>9.00</td><td>36.38</td><td>0.00</td><td>100</td><td>307</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.00	100.04	110.20	-9.36	93.88	34.38	8.95	36.37	0.00	100	307	PEAK	2	5935.50	60.63	88.20	-27.57	53.75	34.26	9.00	36.38	0.00	100	307	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.00	100.04	110.20	-9.36	93.88	34.38	8.95	36.37	0.00	100	307	PEAK																																															
2	5935.50	60.63	88.20	-27.57	53.75	34.26	9.00	36.38	0.00	100	307	PEAK																																															
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>85.92</td><td>90.02</td><td>-4.10</td><td>78.96</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>100</td><td>307</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.25</td><td>44.82</td><td>68.20</td><td>-23.38</td><td>37.91</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>307</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.25	85.92	90.02	-4.10	78.96	34.38	8.95	36.37	0.00	100	307	AVERAGE	2	5926.25	44.82	68.20	-23.38	37.91	34.30	8.99	36.38	0.00	100	307	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	85.92	90.02	-4.10	78.96	34.38	8.95	36.37	0.00	100	307	AVERAGE																																															
2	5926.25	44.82	68.20	-23.38	37.91	34.30	8.99	36.38	0.00	100	307	AVERAGE																																															

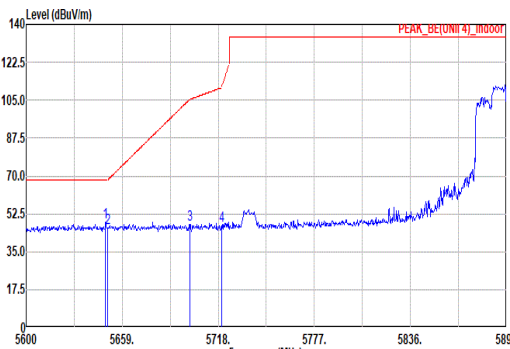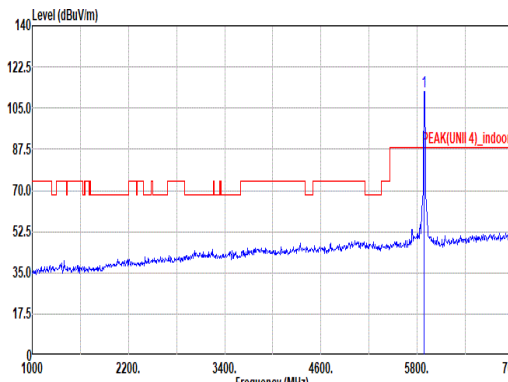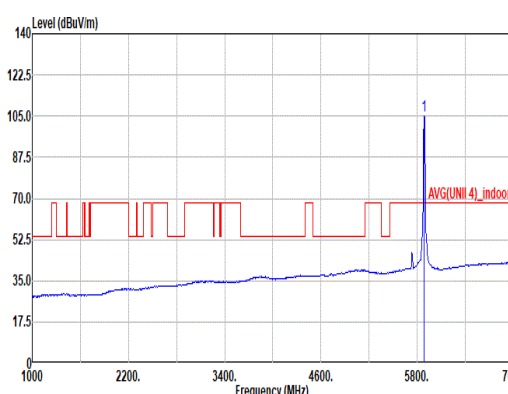

	92																																																																																																																																									
Mode	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																																																																																									
ANT	1+2																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak	 Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a blue signal line with several peaks and a red limit line. A peak is labeled 'PEAK_BE(UNII 4)_indoor'.						 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a single sharp peak and a red limit line. A peak is labeled 'PEAK(UNII 4)_indoor'.																																																																																																																																			
	Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.68</td><td>48.41</td><td>68.20</td><td>-19.79</td><td>42.76</td><td>33.29</td><td>8.68</td><td>36.32</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5658.15</td><td>46.02</td><td>68.31</td><td>-22.29</td><td>40.35</td><td>33.30</td><td>8.69</td><td>36.32</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>5700.68</td><td>47.64</td><td>105.37</td><td>-57.73</td><td>41.53</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>46.79</td><td>110.95</td><td>-64.16</td><td>40.62</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.68	48.41	68.20	-19.79	42.76	33.29	8.68	36.32	0.00	120	0	PEAK	2	5658.15	46.02	68.31	-22.29	40.35	33.30	8.69	36.32	0.00	120	0	PEAK	3	5700.68	47.64	105.37	-57.73	41.53	33.70	8.74	36.33	0.00	120	0	PEAK	4	5720.07	46.79	110.95	-64.16	40.62	33.74	8.76	36.33	0.00	120	0	PEAK	Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>111.98</td><td>-----</td><td>-----</td><td>105.07</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	111.98	-----	-----	105.07	34.34	8.94	36.37	0.00	120	0
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5648.68	48.41	68.20	-19.79	42.76	33.29	8.68	36.32	0.00	120	0	PEAK																																																																																																																														
2	5658.15	46.02	68.31	-22.29	40.35	33.30	8.69	36.32	0.00	120	0	PEAK																																																																																																																														
3	5700.68	47.64	105.37	-57.73	41.53	33.70	8.74	36.33	0.00	120	0	PEAK																																																																																																																														
4	5720.07	46.79	110.95	-64.16	40.62	33.74	8.76	36.33	0.00	120	0	PEAK																																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5885.00	111.98	-----	-----	105.07	34.34	8.94	36.37	0.00	120	0	PEAK																																																																																																																														
Avg	Blank						 Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line with a single sharp peak and a red limit line. A peak is labeled 'AVG(UNII 4)_indoor'.																																																																																																																																			
							Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5885.00</td><td>105.04</td><td>-----</td><td>-----</td><td>98.13</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>120</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5885.00	105.04	-----	-----	98.13	34.34	8.94	36.37	0.00	120	0	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5885.00	105.04	-----	-----	98.13	34.34	8.94	36.37	0.00	120	0	AVERAGE																																																																																																																														

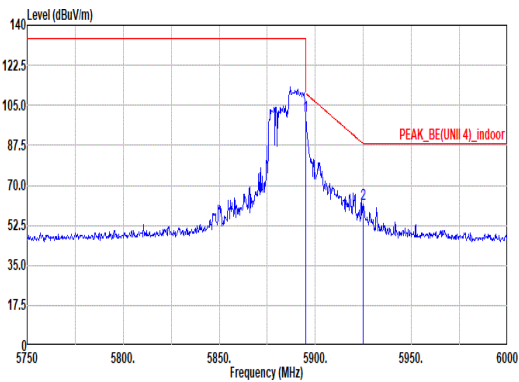
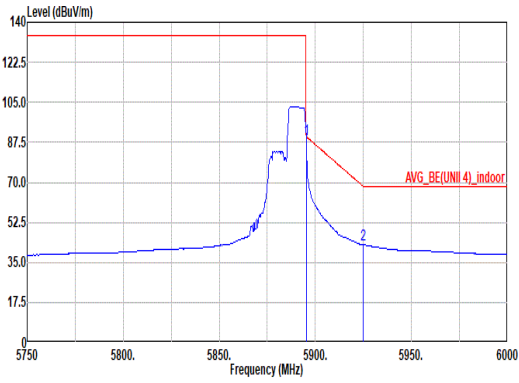


Mode	92																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																			
ANT	1+2																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.00</td><td>100.47</td><td>110.20</td><td>-9.73</td><td>93.51</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5925.00</td><td>61.74</td><td>88.20</td><td>-26.46</td><td>54.83</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>120</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.00	100.47	110.20	-9.73	93.51	34.38	8.95	36.37	0.00	120	0	PEAK	2	5925.00	61.74	88.20	-26.46	54.83	34.30	8.99	36.38	0.00	120	0	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.00	100.47	110.20	-9.73	93.51	34.38	8.95	36.37	0.00	120	0	PEAK																																																								
2	5925.00	61.74	88.20	-26.46	54.83	34.30	8.99	36.38	0.00	120	0	PEAK																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>88.68</td><td>90.02</td><td>-1.34</td><td>81.72</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>120</td><td>0</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>42.86</td><td>68.20</td><td>-25.34</td><td>35.95</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>120</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	88.68	90.02	-1.34	81.72	34.38	8.95	36.37	0.00	120	0	AVERAGE	2	5925.00	42.86	68.20	-25.34	35.95	34.30	8.99	36.38	0.00	120	0	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	88.68	90.02	-1.34	81.72	34.38	8.95	36.37	0.00	120	0	AVERAGE																																																								
2	5925.00	42.86	68.20	-25.34	35.95	34.30	8.99	36.38	0.00	120	0	AVERAGE																																																								






	93																																																																																																																																								
Mode	Band Edge - L																																																																																																																																								
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Partial RU 242/62_5875MHz																																																																																																																																								
ANT	1+2																																																																																																																																								
Pol.	Horizontal						Fundamental																																																																																																																																		
Peak	Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5648.68</td><td>48.91</td><td>68.20</td><td>-19.29</td><td>43.26</td><td>33.29</td><td>8.68</td><td>36.32</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>5658.15</td><td>48.69</td><td>68.31</td><td>-19.62</td><td>43.02</td><td>33.30</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr><tr><td>3</td><td>5700.30</td><td>58.60</td><td>105.28</td><td>-46.68</td><td>52.49</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr><tr><td>4</td><td>5720.95</td><td>61.01</td><td>112.97</td><td>-51.96</td><td>54.84</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5648.68	48.91	68.20	-19.29	43.26	33.29	8.68	36.32	0.00	100	292	PEAK	2	5658.15	48.69	68.31	-19.62	43.02	33.30	8.69	36.32	0.00	100	292	PEAK	3	5700.30	58.60	105.28	-46.68	52.49	33.70	8.74	36.33	0.00	100	292	PEAK	4	5720.95	61.01	112.97	-51.96	54.84	33.74	8.76	36.33	0.00	100	292	PEAK	Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>110.74</td><td>-----</td><td>-----</td><td>103.88</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	110.74	-----	-----	103.88	34.30	8.93	36.37	0.00	100	292	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5648.68	48.91	68.20	-19.29	43.26	33.29	8.68	36.32	0.00	100	292	PEAK																																																																																																																													
2	5658.15	48.69	68.31	-19.62	43.02	33.30	8.69	36.32	0.00	100	292	PEAK																																																																																																																													
3	5700.30	58.60	105.28	-46.68	52.49	33.70	8.74	36.33	0.00	100	292	PEAK																																																																																																																													
4	5720.95	61.01	112.97	-51.96	54.84	33.74	8.76	36.33	0.00	100	292	PEAK																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5875.00	110.74	-----	-----	103.88	34.30	8.93	36.37	0.00	100	292	PEAK																																																																																																																													
Avg	Blank						Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>104.12</td><td>-----</td><td>-----</td><td>97.26</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>100</td><td>292</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5875.00	104.12	-----	-----	97.26	34.30	8.93	36.37	0.00	100	292	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	5875.00	104.12	-----	-----	97.26	34.30	8.93	36.37	0.00	100	292	AVERAGE																																																																																																																													

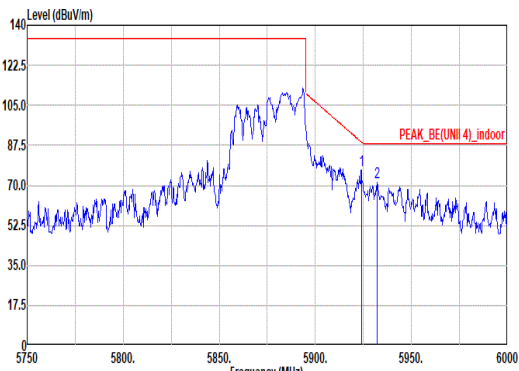
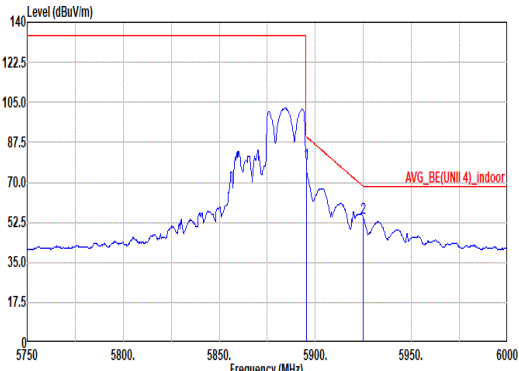


Mode	93																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Partial RU 242/62_5875MHz																																																										
ANT	1+2																																																										
Pol.	Horizontal	Fundamental																																																									
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.00</td><td>76.64</td><td>88.93</td><td>-12.29</td><td>69.73</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr><tr><td>2</td><td>5932.00</td><td>71.09</td><td>88.20</td><td>-17.11</td><td>64.20</td><td>34.27</td><td>9.00</td><td>36.38</td><td>0.00</td><td>100</td><td>292</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5924.00	76.64	88.93	-12.29	69.73	34.30	8.99	36.38	0.00	100	292	PEAK	2	5932.00	71.09	88.20	-17.11	64.20	34.27	9.00	36.38	0.00	100	292	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5924.00	76.64	88.93	-12.29	69.73	34.30	8.99	36.38	0.00	100	292	PEAK																																															
2	5932.00	71.09	88.20	-17.11	64.20	34.27	9.00	36.38	0.00	100	292	PEAK																																															
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>78.00</td><td>90.02</td><td>-12.02</td><td>71.04</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>100</td><td>292</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>54.33</td><td>68.20</td><td>-13.87</td><td>47.42</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>292</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.25	78.00	90.02	-12.02	71.04	34.38	8.95	36.37	0.00	100	292	AVERAGE	2	5925.00	54.33	68.20	-13.87	47.42	34.30	8.99	36.38	0.00	100	292	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																	
1	5895.25	78.00	90.02	-12.02	71.04	34.38	8.95	36.37	0.00	100	292	AVERAGE																																															
2	5925.00	54.33	68.20	-13.87	47.42	34.30	8.99	36.38	0.00	100	292	AVERAGE																																															

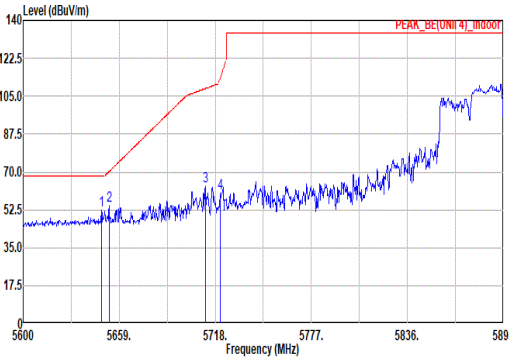
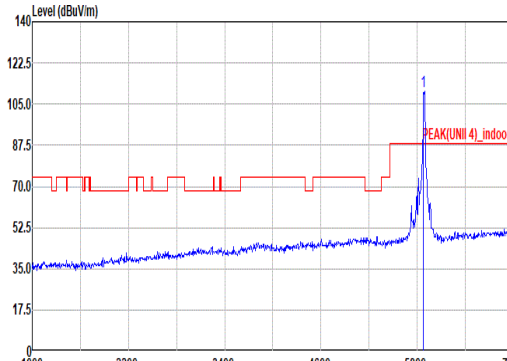
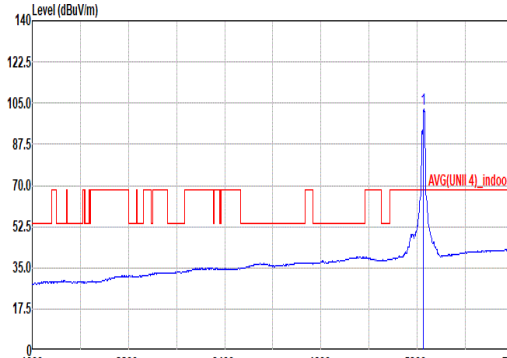


Mode	93																																																																																																																																							
	Band Edge - L																																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Partial RU 242/62_5875MHz																																																																																																																																							
ANT	1+2																																																																																																																																							
Pol.	Vertical					Fundamental																																																																																																																																		
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5648.09</td><td>52.12</td><td>68.20</td><td>-16.08</td><td></td><td>46.47</td><td>33.29</td><td>8.68</td><td>36.32</td><td>0.00</td><td>139</td><td></td><td>0 PEAK</td></tr><tr><td>2</td><td>5652.81</td><td>54.17</td><td>70.28</td><td>-16.11</td><td></td><td>48.48</td><td>33.32</td><td>8.69</td><td>36.32</td><td>0.00</td><td>139</td><td></td><td>0 PEAK</td></tr><tr><td>3</td><td>5711.81</td><td>63.49</td><td>108.51</td><td>-45.02</td><td></td><td>57.35</td><td>33.72</td><td>8.75</td><td>36.33</td><td>0.00</td><td>139</td><td></td><td>0 PEAK</td></tr><tr><td>4</td><td>5720.95</td><td>60.29</td><td>112.97</td><td>-52.68</td><td></td><td>54.12</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>139</td><td></td><td>0 PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5648.09	52.12	68.20	-16.08		46.47	33.29	8.68	36.32	0.00	139		0 PEAK	2	5652.81	54.17	70.28	-16.11		48.48	33.32	8.69	36.32	0.00	139		0 PEAK	3	5711.81	63.49	108.51	-45.02		57.35	33.72	8.75	36.33	0.00	139		0 PEAK	4	5720.95	60.29	112.97	-52.68		54.12	33.74	8.76	36.33	0.00	139		0 PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>110.62</td><td>-----</td><td>-----</td><td></td><td>103.76</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>139</td><td></td><td>0 PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5875.00	110.62	-----	-----		103.76	34.30	8.93	36.37	0.00	139		0 PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1	5648.09	52.12	68.20	-16.08		46.47	33.29	8.68	36.32	0.00	139		0 PEAK																																																																																																																											
2	5652.81	54.17	70.28	-16.11		48.48	33.32	8.69	36.32	0.00	139		0 PEAK																																																																																																																											
3	5711.81	63.49	108.51	-45.02		57.35	33.72	8.75	36.33	0.00	139		0 PEAK																																																																																																																											
4	5720.95	60.29	112.97	-52.68		54.12	33.74	8.76	36.33	0.00	139		0 PEAK																																																																																																																											
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1	5875.00	110.62	-----	-----		103.76	34.30	8.93	36.37	0.00	139		0 PEAK																																																																																																																											
Avg	Blank					 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>102.33</td><td>-----</td><td>-----</td><td></td><td>95.47</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>139</td><td></td><td>0 AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1	5875.00	102.33	-----	-----		95.47	34.30	8.93	36.37	0.00	139		0 AVERAGE																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1	5875.00	102.33	-----	-----		95.47	34.30	8.93	36.37	0.00	139		0 AVERAGE																																																																																																																											

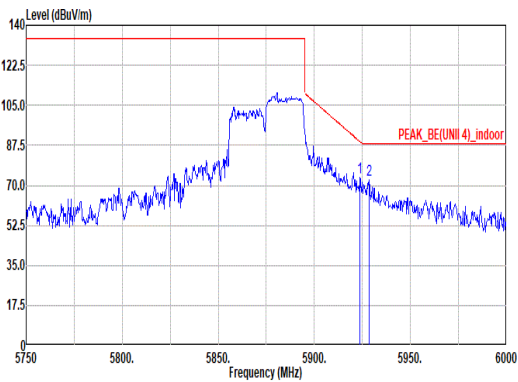
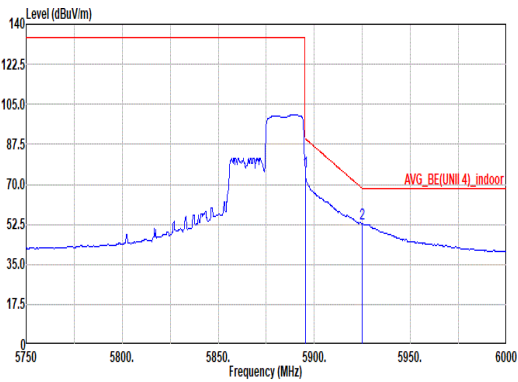


Mode	93																																																																		
	Band Edge - R																																																																		
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Partial RU 242/62_5875MHz																																																																		
ANT	1+2																																																																		
Pol.	Vertical						Fundamental																																																												
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5923.75</td><td>73.66</td><td>89.11</td><td>-15.45</td><td>66.74</td><td>34.31</td><td>8.99</td><td>36.38</td><td>0.00</td><td>139</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5928.58</td><td>72.62</td><td>88.20</td><td>-15.58</td><td>65.72</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>139</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5923.75	73.66	89.11	-15.45	66.74	34.31	8.99	36.38	0.00	139	0	PEAK	2	5928.58	72.62	88.20	-15.58	65.72	34.29	8.99	36.38	0.00	139	0	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																												
1	5923.75	73.66	89.11	-15.45	66.74	34.31	8.99	36.38	0.00	139	0	PEAK																																																							
2	5928.58	72.62	88.20	-15.58	65.72	34.29	8.99	36.38	0.00	139	0	PEAK																																																							
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5895.25</td><td>75.77</td><td>90.02</td><td>-14.25</td><td>68.81</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>139</td><td>0</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>52.63</td><td>68.20</td><td>-15.57</td><td>45.72</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>139</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB			1	5895.25	75.77	90.02	-14.25	68.81	34.38	8.95	36.37	0.00	139	0	AVERAGE	2	5925.00	52.63	68.20	-15.57	45.72	34.30	8.99	36.38	0.00	139	0	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Level	Factor	Loss	Factor	Factor	cm	deg																																																										
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB																																																												
1	5895.25	75.77	90.02	-14.25	68.81	34.38	8.95	36.37	0.00	139	0	AVERAGE																																																							
2	5925.00	52.63	68.20	-15.57	45.72	34.30	8.99	36.38	0.00	139	0	AVERAGE																																																							

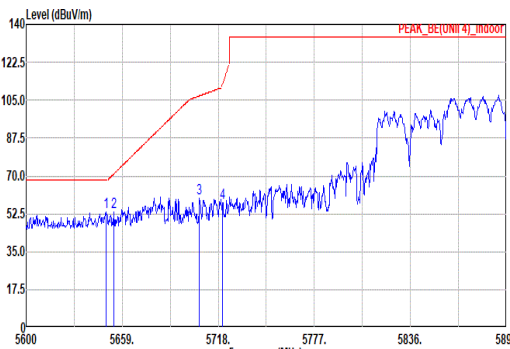
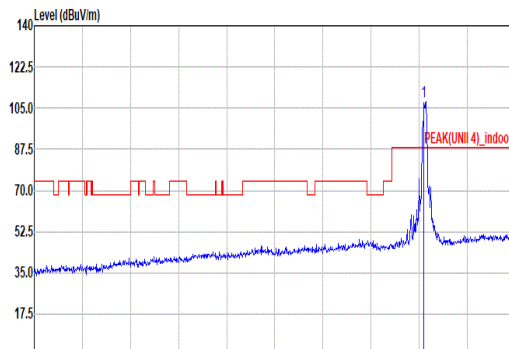
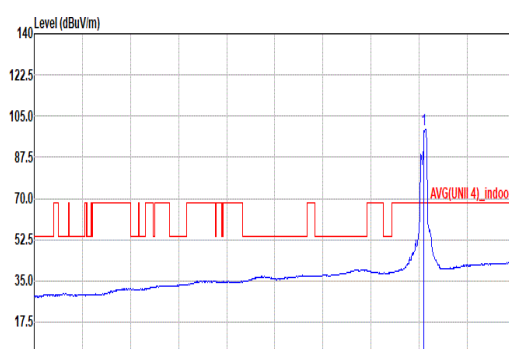


	94																																																																																																																																										
Mode	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Partial RU 484/66_5855MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5648.97</td><td>53.20</td><td>68.20</td><td>-15.00</td><td>47.55</td><td>33.29</td><td>8.68</td><td>36.32</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr><tr><td>2</td><td>5653.69</td><td>53.43</td><td>70.94</td><td>-17.51</td><td>47.73</td><td>33.33</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr><tr><td>3</td><td>5706.50</td><td>59.75</td><td>107.02</td><td>-47.27</td><td>53.62</td><td>33.71</td><td>8.75</td><td>36.33</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr><tr><td>4</td><td>5720.66</td><td>57.55</td><td>112.29</td><td>-54.74</td><td>51.38</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5648.97	53.20	68.20	-15.00	47.55	33.29	8.68	36.32	0.00	100	261	PEAK	2	5653.69	53.43	70.94	-17.51	47.73	33.33	8.69	36.32	0.00	100	261	PEAK	3	5706.50	59.75	107.02	-47.27	53.62	33.71	8.75	36.33	0.00	100	261	PEAK	4	5720.66	57.55	112.29	-54.74	51.38	33.74	8.76	36.33	0.00	100	261	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>107.55</td><td>-----</td><td>-----</td><td>100.79</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	107.55	-----	-----	100.79	34.22	8.91	36.37	0.00	100	261	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5648.97	53.20	68.20	-15.00	47.55	33.29	8.68	36.32	0.00	100	261	PEAK																																																																																																																															
2	5653.69	53.43	70.94	-17.51	47.73	33.33	8.69	36.32	0.00	100	261	PEAK																																																																																																																															
3	5706.50	59.75	107.02	-47.27	53.62	33.71	8.75	36.33	0.00	100	261	PEAK																																																																																																																															
4	5720.66	57.55	112.29	-54.74	51.38	33.74	8.76	36.33	0.00	100	261	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	107.55	-----	-----	100.79	34.22	8.91	36.37	0.00	100	261	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>99.36</td><td>-----</td><td>-----</td><td>92.60</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>100</td><td>261</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	99.36	-----	-----	92.60	34.22	8.91	36.37	0.00	100	261	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	99.36	-----	-----	92.60	34.22	8.91	36.37	0.00	100	261	AVERAGE																																																																																																																															

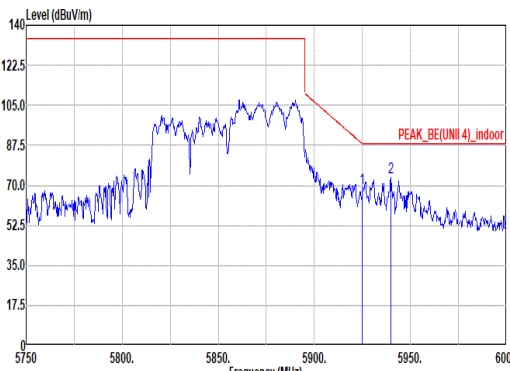
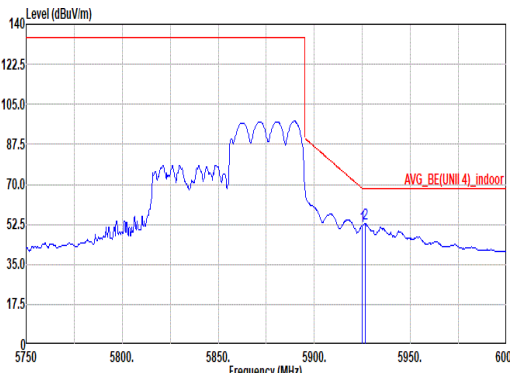


Mode	94																																																																																
	Band Edge - R																																																																																
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Partial RU 484/66_5855MHz																																																																																
ANT	1+2																																																																																
Pol.	Horizontal																																																																																
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5925.00</td><td>68.76</td><td>88.20</td><td>-19.44</td><td>61.85</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr><tr><td>2</td><td>5939.75</td><td>73.23</td><td>88.20</td><td>-14.97</td><td>66.38</td><td>34.24</td><td>9.00</td><td>36.39</td><td>0.00</td><td>100</td><td>261</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5925.00	68.76	88.20	-19.44	61.85	34.30	8.99	36.38	0.00	100	261	PEAK	2	5939.75	73.23	88.20	-14.97	66.38	34.24	9.00	36.39	0.00	100	261	PEAK	Blank										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																									
1	5925.00	68.76	88.20	-19.44	61.85	34.30	8.99	36.38	0.00	100	261	PEAK																																																																					
2	5939.75	73.23	88.20	-14.97	66.38	34.24	9.00	36.39	0.00	100	261	PEAK																																																																					
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>5925.00</td><td>51.99</td><td>68.20</td><td>-16.21</td><td>45.08</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>261</td><td>AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>52.69</td><td>68.20</td><td>-15.51</td><td>45.79</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>261</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	5925.00	51.99	68.20	-16.21	45.08	34.30	8.99	36.38	0.00	100	261	AVERAGE	2	5926.50	52.69	68.20	-15.51	45.79	34.29	8.99	36.38	0.00	100	261	AVERAGE	Blank										
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																									
1	5925.00	51.99	68.20	-16.21	45.08	34.30	8.99	36.38	0.00	100	261	AVERAGE																																																																					
2	5926.50	52.69	68.20	-15.51	45.79	34.29	8.99	36.38	0.00	100	261	AVERAGE																																																																					

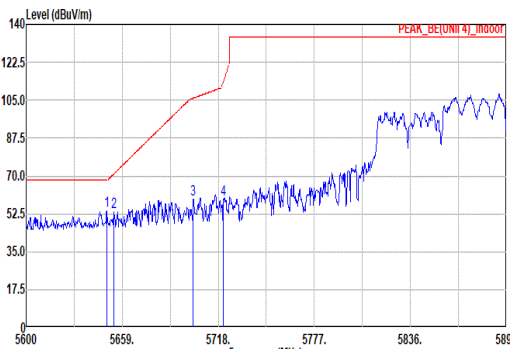
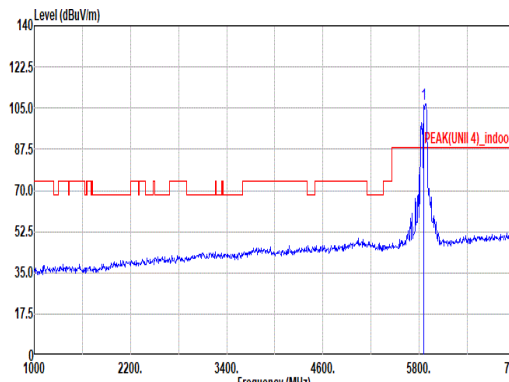
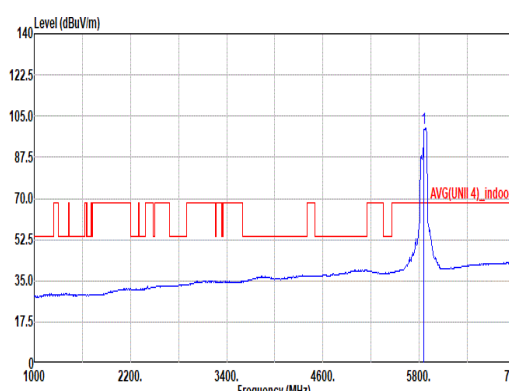


Mode	94																																																																																																																																													
	Band Edge - L																																																																																																																																													
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Partial RU 484/66_5855MHz																																																																																																																																													
ANT	1+2																																																																																																																																													
Pol.	Vertical						Fundamental																																																																																																																																							
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5649.56</td><td>53.67</td><td>68.20</td><td>-14.53</td><td>48.01</td><td>33.30</td><td>8.68</td><td>36.32</td><td>0.00</td><td>300</td><td>271</td><td>PEAK</td></tr><tr><td>2</td><td>5653.69</td><td>53.27</td><td>70.94</td><td>-17.67</td><td>47.57</td><td>33.33</td><td>8.69</td><td>36.32</td><td>0.00</td><td>300</td><td>271</td><td>PEAK</td></tr><tr><td>3</td><td>5702.66</td><td>59.19</td><td>105.95</td><td>-46.76</td><td>53.07</td><td>33.71</td><td>8.74</td><td>36.33</td><td>0.00</td><td>300</td><td>271</td><td>PEAK</td></tr><tr><td>4</td><td>5721.25</td><td>59.33</td><td>113.64</td><td>-54.31</td><td>53.16</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>300</td><td>271</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5649.56	53.67	68.20	-14.53	48.01	33.30	8.68	36.32	0.00	300	271	PEAK	2	5653.69	53.27	70.94	-17.67	47.57	33.33	8.69	36.32	0.00	300	271	PEAK	3	5702.66	59.19	105.95	-46.76	53.07	33.71	8.74	36.33	0.00	300	271	PEAK	4	5721.25	59.33	113.64	-54.31	53.16	33.74	8.76	36.33	0.00	300	271	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>106.72</td><td>-----</td><td>-----</td><td>99.96</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>300</td><td>271</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	106.72	-----	-----	99.96	34.22	8.91	36.37	0.00	300	271	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	5649.56	53.67	68.20	-14.53	48.01	33.30	8.68	36.32	0.00	300	271	PEAK																																																																																																																																		
2	5653.69	53.27	70.94	-17.67	47.57	33.33	8.69	36.32	0.00	300	271	PEAK																																																																																																																																		
3	5702.66	59.19	105.95	-46.76	53.07	33.71	8.74	36.33	0.00	300	271	PEAK																																																																																																																																		
4	5721.25	59.33	113.64	-54.31	53.16	33.74	8.76	36.33	0.00	300	271	PEAK																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	5855.00	106.72	-----	-----	99.96	34.22	8.91	36.37	0.00	300	271	PEAK																																																																																																																																		
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>99.85</td><td>-----</td><td>-----</td><td>93.09</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>300</td><td>271</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5855.00	99.85	-----	-----	93.09	34.22	8.91	36.37	0.00	300	271	AVERAGE																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	5855.00	99.85	-----	-----	93.09	34.22	8.91	36.37	0.00	300	271	AVERAGE																																																																																																																																		

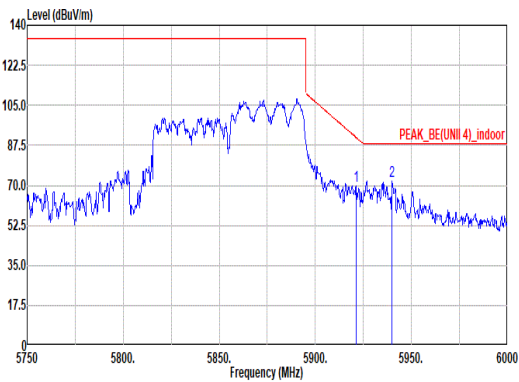
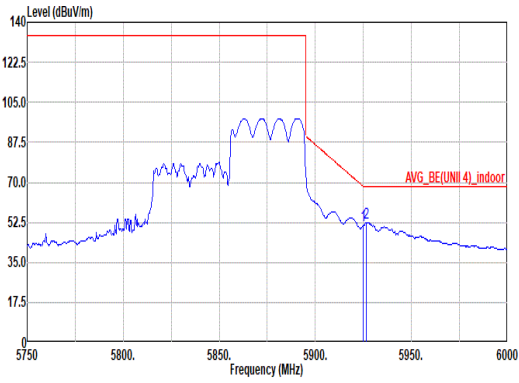


Mode	94																																																			
	Band Edge - R																																																			
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Partial RU 484/66_5855MHz																																																			
ANT	1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5921.25</td><td>69.56</td><td>90.94</td><td>-21.38</td><td>62.64</td><td>34.32</td><td>8.98</td><td>36.38</td><td>0.00 300 271 PEAK</td></tr><tr><td>2</td><td>5940.00</td><td>71.78</td><td>88.20</td><td>-16.42</td><td>64.93</td><td>34.24</td><td>9.00</td><td>36.39</td><td>0.00 300 271 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5921.25	69.56	90.94	-21.38	62.64	34.32	8.98	36.38	0.00 300 271 PEAK	2	5940.00	71.78	88.20	-16.42	64.93	34.24	9.00	36.39	0.00 300 271 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5921.25	69.56	90.94	-21.38	62.64	34.32	8.98	36.38	0.00 300 271 PEAK																																											
2	5940.00	71.78	88.20	-16.42	64.93	34.24	9.00	36.39	0.00 300 271 PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5925.00</td><td>50.99</td><td>68.20</td><td>-17.21</td><td>44.08</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00 300 271 AVERAGE</td></tr><tr><td>2</td><td>5926.50</td><td>52.56</td><td>68.20</td><td>-15.64</td><td>45.66</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00 300 271 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5925.00	50.99	68.20	-17.21	44.08	34.30	8.99	36.38	0.00 300 271 AVERAGE	2	5926.50	52.56	68.20	-15.64	45.66	34.29	8.99	36.38	0.00 300 271 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1	5925.00	50.99	68.20	-17.21	44.08	34.30	8.99	36.38	0.00 300 271 AVERAGE																																											
2	5926.50	52.56	68.20	-15.64	45.66	34.29	8.99	36.38	0.00 300 271 AVERAGE																																											

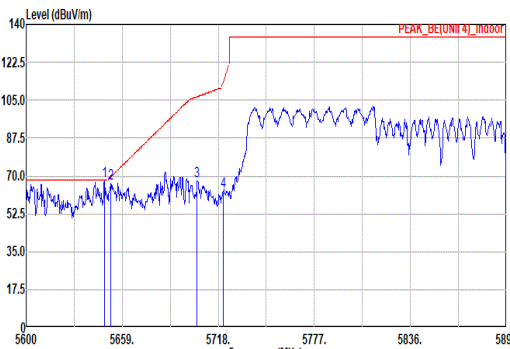
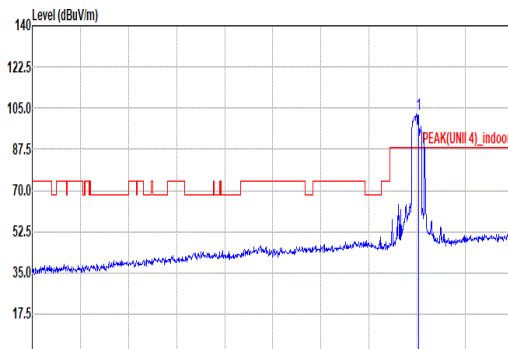
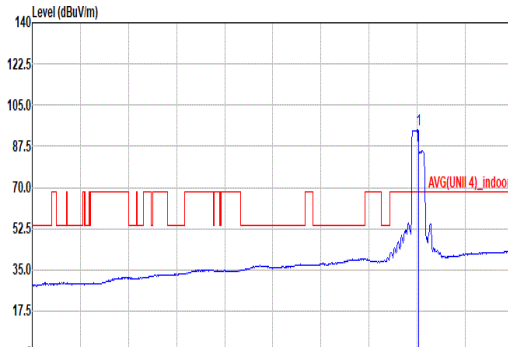


Mode	95																																																																																																																							
	Band Edge - L																																																																																																																							
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Partial RU 996/67_5815MHz																																																																																																																							
ANT	1+2																																																																																																																							
Pol.	Horizontal					Fundamental																																																																																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5648.09</td><td>67.81</td><td>68.20</td><td>-0.39</td><td>62.16</td><td>33.29</td><td>8.68</td><td>36.32</td><td>0.00 100 265 PEAK</td></tr><tr><td>2</td><td>5651.92</td><td>66.53</td><td>69.63</td><td>-3.10</td><td>60.84</td><td>33.32</td><td>8.69</td><td>36.32</td><td>0.00 100 265 PEAK</td></tr><tr><td>3</td><td>5705.02</td><td>67.60</td><td>106.61</td><td>-39.01</td><td>61.47</td><td>33.71</td><td>8.75</td><td>36.33</td><td>0.00 100 265 PEAK</td></tr><tr><td>4</td><td>5720.95</td><td>62.99</td><td>112.97</td><td>-49.98</td><td>56.82</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00 100 265 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5648.09	67.81	68.20	-0.39	62.16	33.29	8.68	36.32	0.00 100 265 PEAK	2	5651.92	66.53	69.63	-3.10	60.84	33.32	8.69	36.32	0.00 100 265 PEAK	3	5705.02	67.60	106.61	-39.01	61.47	33.71	8.75	36.33	0.00 100 265 PEAK	4	5720.95	62.99	112.97	-49.98	56.82	33.74	8.76	36.33	0.00 100 265 PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>102.55</td><td>-----</td><td>-----</td><td>95.91</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00 100 265 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5815.00	102.55	-----	-----	95.91	34.13	8.87	36.36	0.00 100 265 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5648.09	67.81	68.20	-0.39	62.16	33.29	8.68	36.32	0.00 100 265 PEAK																																																																																																															
2	5651.92	66.53	69.63	-3.10	60.84	33.32	8.69	36.32	0.00 100 265 PEAK																																																																																																															
3	5705.02	67.60	106.61	-39.01	61.47	33.71	8.75	36.33	0.00 100 265 PEAK																																																																																																															
4	5720.95	62.99	112.97	-49.98	56.82	33.74	8.76	36.33	0.00 100 265 PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5815.00	102.55	-----	-----	95.91	34.13	8.87	36.36	0.00 100 265 PEAK																																																																																																															
Avg	Blank					 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>94.70</td><td>-----</td><td>-----</td><td>88.06</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00 100 265 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5815.00	94.70	-----	-----	88.06	34.13	8.87	36.36	0.00 100 265 AVERAGE																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																															
1	5815.00	94.70	-----	-----	88.06	34.13	8.87	36.36	0.00 100 265 AVERAGE																																																																																																															

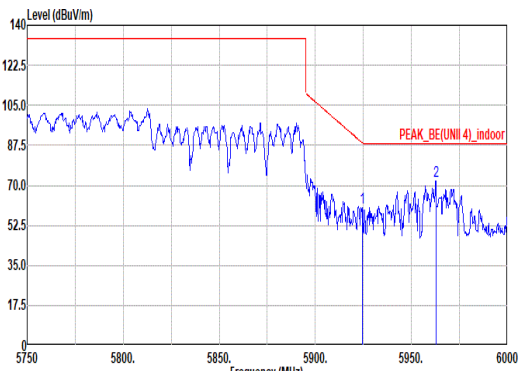
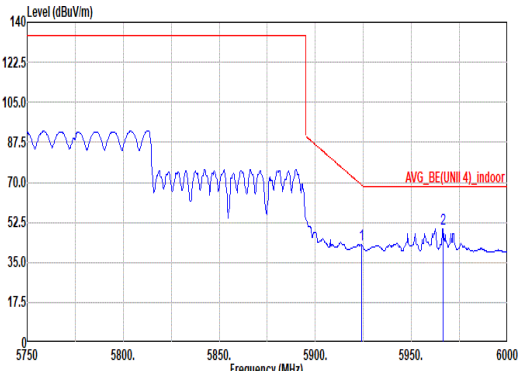


Mode	95																																																					
	Band Edge - R																																																					
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Partial RU 996/67_5815MHz																																																					
ANT	1+2																																																					
Pol.	Horizontal	Fundamental																																																				
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.50</td><td>60.17</td><td>88.57</td><td>-28.40</td><td>53.26</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>265</td><td>PEAK</td></tr><tr><td>2</td><td>5962.75</td><td>71.76</td><td>88.20</td><td>-16.44</td><td>64.92</td><td>34.20</td><td>9.03</td><td>36.39</td><td>0.00</td><td>100</td><td>265</td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.50	60.17	88.57	-28.40	53.26	34.30	8.99	36.38	0.00	100	265	PEAK	2	5962.75	71.76	88.20	-16.44	64.92	34.20	9.03	36.39	0.00	100	265	PEAK	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	5924.50	60.17	88.57	-28.40	53.26	34.30	8.99	36.38	0.00	100	265	PEAK																																										
2	5962.75	71.76	88.20	-16.44	64.92	34.20	9.03	36.39	0.00	100	265	PEAK																																										
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5924.00</td><td>42.70</td><td>68.93</td><td>-26.23</td><td>35.79</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>265</td><td>AVERAGE</td></tr><tr><td>2</td><td>5966.50</td><td>49.92</td><td>68.20</td><td>-18.28</td><td>43.00</td><td>34.20</td><td>9.03</td><td>36.39</td><td>0.00</td><td>100</td><td>265</td><td>AVERAGE</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5924.00	42.70	68.93	-26.23	35.79	34.30	8.99	36.38	0.00	100	265	AVERAGE	2	5966.50	49.92	68.20	-18.28	43.00	34.20	9.03	36.39	0.00	100	265	AVERAGE	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	5924.00	42.70	68.93	-26.23	35.79	34.30	8.99	36.38	0.00	100	265	AVERAGE																																										
2	5966.50	49.92	68.20	-18.28	43.00	34.20	9.03	36.39	0.00	100	265	AVERAGE																																										

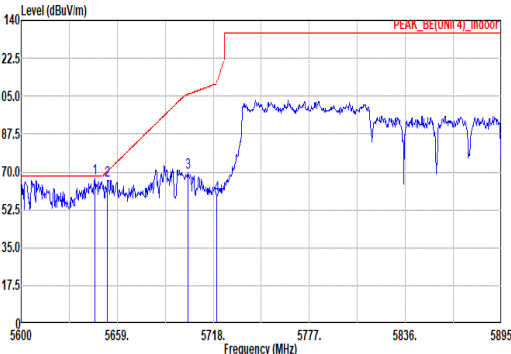
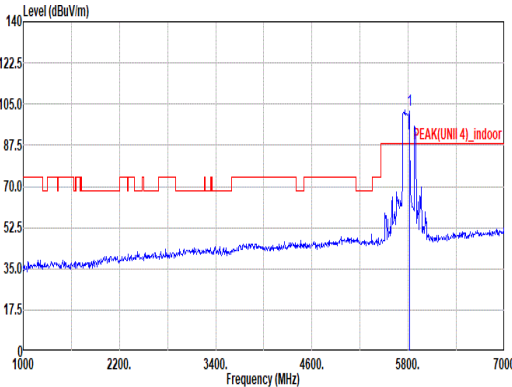
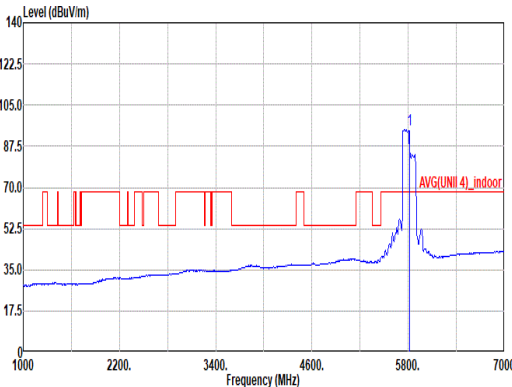


		95																																																																																																																																				
Mode	Band Edge - L																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Partial RU 996/67_5815MHz																																																																																																																																					
ANT	1+2																																																																																																																																					
Pol.	Vertical						Fundamental																																																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5645.43</td><td>67.29</td><td>68.20</td><td>-0.91</td><td>61.65</td><td>33.27</td><td>8.68</td><td>36.31</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5653.10</td><td>66.27</td><td>70.50</td><td>-4.23</td><td>60.58</td><td>33.32</td><td>8.69</td><td>36.32</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr><tr><td>3</td><td>5702.37</td><td>69.97</td><td>105.86</td><td>-35.89</td><td>63.06</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>59.43</td><td>110.95</td><td>-51.52</td><td>53.26</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5645.43	67.29	68.20	-0.91	61.65	33.27	8.68	36.31	0.00	149	360	PEAK	2	5653.10	66.27	70.50	-4.23	60.58	33.32	8.69	36.32	0.00	149	360	PEAK	3	5702.37	69.97	105.86	-35.89	63.06	33.70	8.74	36.33	0.00	149	360	PEAK	4	5720.07	59.43	110.95	-51.52	53.26	33.74	8.76	36.33	0.00	149	360	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>102.37</td><td>-----</td><td>-----</td><td>95.73</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	102.37	-----	-----	95.73	34.13	8.87	36.36	0.00	149	360	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																									
1	5645.43	67.29	68.20	-0.91	61.65	33.27	8.68	36.31	0.00	149	360	PEAK																																																																																																																										
2	5653.10	66.27	70.50	-4.23	60.58	33.32	8.69	36.32	0.00	149	360	PEAK																																																																																																																										
3	5702.37	69.97	105.86	-35.89	63.06	33.70	8.74	36.33	0.00	149	360	PEAK																																																																																																																										
4	5720.07	59.43	110.95	-51.52	53.26	33.74	8.76	36.33	0.00	149	360	PEAK																																																																																																																										
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																									
1	5815.00	102.37	-----	-----	95.73	34.13	8.87	36.36	0.00	149	360	PEAK																																																																																																																										
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>94.59</td><td>-----</td><td>-----</td><td>87.95</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>149</td><td>360</td><td>AVERAGE</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	94.59	-----	-----	87.95	34.13	8.87	36.36	0.00	149	360	AVERAGE																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																									
1	5815.00	94.59	-----	-----	87.95	34.13	8.87	36.36	0.00	149	360	AVERAGE																																																																																																																										

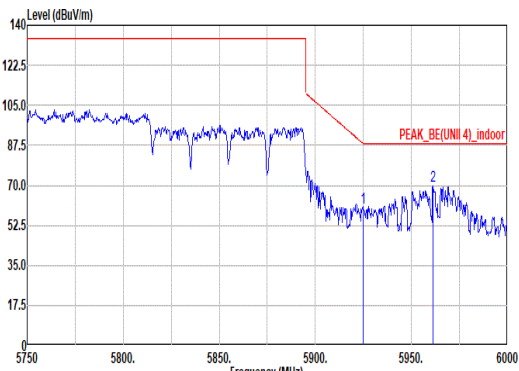
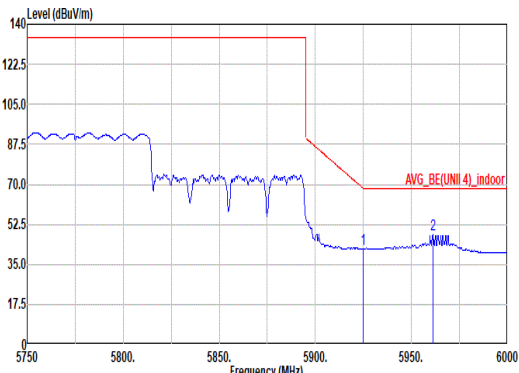


Mode	95																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE160_CH163_Partial RU 996/67_5815MHz																																																																				
ANT	1+2																																																																				
Pol.	Vertical						Fundamental																																																														
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>60.37</td><td>88.20</td><td>-27.83</td><td>53.46</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5961.25</td><td>69.70</td><td>88.20</td><td>-18.50</td><td>62.86</td><td>34.20</td><td>9.03</td><td>36.39</td><td>0.00</td><td>149</td><td>360</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	60.37	88.20	-27.83	53.46	34.30	8.99	36.38	0.00	149	360	PEAK	2	5961.25	69.70	88.20	-18.50	62.86	34.20	9.03	36.39	0.00	149	360	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5925.00	60.37	88.20	-27.83	53.46	34.30	8.99	36.38	0.00	149	360	PEAK																																																									
2	5961.25	69.70	88.20	-18.50	62.86	34.20	9.03	36.39	0.00	149	360	PEAK																																																									
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>41.78</td><td>68.20</td><td>-26.42</td><td>34.87</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>149</td><td>360</td><td>AVERAGE</td></tr><tr><td>2</td><td>5961.25</td><td>47.82</td><td>68.20</td><td>-20.38</td><td>40.98</td><td>34.20</td><td>9.03</td><td>36.39</td><td>0.00</td><td>149</td><td>360</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	41.78	68.20	-26.42	34.87	34.30	8.99	36.38	0.00	149	360	AVERAGE	2	5961.25	47.82	68.20	-20.38	40.98	34.20	9.03	36.39	0.00	149	360	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5925.00	41.78	68.20	-26.42	34.87	34.30	8.99	36.38	0.00	149	360	AVERAGE																																																									
2	5961.25	47.82	68.20	-20.38	40.98	34.20	9.03	36.39	0.00	149	360	AVERAGE																																																									

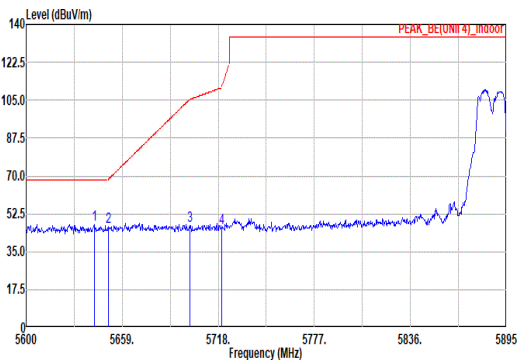
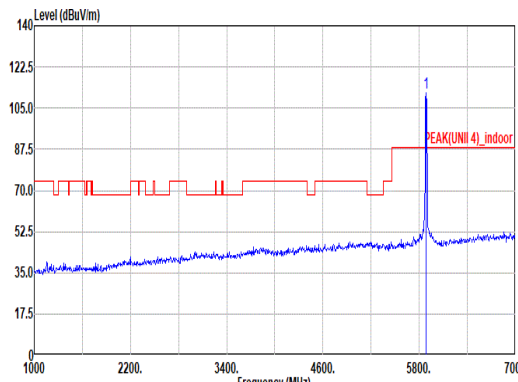
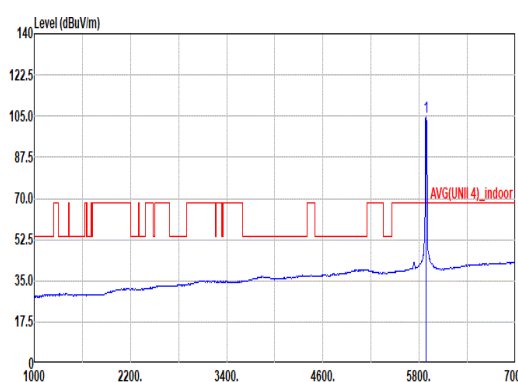


Mode	96																																																																																																																																	
	Band Edge - L																																																																																																																																	
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																																																																																	
ANT	1+2																																																																																																																																	
Pol.	Horizontal						Fundamental																																																																																																																											
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5641.89</td><td>47.36</td><td>68.20</td><td>-20.84</td><td>41.74</td><td>33.25</td><td>8.68</td><td>36.31</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>46.45</td><td>68.75</td><td>-22.30</td><td>40.77</td><td>33.31</td><td>8.69</td><td>36.32</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>47.24</td><td>105.37</td><td>-58.13</td><td>41.13</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>46.08</td><td>110.95</td><td>-64.87</td><td>39.91</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5641.89	47.36	68.20	-20.84	41.74	33.25	8.68	36.31	0.00	267	315	PEAK	2	5650.74	46.45	68.75	-22.30	40.77	33.31	8.69	36.32	0.00	267	315	PEAK	3	5700.60	47.24	105.37	-58.13	41.13	33.70	8.74	36.33	0.00	267	315	PEAK	4	5720.07	46.08	110.95	-64.87	39.91	33.74	8.76	36.33	0.00	267	315	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>111.56</td><td>-----</td><td>-----</td><td>104.65</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	111.56	-----	-----	104.65	34.34	8.94	36.37	0.00	267	315	PEAK
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5641.89	47.36	68.20	-20.84	41.74	33.25	8.68	36.31	0.00	267	315	PEAK																																																																																																																						
2	5650.74	46.45	68.75	-22.30	40.77	33.31	8.69	36.32	0.00	267	315	PEAK																																																																																																																						
3	5700.60	47.24	105.37	-58.13	41.13	33.70	8.74	36.33	0.00	267	315	PEAK																																																																																																																						
4	5720.07	46.08	110.95	-64.87	39.91	33.74	8.76	36.33	0.00	267	315	PEAK																																																																																																																						
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5885.00	111.56	-----	-----	104.65	34.34	8.94	36.37	0.00	267	315	PEAK																																																																																																																						
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>104.56</td><td>-----</td><td>-----</td><td>97.65</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>267</td><td>315</td><td>AVERAGE</td></tr></tbody></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	104.56	-----	-----	97.65	34.34	8.94	36.37	0.00	267	315	AVERAGE																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5885.00	104.56	-----	-----	97.65	34.34	8.94	36.37	0.00	267	315	AVERAGE																																																																																																																						

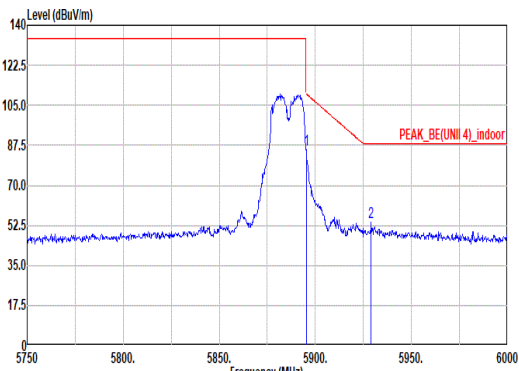
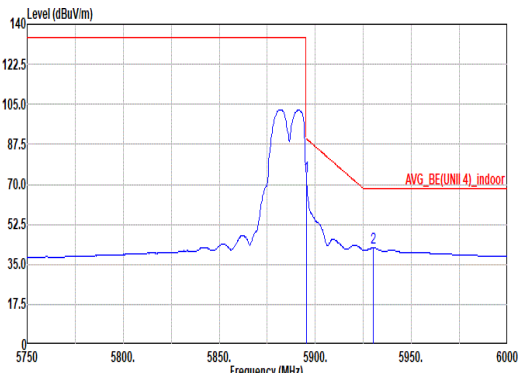


Mode	96																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																			
ANT	1+2																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>85.61</td><td>110.02</td><td>-24.41</td><td>78.65</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr><tr><td>2</td><td>5929.00</td><td>54.07</td><td>88.20</td><td>-34.13</td><td>47.18</td><td>34.28</td><td>8.99</td><td>36.38</td><td>0.00</td><td>267</td><td>315</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	85.61	110.02	-24.41	78.65	34.38	8.95	36.37	0.00	267	315	PEAK	2	5929.00	54.07	88.20	-34.13	47.18	34.28	8.99	36.38	0.00	267	315	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	85.61	110.02	-24.41	78.65	34.38	8.95	36.37	0.00	267	315	PEAK																																																								
2	5929.00	54.07	88.20	-34.13	47.18	34.28	8.99	36.38	0.00	267	315	PEAK																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>73.43</td><td>90.02</td><td>-16.59</td><td>66.47</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>267</td><td>315</td><td>AVERAGE</td></tr><tr><td>2</td><td>5930.00</td><td>42.17</td><td>68.20</td><td>-26.03</td><td>35.28</td><td>34.28</td><td>8.99</td><td>36.38</td><td>0.00</td><td>267</td><td>315</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	73.43	90.02	-16.59	66.47	34.38	8.95	36.37	0.00	267	315	AVERAGE	2	5930.00	42.17	68.20	-26.03	35.28	34.28	8.99	36.38	0.00	267	315	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	73.43	90.02	-16.59	66.47	34.38	8.95	36.37	0.00	267	315	AVERAGE																																																								
2	5930.00	42.17	68.20	-26.03	35.28	34.28	8.99	36.38	0.00	267	315	AVERAGE																																																								

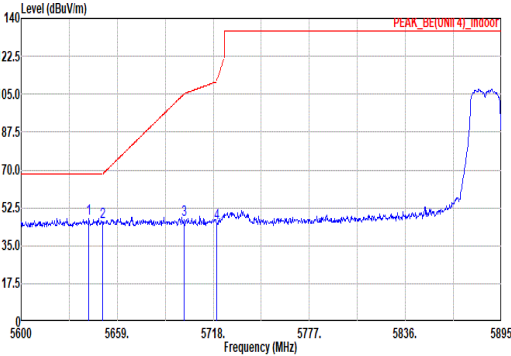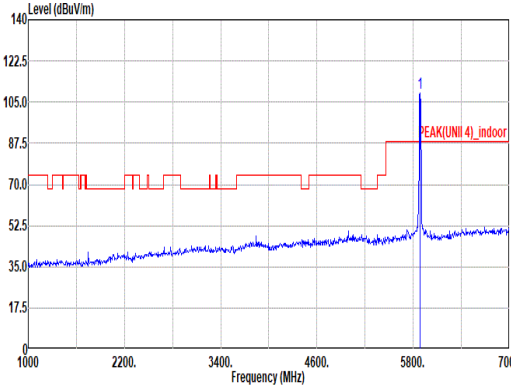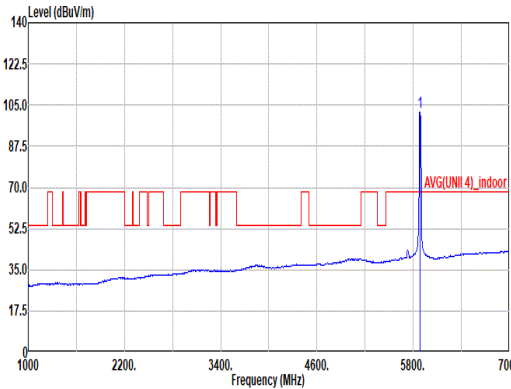


Mode	96																																																																																																																																											
	Band Edge - L																																																																																																																																											
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																																																																																											
ANT	1+2																																																																																																																																											
Pol.	Vertical							Fundamental																																																																																																																																				
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5641.60</td><td>47.49</td><td>68.20</td><td>-20.71</td><td>41.87</td><td>33.25</td><td>8.68</td><td>36.31</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>46.05</td><td>68.31</td><td>-22.26</td><td>40.38</td><td>33.30</td><td>8.69</td><td>36.32</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>5700.01</td><td>47.27</td><td>105.20</td><td>-57.93</td><td>41.16</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>45.58</td><td>110.95</td><td>-65.37</td><td>39.41</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5641.60	47.49	68.20	-20.71	41.87	33.25	8.68	36.31	0.00	116	0	0	PEAK	2	5650.15	46.05	68.31	-22.26	40.38	33.30	8.69	36.32	0.00	116	0	0	PEAK	3	5700.01	47.27	105.20	-57.93	41.16	33.70	8.74	36.33	0.00	116	0	0	PEAK	4	5720.07	45.58	110.95	-65.37	39.41	33.74	8.76	36.33	0.00	116	0	0	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>109.06</td><td>-----</td><td>-----</td><td>102.15</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	109.06	-----	-----	102.15	34.34	8.94	36.37	0.00	116	0	0	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5641.60	47.49	68.20	-20.71	41.87	33.25	8.68	36.31	0.00	116	0	0	PEAK																																																																																																																															
2	5650.15	46.05	68.31	-22.26	40.38	33.30	8.69	36.32	0.00	116	0	0	PEAK																																																																																																																															
3	5700.01	47.27	105.20	-57.93	41.16	33.70	8.74	36.33	0.00	116	0	0	PEAK																																																																																																																															
4	5720.07	45.58	110.95	-65.37	39.41	33.74	8.76	36.33	0.00	116	0	0	PEAK																																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5885.00	109.06	-----	-----	102.15	34.34	8.94	36.37	0.00	116	0	0	PEAK																																																																																																																															
Avg	Blank							 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5885.00</td><td>101.84</td><td>-----</td><td>-----</td><td>94.93</td><td>34.34</td><td>8.94</td><td>36.37</td><td>0.00</td><td>116</td><td>0</td><td>0</td><td>AVERAGE</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5885.00	101.84	-----	-----	94.93	34.34	8.94	36.37	0.00	116	0	0	AVERAGE																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5885.00	101.84	-----	-----	94.93	34.34	8.94	36.37	0.00	116	0	0	AVERAGE																																																																																																																															


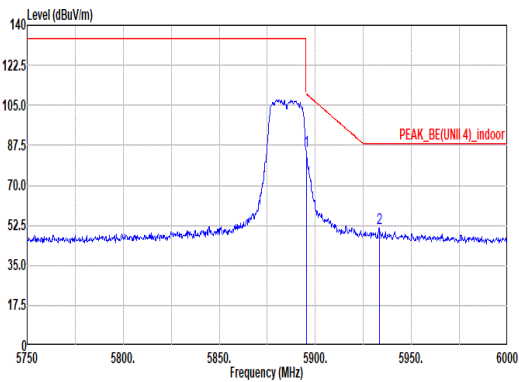
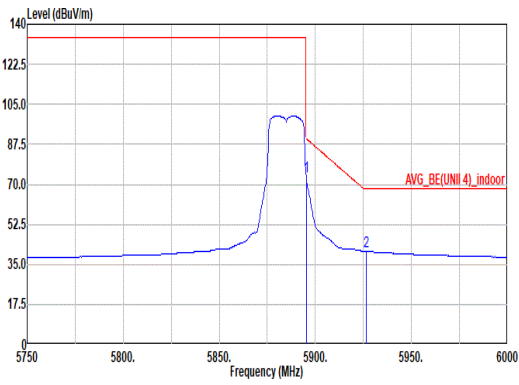


Mode	96																																																													
	Band Edge - R																																																													
	U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																													
ANT	1+2																																																													
Pol.	Vertical					Fundamental																																																								
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5895.25</td><td>85.01</td><td>110.02</td><td>-25.01</td><td>78.05</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>116</td><td>0 PEAK</td></tr><tr><td>2 5933.25</td><td>51.37</td><td>88.20</td><td>-36.83</td><td>44.48</td><td>34.27</td><td>9.00</td><td>36.38</td><td>0.00</td><td>116</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5895.25	85.01	110.02	-25.01	78.05	34.38	8.95	36.37	0.00	116	0 PEAK	2 5933.25	51.37	88.20	-36.83	44.48	34.27	9.00	36.38	0.00	116	0 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																								
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																					
1 5895.25	85.01	110.02	-25.01	78.05	34.38	8.95	36.37	0.00	116	0 PEAK																																																				
2 5933.25	51.37	88.20	-36.83	44.48	34.27	9.00	36.38	0.00	116	0 PEAK																																																				
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5895.25</td><td>73.25</td><td>90.02</td><td>-16.77</td><td>66.29</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>116</td><td>0 AVERAGE</td></tr><tr><td>2 5926.50</td><td>40.84</td><td>68.20</td><td>-27.36</td><td>33.94</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>116</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1 5895.25	73.25	90.02	-16.77	66.29	34.38	8.95	36.37	0.00	116	0 AVERAGE	2 5926.50	40.84	68.20	-27.36	33.94	34.29	8.99	36.38	0.00	116	0 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																								
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																					
1 5895.25	73.25	90.02	-16.77	66.29	34.38	8.95	36.37	0.00	116	0 AVERAGE																																																				
2 5926.50	40.84	68.20	-27.36	33.94	34.29	8.99	36.38	0.00	116	0 AVERAGE																																																				


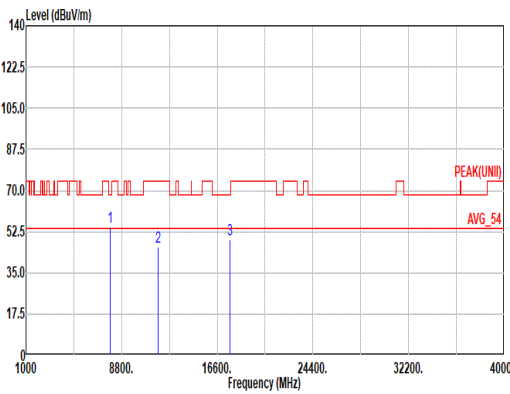


		96																																																																																				
Mode		Harmonic																																																																																				
		U-NII-4_5.85-5.895_802.11ac VHT20_CH177_5885MHz																																																																																				
ANT		1+2																																																																																				
Pol.		Horizontal							Vertical																																																																													
Peak Avg																																																																																						
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL																																																																																					
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7846.67</td><td>54.44</td><td>68.20</td><td>-13.76</td><td>66.38</td><td>36.99</td><td>10.34</td><td>60.20</td><td>0.93</td><td>281</td><td>310</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11770.00</td><td>45.83</td><td>74.00</td><td>-28.17</td><td>51.38</td><td>38.74</td><td>12.76</td><td>57.98</td><td>0.93</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr><tr><td>3</td><td>17655.00</td><td>49.14</td><td>68.20</td><td>-19.06</td><td>52.17</td><td>39.28</td><td>15.72</td><td>58.96</td><td>0.93</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7846.67	54.44	68.20	-13.76	66.38	36.99	10.34	60.20	0.93	281	310		PEAK	2	11770.00	45.83	74.00	-28.17	51.38	38.74	12.76	57.98	0.93	--	--		PEAK	3	17655.00	49.14	68.20	-19.06	52.17	39.28	15.72	58.96	0.93	--	--		PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	7846.67	54.44	68.20	-13.76	66.38	36.99	10.34	60.20	0.93	281	310		PEAK																																																																									
2	11770.00	45.83	74.00	-28.17	51.38	38.74	12.76	57.98	0.93	--	--		PEAK																																																																									
3	17655.00	49.14	68.20	-19.06	52.17	39.28	15.72	58.96	0.93	--	--		PEAK																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>7846.67</td><td>56.68</td><td>68.20</td><td>-11.52</td><td>68.62</td><td>36.99</td><td>10.34</td><td>60.20</td><td>0.93</td><td>100</td><td>223</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11770.00</td><td>46.01</td><td>74.00</td><td>-27.99</td><td>51.56</td><td>38.74</td><td>12.76</td><td>57.98</td><td>0.93</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr><tr><td>3</td><td>17655.00</td><td>49.30</td><td>68.20</td><td>-18.90</td><td>52.33</td><td>39.28</td><td>15.72</td><td>58.96</td><td>0.93</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	7846.67	56.68	68.20	-11.52	68.62	36.99	10.34	60.20	0.93	100	223		PEAK	2	11770.00	46.01	74.00	-27.99	51.56	38.74	12.76	57.98	0.93	--	--		PEAK	3	17655.00	49.30	68.20	-18.90	52.33	39.28	15.72	58.96	0.93	--	--		PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	7846.67	56.68	68.20	-11.52	68.62	36.99	10.34	60.20	0.93	100	223		PEAK																																																																									
2	11770.00	46.01	74.00	-27.99	51.56	38.74	12.76	57.98	0.93	--	--		PEAK																																																																									
3	17655.00	49.30	68.20	-18.90	52.33	39.28	15.72	58.96	0.93	--	--		PEAK																																																																									

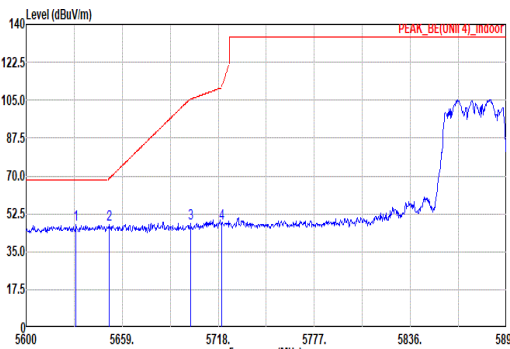
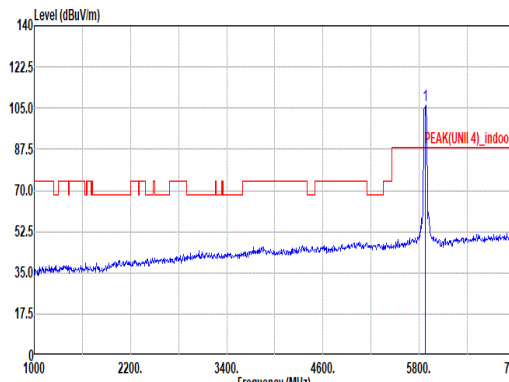
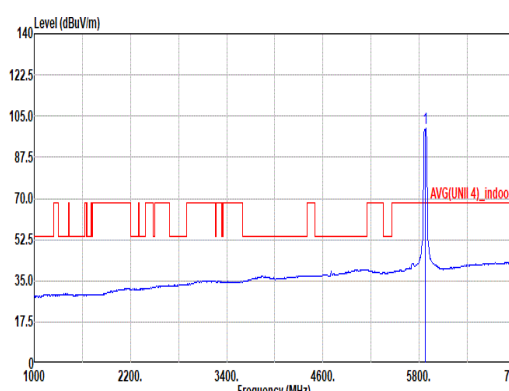


Mode	97																																																																																																																															
	Band Edge - L																																																																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																																																															
ANT	1+2																																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																																									
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5630.68</td><td>47.72</td><td>68.20</td><td>-20.48</td><td>42.19</td><td>33.18</td><td>8.66</td><td>36.31</td><td>0.00</td><td>100</td><td>296 PEAK</td></tr><tr><td>2 5651.04</td><td>47.45</td><td>68.97</td><td>-21.52</td><td>41.77</td><td>33.31</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>296 PEAK</td></tr><tr><td>3 5701.19</td><td>47.86</td><td>105.53</td><td>-57.67</td><td>41.75</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100</td><td>296 PEAK</td></tr><tr><td>4 5720.07</td><td>48.33</td><td>110.95</td><td>-62.62</td><td>42.16</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>296 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5630.68	47.72	68.20	-20.48	42.19	33.18	8.66	36.31	0.00	100	296 PEAK	2 5651.04	47.45	68.97	-21.52	41.77	33.31	8.69	36.32	0.00	100	296 PEAK	3 5701.19	47.86	105.53	-57.67	41.75	33.70	8.74	36.33	0.00	100	296 PEAK	4 5720.07	48.33	110.95	-62.62	42.16	33.74	8.76	36.33	0.00	100	296 PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5875.00</td><td>105.94</td><td>-----</td><td>-----</td><td>99.00</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>100</td><td>296 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5875.00	105.94	-----	-----	99.00	34.30	8.93	36.37	0.00	100	296 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5630.68	47.72	68.20	-20.48	42.19	33.18	8.66	36.31	0.00	100	296 PEAK																																																																																																																						
2 5651.04	47.45	68.97	-21.52	41.77	33.31	8.69	36.32	0.00	100	296 PEAK																																																																																																																						
3 5701.19	47.86	105.53	-57.67	41.75	33.70	8.74	36.33	0.00	100	296 PEAK																																																																																																																						
4 5720.07	48.33	110.95	-62.62	42.16	33.74	8.76	36.33	0.00	100	296 PEAK																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5875.00	105.94	-----	-----	99.00	34.30	8.93	36.37	0.00	100	296 PEAK																																																																																																																						
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5875.00</td><td>99.91</td><td>-----</td><td>-----</td><td>93.05</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>100</td><td>296 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5875.00	99.91	-----	-----	93.05	34.30	8.93	36.37	0.00	100	296 AVERAGE																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1 5875.00	99.91	-----	-----	93.05	34.30	8.93	36.37	0.00	100	296 AVERAGE																																																																																																																						

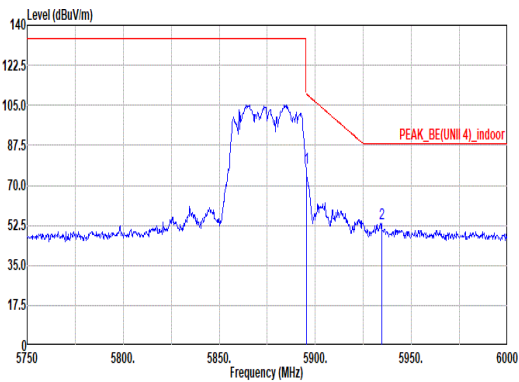
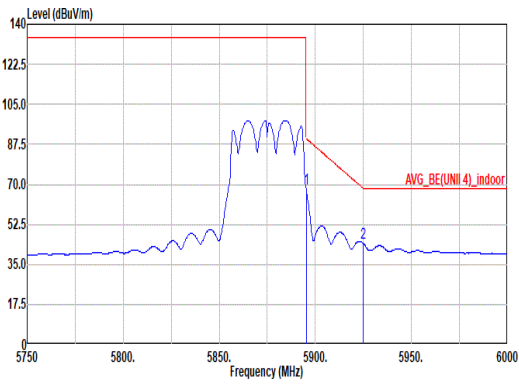


Mode	97																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																			
ANT	1+2																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>77.49</td><td>110.02</td><td>-32.53</td><td>70.53</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>100</td><td>296</td><td>PEAK</td></tr><tr><td>2</td><td>5934.50</td><td>53.57</td><td>88.20</td><td>-34.63</td><td>46.69</td><td>34.26</td><td>9.00</td><td>36.38</td><td>0.00</td><td>100</td><td>296</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	77.49	110.02	-32.53	70.53	34.38	8.95	36.37	0.00	100	296	PEAK	2	5934.50	53.57	88.20	-34.63	46.69	34.26	9.00	36.38	0.00	100	296	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	77.49	110.02	-32.53	70.53	34.38	8.95	36.37	0.00	100	296	PEAK																																																								
2	5934.50	53.57	88.20	-34.63	46.69	34.26	9.00	36.38	0.00	100	296	PEAK																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>68.10</td><td>90.02</td><td>-21.92</td><td>61.14</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>100</td><td>296</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>44.12</td><td>68.20</td><td>-24.08</td><td>37.21</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>296</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5895.25	68.10	90.02	-21.92	61.14	34.38	8.95	36.37	0.00	100	296	AVERAGE	2	5925.00	44.12	68.20	-24.08	37.21	34.30	8.99	36.38	0.00	100	296	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5895.25	68.10	90.02	-21.92	61.14	34.38	8.95	36.37	0.00	100	296	AVERAGE																																																								
2	5925.00	44.12	68.20	-24.08	37.21	34.30	8.99	36.38	0.00	100	296	AVERAGE																																																								

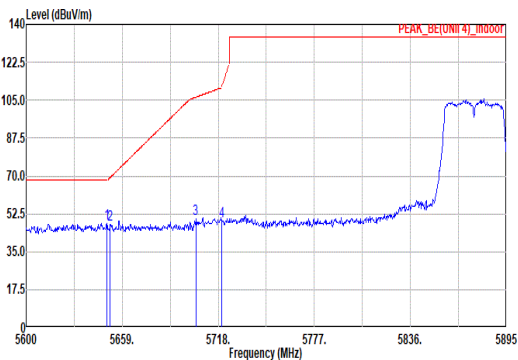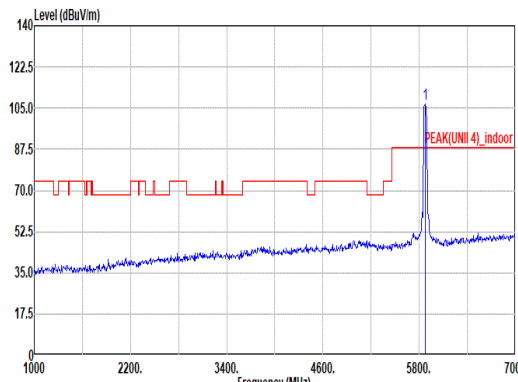
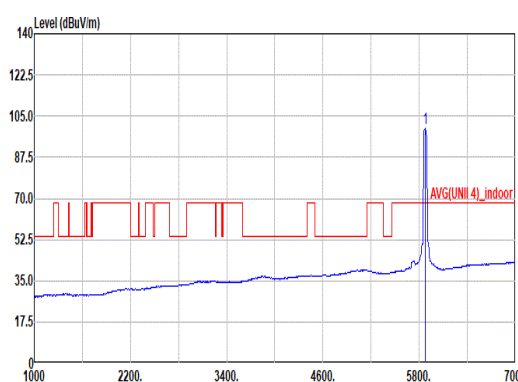


	97																																																																																																																																										
Mode	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Vertical						Fundamental																																																																																																																																				
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.56</td><td>48.03</td><td>68.20</td><td>-20.17</td><td>42.37</td><td>33.30</td><td>8.68</td><td>36.32</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5651.63</td><td>47.60</td><td>69.41</td><td>-21.81</td><td>41.92</td><td>33.31</td><td>8.69</td><td>36.32</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>5704.14</td><td>49.96</td><td>106.36</td><td>-56.40</td><td>43.84</td><td>33.71</td><td>8.74</td><td>36.33</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>49.25</td><td>110.95</td><td>-61.70</td><td>43.08</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5649.56	48.03	68.20	-20.17	42.37	33.30	8.68	36.32	0.00	107	0	PEAK	2	5651.63	47.60	69.41	-21.81	41.92	33.31	8.69	36.32	0.00	107	0	PEAK	3	5704.14	49.96	106.36	-56.40	43.84	33.71	8.74	36.33	0.00	107	0	PEAK	4	5720.07	49.25	110.95	-61.70	43.08	33.74	8.76	36.33	0.00	107	0	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>106.71</td><td>-----</td><td>-----</td><td>99.85</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5875.00	106.71	-----	-----	99.85	34.30	8.93	36.37	0.00	107	0	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5649.56	48.03	68.20	-20.17	42.37	33.30	8.68	36.32	0.00	107	0	PEAK																																																																																																																															
2	5651.63	47.60	69.41	-21.81	41.92	33.31	8.69	36.32	0.00	107	0	PEAK																																																																																																																															
3	5704.14	49.96	106.36	-56.40	43.84	33.71	8.74	36.33	0.00	107	0	PEAK																																																																																																																															
4	5720.07	49.25	110.95	-61.70	43.08	33.74	8.76	36.33	0.00	107	0	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5875.00	106.71	-----	-----	99.85	34.30	8.93	36.37	0.00	107	0	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5875.00</td><td>99.63</td><td>-----</td><td>-----</td><td>92.77</td><td>34.30</td><td>8.93</td><td>36.37</td><td>0.00</td><td>107</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5875.00	99.63	-----	-----	92.77	34.30	8.93	36.37	0.00	107	0	AVERAGE																																																																																			
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5875.00	99.63	-----	-----	92.77	34.30	8.93	36.37	0.00	107	0	AVERAGE																																																																																																																															


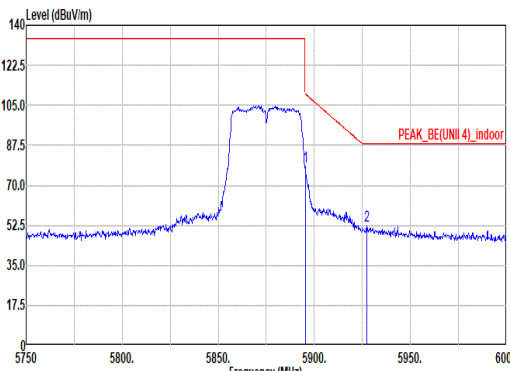
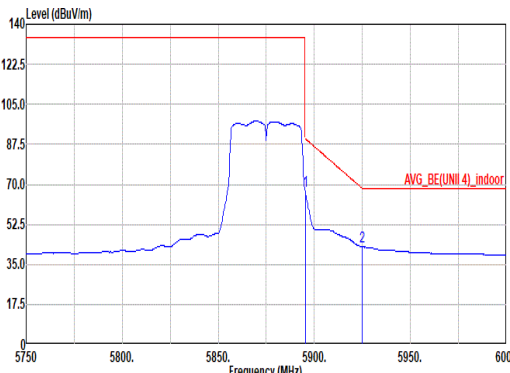


Mode	97																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																			
ANT	1+2																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>78.26</td><td>110.02</td><td>-31.76</td><td>71.30</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5927.50</td><td>52.11</td><td>88.20</td><td>-36.09</td><td>45.21</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>107</td><td>0</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.25	78.26	110.02	-31.76	71.30	34.38	8.95	36.37	0.00	107	0	PEAK	2	5927.50	52.11	88.20	-36.09	45.21	34.29	8.99	36.38	0.00	107	0	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	78.26	110.02	-31.76	71.30	34.38	8.95	36.37	0.00	107	0	PEAK																																																								
2	5927.50	52.11	88.20	-36.09	45.21	34.29	8.99	36.38	0.00	107	0	PEAK																																																								
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>66.93</td><td>90.02</td><td>-23.09</td><td>59.97</td><td>34.38</td><td>8.95</td><td>36.37</td><td>0.00</td><td>107</td><td>0</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>42.71</td><td>68.20</td><td>-25.49</td><td>35.00</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>107</td><td>0</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5895.25	66.93	90.02	-23.09	59.97	34.38	8.95	36.37	0.00	107	0	AVERAGE	2	5925.00	42.71	68.20	-25.49	35.00	34.30	8.99	36.38	0.00	107	0	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																										
1	5895.25	66.93	90.02	-23.09	59.97	34.38	8.95	36.37	0.00	107	0	AVERAGE																																																								
2	5925.00	42.71	68.20	-25.49	35.00	34.30	8.99	36.38	0.00	107	0	AVERAGE																																																								

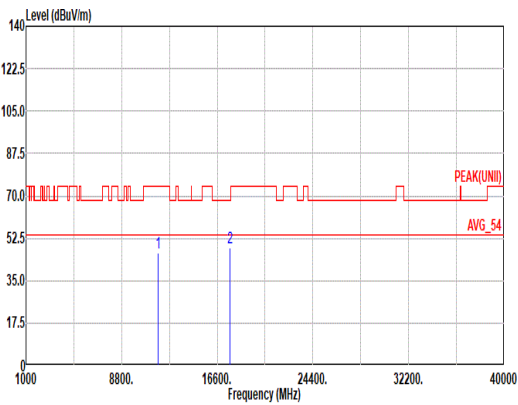
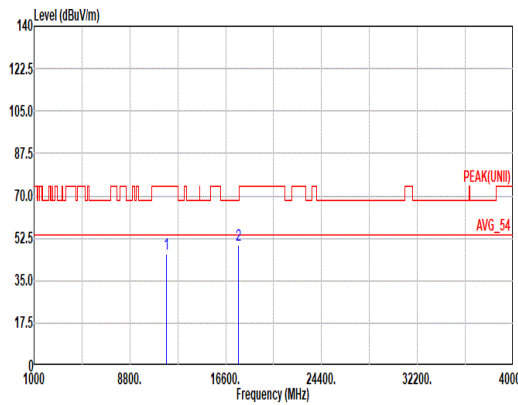


Mode	97																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT40_CH175_5875MHz																																																																																																																															
ANT	1+2																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL						Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 VERTICAL																																																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>46.37</td><td>74.00</td><td>-27.63</td><td>52.00</td><td>38.70</td><td>12.74</td><td>58.00</td><td>0.93</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17625.00</td><td>48.85</td><td>68.20</td><td>-19.35</td><td>52.10</td><td>39.12</td><td>15.70</td><td>59.00</td><td>0.93</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	46.37	74.00	-27.63	52.00	38.70	12.74	58.00	0.93	--	PEAK	2	17625.00	48.85	68.20	-19.35	52.10	39.12	15.70	59.00	0.93	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>46.18</td><td>74.00</td><td>-27.82</td><td>51.81</td><td>38.70</td><td>12.74</td><td>58.00</td><td>0.93</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17625.00</td><td>49.46</td><td>68.20</td><td>-18.74</td><td>52.71</td><td>39.12</td><td>15.70</td><td>59.00</td><td>0.93</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11750.00	46.18	74.00	-27.82	51.81	38.70	12.74	58.00	0.93	--	PEAK	2	17625.00	49.46	68.20	-18.74	52.71	39.12	15.70	59.00	0.93	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	11750.00	46.37	74.00	-27.63	52.00	38.70	12.74	58.00	0.93	--	PEAK																																																																																																																					
2	17625.00	48.85	68.20	-19.35	52.10	39.12	15.70	59.00	0.93	--	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																					
1	11750.00	46.18	74.00	-27.82	51.81	38.70	12.74	58.00	0.93	--	PEAK																																																																																																																					
2	17625.00	49.46	68.20	-18.74	52.71	39.12	15.70	59.00	0.93	--	PEAK																																																																																																																					

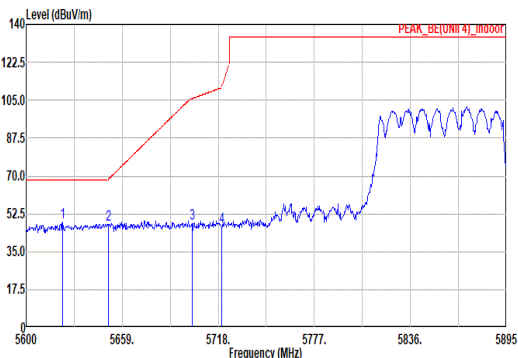
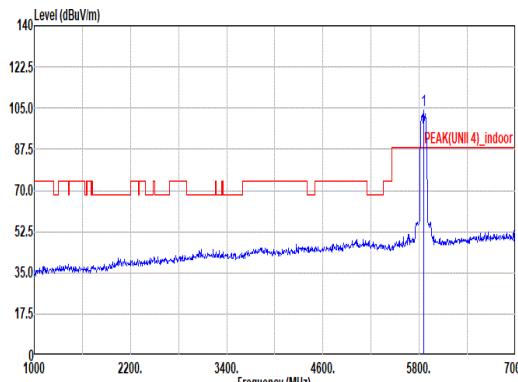
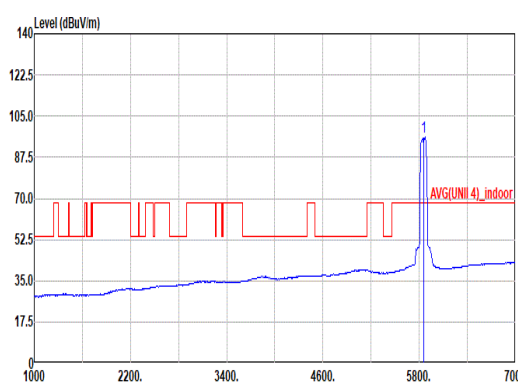


Mode	98																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																																										
ANT	1+2																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5622.42</td><td>48.46</td><td>68.20</td><td>-19.74</td><td>42.99</td><td>33.13</td><td>8.65</td><td>36.31</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr><tr><td>2</td><td>5650.74</td><td>47.58</td><td>68.75</td><td>-21.17</td><td>41.90</td><td>33.31</td><td>8.69</td><td>36.32</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr><tr><td>3</td><td>5701.78</td><td>48.28</td><td>105.70</td><td>-57.42</td><td>42.17</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>46.46</td><td>110.95</td><td>-64.49</td><td>40.29</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5622.42	48.46	68.20	-19.74	42.99	33.13	8.65	36.31	0.00	100	271	PEAK	2	5650.74	47.58	68.75	-21.17	41.90	33.31	8.69	36.32	0.00	100	271	PEAK	3	5701.78	48.28	105.70	-57.42	42.17	33.70	8.74	36.33	0.00	100	271	PEAK	4	5720.07	46.46	110.95	-64.49	40.29	33.74	8.76	36.33	0.00	100	271	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>103.85</td><td>-----</td><td>-----</td><td>97.09</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	103.85	-----	-----	97.09	34.22	8.91	36.37	0.00	100	271	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5622.42	48.46	68.20	-19.74	42.99	33.13	8.65	36.31	0.00	100	271	PEAK																																																																																																																															
2	5650.74	47.58	68.75	-21.17	41.90	33.31	8.69	36.32	0.00	100	271	PEAK																																																																																																																															
3	5701.78	48.28	105.70	-57.42	42.17	33.70	8.74	36.33	0.00	100	271	PEAK																																																																																																																															
4	5720.07	46.46	110.95	-64.49	40.29	33.74	8.76	36.33	0.00	100	271	PEAK																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	103.85	-----	-----	97.09	34.22	8.91	36.37	0.00	100	271	PEAK																																																																																																																															
Avg	Blank						 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>95.91</td><td>-----</td><td>-----</td><td>89.15</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>100</td><td>271</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	95.91	-----	-----	89.15	34.22	8.91	36.37	0.00	100	271	AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	95.91	-----	-----	89.15	34.22	8.91	36.37	0.00	100	271	AVERAGE																																																																																																																															

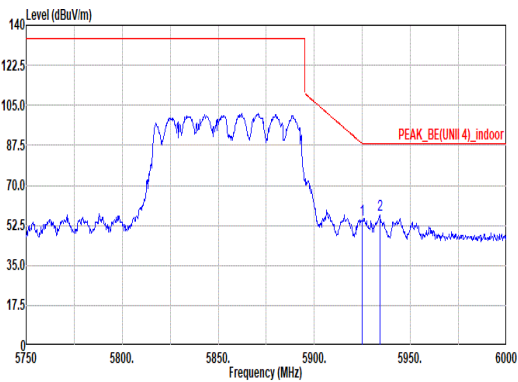
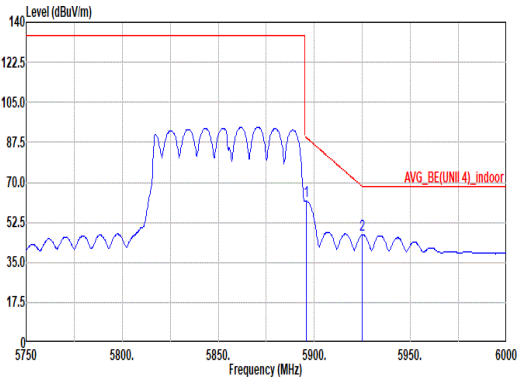


		98																																																							
Mode	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																								
ANT	1+2																																																								
Pol.	Horizontal						Fundamental																																																		
Peak							Blank																																																		
	Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5925.00</td><td>54.73</td><td>88.20</td><td>-33.47</td><td>47.62</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr><tr><td>2</td><td>5934.00</td><td>56.87</td><td>88.20</td><td>-31.33</td><td>49.99</td><td>34.26</td><td>9.00</td><td>36.38</td><td>0.00</td><td>100</td><td>271</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5925.00	54.73	88.20	-33.47	47.62	34.30	8.99	36.38	0.00	100	271	PEAK	2	5934.00	56.87	88.20	-31.33	49.99	34.26
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	5925.00	54.73	88.20	-33.47	47.62	34.30	8.99	36.38	0.00	100	271	PEAK																																													
2	5934.00	56.87	88.20	-31.33	49.99	34.26	9.00	36.38	0.00	100	271	PEAK																																													
Avg							Blank																																																		
	Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5895.75</td><td>61.75</td><td>89.65</td><td>-27.90</td><td>54.78</td><td>34.38</td><td>8.96</td><td>36.37</td><td>0.00</td><td>100</td><td>271</td><td>AVERAGE</td></tr><tr><td>2</td><td>5925.00</td><td>46.96</td><td>68.20</td><td>-21.24</td><td>40.05</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>100</td><td>271</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5895.75	61.75	89.65	-27.90	54.78	34.38	8.96	36.37	0.00	100	271	AVERAGE	2	5925.00	46.96	68.20	-21.24	40.05	34.30
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	5895.75	61.75	89.65	-27.90	54.78	34.38	8.96	36.37	0.00	100	271	AVERAGE																																													
2	5925.00	46.96	68.20	-21.24	40.05	34.30	8.99	36.38	0.00	100	271	AVERAGE																																													

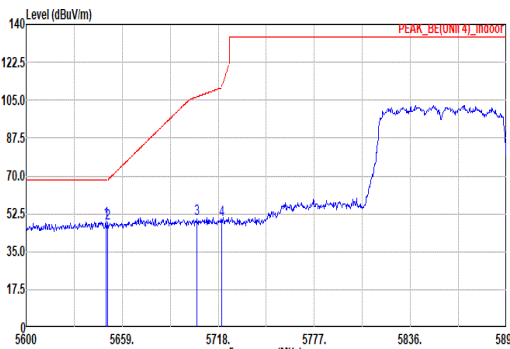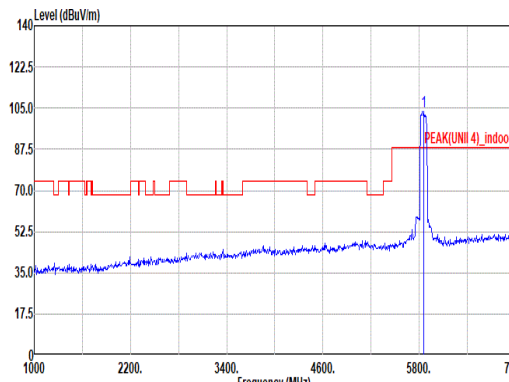
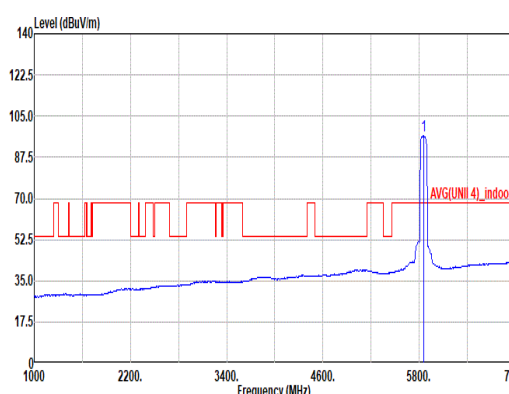


	98																																																																																																																						
Mode	Band Edge - L																																																																																																																						
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																						
ANT	1+2																																																																																																																						
Pol.	Vertical	Fundamental																																																																																																																					
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5649.27</td><td>49.20</td><td>68.20</td><td>-19.00</td><td>43.54</td><td>33.30</td><td>8.68</td><td>36.32</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5650.15</td><td>47.84</td><td>68.31</td><td>-20.47</td><td>42.17</td><td>33.30</td><td>8.69</td><td>36.32</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>5704.73</td><td>50.28</td><td>106.52</td><td>-56.24</td><td>44.15</td><td>33.71</td><td>8.75</td><td>36.33</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>49.83</td><td>110.95</td><td>-61.12</td><td>43.66</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5649.27	49.20	68.20	-19.00	43.54	33.30	8.68	36.32	0.00	143	0	PEAK	2	5650.15	47.84	68.31	-20.47	42.17	33.30	8.69	36.32	0.00	143	0	PEAK	3	5704.73	50.28	106.52	-56.24	44.15	33.71	8.75	36.33	0.00	143	0	PEAK	4	5720.07	49.83	110.95	-61.12	43.66	33.74	8.76	36.33	0.00	143	0	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>103.39</td><td>-----</td><td>-----</td><td>96.63</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5855.00	103.39	-----	-----	96.63	34.22	8.91	36.37	0.00	143	0	PEAK
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5649.27	49.20	68.20	-19.00	43.54	33.30	8.68	36.32	0.00	143	0	PEAK																																																																																																											
2	5650.15	47.84	68.31	-20.47	42.17	33.30	8.69	36.32	0.00	143	0	PEAK																																																																																																											
3	5704.73	50.28	106.52	-56.24	44.15	33.71	8.75	36.33	0.00	143	0	PEAK																																																																																																											
4	5720.07	49.83	110.95	-61.12	43.66	33.74	8.76	36.33	0.00	143	0	PEAK																																																																																																											
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5855.00	103.39	-----	-----	96.63	34.22	8.91	36.37	0.00	143	0	PEAK																																																																																																											
Avg	Blank	 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>96.66</td><td>-----</td><td>-----</td><td>89.90</td><td>34.22</td><td>8.91</td><td>36.37</td><td>0.00</td><td>143</td><td>0</td><td>AVERAGE</td></tr></tbody></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5855.00	96.66	-----	-----	89.90	34.22	8.91	36.37	0.00	143	0	AVERAGE																																																																														
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																											
1	5855.00	96.66	-----	-----	89.90	34.22	8.91	36.37	0.00	143	0	AVERAGE																																																																																																											


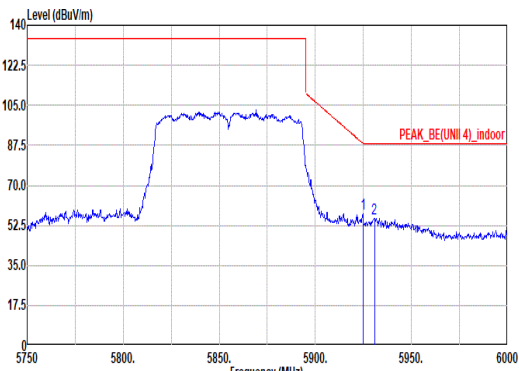
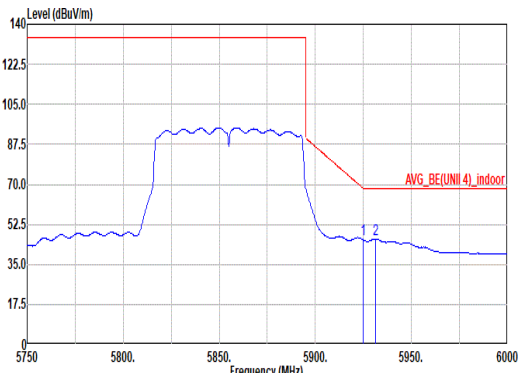


Mode	98																																																									
	Band Edge - R																																																									
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																									
ANT	1+2																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5924.75</td><td>57.41</td><td>88.38</td><td>-30.97</td><td>50.50</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5930.75</td><td>55.60</td><td>88.20</td><td>-32.60</td><td>48.71</td><td>34.28</td><td>8.99</td><td>36.38</td><td>0.00</td><td>143</td><td>0</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5924.75	57.41	88.38	-30.97	50.50	34.30	8.99	36.38	0.00	143	0	PEAK	2	5930.75	55.60	88.20	-32.60	48.71	34.28	8.99	36.38	0.00	143	0	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																	
1	5924.75	57.41	88.38	-30.97	50.50	34.30	8.99	36.38	0.00	143	0	PEAK																																														
2	5930.75	55.60	88.20	-32.60	48.71	34.28	8.99	36.38	0.00	143	0	PEAK																																														
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5924.75</td><td>45.91</td><td>68.38</td><td>-22.47</td><td>39.00</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>143</td><td>0</td><td>AVERAGE</td></tr><tr><td>2</td><td>5931.50</td><td>46.08</td><td>68.20</td><td>-22.12</td><td>39.20</td><td>34.27</td><td>8.99</td><td>36.38</td><td>0.00</td><td>143</td><td>0</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	1	5924.75	45.91	68.38	-22.47	39.00	34.30	8.99	36.38	0.00	143	0	AVERAGE	2	5931.50	46.08	68.20	-22.12	39.20	34.27	8.99	36.38	0.00	143	0	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm																																																	
1	5924.75	45.91	68.38	-22.47	39.00	34.30	8.99	36.38	0.00	143	0	AVERAGE																																														
2	5931.50	46.08	68.20	-22.12	39.20	34.27	8.99	36.38	0.00	143	0	AVERAGE																																														

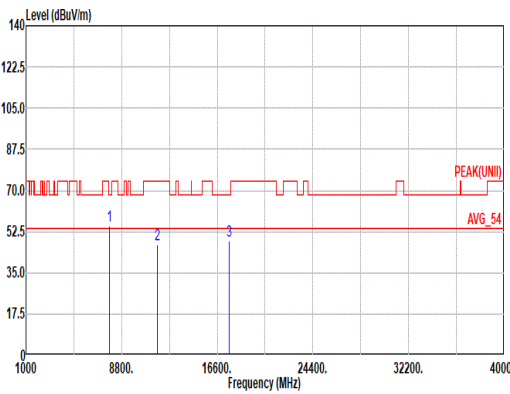
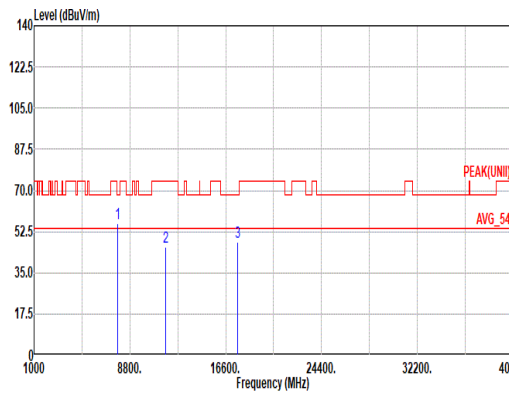


Mode	98													
	Harmonic													
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz													
ANT	1+2													
Pol.	Horizontal							Vertical						
Peak Avg														
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL							Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	7806.67	55.14	68.20	-13.06	67.22	36.91	10.31	60.18	0.88	100	98		PEAK	
2	11710.00	47.04	74.00	-26.96	52.79	38.62	12.72	58.02	0.93	--	--		PEAK	
3	17565.00	48.40	68.20	-19.80	52.08	38.83	15.66	59.10	0.93	--	--		PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	7806.67	56.09	68.20	-12.11	68.17	36.91	10.31	60.18	0.88	100	33		PEAK	
2	11710.00	46.03	74.00	-27.97	51.78	38.62	12.72	58.02	0.93	--	--		PEAK	
3	17565.00	48.27	68.20	-19.93	51.95	38.83	15.66	59.10	0.93	--	--		PEAK	

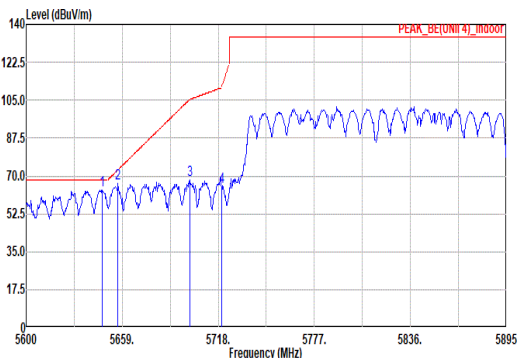
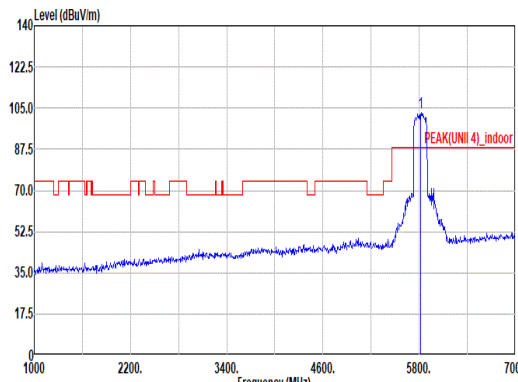
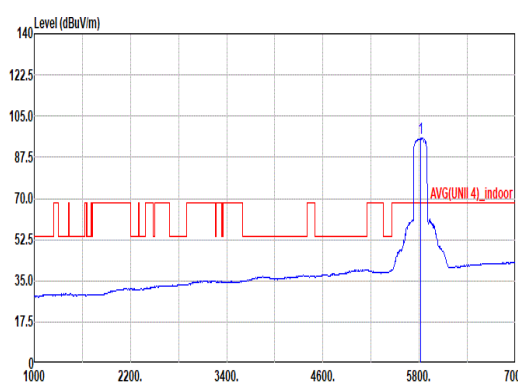


Mode	99																																																																																																																																											
	Band Edge - L																																																																																																																																											
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																																																																																																											
ANT	1+2																																																																																																																																											
Pol.	Horizontal							Fundamental																																																																																																																																				
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5646.61</td><td>63.59</td><td>68.20</td><td>-4.61</td><td></td><td>57.95</td><td>33.28</td><td>8.68</td><td>36.32</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr><tr><td>2</td><td>5656.35</td><td>66.45</td><td>72.91</td><td>-6.46</td><td></td><td>60.73</td><td>33.35</td><td>8.69</td><td>36.32</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr><tr><td>3</td><td>5700.60</td><td>67.99</td><td>105.37</td><td>-37.38</td><td></td><td>61.88</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>64.76</td><td>110.95</td><td>-46.19</td><td></td><td>58.59</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5646.61	63.59	68.20	-4.61		57.95	33.28	8.68	36.32	0.00	101	309	PEAK	2	5656.35	66.45	72.91	-6.46		60.73	33.35	8.69	36.32	0.00	101	309	PEAK	3	5700.60	67.99	105.37	-37.38		61.88	33.70	8.74	36.33	0.00	101	309	PEAK	4	5720.07	64.76	110.95	-46.19		58.59	33.74	8.76	36.33	0.00	101	309	PEAK	 Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>103.15</td><td>-----</td><td>-----</td><td></td><td>96.51</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	103.15	-----	-----		96.51	34.13	8.87	36.36	0.00	101	309	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5646.61	63.59	68.20	-4.61		57.95	33.28	8.68	36.32	0.00	101	309	PEAK																																																																																																																															
2	5656.35	66.45	72.91	-6.46		60.73	33.35	8.69	36.32	0.00	101	309	PEAK																																																																																																																															
3	5700.60	67.99	105.37	-37.38		61.88	33.70	8.74	36.33	0.00	101	309	PEAK																																																																																																																															
4	5720.07	64.76	110.95	-46.19		58.59	33.74	8.76	36.33	0.00	101	309	PEAK																																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5815.00	103.15	-----	-----		96.51	34.13	8.87	36.36	0.00	101	309	PEAK																																																																																																																															
Avg	Blank							 Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>95.82</td><td>-----</td><td>-----</td><td></td><td>89.18</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>101</td><td>309</td><td>AVERAGE</td></tr></tbody></table>								Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	95.82	-----	-----		89.18	34.13	8.87	36.36	0.00	101	309	AVERAGE																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																															
1	5815.00	95.82	-----	-----		89.18	34.13	8.87	36.36	0.00	101	309	AVERAGE																																																																																																																															

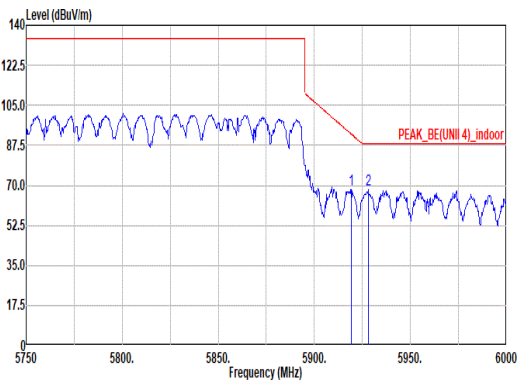
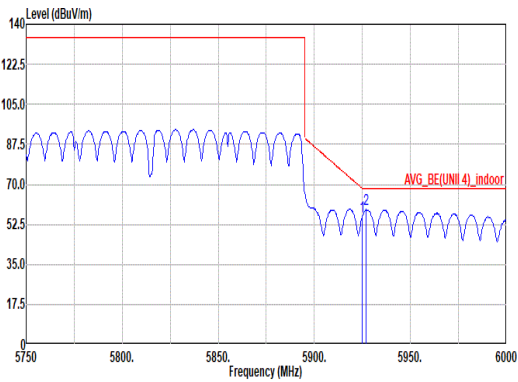


Mode	99																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																																				
ANT	1+2																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5919.25</td><td>68.38</td><td>92.41</td><td>-24.03</td><td>61.46</td><td>34.32</td><td>8.98</td><td>36.38</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr><tr><td>2</td><td>5928.00</td><td>68.06</td><td>88.20</td><td>-20.14</td><td>61.16</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>101</td><td>309</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5919.25	68.38	92.41	-24.03	61.46	34.32	8.98	36.38	0.00	101	309	PEAK	2	5928.00	68.06	88.20	-20.14	61.16	34.29	8.99	36.38	0.00	101	309	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5919.25	68.38	92.41	-24.03	61.46	34.32	8.98	36.38	0.00	101	309	PEAK																																																									
2	5928.00	68.06	88.20	-20.14	61.16	34.29	8.99	36.38	0.00	101	309	PEAK																																																									
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>55.96</td><td>68.20</td><td>-12.24</td><td>49.05</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>101</td><td>309</td><td>AVERAGE</td></tr><tr><td>2</td><td>5927.00</td><td>58.92</td><td>68.20</td><td>-9.28</td><td>52.02</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>101</td><td>309</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5925.00	55.96	68.20	-12.24	49.05	34.30	8.99	36.38	0.00	101	309	AVERAGE	2	5927.00	58.92	68.20	-9.28	52.02	34.29	8.99	36.38	0.00	101	309	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																											
1	5925.00	55.96	68.20	-12.24	49.05	34.30	8.99	36.38	0.00	101	309	AVERAGE																																																									
2	5927.00	58.92	68.20	-9.28	52.02	34.29	8.99	36.38	0.00	101	309	AVERAGE																																																									

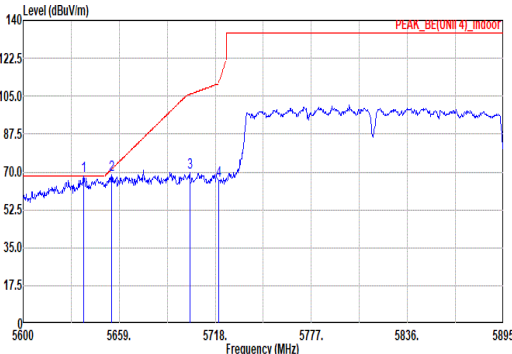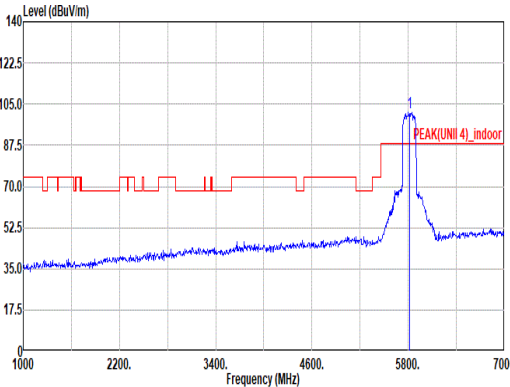
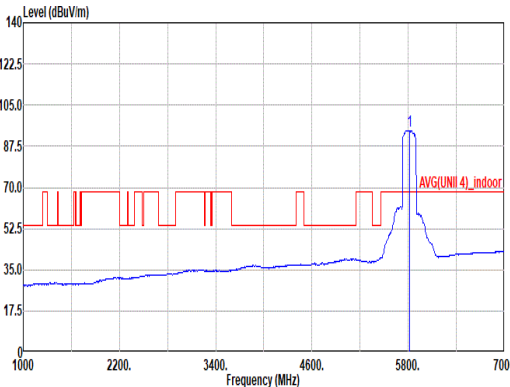


	99																																																																																																																																
Mode	Band Edge - L																																																																																																																																
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																																																																																																
ANT	1+2																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5637.17</td><td>68.02</td><td>68.20</td><td>-0.18</td><td>62.44</td><td>33.22</td><td>8.67</td><td>36.31</td><td>0.00</td><td>131</td><td>0</td><td>PEAK</td></tr><tr><td>2</td><td>5654.28</td><td>68.78</td><td>71.38</td><td>-2.60</td><td>63.08</td><td>33.33</td><td>8.69</td><td>36.32</td><td>0.00</td><td>131</td><td>0</td><td>PEAK</td></tr><tr><td>3</td><td>5702.37</td><td>69.90</td><td>105.86</td><td>-35.96</td><td>63.79</td><td>33.70</td><td>8.74</td><td>36.33</td><td>0.00</td><td>131</td><td>0</td><td>PEAK</td></tr><tr><td>4</td><td>5720.07</td><td>66.12</td><td>110.95</td><td>-44.83</td><td>59.95</td><td>33.74</td><td>8.76</td><td>36.33</td><td>0.00</td><td>131</td><td>0</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5637.17	68.02	68.20	-0.18	62.44	33.22	8.67	36.31	0.00	131	0	PEAK	2	5654.28	68.78	71.38	-2.60	63.08	33.33	8.69	36.32	0.00	131	0	PEAK	3	5702.37	69.90	105.86	-35.96	63.79	33.70	8.74	36.33	0.00	131	0	PEAK	4	5720.07	66.12	110.95	-44.83	59.95	33.74	8.76	36.33	0.00	131	0	PEAK	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)_indoor Site : 03CH15-HY Condition: PEAK(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>101.64</td><td>-----</td><td>-----</td><td>95.00</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>131</td><td>0</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	101.64	-----	-----	95.00	34.13	8.87	36.36	0.00	131	0	PEAK
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5637.17	68.02	68.20	-0.18	62.44	33.22	8.67	36.31	0.00	131	0	PEAK																																																																																																																					
2	5654.28	68.78	71.38	-2.60	63.08	33.33	8.69	36.32	0.00	131	0	PEAK																																																																																																																					
3	5702.37	69.90	105.86	-35.96	63.79	33.70	8.74	36.33	0.00	131	0	PEAK																																																																																																																					
4	5720.07	66.12	110.95	-44.83	59.95	33.74	8.76	36.33	0.00	131	0	PEAK																																																																																																																					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5815.00	101.64	-----	-----	95.00	34.13	8.87	36.36	0.00	131	0	PEAK																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)_indoor Site : 03CH15-HY Condition: AVG(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5815.00</td><td>94.19</td><td>-----</td><td>-----</td><td>87.55</td><td>34.13</td><td>8.87</td><td>36.36</td><td>0.00</td><td>131</td><td>0</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5815.00	94.19	-----	-----	87.55	34.13	8.87	36.36	0.00	131	0	AVERAGE																																																																														
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5815.00	94.19	-----	-----	87.55	34.13	8.87	36.36	0.00	131	0	AVERAGE																																																																																																																					

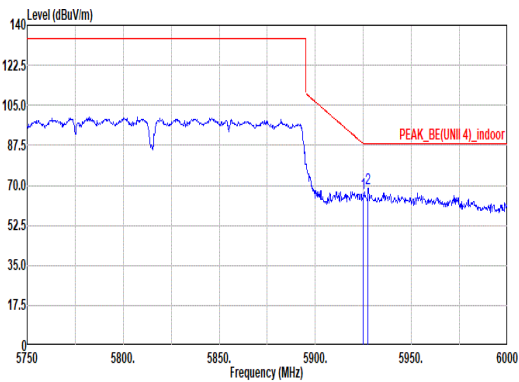
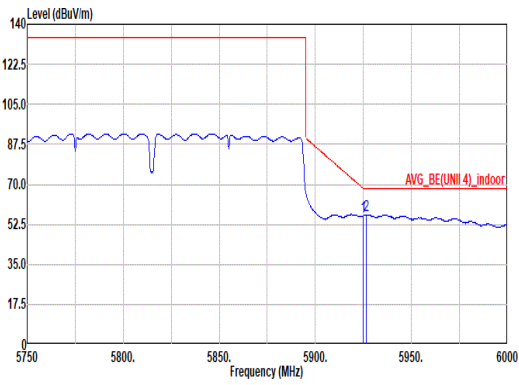


Mode	99																																																			
	Band Edge - R																																																			
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																			
ANT	1+2																																																			
Pol.	Vertical	Fundamental																																																		
Peak	 Site : 03CH15-HY Condition: PEAK_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5925.00</td><td>66.58</td><td>88.20</td><td>-21.62</td><td>59.67</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>131 0 PEAK</td></tr><tr><td>2 5927.50</td><td>68.67</td><td>88.20</td><td>-19.53</td><td>61.77</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>131 0 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5925.00	66.58	88.20	-21.62	59.67	34.30	8.99	36.38	0.00	131 0 PEAK	2 5927.50	68.67	88.20	-19.53	61.77	34.29	8.99	36.38	0.00	131 0 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1 5925.00	66.58	88.20	-21.62	59.67	34.30	8.99	36.38	0.00	131 0 PEAK																																											
2 5927.50	68.67	88.20	-19.53	61.77	34.29	8.99	36.38	0.00	131 0 PEAK																																											
Avg	 Site : 03CH15-HY Condition: AVG_BE(UNII 4)_indoor 3m BBHA 9120 D_91200-02294 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5925.00</td><td>56.26</td><td>68.20</td><td>-11.94</td><td>49.35</td><td>34.30</td><td>8.99</td><td>36.38</td><td>0.00</td><td>131 0 AVERAGE</td></tr><tr><td>2 5926.50</td><td>56.64</td><td>68.20</td><td>-11.56</td><td>49.74</td><td>34.29</td><td>8.99</td><td>36.38</td><td>0.00</td><td>131 0 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5925.00	56.26	68.20	-11.94	49.35	34.30	8.99	36.38	0.00	131 0 AVERAGE	2 5926.50	56.64	68.20	-11.56	49.74	34.29	8.99	36.38	0.00	131 0 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																											
1 5925.00	56.26	68.20	-11.94	49.35	34.30	8.99	36.38	0.00	131 0 AVERAGE																																											
2 5926.50	56.64	68.20	-11.56	49.74	34.29	8.99	36.38	0.00	131 0 AVERAGE																																											

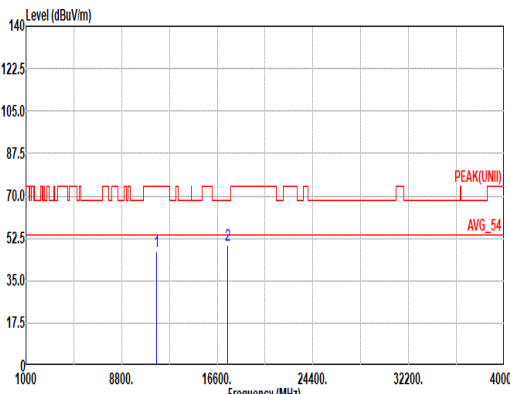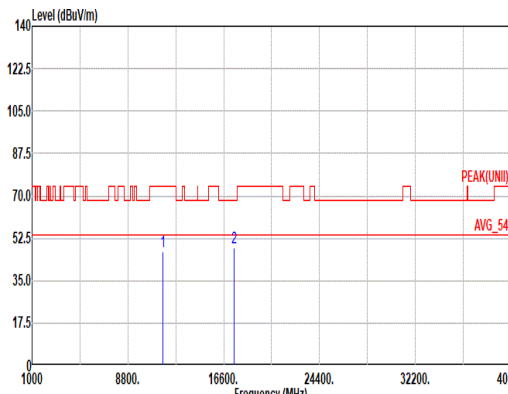

		99																																																																																																																																											
Mode	Harmonic																																																																																																																																												
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																																																																																																												
ANT	1+2																																																																																																																																												
Pol.	Horizontal												Vertical																																																																																																																																
Peak Avg																																																																																																																																													
	Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 HORIZONTAL													Site : 03CH15-HY Condition: PEAK(UNII) 3m BBHA 9120 D_91200-02294 VERTICAL																																																																																																																															
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11630.00</td><td>46.94</td><td>74.00</td><td>-27.06</td><td>52.88</td><td>38.53</td><td>12.67</td><td>58.07</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17445.00</td><td>49.54</td><td>68.20</td><td>-18.66</td><td>53.73</td><td>38.50</td><td>15.59</td><td>59.22</td><td>0.94</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11630.00	46.94	74.00	-27.06	52.88	38.53	12.67	58.07	0.93	--	--	PEAK	2	17445.00	49.54	68.20	-18.66	53.73	38.50	15.59	59.22	0.94	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11630.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>53.14</td><td>38.53</td><td>12.67</td><td>58.07</td><td>0.93</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>17445.00</td><td>48.69</td><td>68.20</td><td>-19.51</td><td>52.88</td><td>38.50</td><td>15.59</td><td>59.22</td><td>0.94</td><td>--</td><td>--</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11630.00	47.20	74.00	-26.80	53.14	38.53	12.67	58.07	0.93	--	--	PEAK	2	17445.00	48.69	68.20	-19.51	52.88	38.50	15.59	59.22	0.94	--	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11630.00	46.94	74.00	-27.06	52.88	38.53	12.67	58.07	0.93	--	--	PEAK																																																																																																																																	
2	17445.00	49.54	68.20	-18.66	53.73	38.50	15.59	59.22	0.94	--	--	PEAK																																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11630.00	47.20	74.00	-26.80	53.14	38.53	12.67	58.07	0.93	--	--	PEAK																																																																																																																																	
2	17445.00	48.69	68.20	-19.51	52.88	38.50	15.59	59.22	0.94	--	--	PEAK																																																																																																																																	

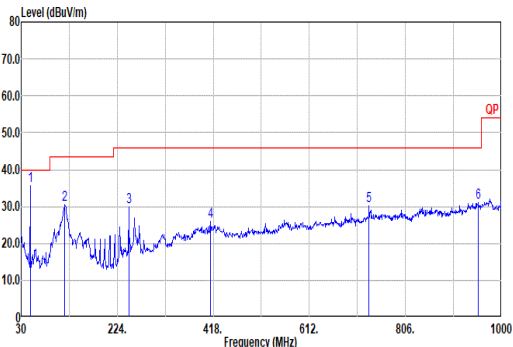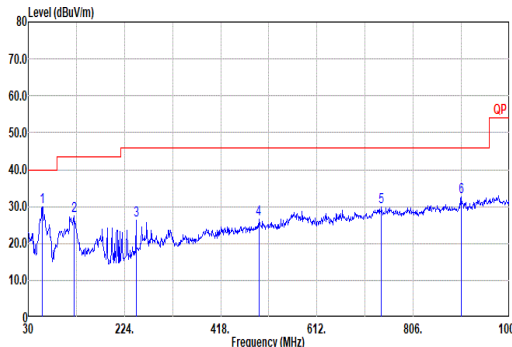


Mode	100																																																																																																																												
	LF																																																																																																																												
	U-NII-4_5.725-5.85_802.11ac VHT160_CH163_5815MHz																																																																																																																												
ANT	1+2																																																																																																																												
Pol.	Horizontal							Vertical																																																																																																																					
QP/ Peak																																																																																																																													
	Site : 03CH15-HY Condition: QP 3m CBL 6111D & 00800N1D01N-06_41912805 HORIZONTAL Plane :																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>48.43</td><td>35.65</td><td>40.00</td><td>-4.35</td><td>51.44</td><td>15.22</td><td>0.85</td><td>31.91</td><td>0.05</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>118.27</td><td>30.42</td><td>43.50</td><td>-13.08</td><td>43.00</td><td>17.00</td><td>1.31</td><td>31.92</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>247.28</td><td>29.85</td><td>46.00</td><td>-16.15</td><td>41.65</td><td>17.90</td><td>1.86</td><td>31.83</td><td>0.27</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>412.18</td><td>25.84</td><td>46.00</td><td>-20.16</td><td>33.21</td><td>21.97</td><td>2.38</td><td>31.84</td><td>0.12</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>732.28</td><td>30.12</td><td>46.00</td><td>-15.88</td><td>31.29</td><td>27.20</td><td>3.14</td><td>31.66</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>953.44</td><td>31.03</td><td>46.00</td><td>-14.97</td><td>27.72</td><td>29.88</td><td>3.56</td><td>30.43</td><td>0.30</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	48.43	35.65	40.00	-4.35	51.44	15.22	0.85	31.91	0.05	--	--	--	Peak	2	118.27	30.42	43.50	-13.08	43.00	17.00	1.31	31.92	0.15	--	--	--	Peak	3	247.28	29.85	46.00	-16.15	41.65	17.90	1.86	31.83	0.27	--	--	--	Peak	4	412.18	25.84	46.00	-20.16	33.21	21.97	2.38	31.84	0.12	--	--	--	Peak	5	732.28	30.12	46.00	-15.88	31.29	27.20	3.14	31.66	0.15	--	--	--	Peak	6	953.44	31.03	46.00	-14.97	27.72	29.88	3.56	30.43	0.30	--	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	48.43	35.65	40.00	-4.35	51.44	15.22	0.85	31.91	0.05	--	--	--	Peak																																																																																																																
2	118.27	30.42	43.50	-13.08	43.00	17.00	1.31	31.92	0.15	--	--	--	Peak																																																																																																																
3	247.28	29.85	46.00	-16.15	41.65	17.90	1.86	31.83	0.27	--	--	--	Peak																																																																																																																
4	412.18	25.84	46.00	-20.16	33.21	21.97	2.38	31.84	0.12	--	--	--	Peak																																																																																																																
5	732.28	30.12	46.00	-15.88	31.29	27.20	3.14	31.66	0.15	--	--	--	Peak																																																																																																																
6	953.44	31.03	46.00	-14.97	27.72	29.88	3.56	30.43	0.30	--	--	--	Peak																																																																																																																
Site : 03CH15-HY Condition: QP 3m CBL 6111D & 00800N1D01N-06_41912805 VERTICAL Plane :																																																																																																																													
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>58.13</td><td>29.91</td><td>40.00</td><td>-10.09</td><td>48.71</td><td>12.10</td><td>0.94</td><td>31.90</td><td>0.06</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>122.15</td><td>27.36</td><td>43.50</td><td>-16.14</td><td>40.43</td><td>17.36</td><td>1.33</td><td>31.91</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>247.28</td><td>26.26</td><td>46.00</td><td>-19.74</td><td>38.06</td><td>17.90</td><td>1.86</td><td>31.83</td><td>0.27</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>494.63</td><td>26.48</td><td>46.00</td><td>-19.52</td><td>31.97</td><td>23.45</td><td>2.62</td><td>31.80</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>741.98</td><td>29.92</td><td>46.00</td><td>-16.08</td><td>30.93</td><td>27.32</td><td>3.16</td><td>31.63</td><td>0.14</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>903.00</td><td>32.52</td><td>46.00</td><td>-13.48</td><td>31.31</td><td>28.43</td><td>3.48</td><td>30.91</td><td>0.21</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	58.13	29.91	40.00	-10.09	48.71	12.10	0.94	31.90	0.06	--	--	--	Peak	2	122.15	27.36	43.50	-16.14	40.43	17.36	1.33	31.91	0.15	--	--	--	Peak	3	247.28	26.26	46.00	-19.74	38.06	17.90	1.86	31.83	0.27	--	--	--	Peak	4	494.63	26.48	46.00	-19.52	31.97	23.45	2.62	31.80	0.24	--	--	--	Peak	5	741.98	29.92	46.00	-16.08	30.93	27.32	3.16	31.63	0.14	--	--	--	Peak	6	903.00	32.52	46.00	-13.48	31.31	28.43	3.48	30.91	0.21	--	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	58.13	29.91	40.00	-10.09	48.71	12.10	0.94	31.90	0.06	--	--	--	Peak																																																																																																																
2	122.15	27.36	43.50	-16.14	40.43	17.36	1.33	31.91	0.15	--	--	--	Peak																																																																																																																
3	247.28	26.26	46.00	-19.74	38.06	17.90	1.86	31.83	0.27	--	--	--	Peak																																																																																																																
4	494.63	26.48	46.00	-19.52	31.97	23.45	2.62	31.80	0.24	--	--	--	Peak																																																																																																																
5	741.98	29.92	46.00	-16.08	30.93	27.32	3.16	31.63	0.14	--	--	--	Peak																																																																																																																
6	903.00	32.52	46.00	-13.48	31.31	28.43	3.48	30.91	0.21	--	--	--	Peak																																																																																																																





Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
1+2	802.11a	99.05	-	-	10Hz
1+2	5GHz 802.11ac VHT20	99.51	-	-	10Hz
1+2	5GHz 802.11ac VHT40	99.56	-	-	10Hz
1+2	5GHz 802.11ac VHT80	99.52	-	-	10Hz
1+2	5GHz 802.11ac VHT160	99.41	-	-	10Hz
1+2	5GHz 802.11ax HE20 Full RU	98.80	-	-	10Hz
1+2	5GHz 802.11ax HE20 106 RU	99.69	-	-	10Hz
1+2	5GHz 802.11ax HE40 Full RU	98.88	-	-	10Hz
1+2	5GHz 802.11ax HE40 242 RU	99.27	-	-	10Hz
1+2	5GHz 802.11ax HE80 Full RU	100.00	-	-	10Hz
1+2	5GHz 802.11ax HE80 484 RU	98.59	-	-	10Hz
1+2	5GHz 802.11ax HE160 Full RU	99.56	-	-	10Hz
1+2	5GHz 802.11ax HE160 996 RU	98.91	-	-	10Hz


MIMO <Ant. 1+2>

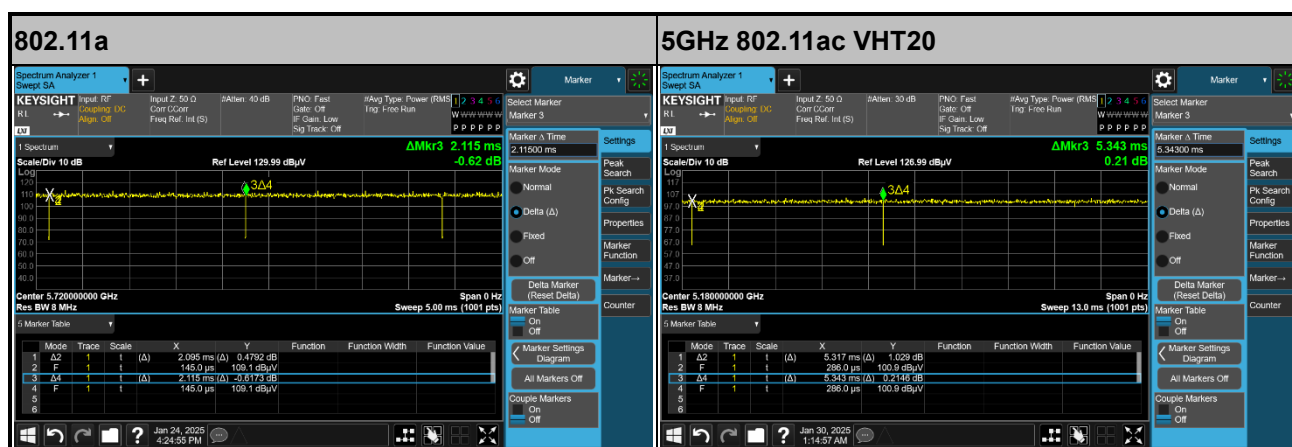

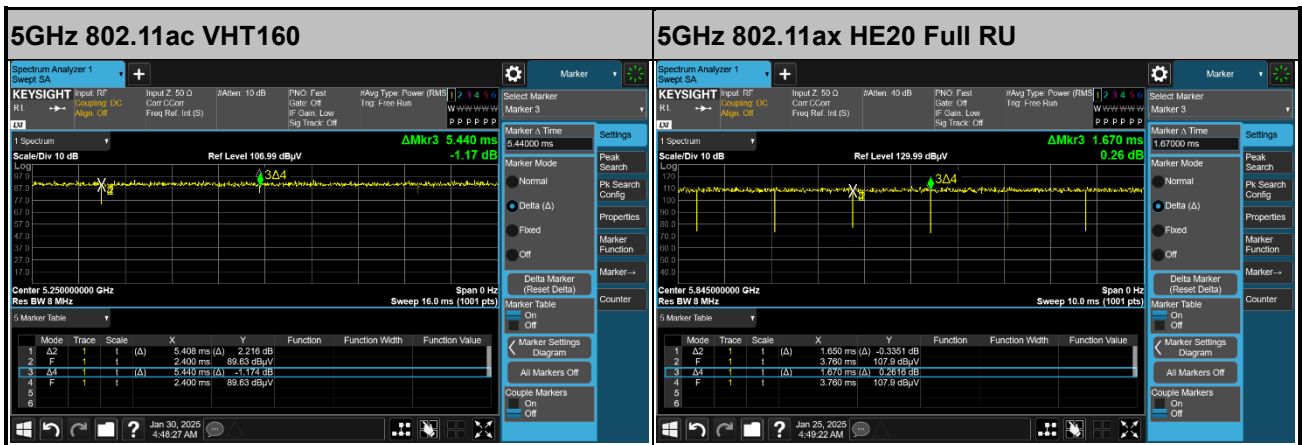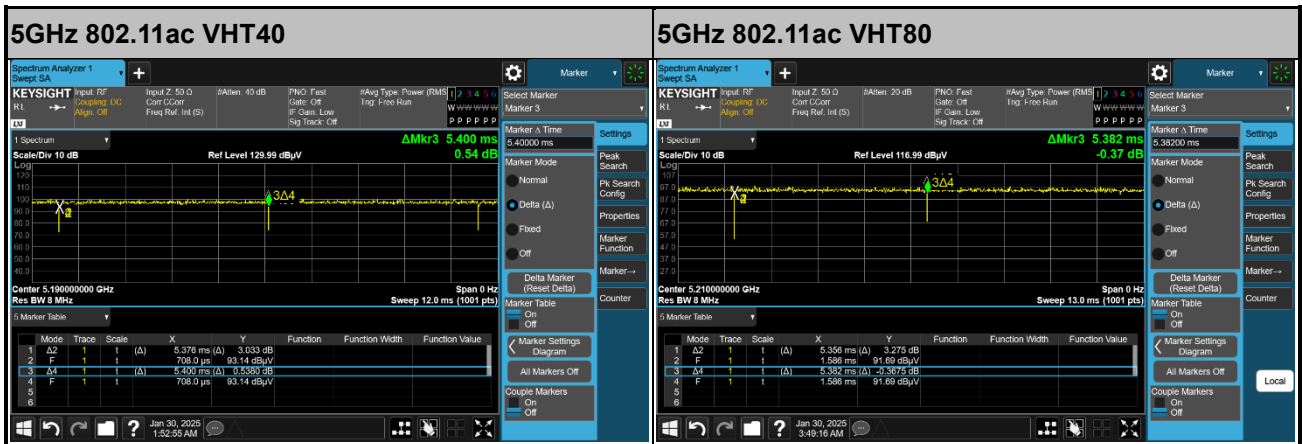





5GHz 802.11ax HE40 Full RU

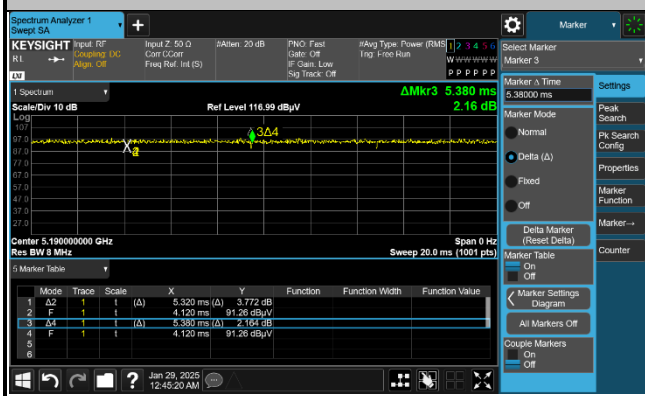


5GHz 802.11ax HE40 242 RU

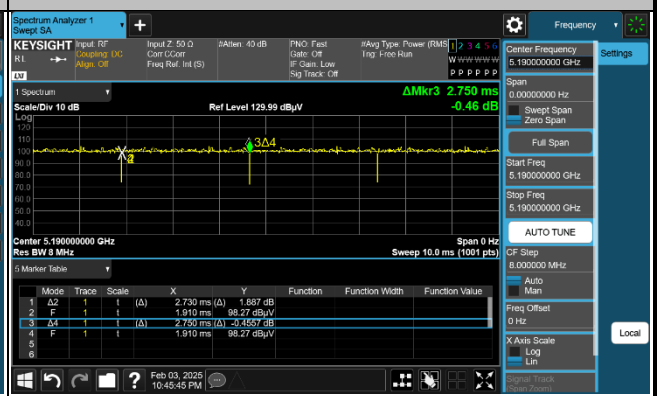


5GHz 802.11ax HE80 Full RU

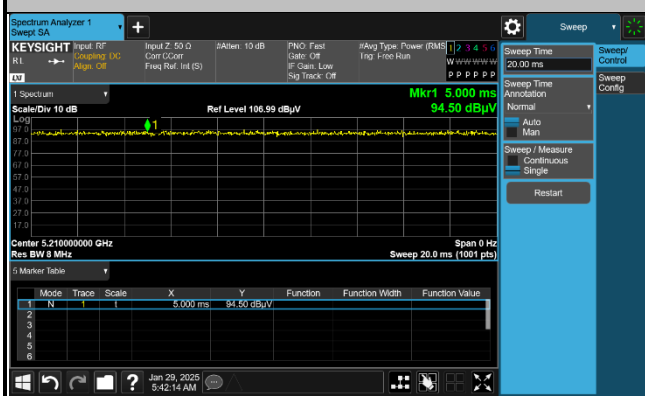

5GHz 802.11ax HE80 484 RU

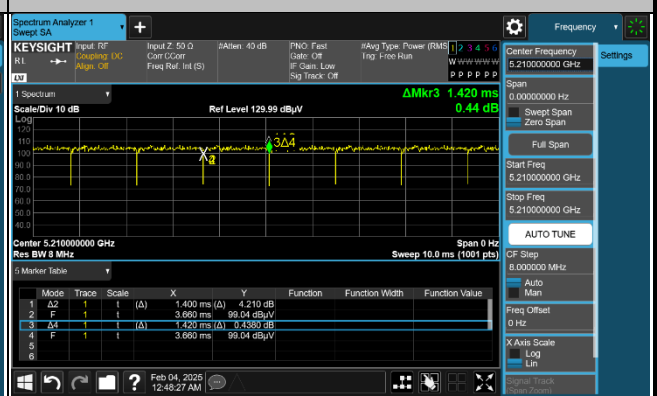

5GHz 802.11ax HE160 Full RU

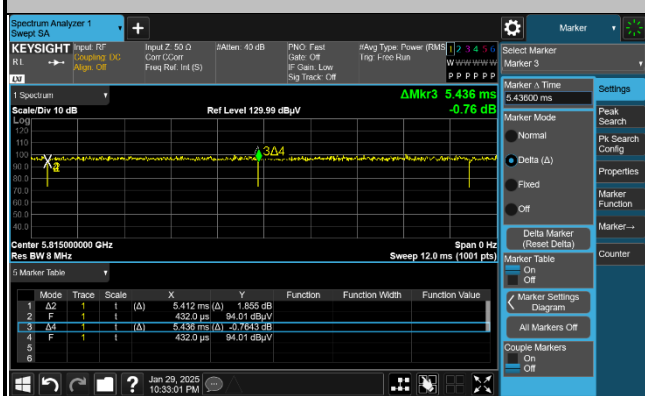

5GHz 802.11ax HE160 996 RU

