



**FCC 47 CFR PART 15 SUBPART C
ISED RSS-210 ISSUE 11**

CERTIFICATION TEST REPORT

For

Customer Display

**FCC MODEL NUMBER: SPS5-01
ISED MODEL NUMBER: SPS5-01-A**

REPORT NUMBER: 4791923606.2-1-RF-1

ISSUE DATE: December 12, 2025

**FCC ID: 2AF3K-SPS5
IC: 21827-SPS5**

Prepared for

Block, Inc.

**FCC: 1955 Broadway, Suite. 600, Oakland, CA 94612, US
ISED: 5000 Yonge Street, Toronto, ON, M2N7E9 Canada**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

**Tel: +86 769 22038881
Fax: +86 769 33244054
Website: www.ul.com**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	December 12, 2025	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	Transmitter 99% Emission Bandwidth / 20dB Bandwidth	RSS-Gen 6.7/ Part 15.215 (c)	PASS
2	Transmitter Frequency Stability (Temperature & Voltage Variation)	CFR 47 FCC §15.225(e) ISED RSS-Gen Clause 6.11 ISED RSS-210 Annex B.6	PASS
3	Fundamental Field Strength	CFR 47 FCC §15.225(a)(b)(c)(d) ISED RSS-Gen Clause 6.12 ISED RSS-210 Annex B.6	PASS
4	Radiated Emissions	CFR 47 FCC§15.209(a) CFR 47 FCC§15.225(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
5	Band Edge Radiated Emissions	CFR 47 FCC §15.209(a) CFR 47 FCC §15.225(c)(d) ISED RSS-Gen Clause 6.13 ISED RSS-210 Annex B.6	PASS
6	Conducted Emission Test for AC Power Port	CFR 47 FCC §15.207 ISED RSS-Gen Clause 8.8	PASS
7	Antenna Requirement	CFR 47 FCC §15.203 ISED RSS-Gen Clause 6.8	PASS
Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China. Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, ISED RSS-210 Issue 11 and ISED RSS-GEN Issue 5 > when <Simple Acceptance> decision rule is applied.			

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. MEASUREMENT UNCERTAINTY.....	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM FIELD STRENGTH.....	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS.....	8
5.4. TEST ENVIRONMENT	9
5.5. DESCRIPTION OF TEST SETUP	10
5.6. MEASURING INSTRUMENT AND SOFTWARE USED	11
6. ANTENNA PORT TEST RESULTS	12
6.1. 99% & 20dB BANDWIDTH	12
6.2. TRANSMITTER FREQUENCY STABILITY	14
7. RADIATED EMISSION TEST RESULTS.....	16
7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS	23
7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz.....	24
7.3. SPURIOUS EMISSIONS BELOW 30MHz	26
8. AC POWER LINE CONDUCTED EMISSIONS	29
9. ANTENNA REQUIREMENTS.....	35

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Block, Inc.
FCC Address: 1955 Broadway, Suite. 600, Oakland, CA 94612, US
ISED Address: 5000 Yonge Street, Toronto, ON, M2N7E9 Canada

Manufacturer Information

Company Name: Block, Inc.
FCC Address: 1955 Broadway, Suite. 600, Oakland, CA 94612, US
ISED Address: 5000 Yonge Street, Toronto, ON, M2N7E9 Canada

EUT Information

EUT Name: Customer Display
FCC Model: SPS5-01
ISED Model: SPS5-01-A
Model Difference: All are the same except for the model name
Brand: Square
Sample Received Date: September 17, 2025
Sample Status: Normal
Sample ID: 8925678
Date of Tested: November 4, 2025 to December 12, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-210 Issue 11	PASS
ISED RSS-GEN Issue 5	PASS

Prepared By:



Fanny Huang
Project Engineer

Checked By:



Kebo Zhang
Senior Project Engineer

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 414788 D01 Radiated Test Site v01r01, FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2020, ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024, ISED RSS-210 Issue 11 and RSS-GEN Issue 5.

Note: ANSI C63.10-2020 is used in FCC, ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024 is used in ISED.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: C-20202, G-20240, R-20248 and T-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber E, the VCCI registration No. is G-20240 and R-20248 Shielding Room F, the VCCI registration No. is C-20202 and T-20202
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2 dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00 dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78 dB (1 GHz-18 GHz)
	5.23 dB (18 GHz-26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Customer Display
FCC Model	SPS5-01
ISED Model	SPS5-01-A
Model Difference:	All are the same except for the model name
Frequency	13.56 MHz
Power Supply	AC 120V 60Hz

5.2. MAXIMUM FIELD STRENGTH

Frequency (MHz)	Max Peak field strength @30m (dB μ V/m)
13.56	46.02

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
13.56	Coil antenna	0

5.4. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	45 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	0 ~ 40°C
Voltage:	VL	AC 102 V
	VN	AC 120 V
	VH	AC 138 V

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	Power Adapter	/	SWJ4-01	/
3	Hub	/	SHG3-01	/
4	Card	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
/	/	/	/	/	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode though the software inside.

SETUP DIAGRAM FOR TESTS

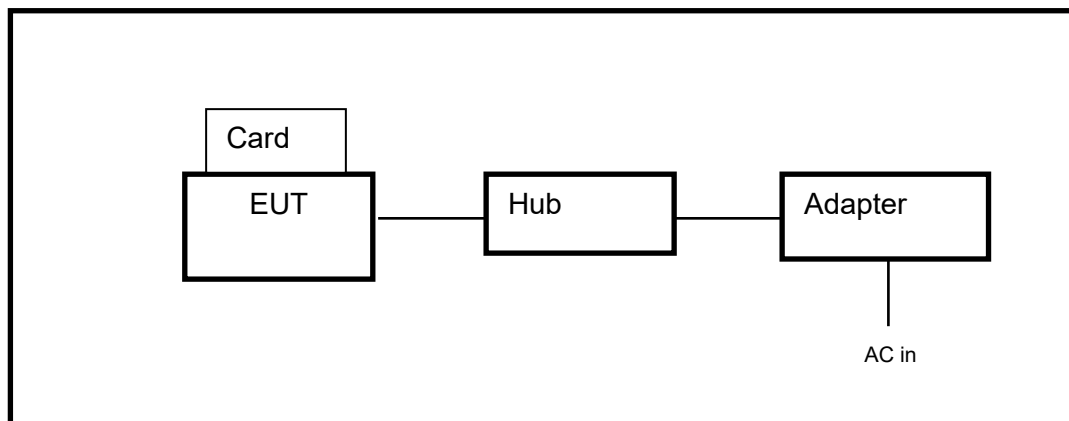

Note:

1. Test was performed with tag and without tag, but only the worst case data (with tag) was recorded in the report.

4. NFC support both ISO /IEC 14443A and ISO /IEC 14443B. All lowest and highest data rates as per the standards are supported - 106 kbps, 212 kbps, 424 kbps and 848 kbps, all the modes had been tested, but only the worst data (ISO 14443A 106 kbps) was recorded in the report.

5.6. MEASURING INSTRUMENT AND SOFTWARE USED

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.12, 2025	Sep.11, 2026
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.12, 2025	Sep.11, 2026
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.12, 2025	Sep.11, 2026
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.12, 2025	Sep.11, 2026
Software					
Description		Manufacturer		Name	Version
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1
Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Sep.16, 2025	Sep.15, 2026
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.12, 2025	Sep.11, 2026

6. ANTENNA PORT TEST RESULTS

6.1. 99% & 20dB BANDWIDTH

LIMITS

Section	Test Item	Limit
ANSI C63.10 Section 6.9	20dB% Bandwidth	For reporting purposes only.
ISED RSS-Gen Clause 6.7 Issue 5	99 % Occupied Bandwidth	For reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1 kHz. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

Note: Because the measured signal is CW or CW-like adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW.

The type of band for the signal is narrowband.

TEST SETUP

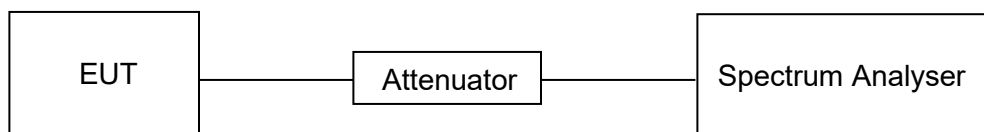


TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	57 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V 60Hz

RESULTS

Frequency (MHz)	99% Occupied Bandwidth (kHz)	20dB bandwidth (kHz)
13.56	2.430	2.859

99% bandwidth

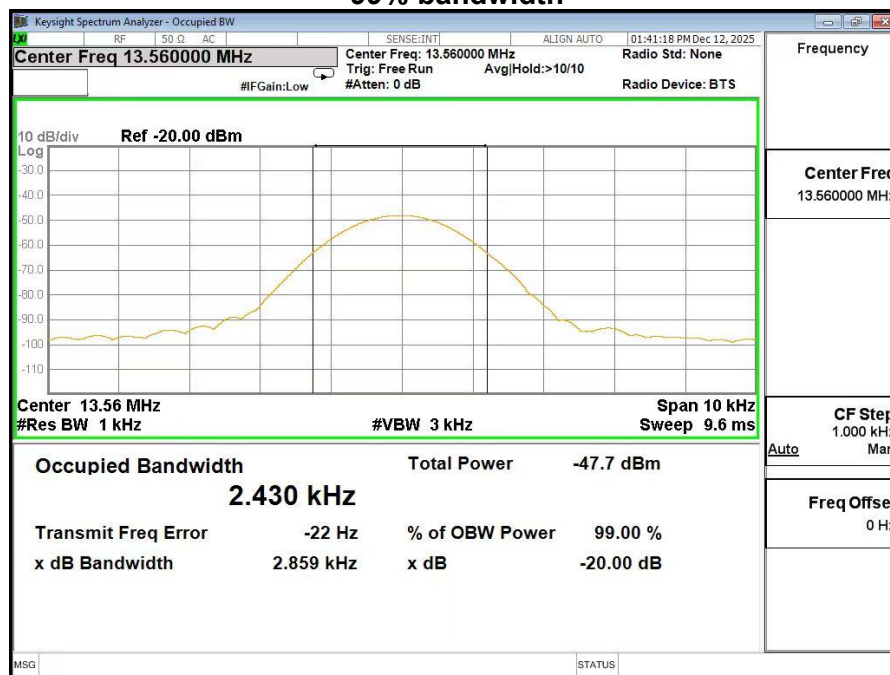

6.2. TRANSMITTER FREQUENCY STABILITY

LIMITS

CFR 47 FCC §15.225(e)
ISED RSS-210 Annex B B.6

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20 degrees to + 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.


TEST SETUP AND PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST SETUP

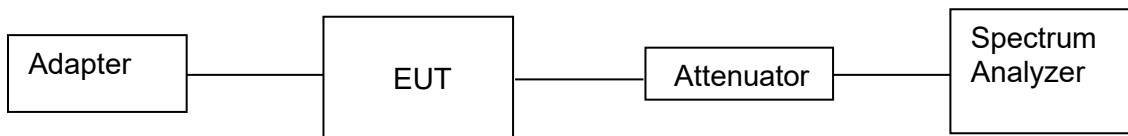

TEST ENVIRONMENT

Temperature	25.2°C	Relative Humidity	57 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120V 60Hz

RESULTS

Maximum frequency error of the EUT with variations in ambient temperature

Temperature (°C)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
-20	13.5598	13.5599	13.5593	13.5599
-10	13.5599	13.5600	13.5599	13.5599
0	13.5596	13.5598	13.5597	13.5600
10	13.5590	13.5595	13.5592	13.5598
20	13.5593	13.5600	13.5599	13.5595
30	13.5597	13.5596	13.5595	13.5597
40	13.5599	13.5594	13.5598	13.5598
50	13.5593	13.5597	13.5592	13.5600
Maximum frequency error	-0.0074%	-0.0044%	-0.0059%	-0.0037%
Limit	±0.01%			
Result	Pass	Pass	Pass	Pass

Maximum frequency error of the EUT with variations in nominal operating voltage at an ambient 20 degrees C temperature.

Supply Voltage (V)	Time after Start-up			
	0 minutes	2 minutes	5 minutes	10 minutes
AC 102 V	13.5597	13.5599	13.5600	13.5600
AC 120 V	13.5599	13.5600	13.5595	13.5598
AC 138 V	13.5596	13.5598	13.5598	13.5600
Maximum frequency error	-0.0029%	-0.0015%	-0.0037%	-0.0015%
Limit	±0.01%			
Result	Pass	Pass	Pass	Pass

7. RADIATED EMISSION TEST RESULTS

LIMITS

Fundamental field strength

FCC Reference:	Part 15.225(a)(b)(c)(d) & 15.209(a)
ISED Canada Reference:	RSS-Gen 6.13 & RSS-210 B.6 & RSS-GEN Clause 8.9
Test Method Used:	ANSI C63.10 Sections 6.4 and 6.5

Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measured Distance (Meters)
13.553-13.567	15848	84	30
13.410-13.553/13.567-13.710	334	50.47	30
13.110-13.410/13.710-14.010	106	40.51	30

Note(s):

1. The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

2. The limit is specified at a test distance of 30 meters. However, as specified by FCC Section 15.31 (f)(2), measurements may be performed at a closer distance and the measured level corrected to the specified measurement distance by using the square of an inverse linear distance extrapolation factor (40dB/decade).

Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (μA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30MHz.

Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.


²Above 38.6c

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

TEST SETUP AND PROCEDURE

Below 30 MHz

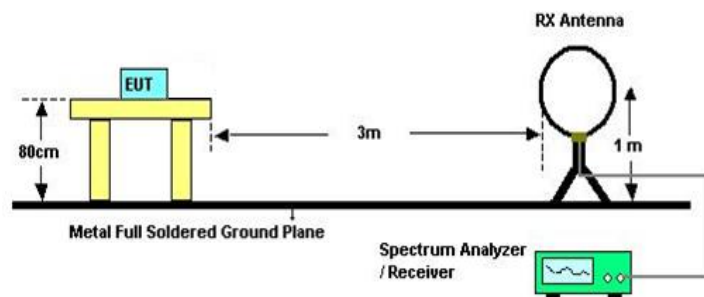


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

- The testing follows the guidelines in ANSI C63.10-2020 clause 6.4.
- The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
- The EUT was placed on a turntable with 80 cm above ground.
- The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
- The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
- For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
- Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
- The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω ; For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

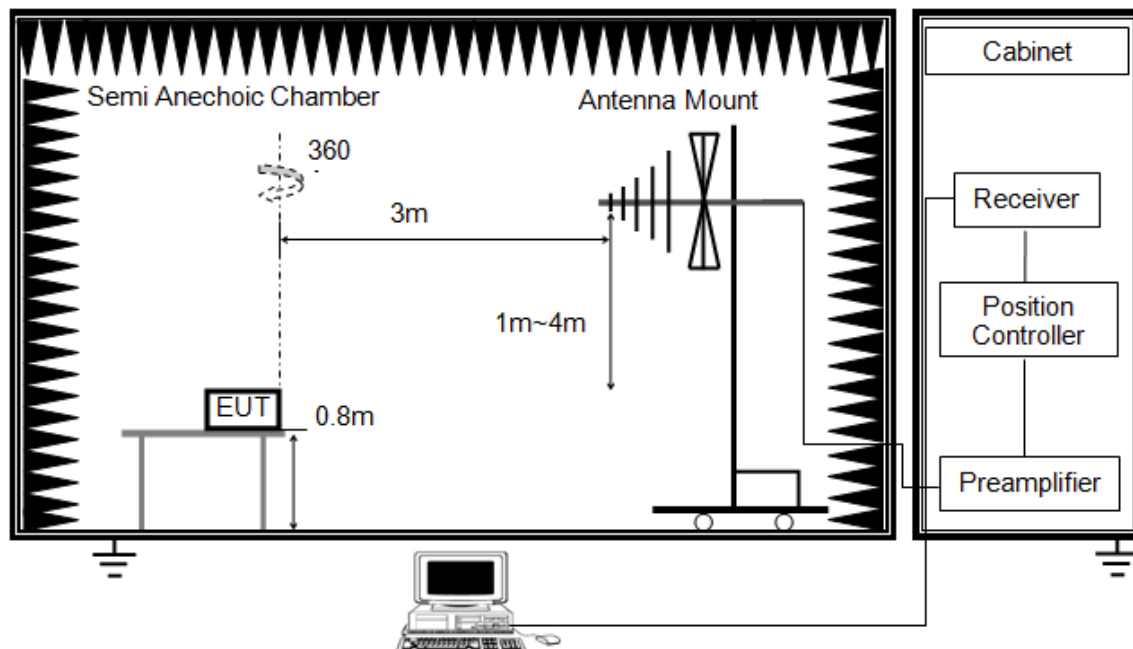


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2020 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
7. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.

X axis, Y axis, Z axis positions:

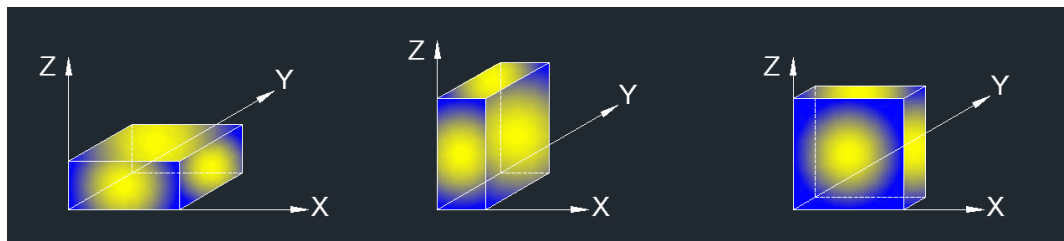

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (Y axis) data recorded in the report.

Note 2: The EUT was fully exercised with external accessories during the test. In the case of multiple accessory external ports, an external accessory shall be connected to one of each type of port.

TEST ENVIRONMENT

Temperature	24.1 °C	Relative Humidity	68 %
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

RESULTS

7.1. FIELD STRENGTH OF INTENTIONAL EMISSIONS

FIELD STRENGTH OF INTENTIONAL EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13.5600	96.74	-50.72	46.02	84.00	-37.98	peak


Note: 1. Result Level = Read Level + Correct Factor.

2. The test result is for 30m, the distance extrapolation factor (40dB/decade) has been considered in the test result.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

7.2. SPURIOUS EMISSIONS BELOW 1GHz AND ABOVE 30MHz


SPURIOUS EMISSIONS (HORIZONTAL)

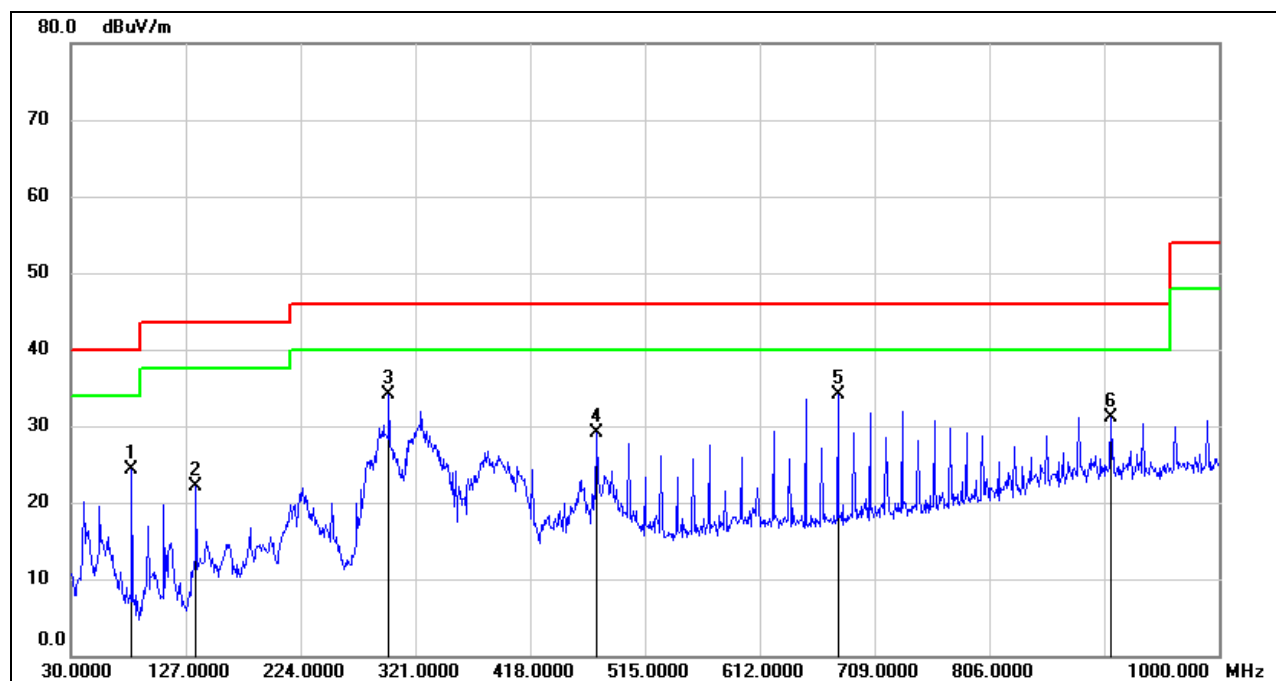

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	81.4100	40.32	-16.09	24.23	40.00	-15.77	peak
2	135.7300	36.33	-14.16	22.17	43.50	-21.33	peak
3	298.6900	45.69	-11.59	34.10	46.00	-11.90	peak
4	474.2600	36.94	-7.92	29.02	46.00	-16.98	peak
5	677.9600	38.88	-4.83	34.05	46.00	-11.95	peak
6	908.8200	31.70	-0.51	31.19	46.00	-14.81	peak

Note: 1. Result Level = Read Level + Correct Factor.

HARMONICS AND SPURIOUS EMISSIONS (VERTICAL)

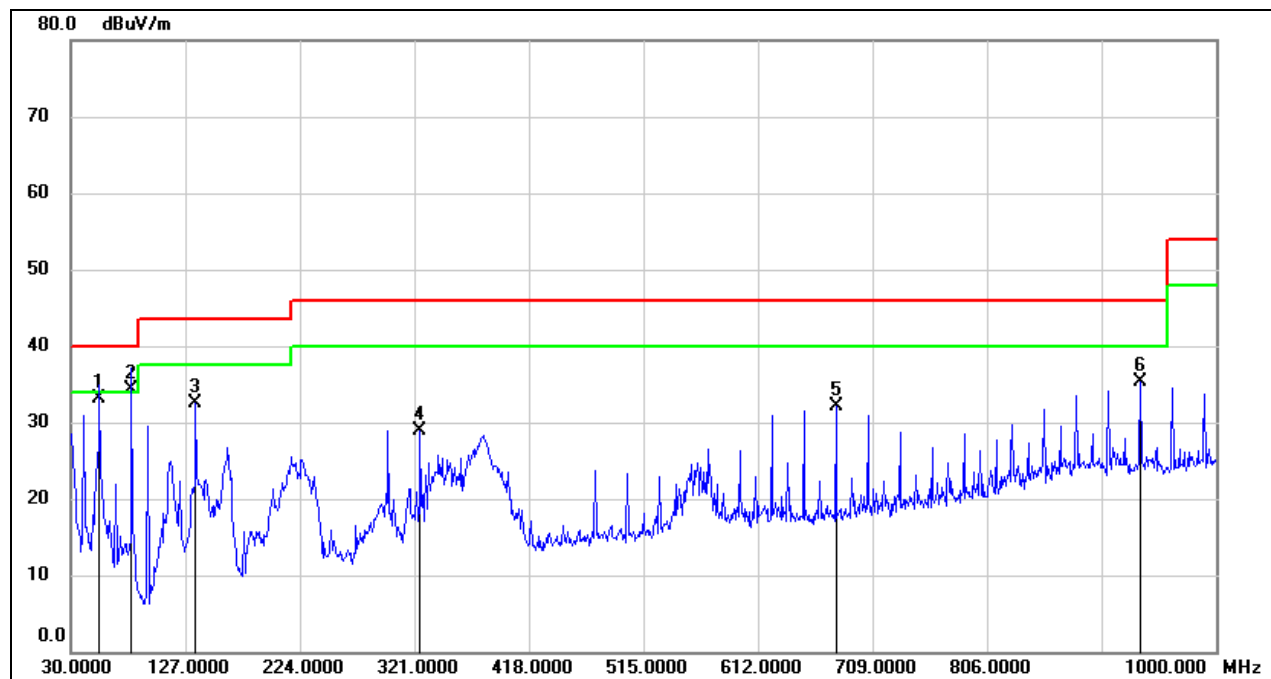


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2500	48.22	-15.02	33.20	40.00	-6.80	peak
2	81.4100	50.37	-16.09	34.28	40.00	-5.72	peak
3	135.7300	46.65	-14.16	32.49	43.50	-11.01	peak
4	325.8500	39.48	-10.49	28.99	46.00	-17.01	peak
5	677.9600	37.02	-4.83	32.19	46.00	-13.81	peak
6	935.9800	36.08	-0.73	35.35	46.00	-10.65	peak

Note: 1. Result Level = Read Level + Correct Factor.

7.3. SPURIOUS EMISSIONS BELOW 30MHz

SPURIOUS EMISSIONS (LOOP ANTENNA FACE ON TO THE EUT)

9 kHz~ 150 kHz

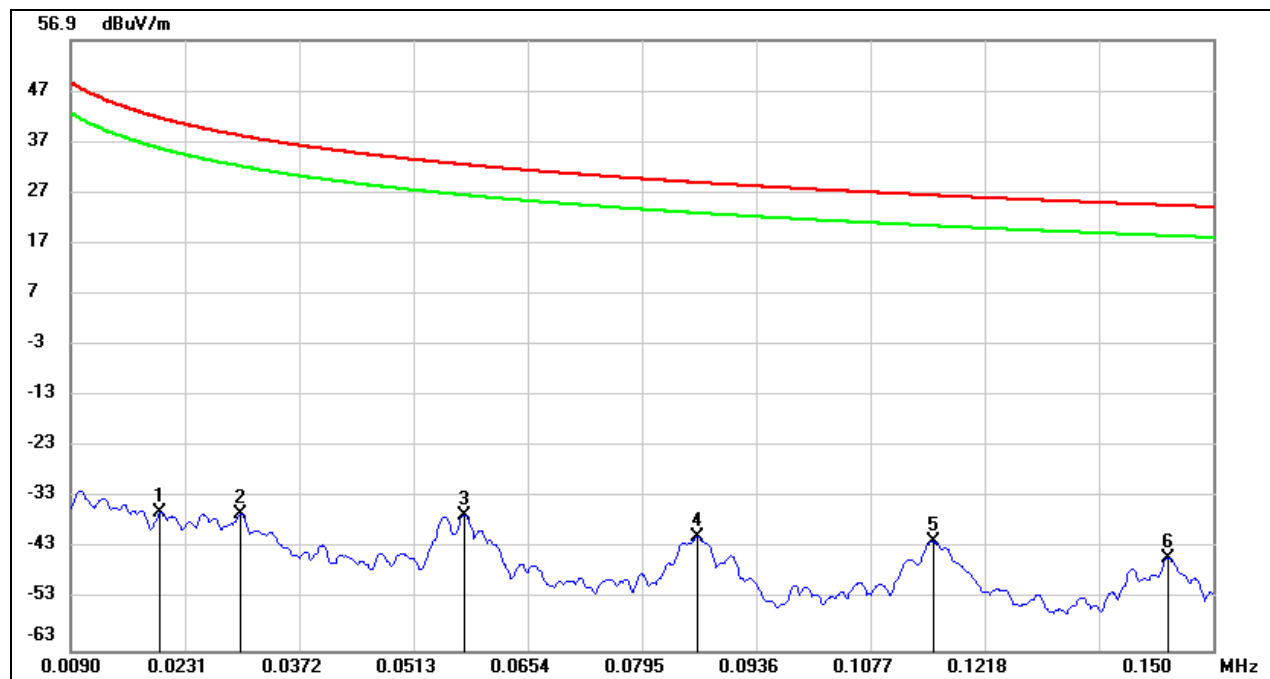


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0200	53.51	-89.40	-35.89	41.58	-87.39	-9.92	-77.47	peak
2	0.0300	54.73	-91.00	-36.27	38.06	-87.77	-13.44	-74.33	peak
3	0.0575	55.47	-92.04	-36.57	32.41	-88.07	-19.09	-68.98	peak
4	0.0864	51.88	-92.60	-40.72	28.87	-92.22	-22.63	-69.59	peak
5	0.1153	50.91	-92.50	-41.59	26.37	-93.09	-25.13	-67.96	peak
6	0.1445	47.41	-92.31	-44.90	24.40	-96.40	-27.10	-69.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

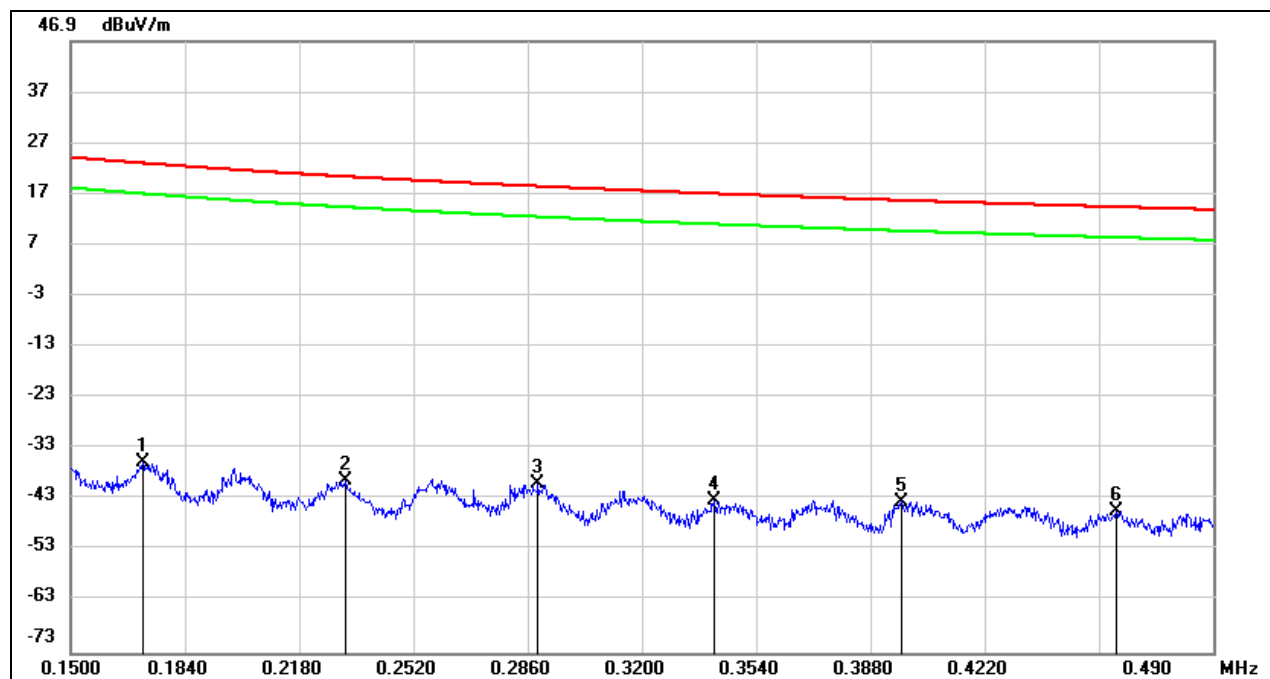

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	0.1714	56.39	-92.14	-35.75	22.93	-87.25	-28.57	-58.68	peak
2	0.2316	52.71	-92.10	-39.39	20.31	-90.89	-31.19	-59.70	peak
3	0.2891	52.34	-92.35	-40.01	18.38	-91.51	-33.12	-58.39	peak
4	0.3414	49.28	-92.48	-43.20	16.94	-94.70	-34.56	-60.14	peak
5	0.3972	49.19	-92.59	-43.40	15.62	-94.90	-35.88	-59.02	peak
6	0.4611	47.45	-92.72	-45.27	14.33	-96.77	-37.17	-59.60	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.

490kHz ~ 30MHz

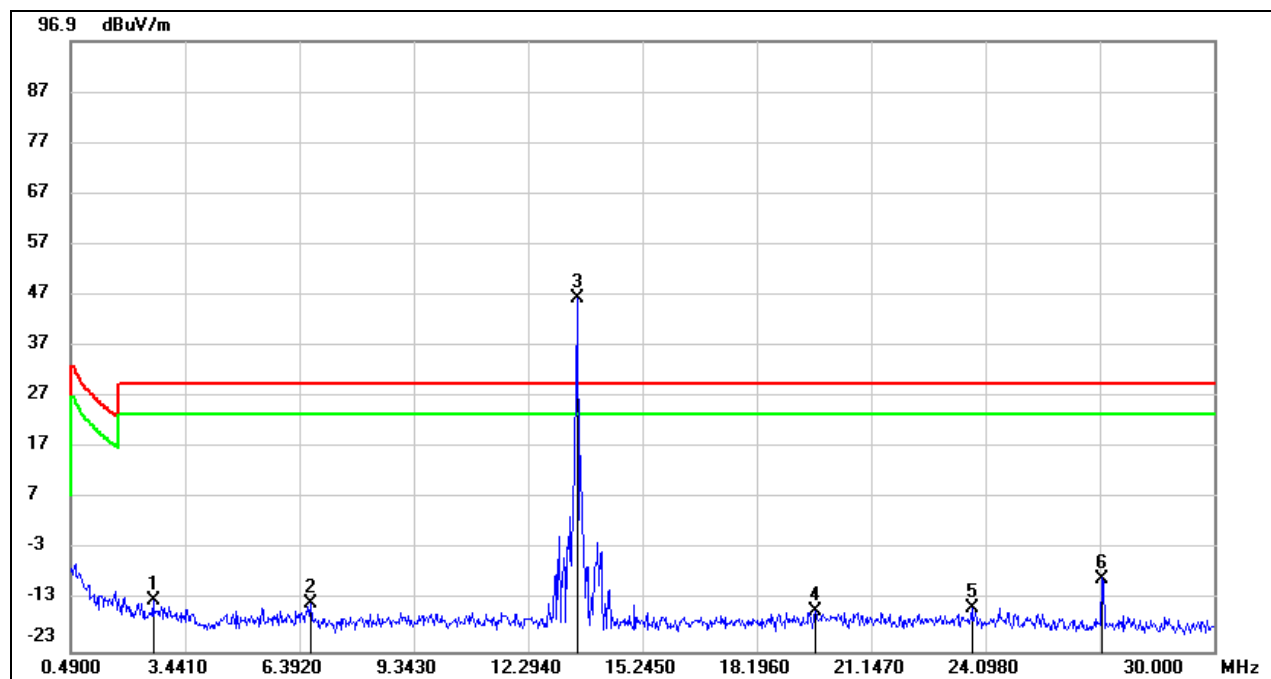

No.	Frequency	Reading	Correct	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dBuA/m)	(dBuA/m)	(dB)	
1	2.6147	38.38	-51.33	-12.95	29.54	-64.45	-21.96	-42.49	peak
2	6.6871	37.50	-51.21	-13.71	29.54	-65.21	-21.96	-43.25	peak
3	13.5629	/	/	/	/	/	/	/	fundamental
4	19.7010	34.67	-49.94	-15.27	29.54	-66.77	-21.96	-44.81	peak
5	23.7439	34.97	-49.53	-14.56	29.54	-66.06	-21.96	-44.10	peak
6	27.1080	41.00	-49.70	-8.70	29.54	-60.20	-21.96	-38.24	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

4. About the Fundamental emission test result please refer to section 7.1.

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS


Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

TEST SETUP AND PROCEDURE

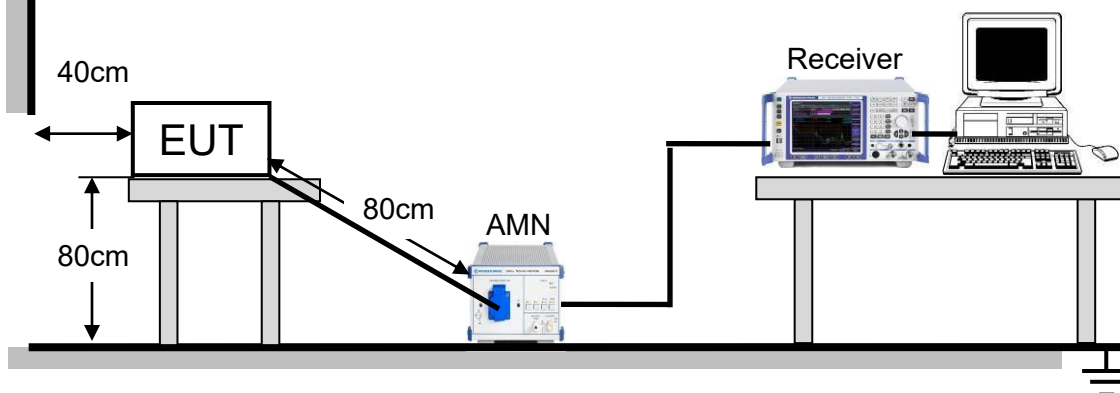

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

1. The testing follows the guidelines in ANSI C63.10-2020.
2. The EUT was placed on the top of a rotating table 0.8 meters above the horizontal ground plane and being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
4. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. LISN at least 80 cm from nearest part of EUT chassis.
6. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.
7. The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	55%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V_60Hz

LINE N RESULTS with modified sample (transmitter terminated into a dummy load)

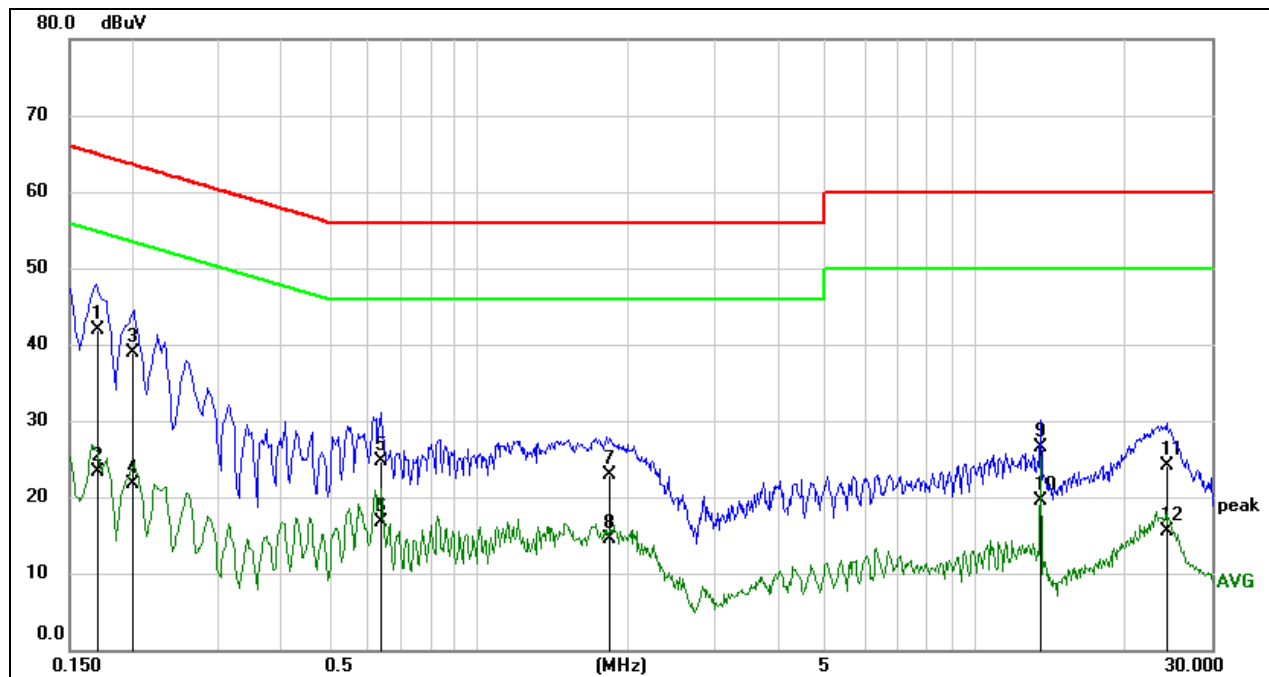


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1709	32.41	9.54	41.95	64.92	-22.97	QP
2	0.1709	13.75	9.54	23.29	54.92	-31.63	AVG
3	0.2003	29.46	9.54	39.00	63.60	-24.60	QP
4	0.2003	12.08	9.54	21.62	53.60	-31.98	AVG
5	0.6310	15.17	9.63	24.80	56.00	-31.20	QP
6	0.6310	7.09	9.63	16.72	46.00	-29.28	AVG
7	1.8221	13.45	9.54	22.99	56.00	-33.01	QP
8	1.8221	4.87	9.54	14.41	46.00	-31.59	AVG
9	13.5599	16.67	9.77	26.44	60.00	-33.56	QP
10	13.5599	9.67	9.77	19.44	50.00	-30.56	AVG
11	24.3142	14.42	9.72	24.14	60.00	-35.86	QP
12	24.3142	5.81	9.72	15.53	50.00	-34.47	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE N RESULTS with unmodified sample (antenna present)

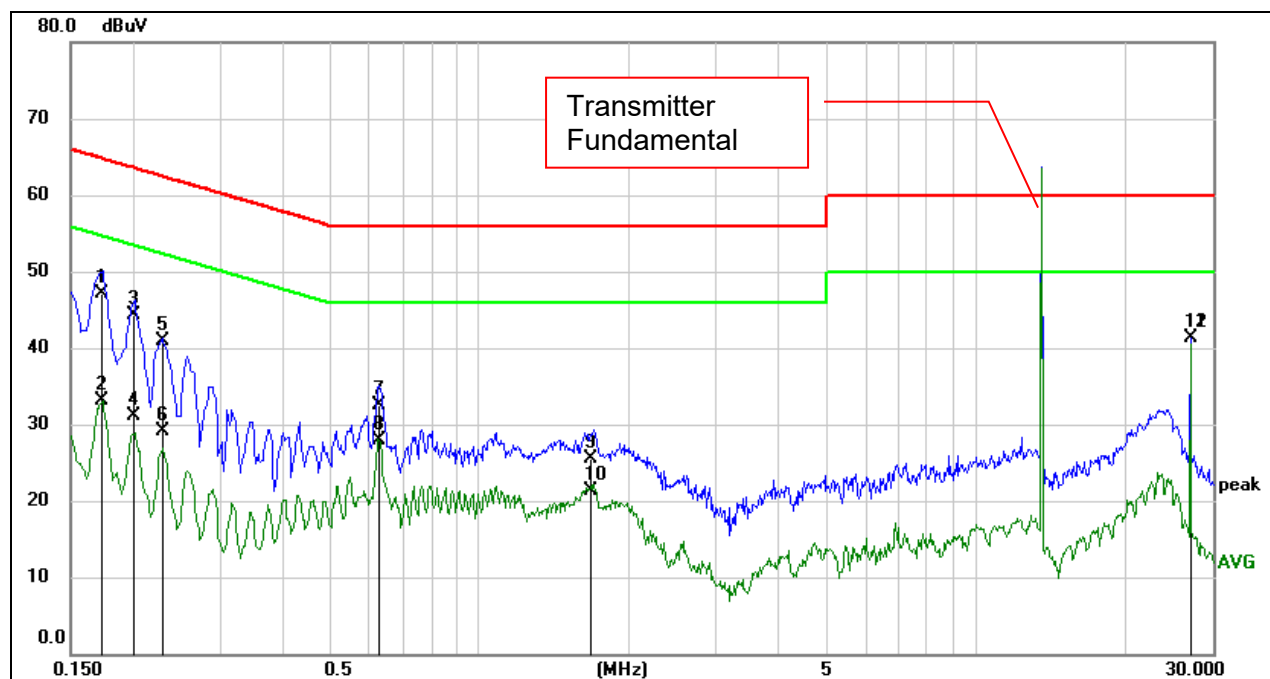


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1724	37.63	9.54	47.17	64.84	-17.67	QP
2	0.1724	23.47	9.54	33.01	54.84	-21.83	AVG
3	0.2002	34.70	9.54	44.24	63.60	-19.36	QP
4	0.2002	21.56	9.54	31.10	53.60	-22.50	AVG
5	0.2295	31.41	9.55	40.96	62.47	-21.51	QP
6	0.2295	19.57	9.55	29.12	52.47	-23.35	AVG
7	0.6261	22.87	9.63	32.50	56.00	-23.50	QP
8	0.6261	18.25	9.63	27.88	46.00	-18.12	AVG
9	1.6730	15.96	9.54	25.50	56.00	-30.50	QP
10	1.6730	11.84	9.54	21.38	46.00	-24.62	AVG
11	27.1204	31.69	9.64	41.33	60.00	-18.67	QP
12	27.1204	31.58	9.64	41.22	50.00	-8.78	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with modified sample (transmitter terminated into a dummy load)

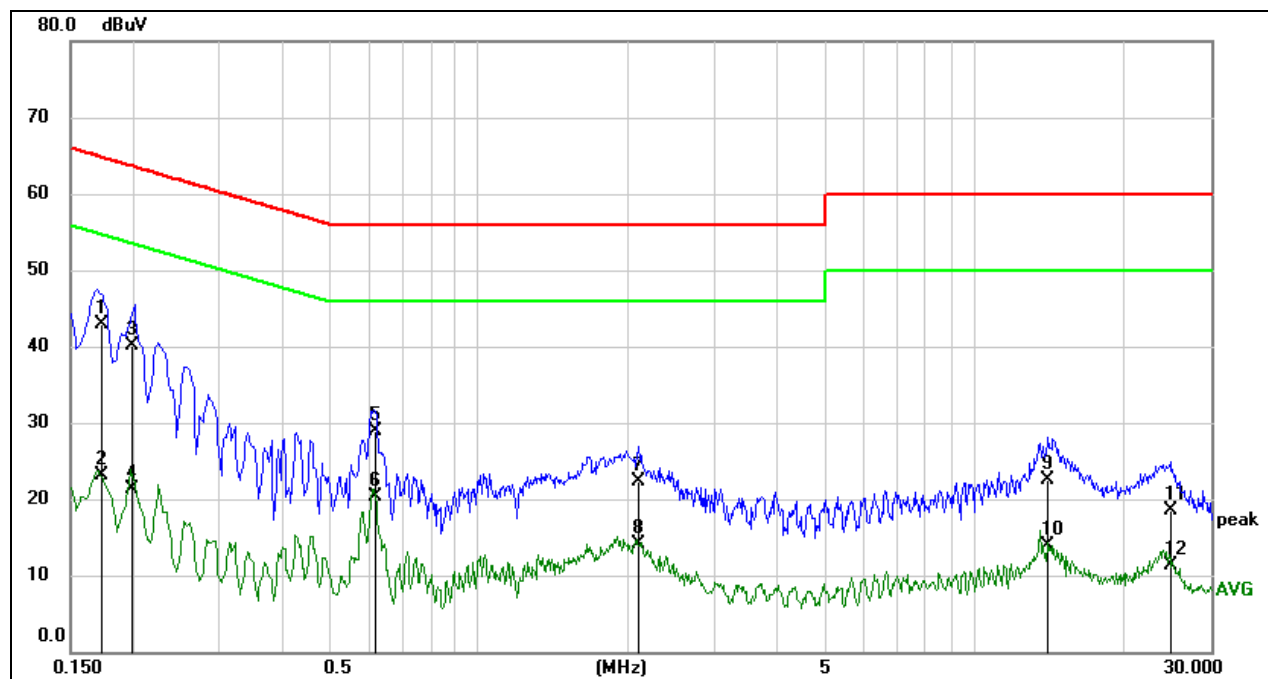


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1731	33.06	9.75	42.81	64.81	-22.00	QP
2	0.1731	13.38	9.75	23.13	54.81	-31.68	AVG
3	0.1992	30.38	9.64	40.02	63.64	-23.62	QP
4	0.1992	11.75	9.64	21.39	53.64	-32.25	AVG
5	0.6201	19.32	9.62	28.94	56.00	-27.06	QP
6	0.6201	10.67	9.62	20.29	46.00	-25.71	AVG
7	2.1108	12.50	9.75	22.25	56.00	-33.75	QP
8	2.1108	4.33	9.75	14.08	46.00	-31.92	AVG
9	14.1050	12.73	9.80	22.53	60.00	-37.47	QP
10	14.1050	4.05	9.80	13.85	50.00	-36.15	AVG
11	24.8088	8.73	9.75	18.48	60.00	-41.52	QP
12	24.8088	1.48	9.75	11.23	50.00	-38.77	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

LINE L RESULTS with unmodified sample (antenna present)

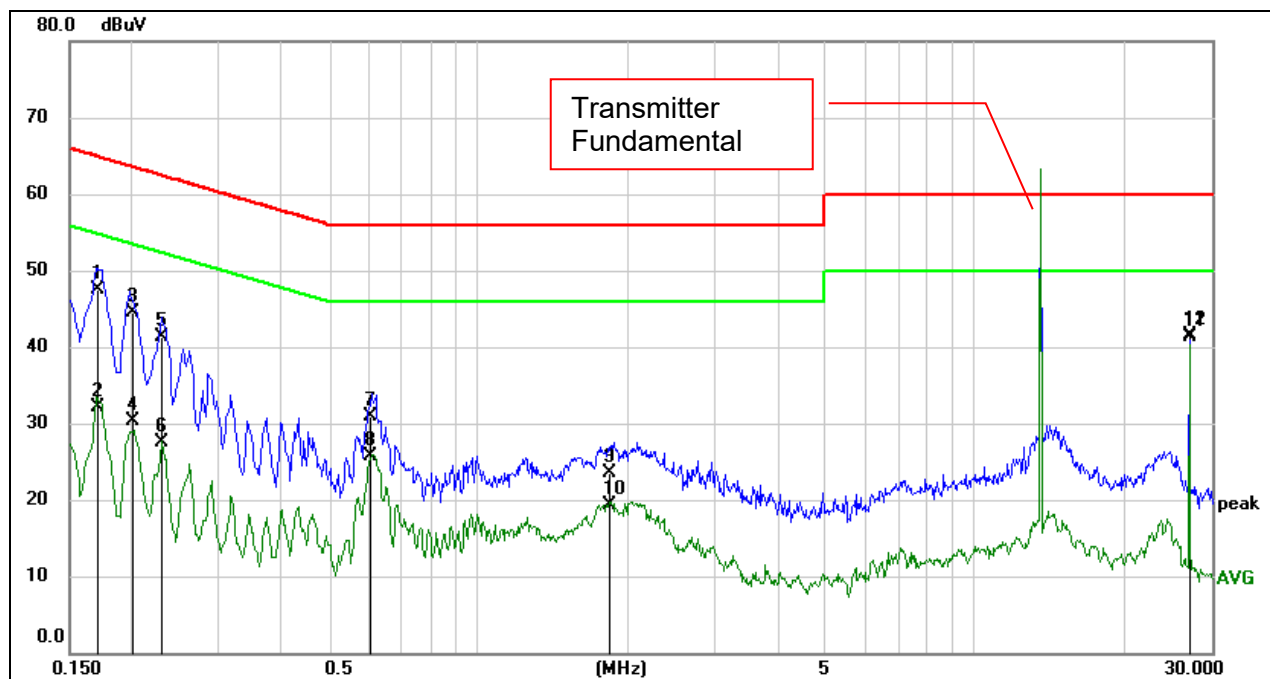

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1703	37.76	9.76	47.52	64.95	-17.43	QP
2	0.1703	22.36	9.76	32.12	54.95	-22.83	AVG
3	0.2010	34.96	9.64	44.60	63.57	-18.97	QP
4	0.2010	20.71	9.64	30.35	53.57	-23.22	AVG
5	0.2287	31.59	9.65	41.24	62.50	-21.26	QP
6	0.2287	17.78	9.65	27.43	52.50	-25.07	AVG
7	0.6023	21.20	9.64	30.84	56.00	-25.16	QP
8	0.6023	15.97	9.64	25.61	46.00	-20.39	AVG
9	1.8457	13.75	9.74	23.49	56.00	-32.51	QP
10	1.8457	9.62	9.74	19.36	46.00	-26.64	AVG
11	27.1203	31.68	9.71	41.39	60.00	-18.61	QP
12	27.1203	31.71	9.71	41.42	50.00	-8.58	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to RSS-GEN section 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

RESULTS

Complies

END OF REPORT