

**Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm**

PART NUMBER: W3006


Series: Chip Antenna

Features:

- 2.4-2.5 / 5.15-5.85GHz
- Peak gain 2.2 / 5.2 dBi
- Efficiency 60 / 70 %
- Compact size W x L x H (10 x 3.2 x 1.5 mm)
- Low weight: 240 mg
- Fully SMD compatible
- Tape and reel packing
- RoHS Compliant Product
- Moisture Sensitivity Level: MSL1

Applications:

- IEEE 802.11a/b/g/n
- 5 GHz WLAN
- 2.4 GHz WLAN
- 2.4 GHz ISM Band Systems
- 5GHz ISM Band Systems
- ZigBee IEEE 802.15.4

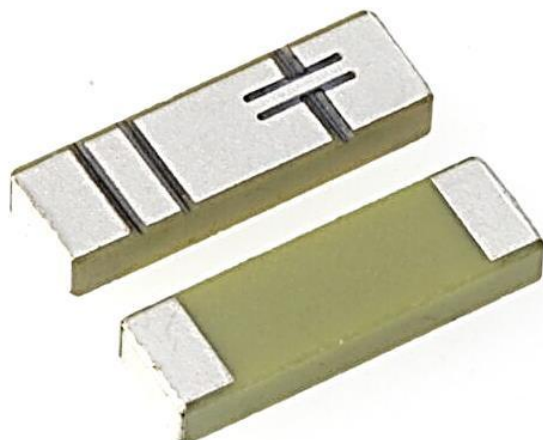

All dimensions are in inches/mm

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters
15255 Innovation Drive #100
San Diego, CA 92128
USA
Tel: 1-858-674-8100

Pulse/Larsen Antennas
18110 SE 34th St Bldg 2 Suite 250
Vancouver, WA 98683
USA
Tel: 1-360-944-7551

Europe Headquarters
Pulse GmbH & Co, KG
Zeppelinstrasse 15
Herrenberg, Germany
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.
99 Huo Ju Road(#29 Bldg, 4th Phase
Suzhou New District
Jiangsu Province, Suzhou 215009 PR China
Tel: 86 512 6807 9998



Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

ELECTRICAL SPECIFICATIONS

Frequency1	2.4-2.5GHz
Frequency2	5.15-5.85GHz
Nominal Impedance	50Ω
Return Loss Frequency1	-8 dB max
Return Loss Frequency2	-10 dB max
Efficiency Frequency1	60 %
Efficiency Frequency2	70 %
Peak Gain Frequency1	2.2dBi
Peak Gain Frequency2	5.2dBi
Polarization	Linear
Interface	SMD mount ceramic antenna

Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL SPECIFICATIONS

Weight	0.24g
Size	10 x 3.2 x 1.5 mm

ENVIRONMENTAL SPECIFICATIONS


Operating temperature	-40~+85 °C
Temperature	-40~+85 °C
Humidity	Cyclic 6 +25 °C/+55 °C 95%
Vibration	
Sinusoidal 2-8Hz	7.5 mm
Sinusoidal 8-200Hz	20 m/s ²
Shocks	0.5 m/s
Salt mist	96 hours

Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION

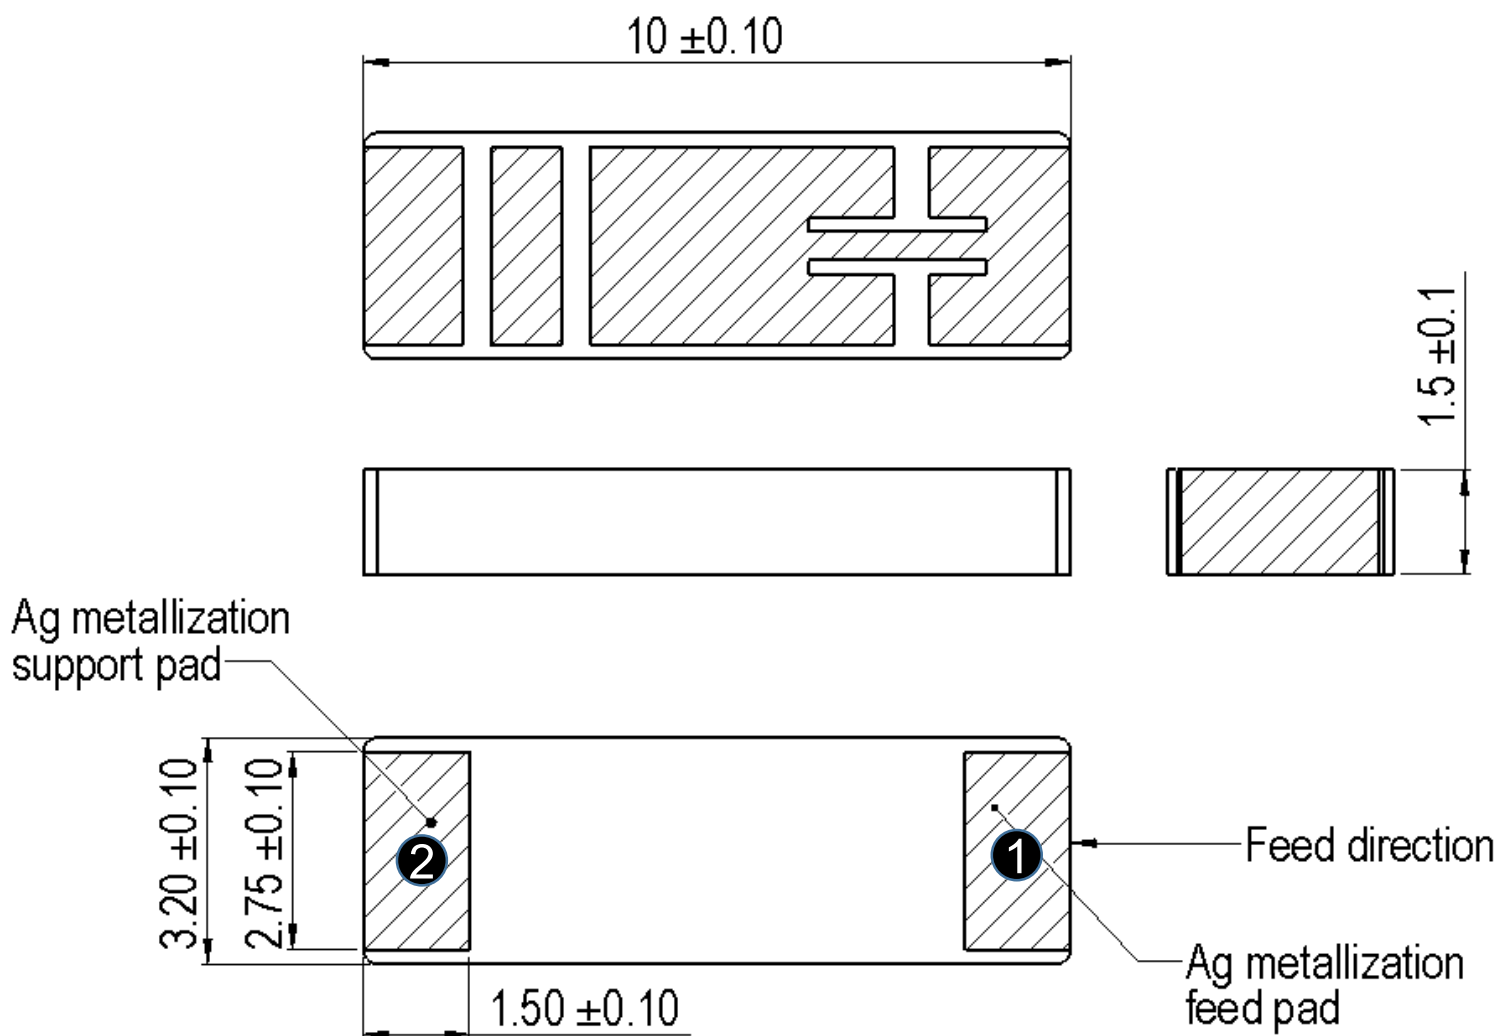

No.	Terminal Name	Terminal Dimensions
1	Feed	1.5 x 2.75 mm
2	Support pad	1.5 x 2.75 mm
Antenna feed pad can be identified by looking top surface metallization pattern		

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm

Series: Chip Antenna


PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION

Ground cleared under antenna, clearance area 11.60 mm x 6.25 mm

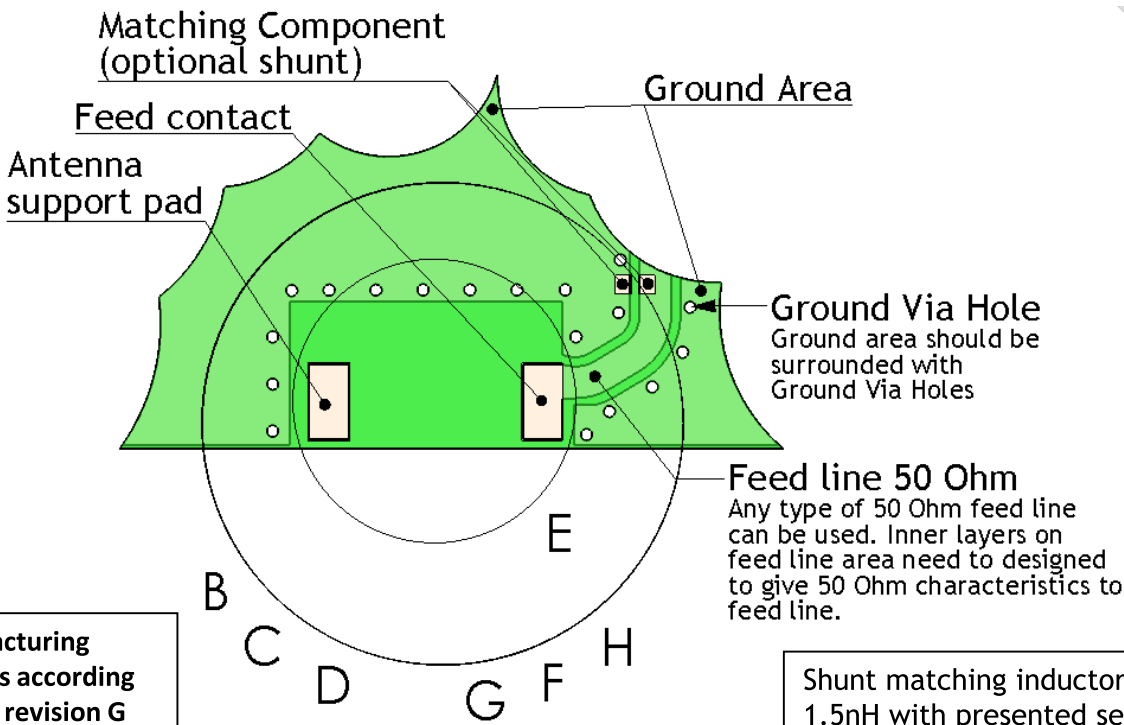

PWB manufacturing requirements according to IPC-A-600 revision G or similar

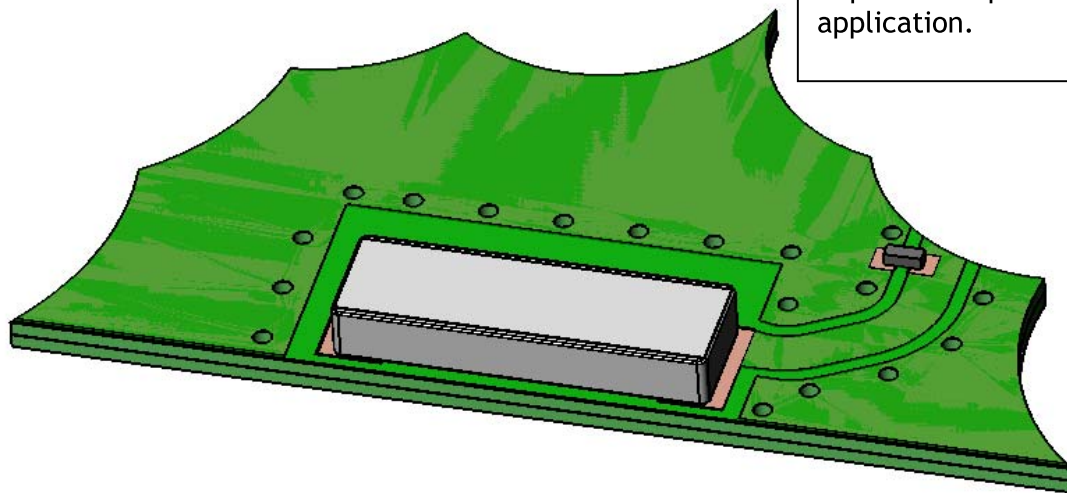

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm

Series: Chip Antenna


PART NUMBER: W3006

MECHANICAL DRAWING AND TERMINAL CONFIGURATION


Ground clearance area (11.60 x 6.25 mm)

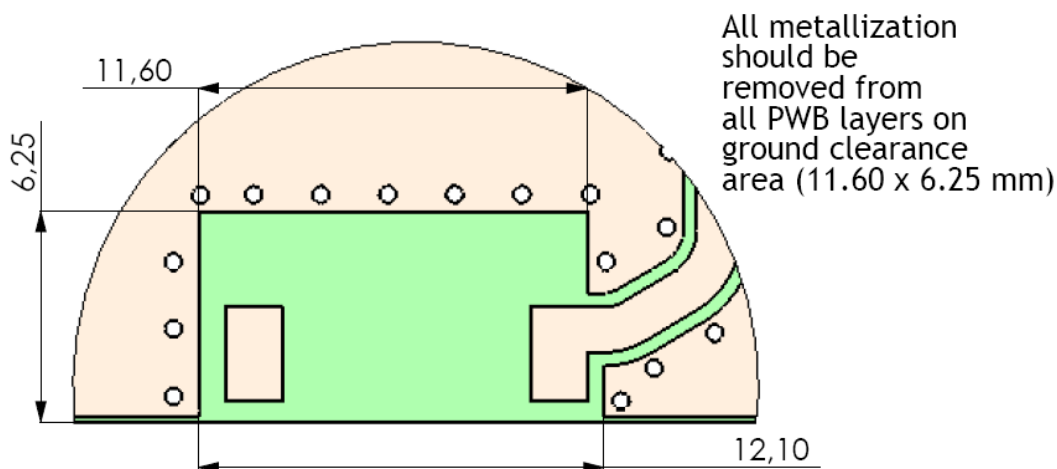

Opening in bottom/inner ground layers

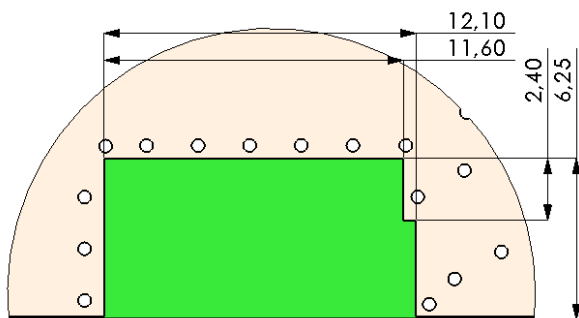

Opening in other layers (no ground/ RF)

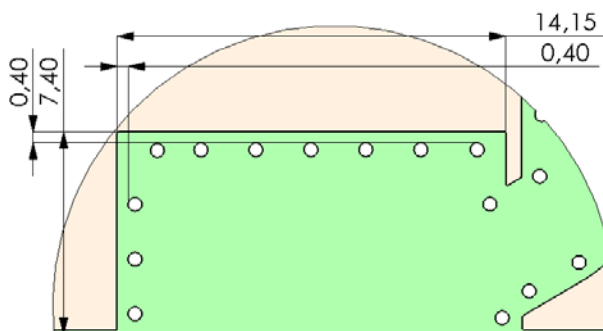

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm


Series: Chip Antenna

PART NUMBER: W3006


MECHANICAL DRAWING AND TERMINAL CONFIGURATION

Recommended Antenna Pad Dimensions on PWB Layout (top surface)

Pad dimensions in top copper

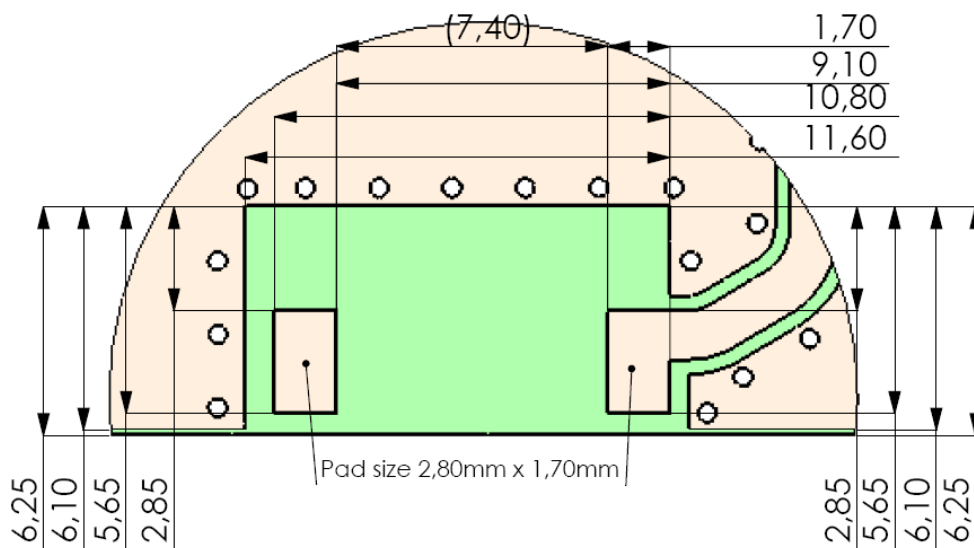

Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37mm

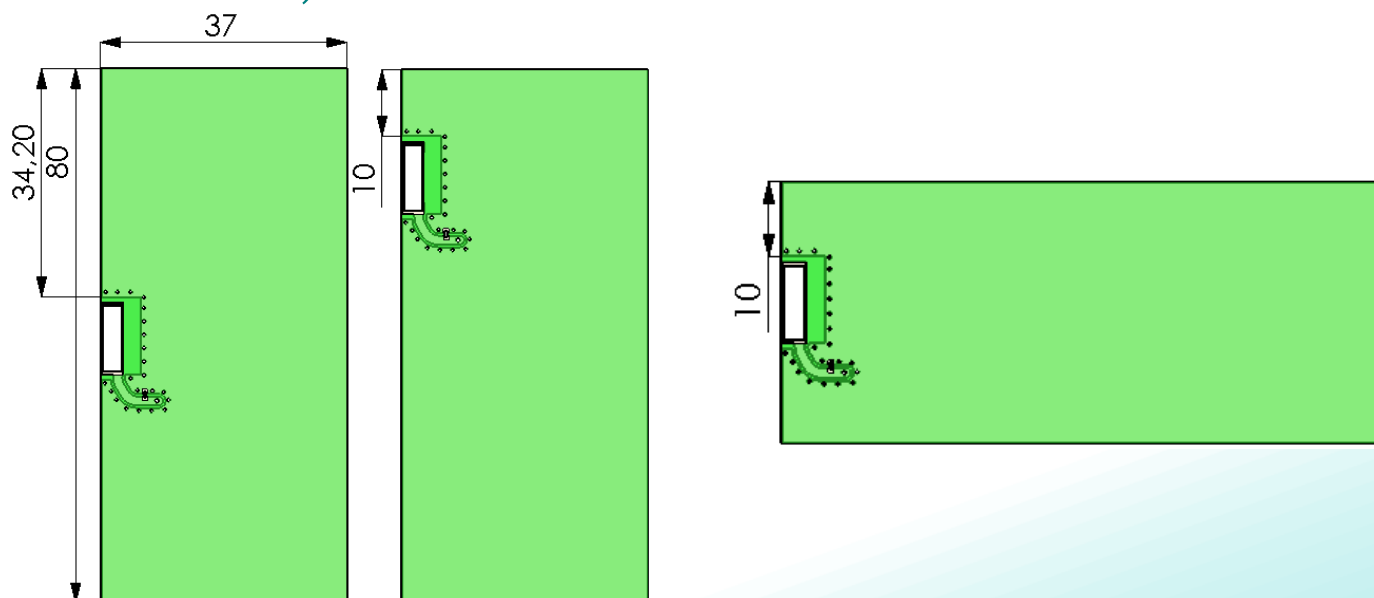

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm**


Series: Chip Antenna

PART NUMBER: W3006

Test setup



Return Loss

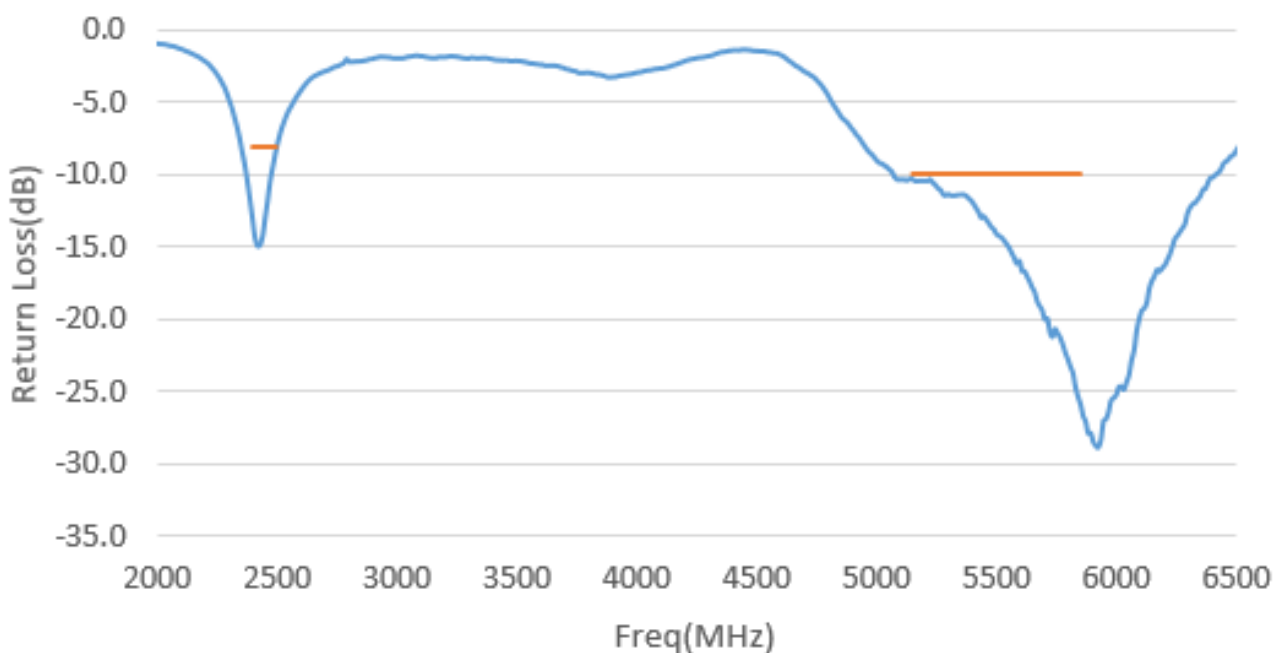

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION



This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm**

Series: Chip Antenna

PART NUMBER: W3006

CHARTS

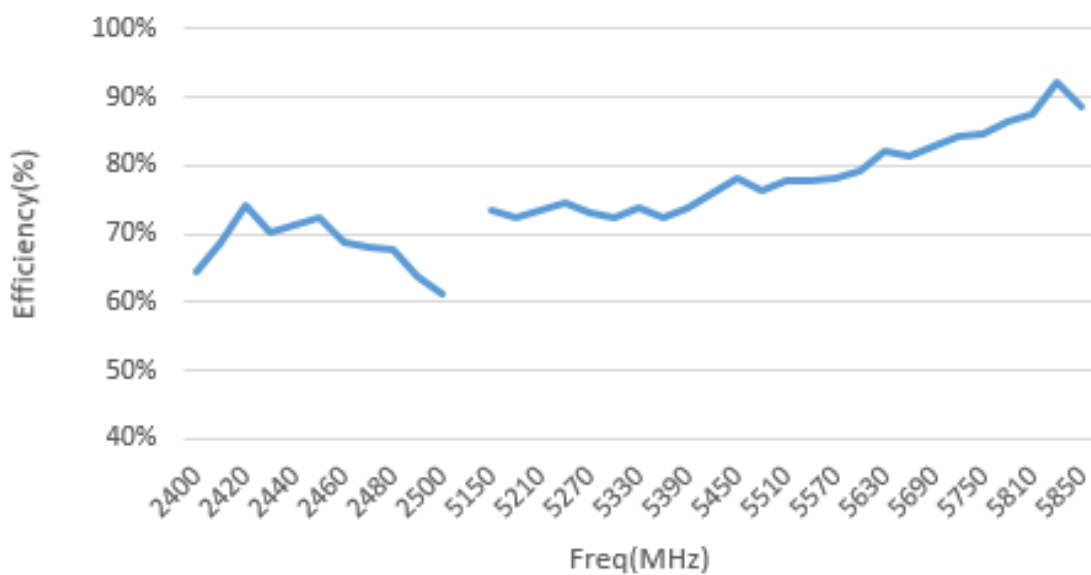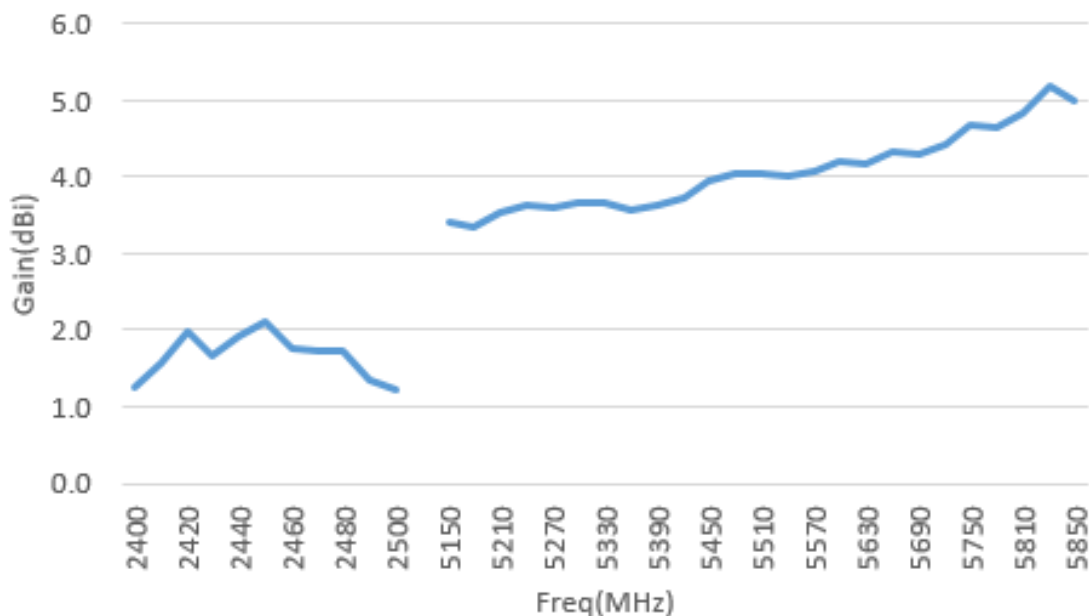

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION




This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2.4-2.5/5.15-5.85GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

CHARTS

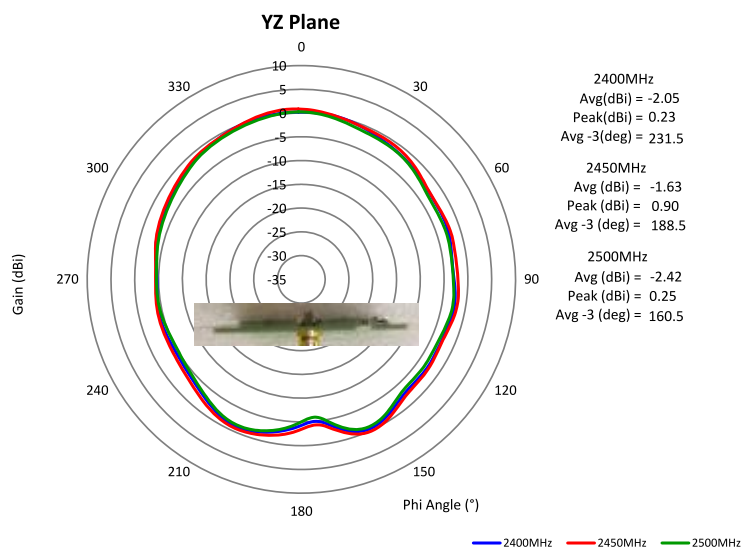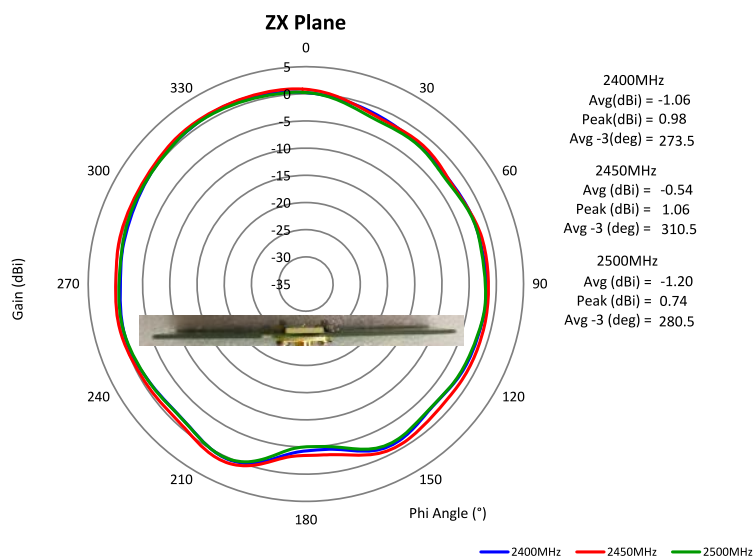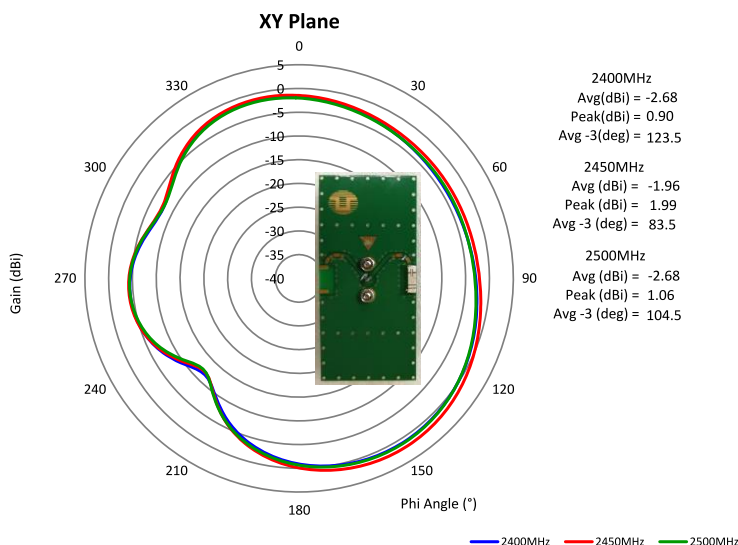

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION




This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

Description: 2.4-2.5/5.15-5.85GHz Dual band Ceramic 10x3.2x1.5mm

Series: Chip Antenna

PART NUMBER: W3006

CHARTS

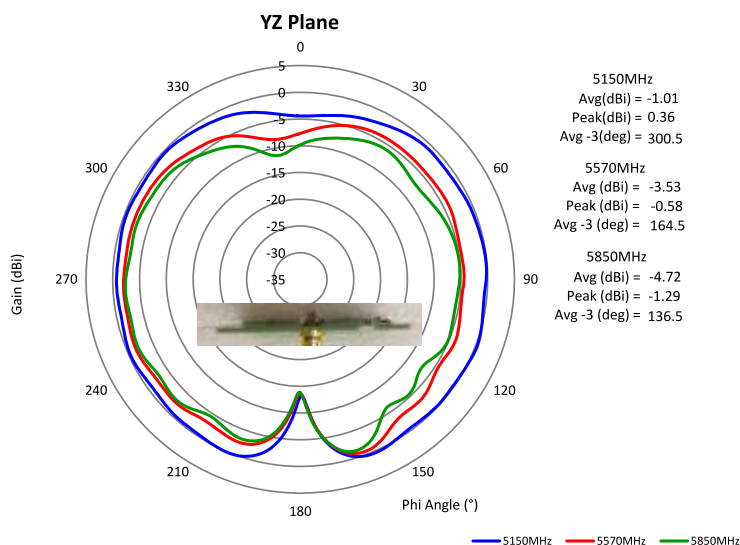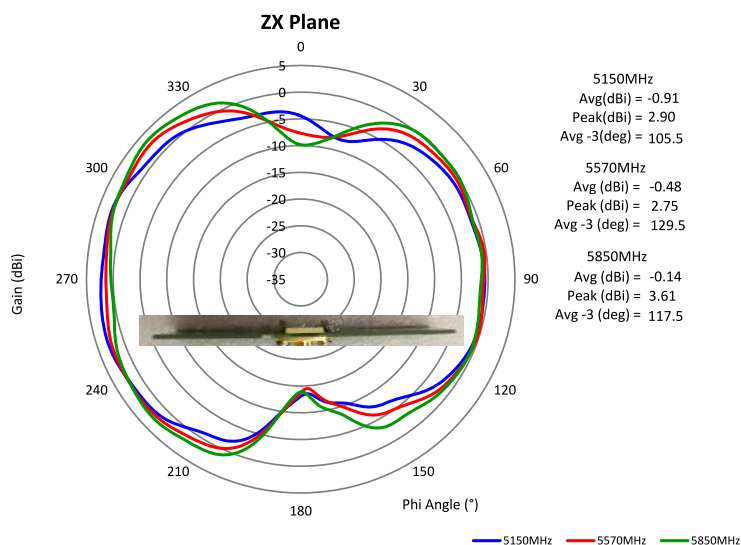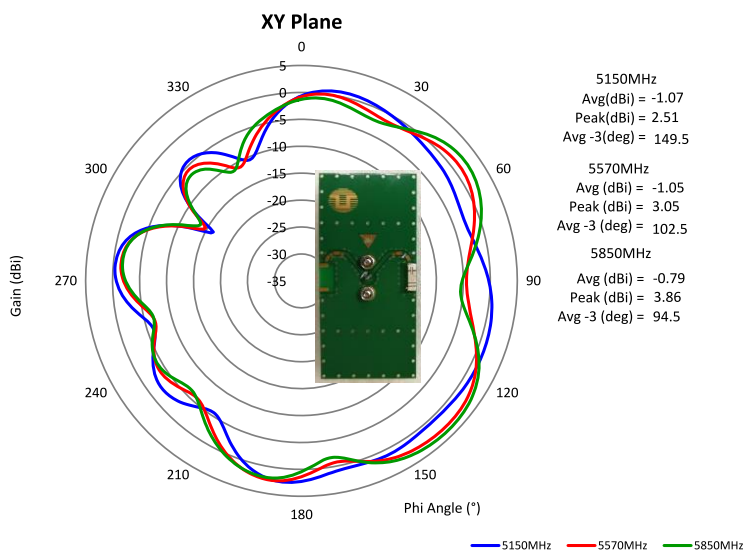

Issue: 1919

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

**Description: 2.4-2.5/5.15-5.85GHz Dual band
Ceramic 10x3.2x1.5mm**

Series: Chip Antenna

PART NUMBER: W3006

PACKAGING



1000pcs antennas per 7" reel

3pcs 7" reel per inner package box

2pcs inner box per out box

Total 6000pcs antenna per out box

Out box size: 390mmx215mmx165mm

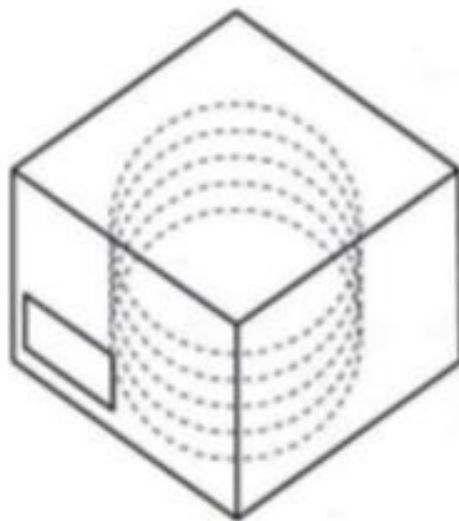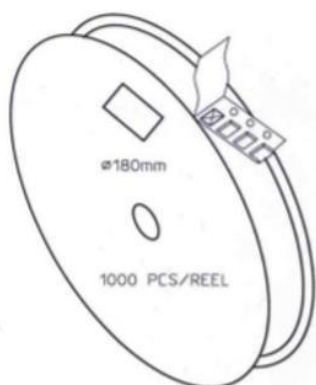

LEVEL

NOT MOISTURE SENSITIVE

1

These Devices do not require special storage conditions provided:

1. They are maintained at conditions equal to or less than 30°C and 85% RH.
2. They are solder reflowed at a peak body temperature which does not exceed 260°C.

Note: Level and body temperature defined by IPC/JEDEC J-STD-020