

LoRa Module

RAK811

Datasheet V1.1

© 2016 Rakwireless all rights reserved .

Mentioned in this document , the actual company and product names, trademarks are their respective owners.

After update the new version, this document without prior notice.

Content

1. General Description	1
2. Features	2
3. System Block Diagram	3
4. Hardware Description	4
4.1 Pin Outline	4
4.2 Pin definition	4
4.3 Physical Dimensions	6
5. General Specification	7
5.1 General specification	7
5.2 Recommended Operating Rating	7
5.3 Specification	7
6. Layout Recommendation	8
7. Recommended Reflow Profile	9
8. Label information	12
9. Contact information	13
10 Change Note	14

1. General Description

RAK811 Low-Power Long Range LoRa Technology Transceiver module, provides an easy to use, small size, low-power solution for long range wireless data transmission.

First, The RAK811 module complies with the latest LoRaWAN Class A & C protocol specifications, it is simple to access LWPA IOT platforms, such as Actility etc. Second, it also support Lora Point to Point communications, this function can help customers implement their own private long range Lora network fast.

Module integrates semtech SX1276 and stm32L, offer user an serials At commands with UART Interface .It is easy to accomplish their applications, such as simple long range sensor data applications with external host MCU, low-power feature is suitable for battery applications.

This compact module is a total solution which developing of LORA-wan protocol techniques. The module' s applications as following:

1. Automated Meters Reading
2. Home and Building Automation
3. Wireless Alarm and Security Systems
4. Industrial Monitoring and Control
5. Long Range Irrigation Systems

2. Features

- Long Range LoraWAN operating in the 863 MHz - 928 MHz frequency bands
 - FCC Frequency range 902MHZ~928MHZ
 - CE Frequency range 863MHZ~870MHZ
 - MIC Frequency range 921MHZ~927MHZ
 - KCC Frequency range 920MHZ~923MHZ
- Lora Point to Point communication in the 860MHz-1020MHz frequency
- Small size and low power
- High Receiver Sensitivity: down to -146 dBm
- FSK, GFSK, and LoRa Technology modulation
- IIP3 = -11 dBm
- Up to 15 km coverage at suburban and up to 5 km coverage at urban area

3. System Block Diagram

The block diagram of module is depicted in the figure below.

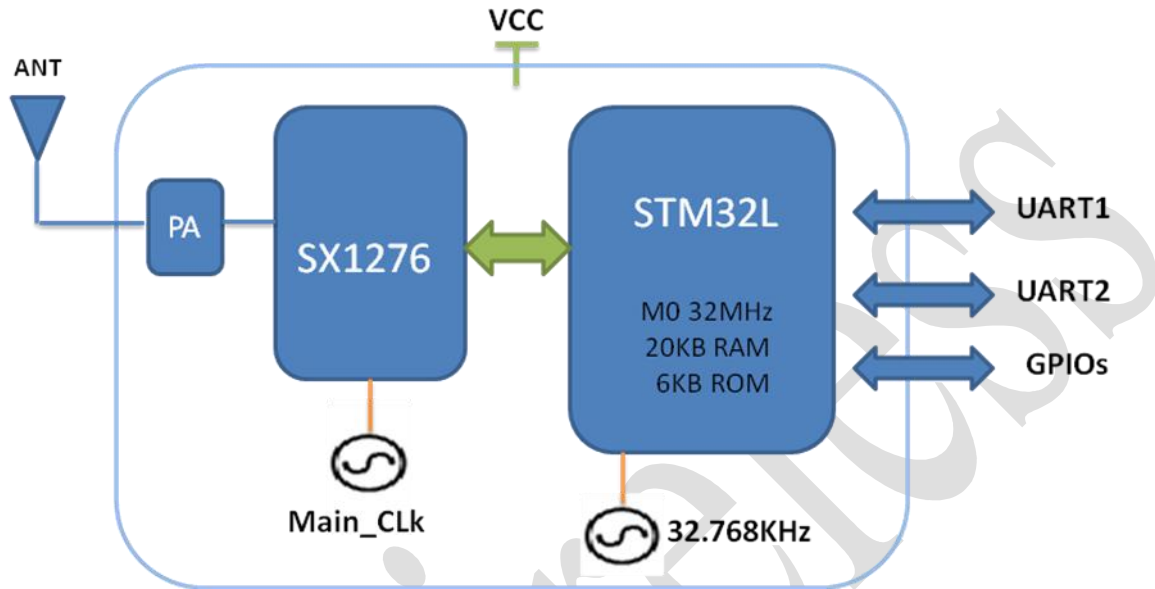


Figure 3-1 System Diagram

4. Hardware Description

4.1 Pin Outline

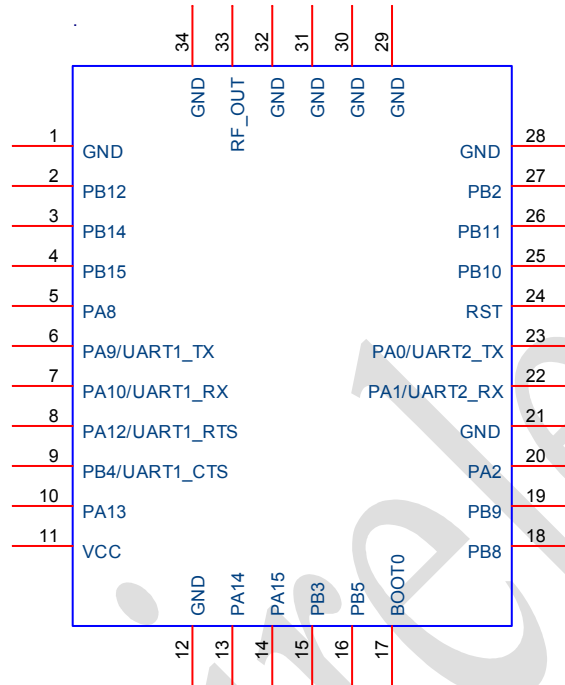


Figure 4-1 Module Pin outline

4.2 Pin definition

Table 4-1: Pin Definition

NO	Name	Type	Description
1	GND	—	Ground connections
2	PB12	I/O	B part for GPIO port
3	PB14	I/O	B part for GPIO port
4	PB15	I/O	B part for GPIO port
5	PA8	I/O	A part for GPIO port
6	PA9/UART1_TX	O	UART1 Interface
7	PA10/UART1_RX	I	UART1 Interface
8	PA12/UART1_RTS	O	UART1 Interface
9	PB4/UART1_CTS	I	UART1 Interface
10	PA13	I/O	A part for GPIO port
11	VCC	P	Main power voltage source input
12	GND	—	Ground connections

13	PA14	I/O	A part for GPIO port
14	PA15	I/O	A part for GPIO port
15	PB3	I/O	B part for GPIO port
16	PB5	I/O	B part for GPIO port
17	BOOT0	I	Boot mode GPIO enable pin
18	PB8	I/O	B part for GPIO port
19	PB9	I/O	B part for GPIO port
20	PA2	I/O	A part for GPIO port
21	GND	—	Ground connections
22	PA1/UART2_RX	I	UART2 Interface
23	PA0/UART2_TX	O	UART2 Interface
24	RST	I	Reset trigger input
25	PB10	I/O	B part for GPIO port
26	PB11	I/O	B part for GPIO port
27	PB2	I/O	B part for GPIO port
28	GND	—	Ground connections
29	GND	—	Ground connections
30	GND	—	Ground connections
31	GND	—	Ground connections
32	GND	—	Ground connections
33	RF_OUT	I/O	RF I/O port
34	GND	—	Ground connections

4.3 Physical Dimensions

(Unit: mm)

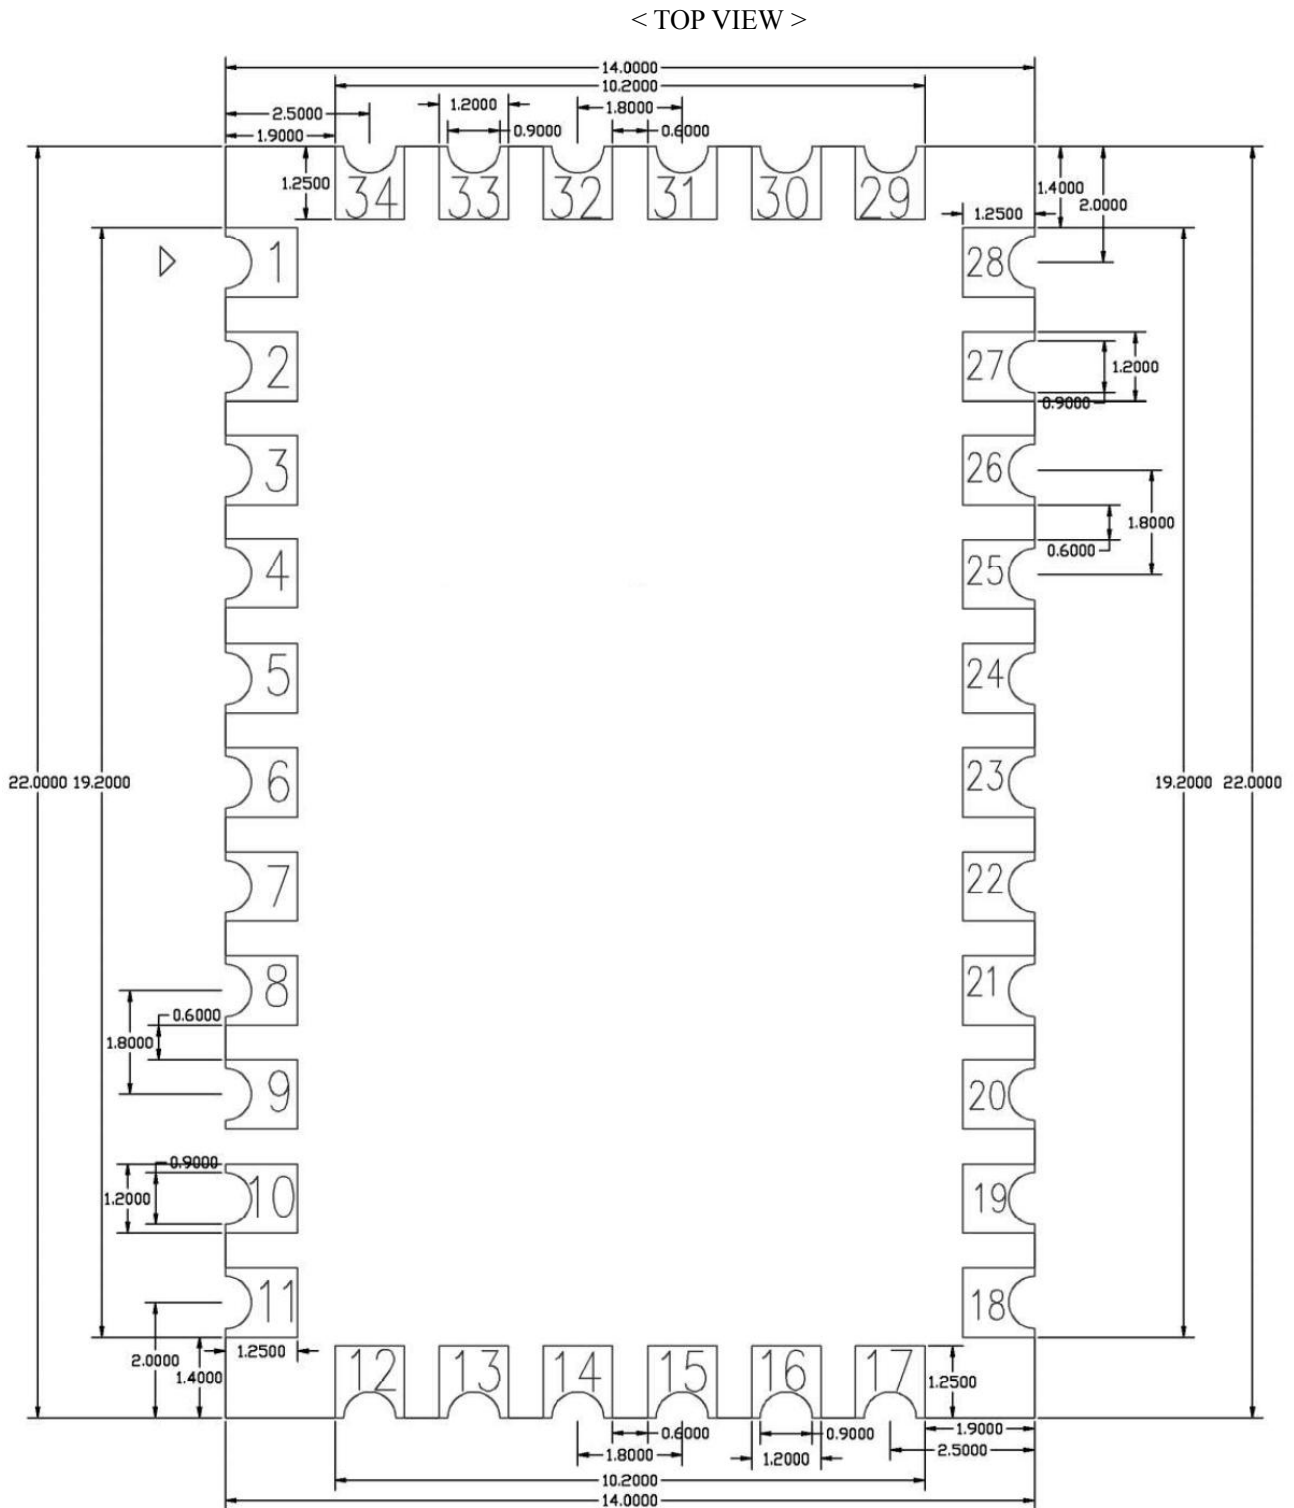


Figure 4-2 Module dimensions

5. General Specification

5.1 General specification


Model Name	RAK811
Dimension	L x W x H: 22 x 14 x 1.7 mm
Interface	UART1, UART2, GPIOs
Operating temperature	-40°C to 85°C
Storage temperature	-40°C to 85°C

5.2 Recommended Operating Rating

	Min.	Typ.	Max.	Unit
Operating Temperature	-40	25	85	deg.C
VCC	3.15	3.3	3.45	V

6. Layout Recommendation

(Unit: mm)

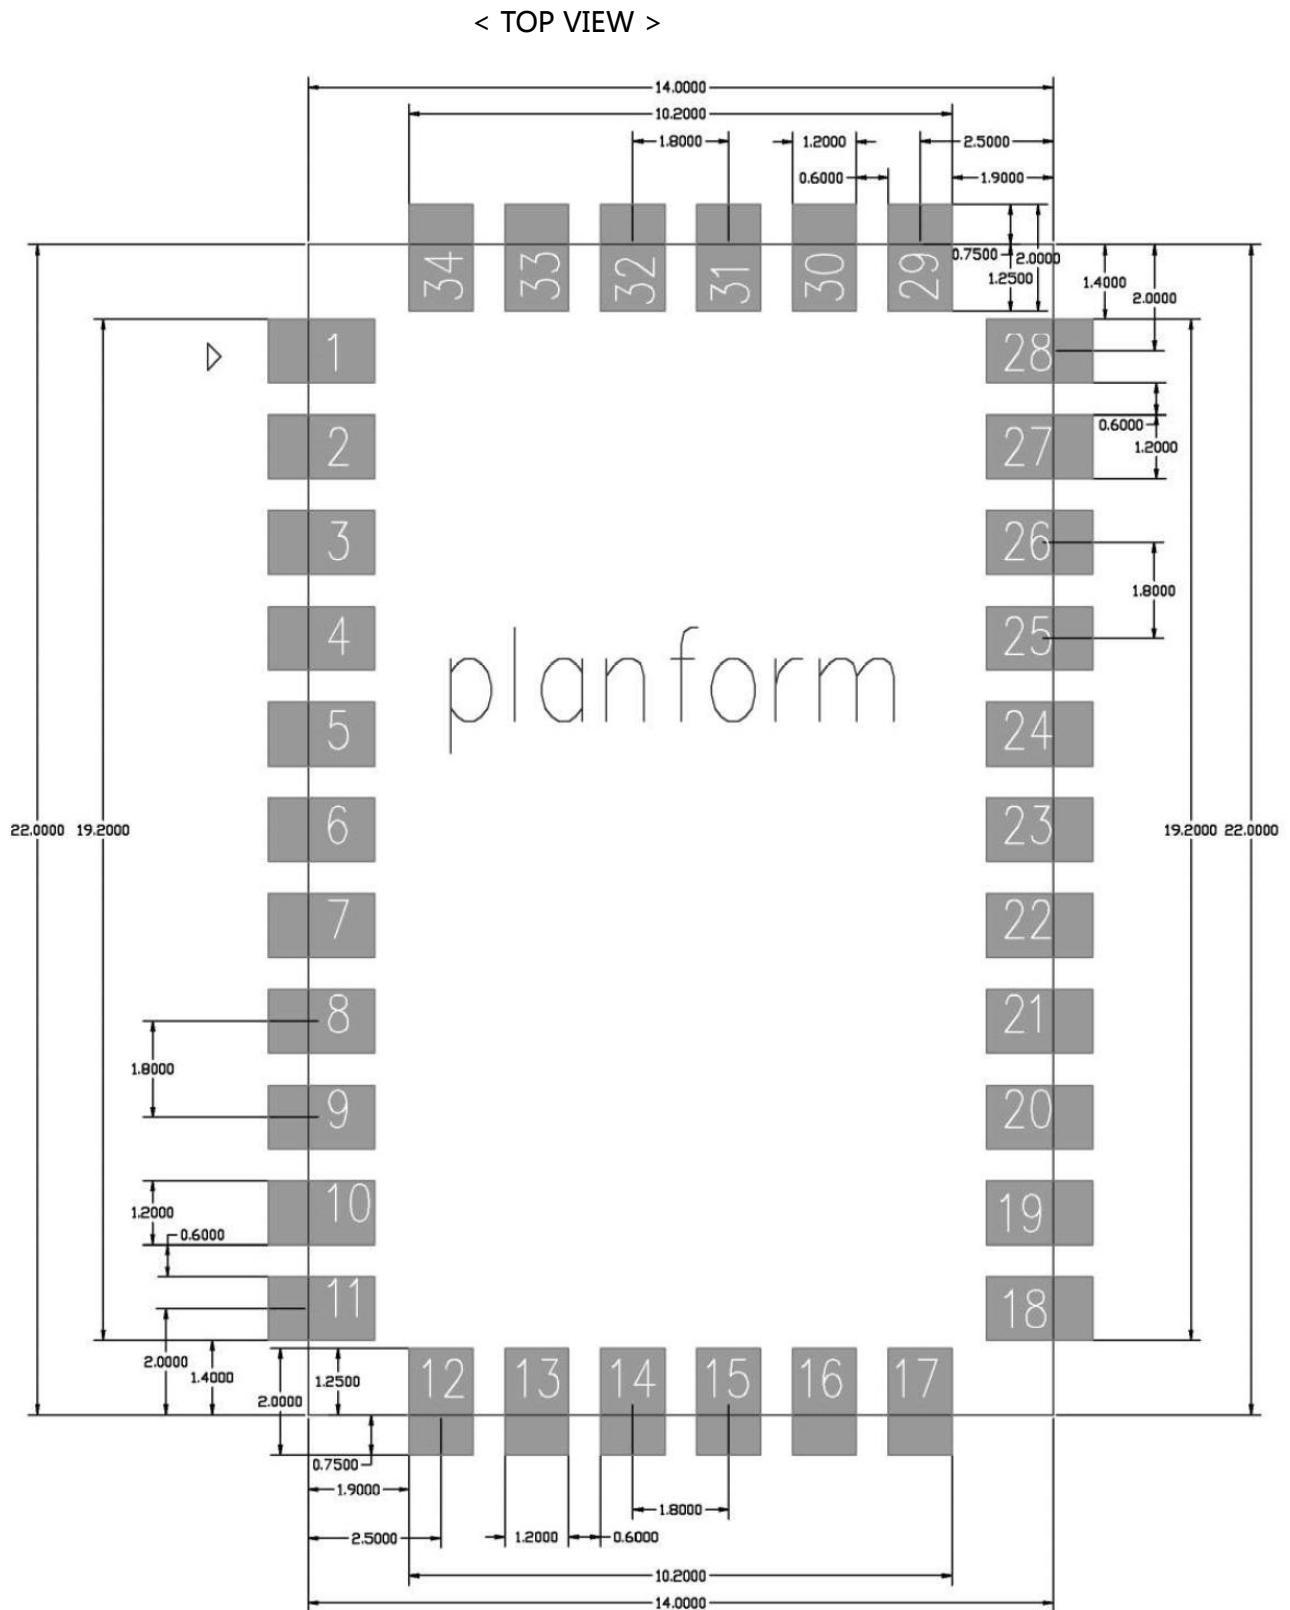


7. Recommended Reflow Profile

Referred to IPC/JEDEC standard.

Peak Temperature : $<250^{\circ}\text{C}$

Number of Times : ≤ 2 times

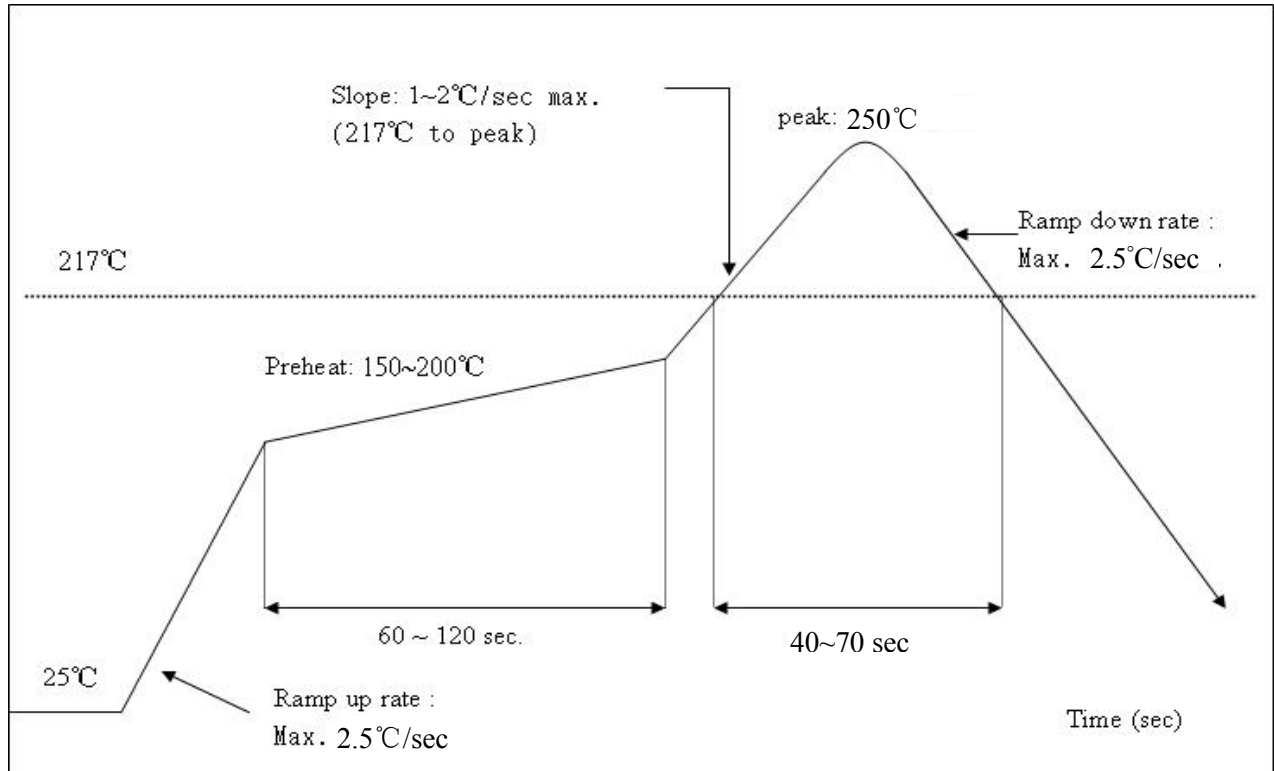

8. Order Information



FCC Caution

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This module is intended for OEM integrator. The OEM integrator is still responsible for the FCC compliance requirement of the end product, which integrates this module.

The final end product must be labeled in a visible area with the following" Contains FCC ID: 2AF6B-RAKSMR006" and the frequency can't be changed by end users.

9. Contact information

Shanghai

FAE mailbox:allan.jin@rakwireless.com

Tel : 185-1082-5762

Address: Room B205, Green light kechuang garden, 2588 Lane, Hongmei South road,
Minhang District, Shanghai

Shenzhen

FAE mailbox: steven.tang@rakwireless.com

Tel : 0755-26506594

Fax: 0755-86152201

Address: RM1007, Hangsheng Technology Building, 4th South Gaoxing Avenue,
Science and Technology Park, Nanshan District, Shenzhen, China

10. Change Note

Version	Date	Change
V1.0	2016-06-11	Draft
V1.1	2016-11-15	Add LoraP2P mode

rakwireless