

FCC Report (WIFI)

Applicant: Circle Media Inc.

Address of Applicant: 1319 SE Martin Luther King Jr. Blvd. Suite 210 Portland, OR 97214, USA

Equipment Under Test (EUT)

Product Name: Circle

Model No.: CIRC001

Trade Mark: Circle

FCC ID: 2AF7E-CIRC001

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2015

Date of sample receipt: August 15, 2016


Date of Test: August 16-22, 2016

Date of report issued: August 23, 2016

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	August 23, 2016	Original

Tested By:*Edward Pan***Date:***August 23, 2016*

Project Engineer**Check By:***Andy Wu***Date:***August 23, 2016*

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST FACILITY	7
5.6 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 CHANNEL BANDWIDTH	16
7.5 POWER SPECTRAL DENSITY	25
7.6 BAND EDGES	35
7.6.1 Conducted Emission Method	35
7.6.2 Radiated Emission Method	40
7.7 SPURIOUS EMISSION	45
7.7.1 Conducted Emission Method	45
7.7.2 Radiated Emission Method	54
8 TEST SETUP PHOTO	69
9 EUT CONSTRUCTIONAL DETAILS	71

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	$\pm 4.34\text{dB}$	(1)
Radiated Emission	30MHz ~ 1000MHz	$\pm 4.24\text{dB}$	(1)
Radiated Emission	1GHz ~ 26.5GHz	$\pm 4.68\text{dB}$	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	$\pm 3.45\text{dB}$	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 Client Information

Applicant:	Circle Media Inc.
Address of Applicant:	1319 SE Martin Luther King Jr. Blvd. Suite 210 Portland, OR 97214, USA
Manufacturer:	Circle Media Inc.
Address of Manufacturer:	1319 SE Martin Luther King Jr. Blvd. Suite 210 Portland, OR 97214, USA

5.2 General Description of EUT

Product Name:	Circle
Model No.:	CIRC001
Operation Frequency:	802.11b/802.11g/802.11n(HT20): 2412MHz~2462MHz 802.11n(HT40): 2422MHz~2452MHz
Channel numbers:	802.11b/802.11g /802.11n(HT20): 11 802.11n(HT40): 7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n(H20)/802.11n(H40): Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	Integral antenna
Antenna gain:	Antenna 1: 2.0dBi (declare by Applicant) Antenna 2: 2.0dBi (declare by Applicant)
Power supply:	Adapter Model: KA1517-0502000USU Input: AC 100-240V, 50/60Hz, 0.35A Max Output: DC 5.0V, 2000mA

Note: MIMO technology
Directional gain: 5.01dBi

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20)	802.11n(HT40)
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

5.3 Test mode

Transmitting mode	Keep the EUT in MIMO TX mode
<i>Remark: During the test, the dutycycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

5.4 Description of Support Units

None.

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone,
Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list


Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	June. 29 2016	June. 28 2017
4	Loop Antenna	Zhinan	ZN30900A	GTS534	June. 29 2016	June. 28 2017
5	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	June. 29 2016	June. 28 2017
6	Double-ridged horn antenna	SCHWARZBECK	9120D	GTS208	June. 29 2016	June. 28 2017
7	Horn Antenna	ETS-LINDGREN	3160-09	GTS218	June. 29 2016	June. 28 2017
8	RF Amplifier	HP	8347A	GTS204	June. 29 2016	June. 28 2017
9	RF Amplifier	HP	8349B	GTS206	June. 29 2016	June. 28 2017
10	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	June. 29 2016	June. 28 2017
11	PSA Series Spectrum Analyzer	Agilent	E4440A	GTS536	June. 29 2016	June. 28 2017
12	Universal Radio Communication tester	ROHDE&SCHWARZ	CMU 200	GTS538	June. 29 2016	June. 28 2017
13	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
14	Coaxial Cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
15	Coaxial Cable	GTS	N/A	GTS211	June. 29 2016	June. 28 2017
16	Coaxial Cable	GTS	N/A	GTS210	June. 29 2016	June. 28 2017
17	Coaxial Cable	GTS	N/A	GTS212	June. 29 2016	June. 28 2017
18	Thermo meter	N/A	N/A	GTS256	June. 29 2016	June. 28 2017
19	D.C. Power Supply	Instek	PS-3030	GTS232	June. 29 2016	June. 28 2017

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017
5	High voltage probe	SCHWARZBECK	TK9420	GTS537	June. 29 2016	June. 28 2017
6	ISN	SCHWARZBECK	NTFM 8158	GTS565	June. 29 2016	June. 28 2017
7	Coaxial Cable	GTS	N/A	GTS227	June. 29 2016	June. 28 2017
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017
10	10dB Pulse Limiter	Rohde & Schwarz	N/A	GTS224	June. 29 2016	June. 28 2017


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June. 29 2016	June. 28 2017

7 Test results and Measurement Data

7.1 Antenna requirement

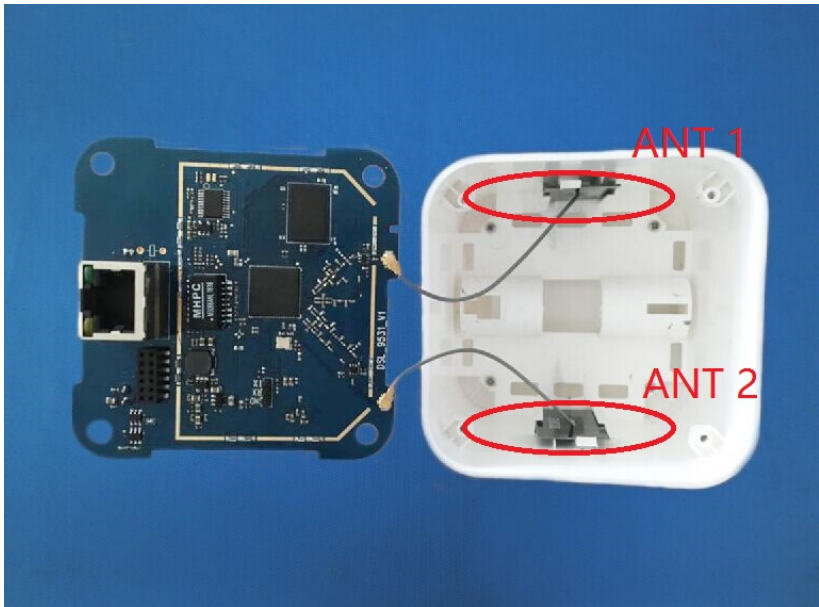
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>Both the ANT 1 and ANT 2 are integral antenna, the best case gain of the antenna are 2.0dBi. This is a MIMO antenna and the polarity is reverse, it can not be replaced by the user.</i> 	

7.2 Conducted Emissions

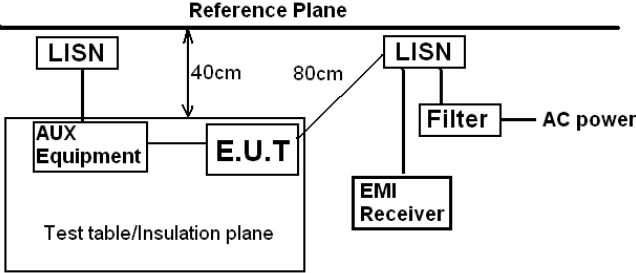Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test setup:			
	Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m		
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.3 for details		
Test results:	Pass		

Measurement data


Line:

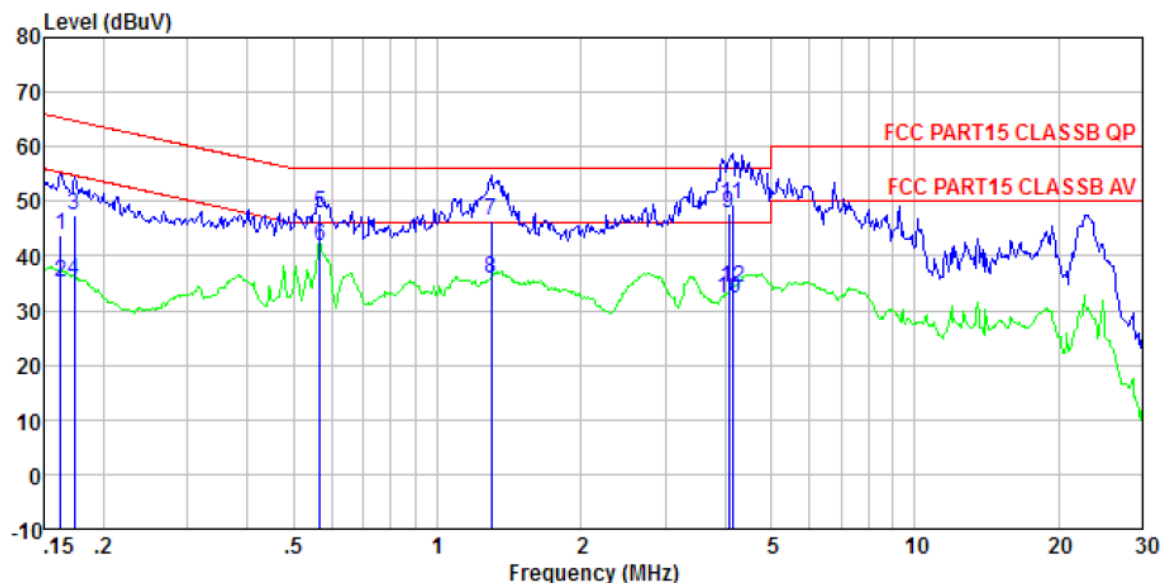

Site : Shielded room
 Condition : FCC PART15 CLASSB QP LISN-2013 LINE
 Job No. : 0173
 Test mode : WiFi mode
 Test Engineer: Boy

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	43.64	0.15	0.12	43.91	65.34	-21.43	QP
2	0.162	34.90	0.15	0.12	35.17	55.34	-20.17	Average
3	0.174	47.26	0.15	0.13	47.54	64.77	-17.23	QP
4	0.174	35.26	0.15	0.13	35.54	54.77	-19.23	Average
5	0.567	47.50	0.13	0.12	47.75	56.00	-8.25	QP
6	0.567	41.59	0.13	0.12	41.84	46.00	-4.16	Average
7	1.296	46.22	0.12	0.13	46.47	56.00	-9.53	QP
8	1.296	35.70	0.12	0.13	35.95	46.00	-10.05	Average
9	4.080	47.50	0.20	0.15	47.85	56.00	-8.15	QP
10	4.080	31.80	0.20	0.15	32.15	46.00	-13.85	Average
11	4.158	49.10	0.20	0.15	49.45	56.00	-6.55	QP
12	4.158	33.80	0.20	0.15	34.15	46.00	-11.85	Average

Neutral:

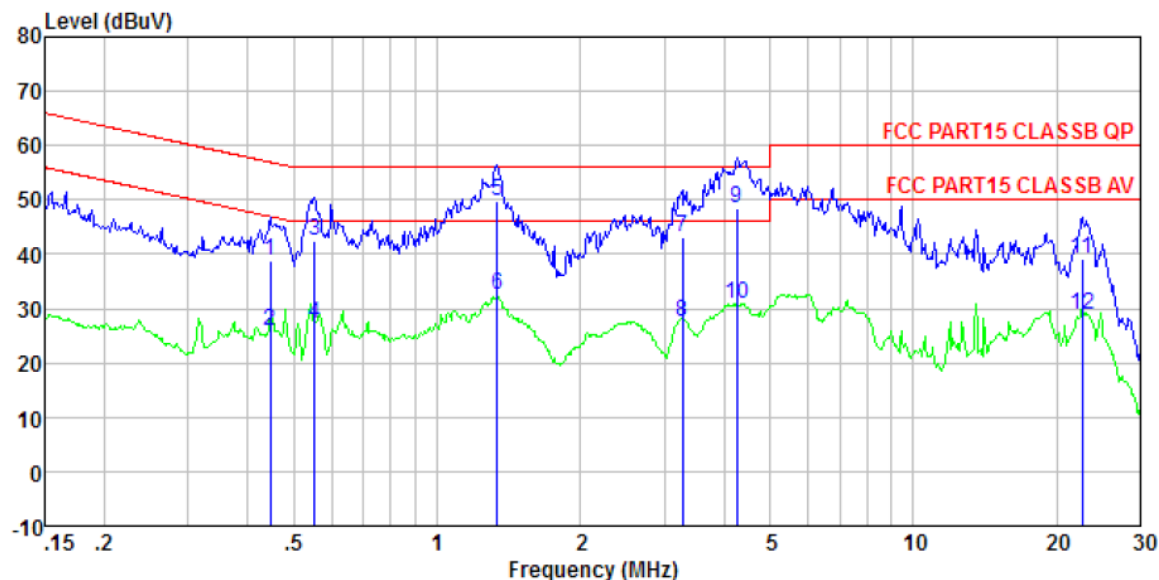


Site : Shielded room
Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL
Job No. : 0173
Test mode : WiFi mode
Test Engineer: Boy

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.447	38.54	0.06	0.11	38.71	56.93	-18.22	QP
2	0.447	25.81	0.06	0.11	25.98	46.93	-20.95	Average
3	0.552	42.26	0.07	0.11	42.44	56.00	-13.56	QP
4	0.552	27.17	0.07	0.11	27.35	46.00	-18.65	Average
5	1.338	49.50	0.09	0.13	49.72	56.00	-6.28	QP
6	1.338	32.20	0.09	0.13	32.42	46.00	-13.58	Average
7	3.276	42.85	0.13	0.15	43.13	56.00	-12.87	QP
8	3.276	27.24	0.13	0.15	27.52	46.00	-18.48	Average
9	4.269	48.20	0.14	0.15	48.49	56.00	-7.51	QP
10	4.269	30.50	0.14	0.15	30.79	46.00	-15.21	Average
11	22.655	38.19	0.82	0.23	39.24	60.00	-20.76	QP
12	22.655	27.90	0.82	0.23	28.95	50.00	-21.05	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

7.3 Conducted Peak Output Power

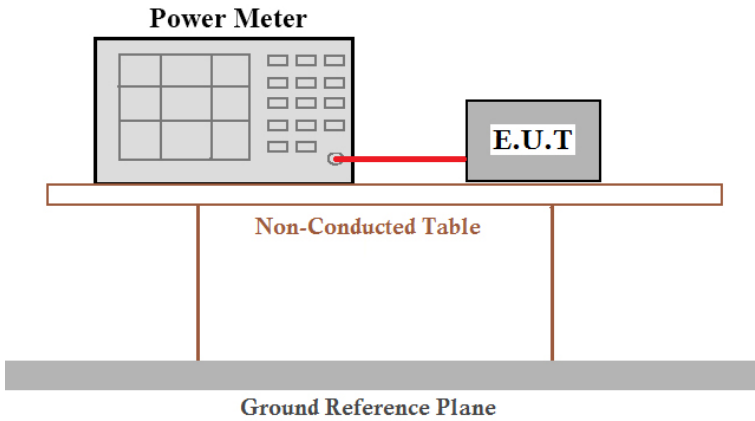
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	 The diagram illustrates the test setup. A Power Meter is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Power Meter and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two vertical legs. Below the table is a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Test mode	Channel	Read Level (dBm)		Read Level (mW)	Total Peak Output Power (mW)	Total Peak Output Power (dBm)	Limit (dBm)	Result
802.11b	Lowest	ANT1	13.23	21.04	40.95	16.12	30	Pass
		ANT2	12.99	19.91				
	Middle	ANT1	13.33	21.53	40.67	16.09		
		ANT2	12.82	19.14				
	Highest	ANT1	13.60	22.91	43.56	16.39		
		ANT2	13.15	20.65				
802.11g	Lowest	ANT1	13.00	19.95	35.64	15.52		
		ANT2	11.67	14.69				
	Middle	ANT1	13.01	20.00	35.42	15.49		
		ANT2	11.88	15.42				
	Highest	ANT1	13.00	19.95	37.21	15.71		
		ANT2	12.37	17.26				

Test mode	Channel	Read Level (dBm)		Read Level (mW)	Total Peak Output Power (mW)	Total Peak Output Power (dBm)	Limit (dBm)	Result
802.11n (HT20)	Lowest	ANT1	12.52	17.86	32.86	15.17	30	Pass
		ANT2	11.76	15.00				
	Middle	ANT1	12.60	18.20	32.26	15.09		
		ANT2	11.48	14.06				
	Highest	ANT1	12.62	18.28	34.95	15.43		
		ANT2	12.22	16.67				
802.11n (HT40)	Lowest	ANT1	12.26	16.83	32.35	15.10		
		ANT2	11.91	15.52				
	Middle	ANT1	12.18	16.52	32.30	15.09		
		ANT2	11.98	15.78				
	Highest	ANT1	12.63	18.32	34.32	15.36		
		ANT2	12.04	16.00				

7.4 Channel Bandwidth

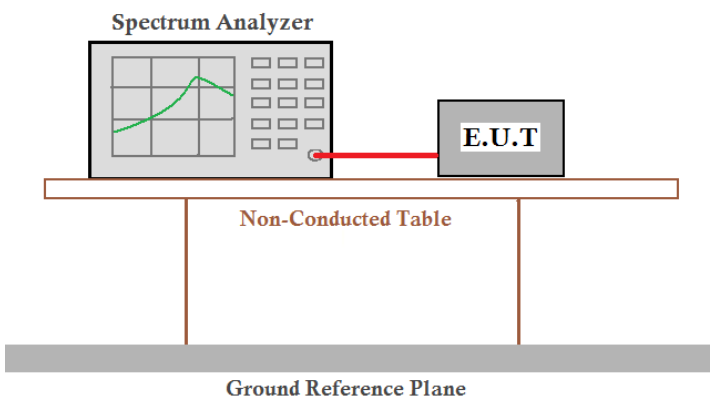Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Antenna 1:

Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	10.212	16.383	17.306	35.307	>500	Pass
Middle	10.188	16.393	17.011	35.261		
Highest	10.065	16.392	17.408	35.266		


Antenna 2:

Test CH	Channel Bandwidth (MHz)				Limit(KHz)	Result
	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)		
Lowest	9.562	16.366	17.517	35.303	>500	Pass
Middle	9.035	16.454	17.329	35.778		
Highest	9.677	16.395	17.524	35.494		


Antenna 1:

Test plot as follows:


Test mode:	802.11b
------------	---------

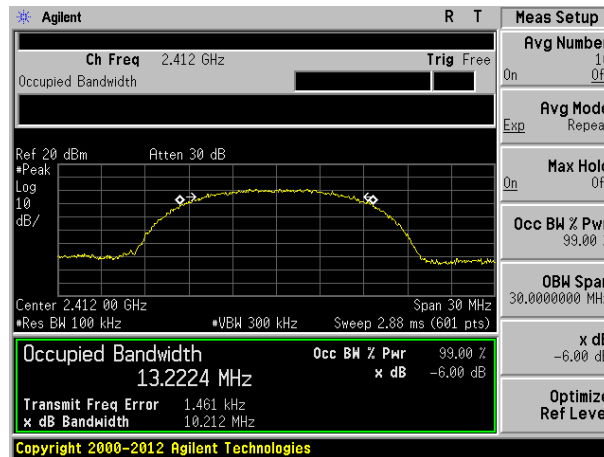

Lowest channel

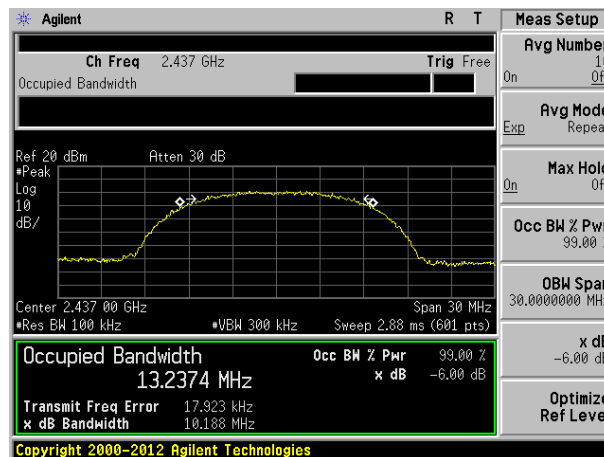


Middle channel

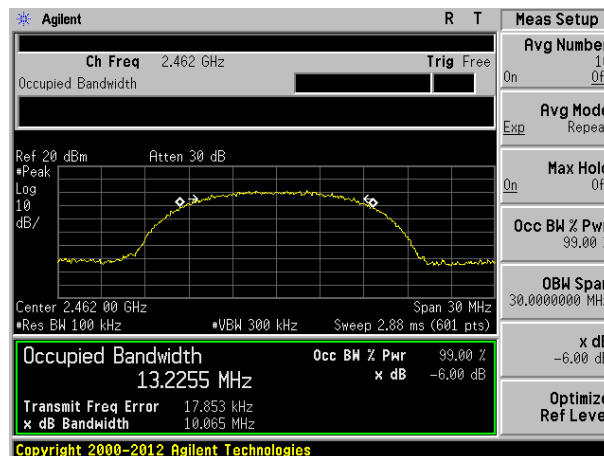


Highest channel


Test mode:	802.11g
------------	---------

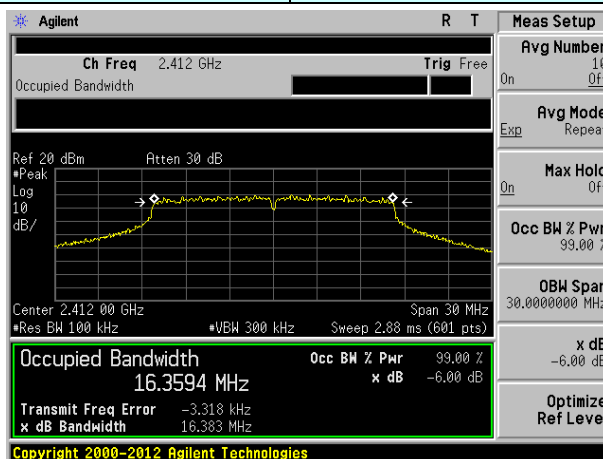

Lowest channel

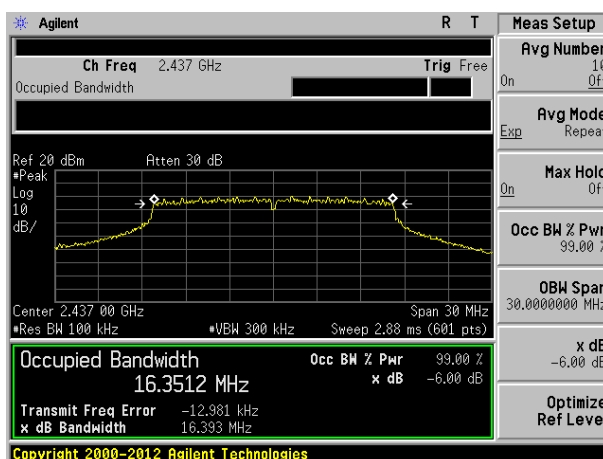


Middle channel

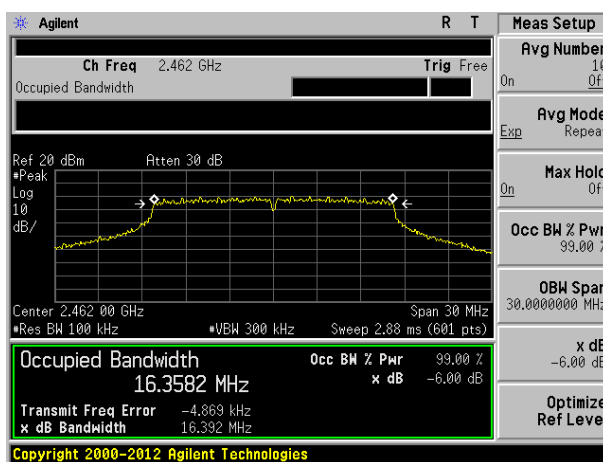


Highest channel


Test mode:	802.11n(HT20)
------------	---------------

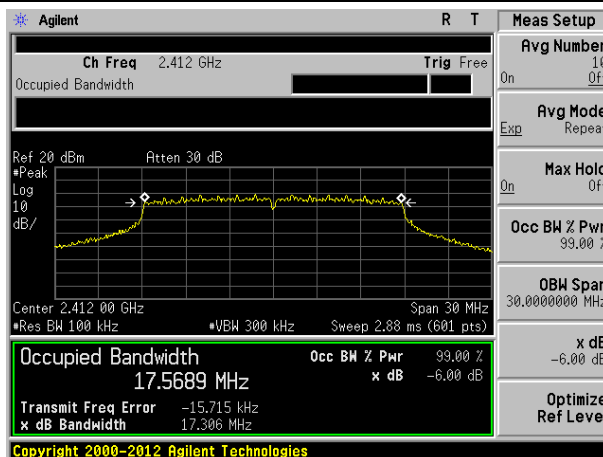

Lowest channel

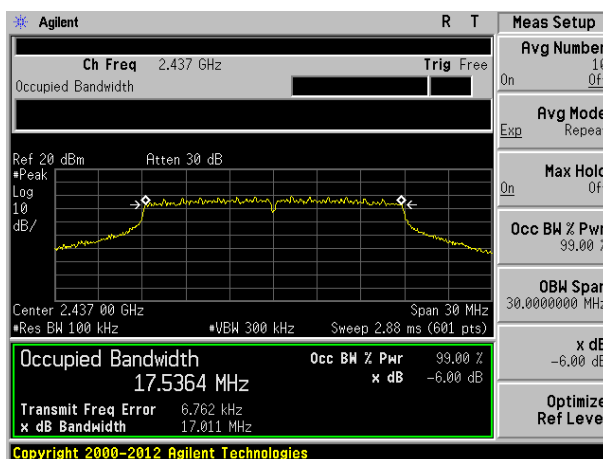


Middle channel

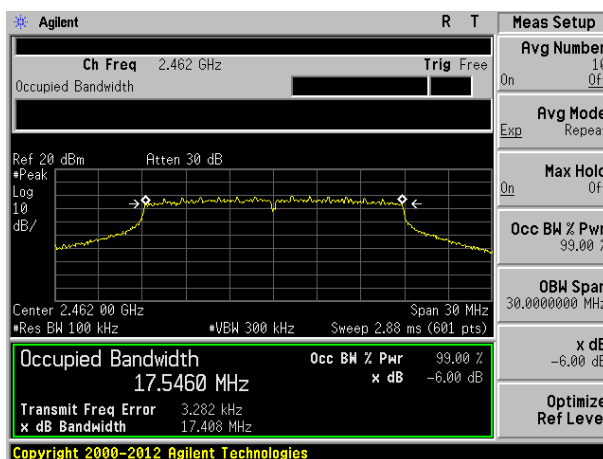


Highest channel


Test mode:	802.11n(HT40)
------------	---------------

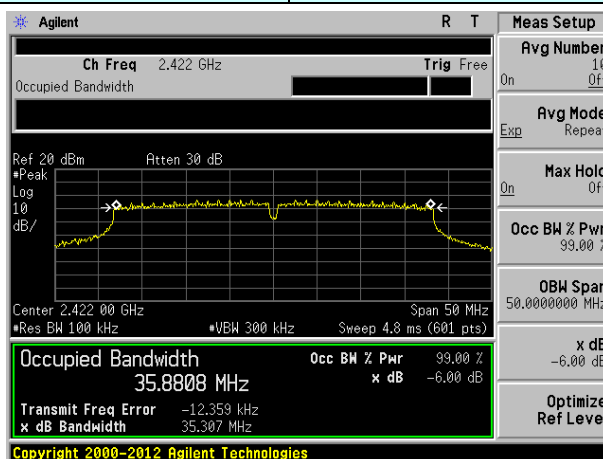

Lowest channel

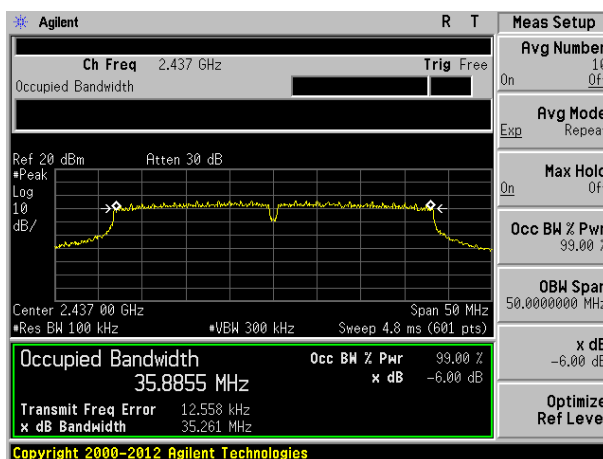

Middle channel

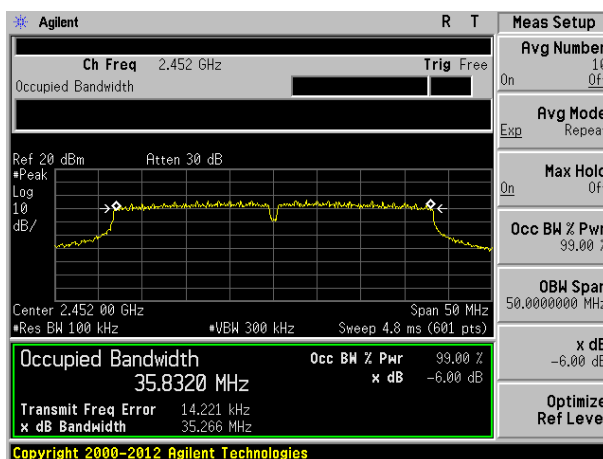


Highest channel


Antenna 2:

Test plot as follows:


Test mode:	802.11b
------------	---------

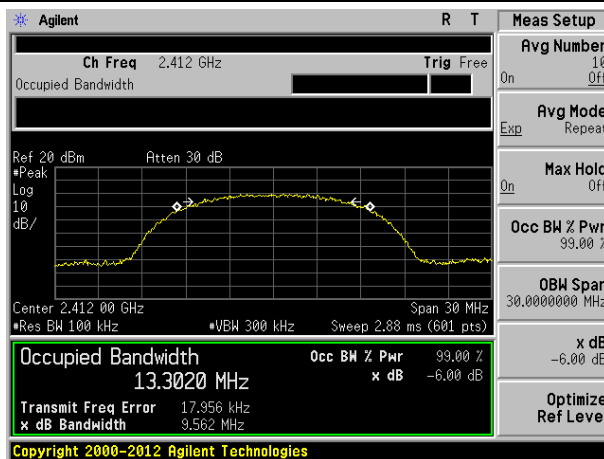

Lowest channel

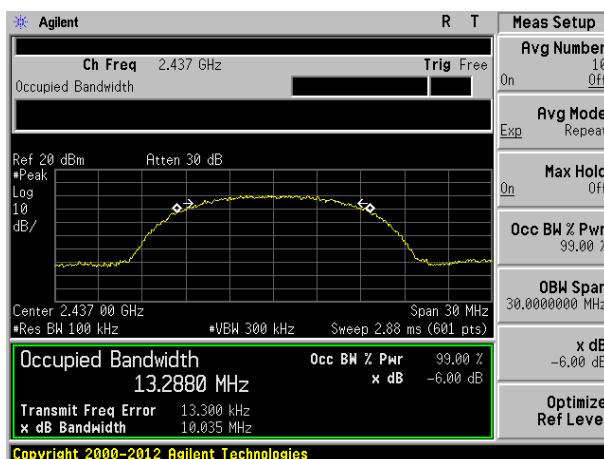


Middle channel

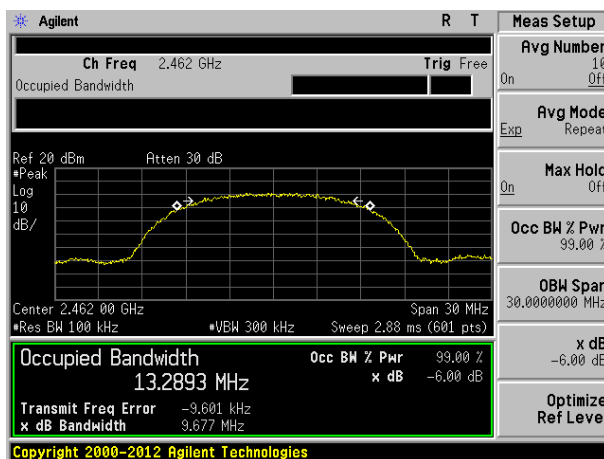


Highest channel


Test mode:	802.11g
------------	---------

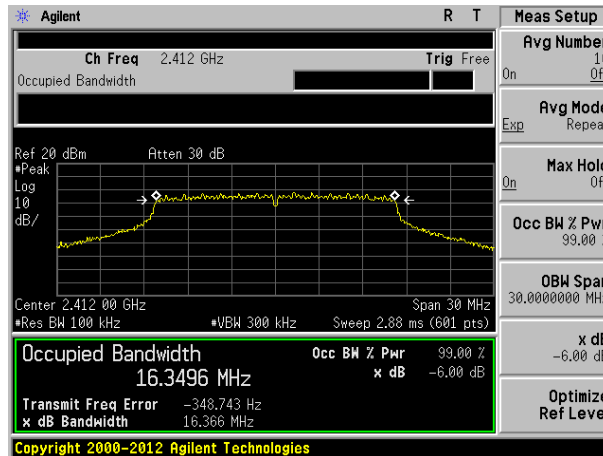

Lowest channel

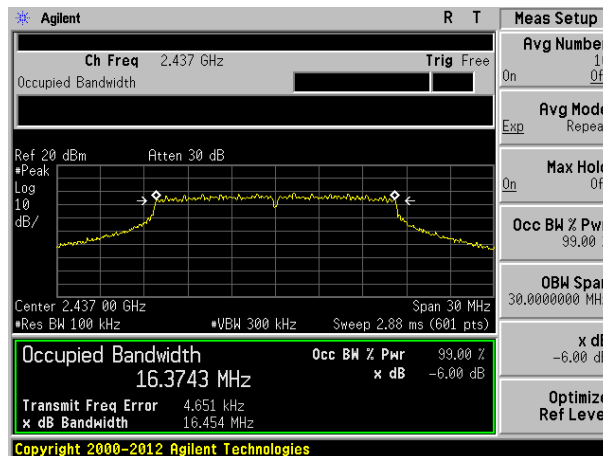


Middle channel

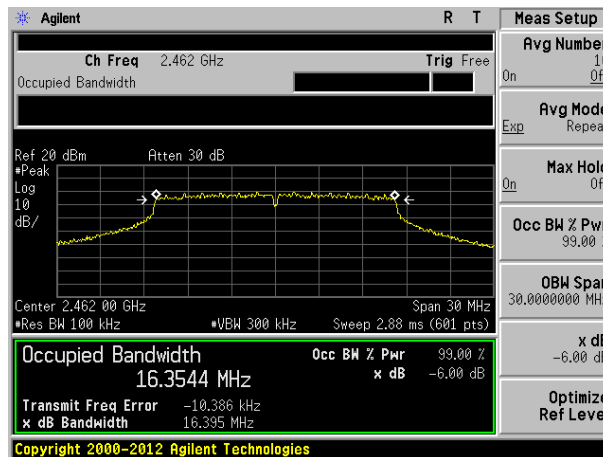


Highest channel


Test mode:	802.11n(HT20)
------------	---------------

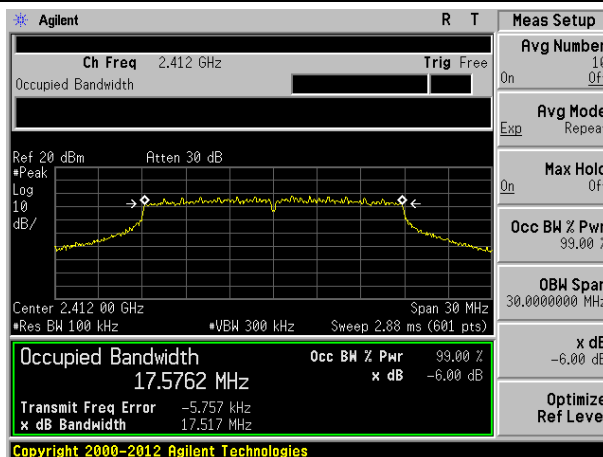

Lowest channel

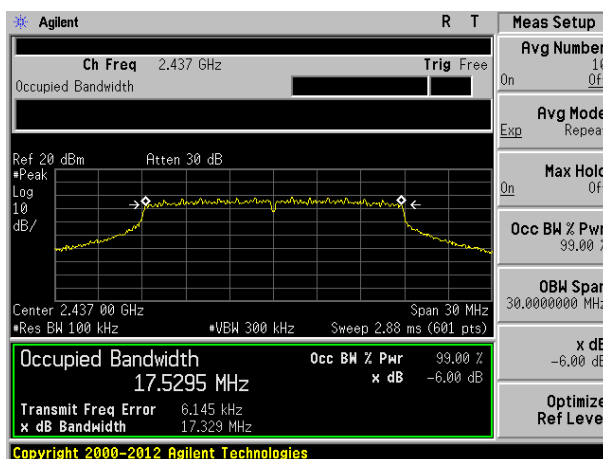


Middle channel

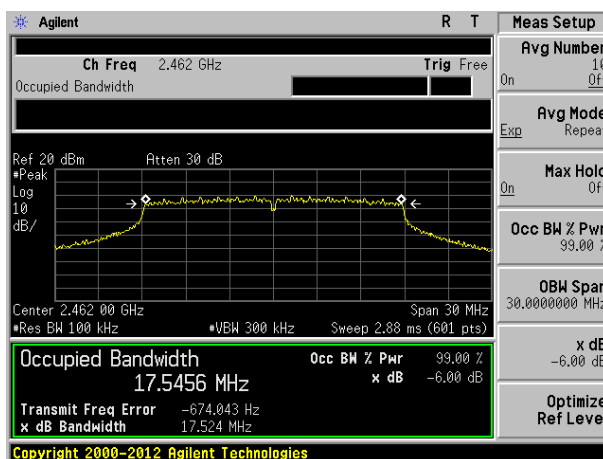


Highest channel


Test mode:	802.11n(HT40)
------------	---------------

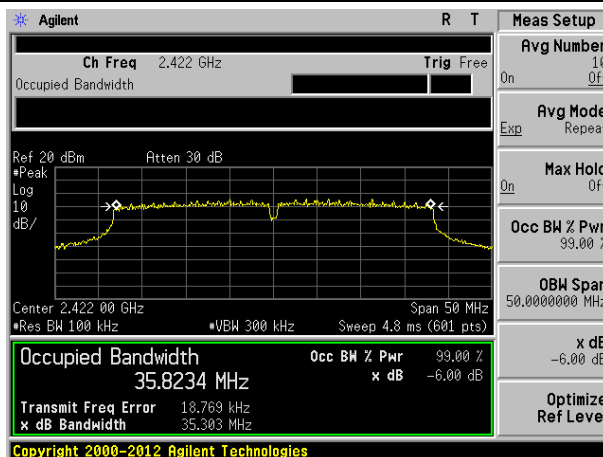

Lowest channel

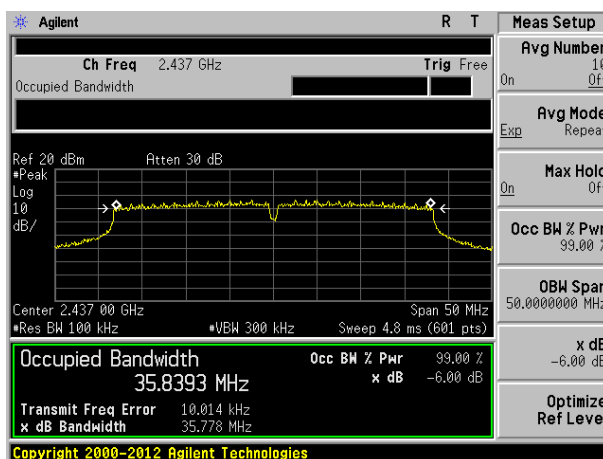


Middle channel

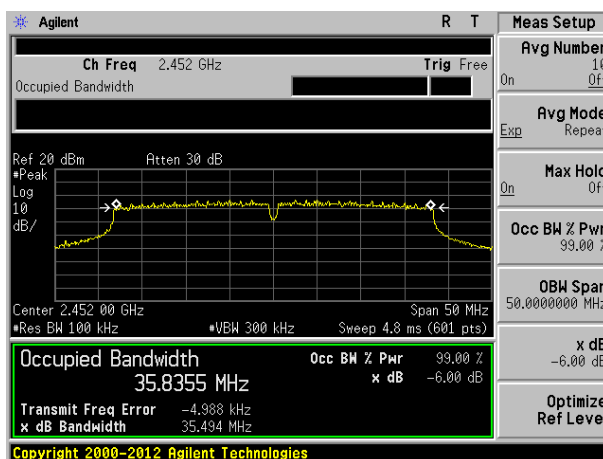

Highest channel

7.5 Power Spectral Density

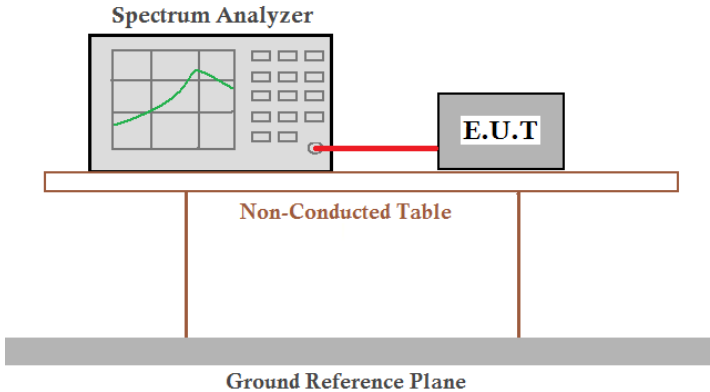Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3KHz
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Test mode	Channel	Read Level (dBm)		Read Level (mW)	Total Power Spectral Density(mW)	Total Power Spectral Density(dBm)	Limit (dBm/3 kHz)	Result
802.11b	Lowest	ANT1	0.99	1.26	2.13	3.28	8.00	Pass
		ANT2	-0.58	0.87				
	Middle	ANT1	0.80	1.20	2.20	3.42		
		ANT2	0.01	1.00				
	Highest	ANT1	1.15	1.30	2.49	3.96		
		ANT2	0.74	1.19				
802.11g	Lowest	ANT1	0.11	1.03	1.67	2.22		
		ANT2	-1.97	0.64				
	Middle	ANT1	0.02	1.00	1.72	2.36		
		ANT2	-1.41	0.72				
	Highest	ANT1	0.30	1.07	1.99	2.99		
		ANT2	-0.36	0.92				

Test mode	Channel	Read Level (dBm)		Read Level (mW)	Total Power Spectral Density(mW)	Total Power Spectral Density(dBm)	Limit (dBm/3 kHz)	Result
802.11n (HT20)	Lowest	ANT1	-1.09	0.78	1.55	1.90	8.00	Pass
		ANT2	-1.14	0.77				
	Middle	ANT1	-0.82	0.83	1.60	2.04		
		ANT2	-1.13	0.77				
	Highest	ANT1	-0.51	0.89	1.83	2.62		
		ANT2	-0.28	0.94				
802.11n (HT40)	Lowest	ANT1	-3.31	0.47	0.87	-0.60		
		ANT2	-3.98	0.40				
	Middle	ANT1	-3.99	0.40	0.81	-0.92		
		ANT2	-3.85	0.41				
	Highest	ANT1	-3.87	0.41	0.84	-0.76		
		ANT2	-3.65	0.43				


Antenna 1:

Test plot as follows:


Test mode:	802.11b
------------	---------

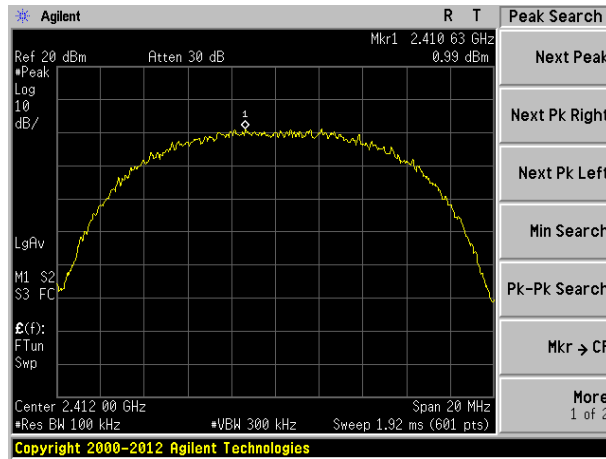

Lowest channel

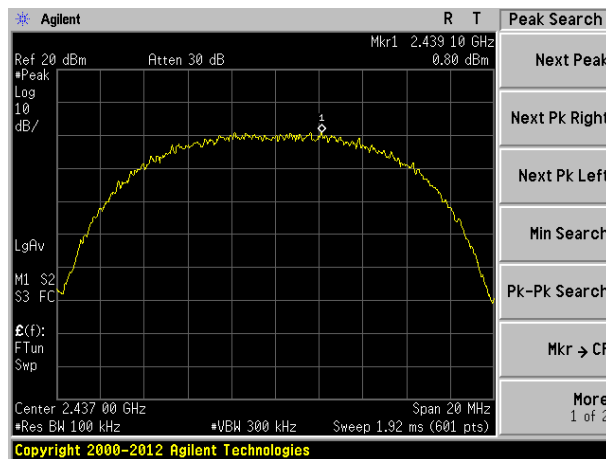


Middle channel

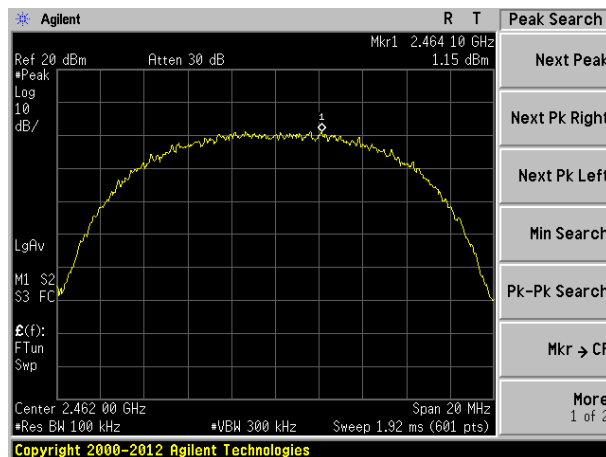


Highest channel


Test mode:	802.11g
------------	---------

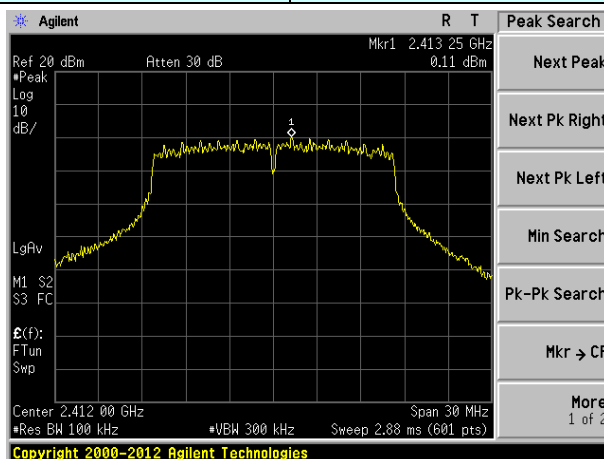

Lowest channel

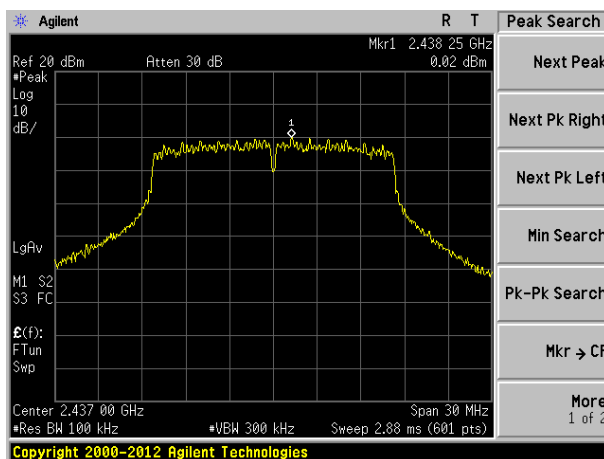


Middle channel

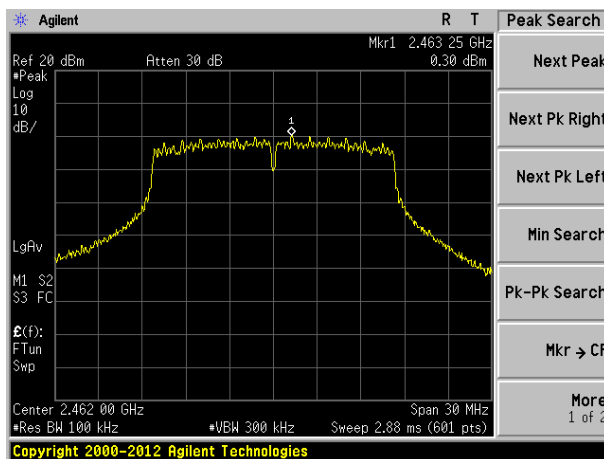


Highest channel


Test mode:	802.11n(HT20)
------------	---------------

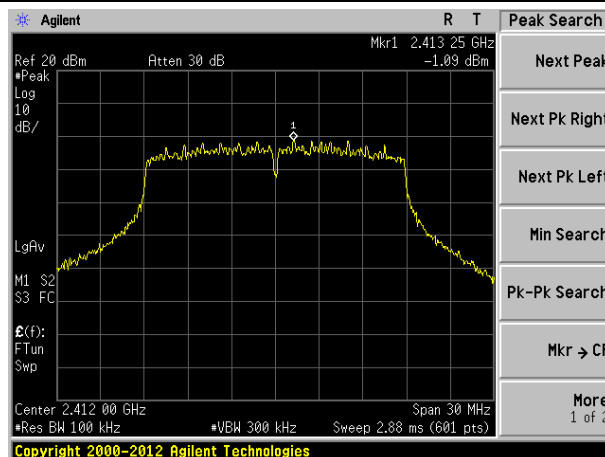

Lowest channel

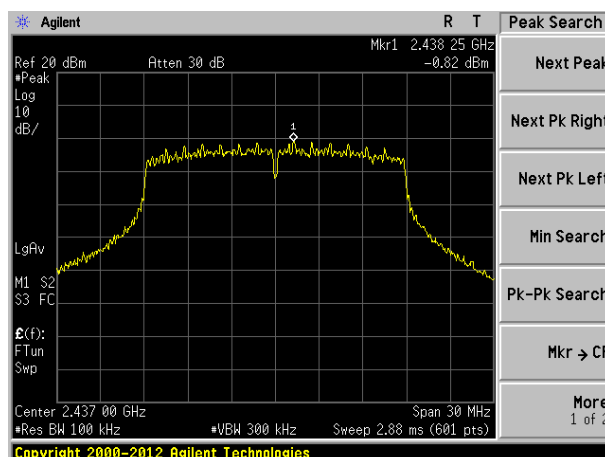


Middle channel

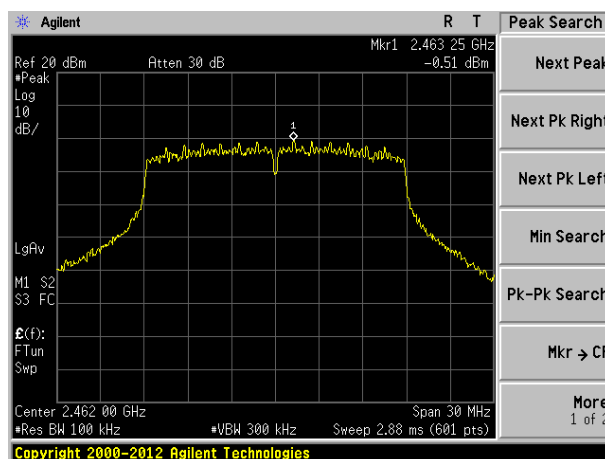


Highest channel


Test mode:	802.11n(HT40)
------------	---------------

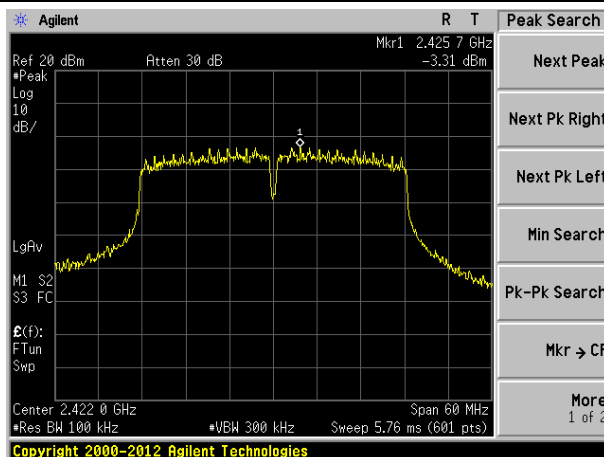

Lowest channel

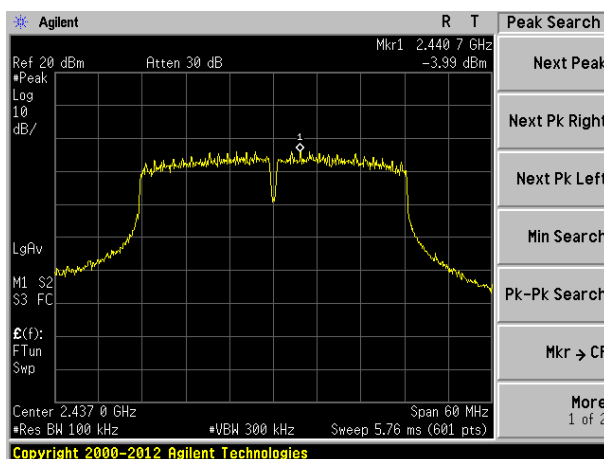


Middle channel

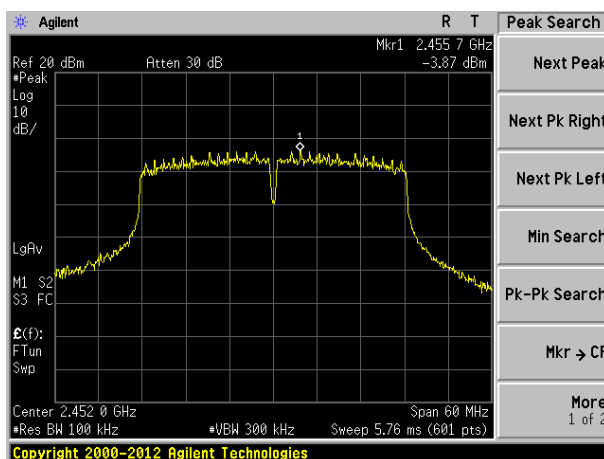


Highest channel

Antenna 2:
Test plot as follows:


Test mode:	802.11b
------------	---------

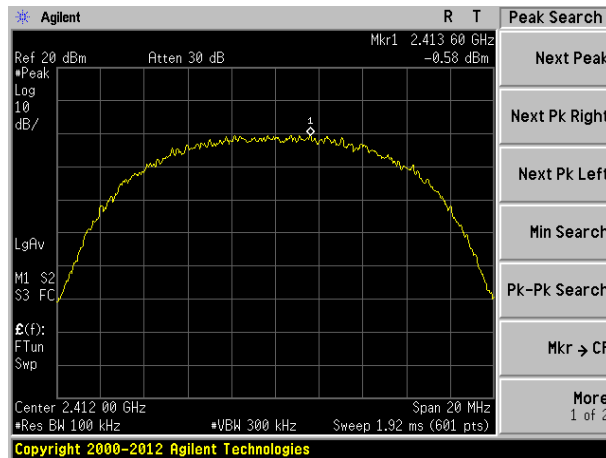

Lowest channel

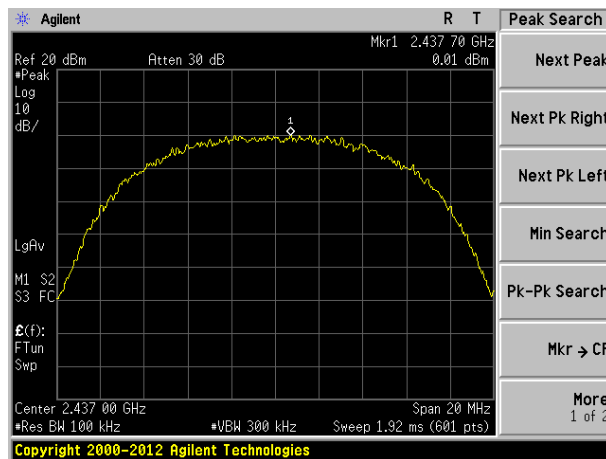


Middle channel

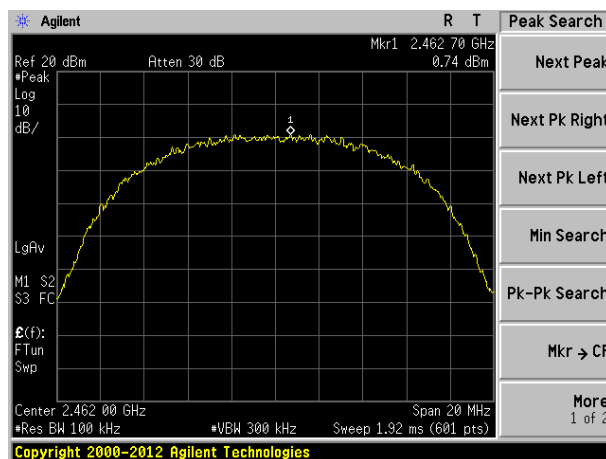


Highest channel


Test mode:	802.11g
------------	---------

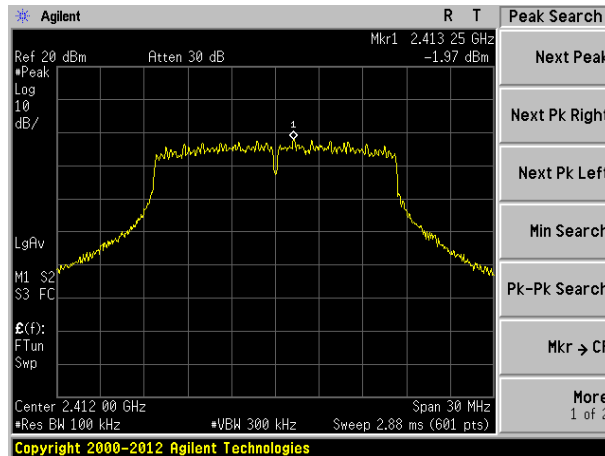

Lowest channel

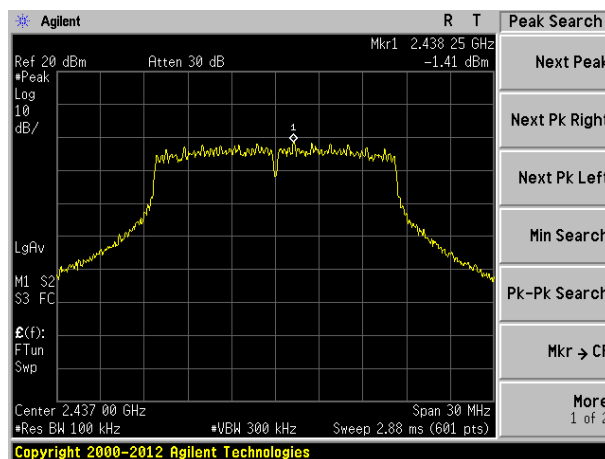


Middle channel

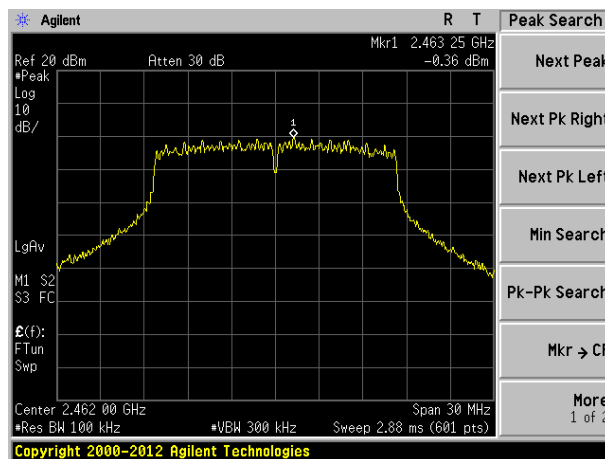


Highest channel


Test mode:	802.11n(HT20)
------------	---------------

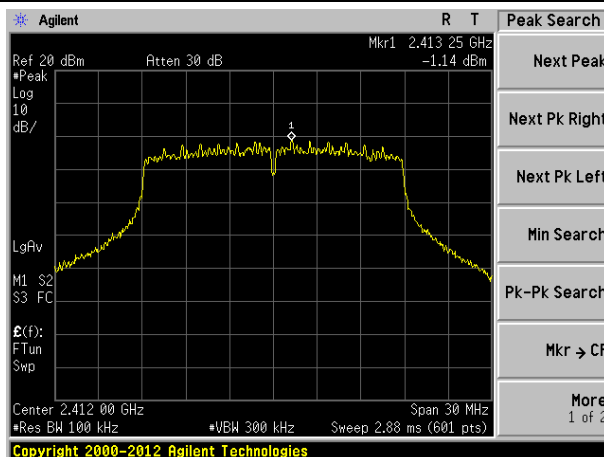

Lowest channel

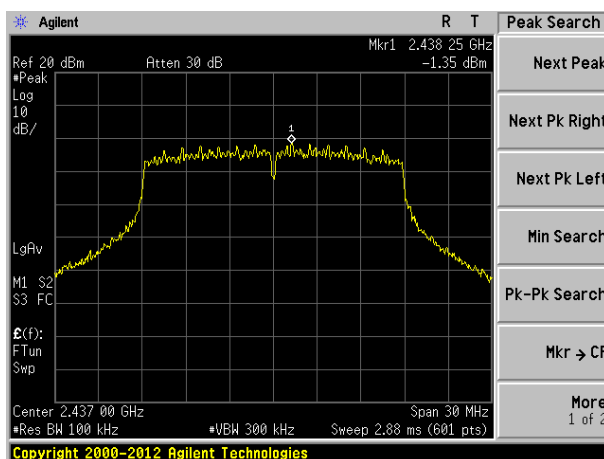


Middle channel

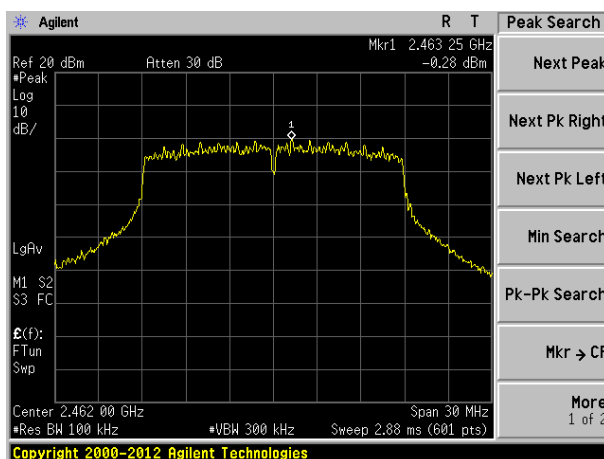


Highest channel


Test mode:	802.11n(HT40)
------------	---------------

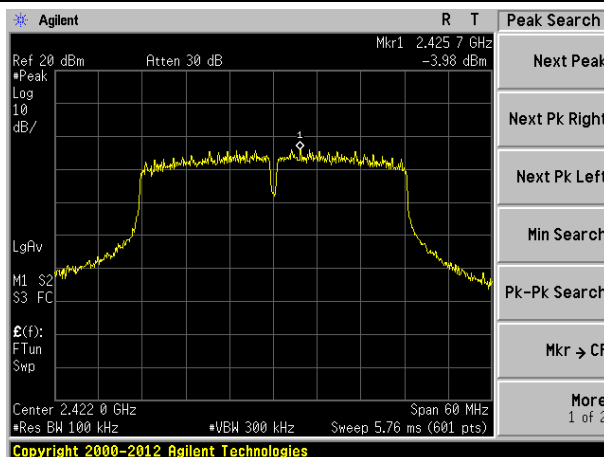

Lowest channel

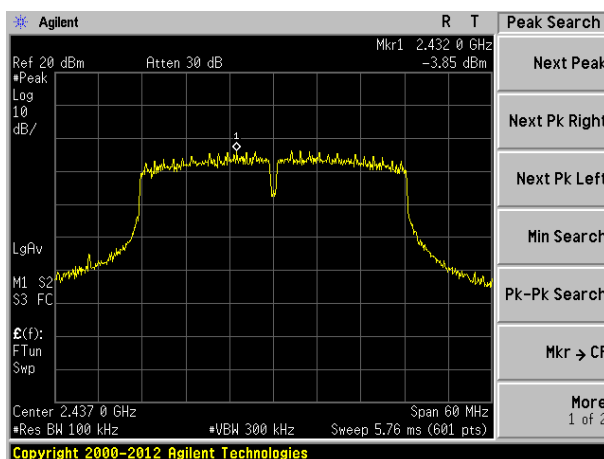


Middle channel

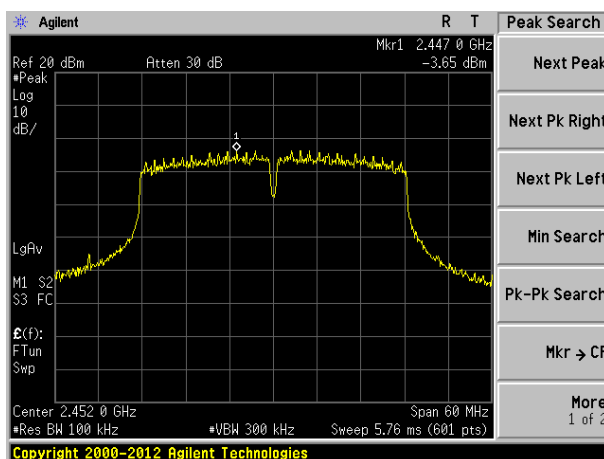

Highest channel


7.6 Band edges



7.6.1 Conducted Emission Method

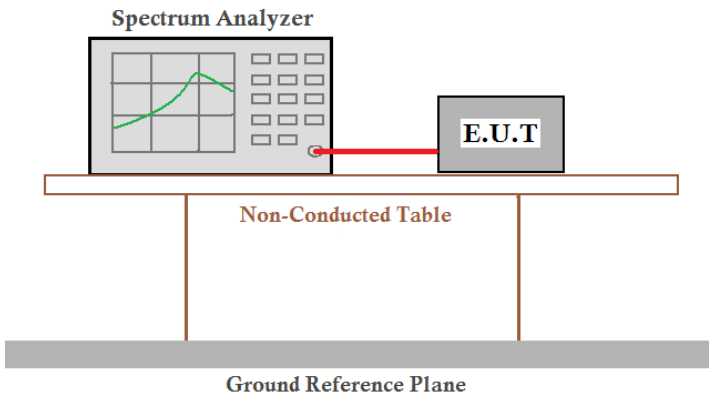Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Antenna 1:


Test plot as follows:

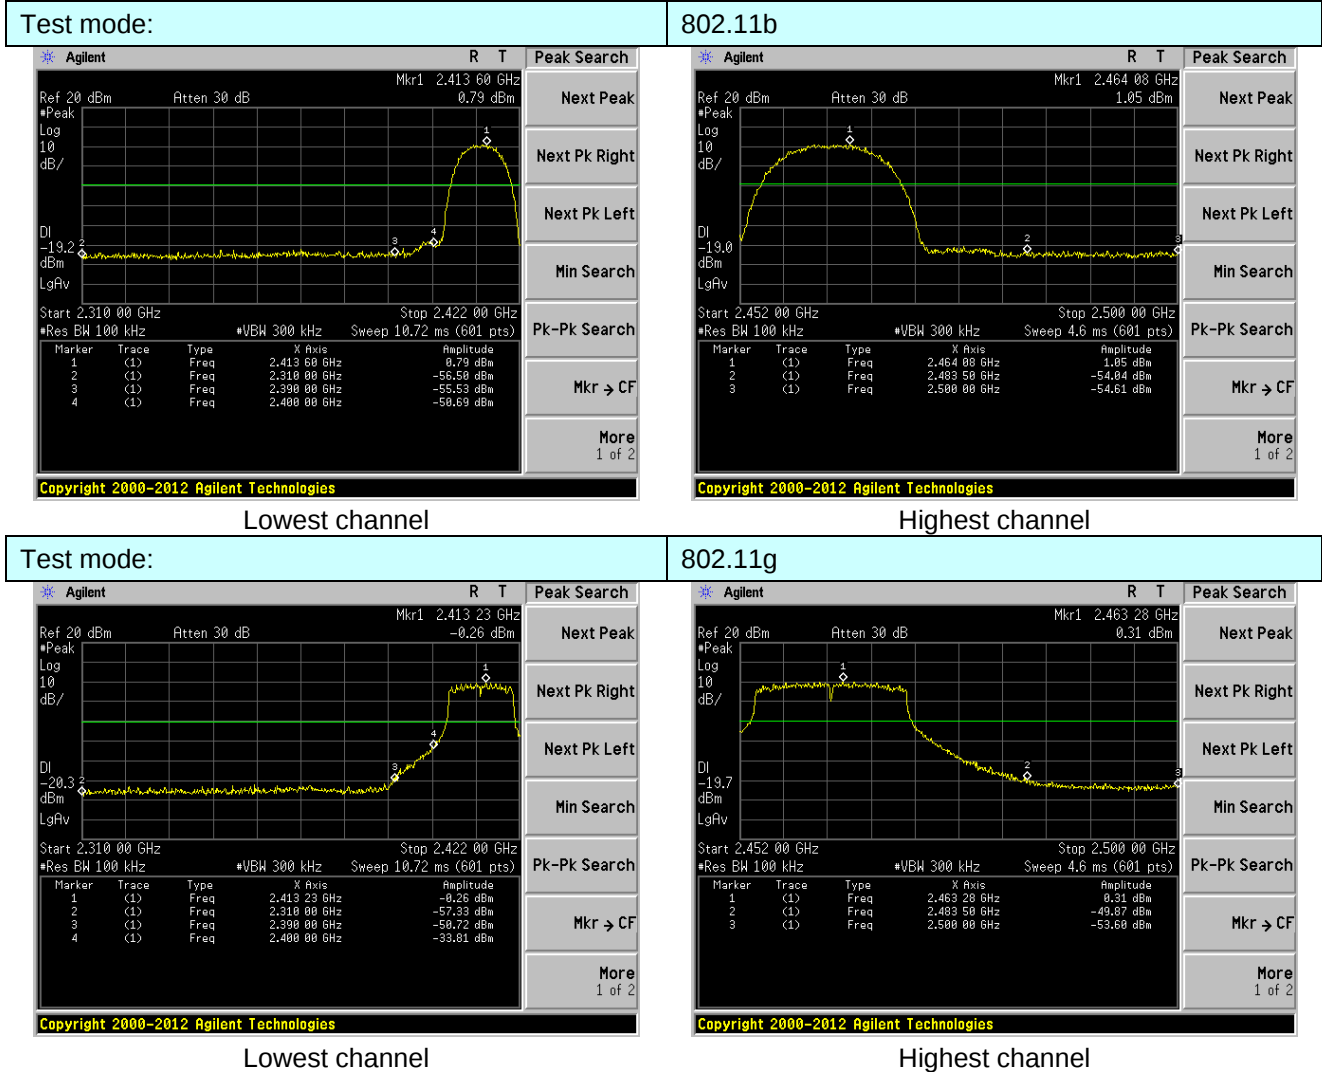


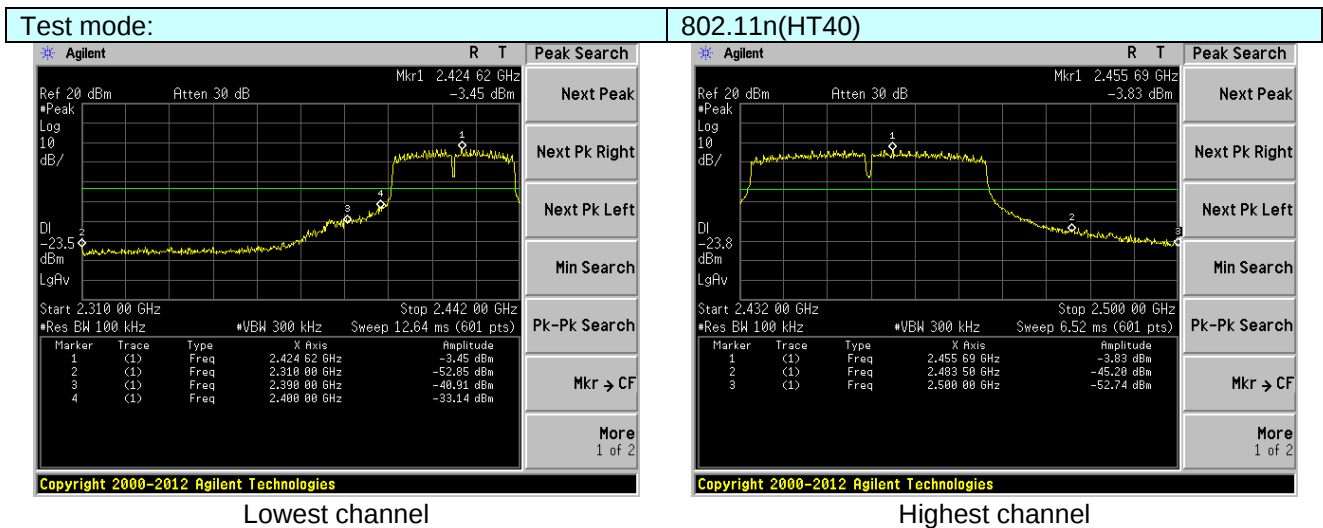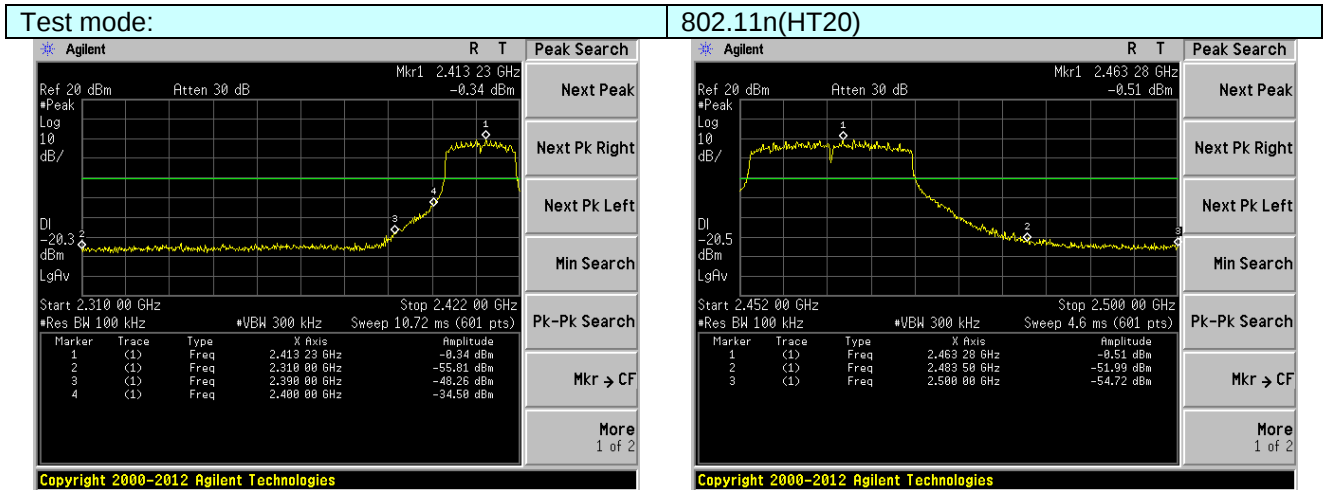

Antenna 2:


Test plot as follows:

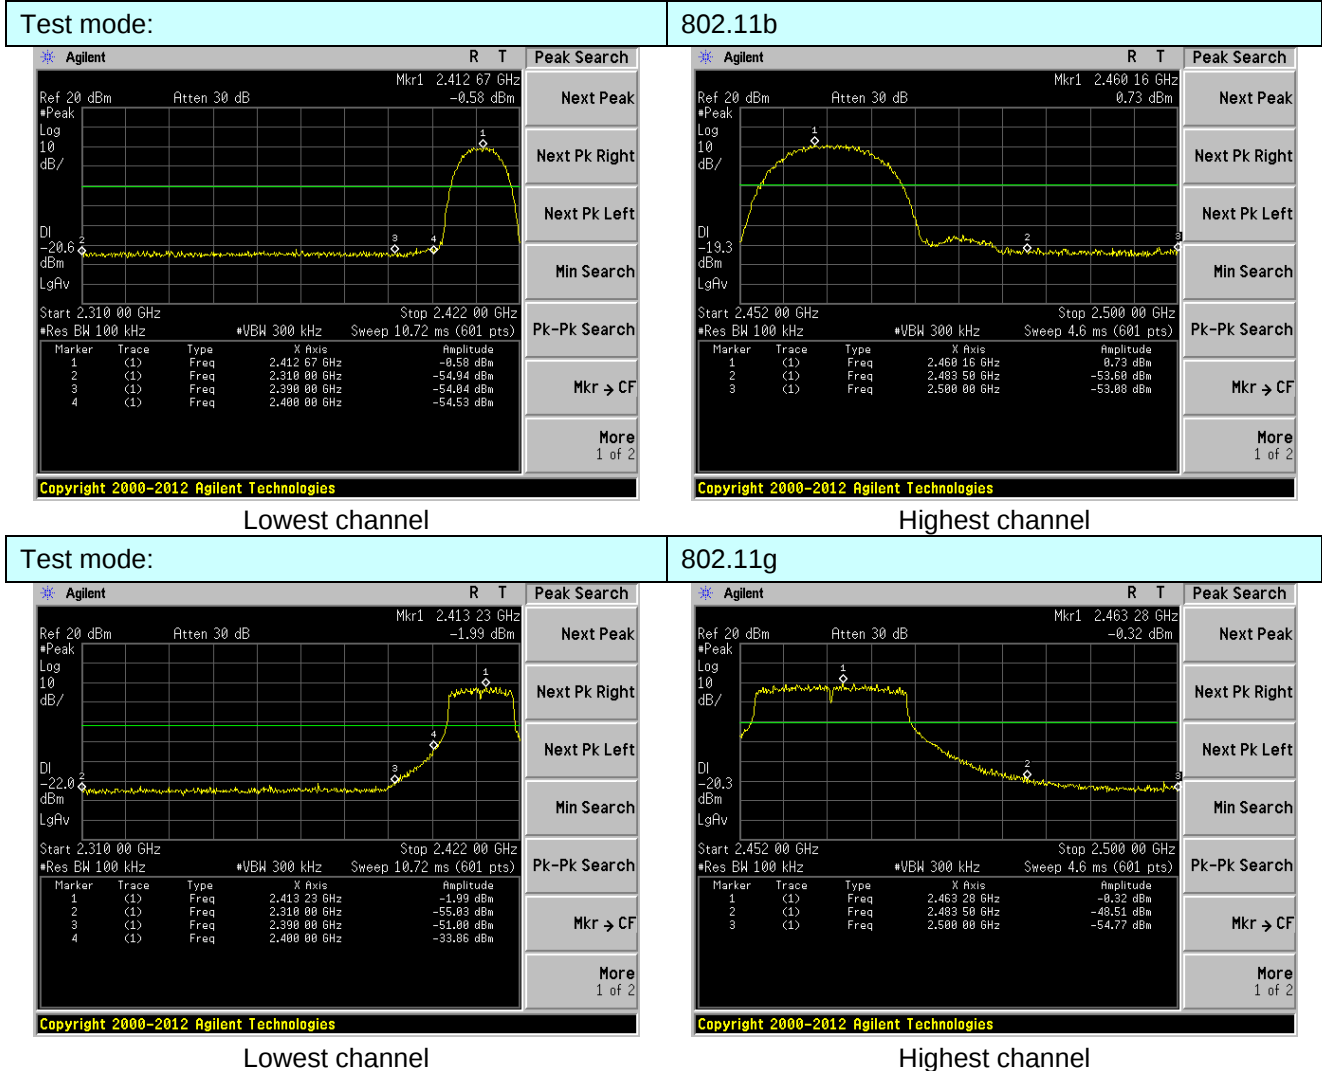

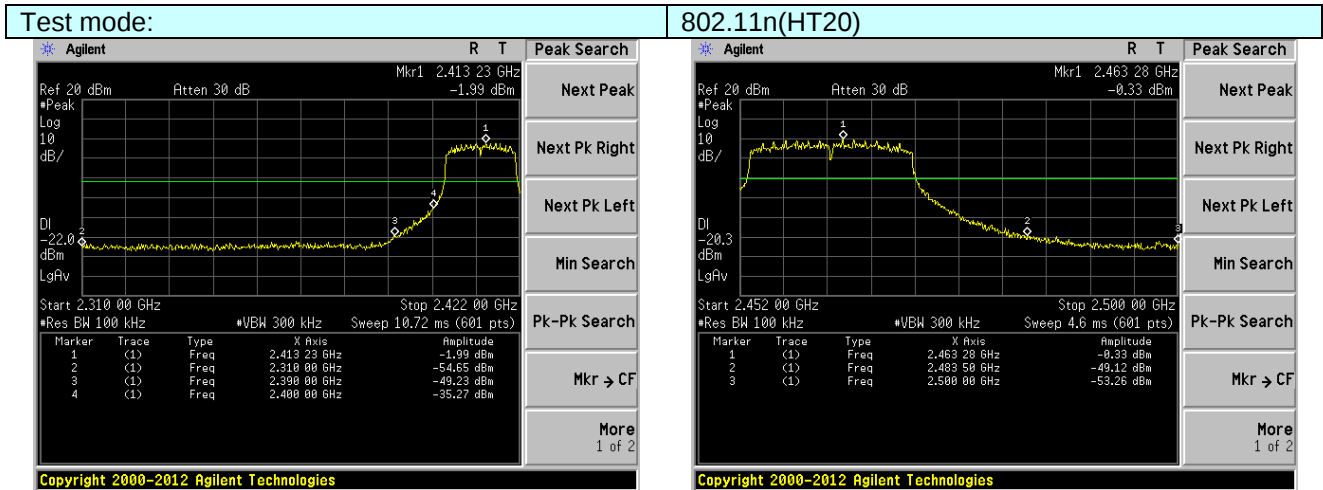

Lowest channel


Highest channel

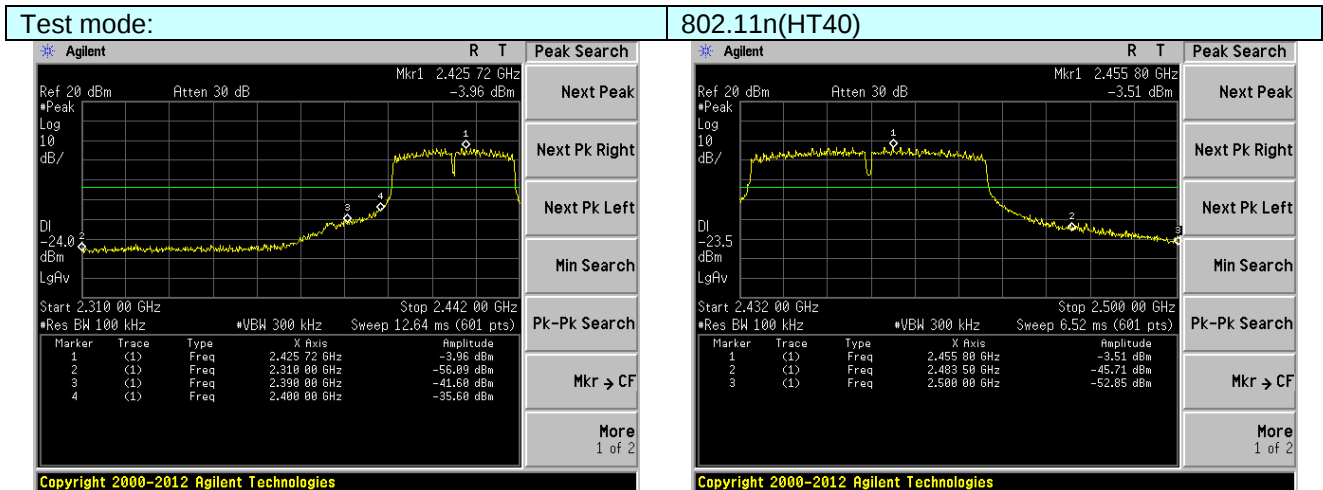

Lowest channel

Highest channel

7.6.2 Radiated Emission Method

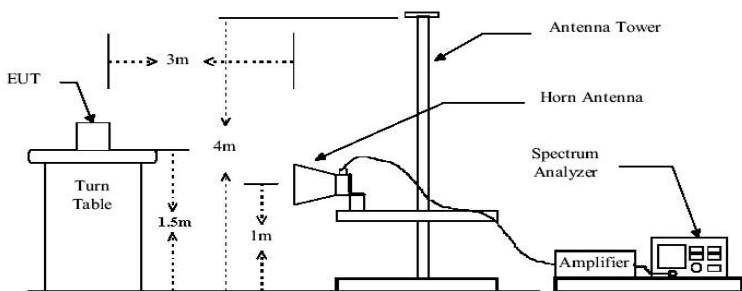Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Keeping MIMO TX mode				
Test results:	Pass				

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	52.15	27.59	5.38	34.01	51.11	74.00	-22.89	Horizontal
2400.00	61.33	27.58	5.39	34.01	60.29	74.00	-13.71	Horizontal
2390.00	53.87	27.59	5.38	34.01	52.83	74.00	-21.17	Vertical
2400.00	63.26	27.58	5.39	34.01	62.22	74.00	-11.78	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	38.77	27.59	5.38	34.01	37.73	54.00	-16.27	Horizontal
2400.00	47.11	27.58	5.39	34.01	46.07	54.00	-7.93	Horizontal
2390.00	40.63	27.59	5.38	34.01	39.59	54.00	-14.41	Vertical
2400.00	48.28	27.58	5.39	34.01	47.24	54.00	-6.76	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	53.02	27.53	5.47	33.92	52.10	74.00	-21.90	Horizontal
2500.00	48.69	27.55	5.49	29.93	51.80	74.00	-22.20	Horizontal
2483.50	55.38	27.53	5.47	33.92	54.46	74.00	-19.54	Vertical
2500.00	51.29	27.55	5.49	29.93	54.40	74.00	-19.60	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	39.21	27.53	5.47	33.92	38.29	54.00	-15.71	Horizontal
2500.00	35.21	27.55	5.49	29.93	38.32	54.00	-15.68	Horizontal
2483.50	41.20	27.53	5.47	33.92	40.28	54.00	-13.72	Vertical
2500.00	37.11	27.55	5.49	29.93	40.22	54.00	-13.78	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.63	27.59	5.38	34.01	49.59	74.00	-24.41	Horizontal
2400.00	59.30	27.58	5.39	34.01	58.26	74.00	-15.74	Horizontal
2390.00	52.24	27.59	5.38	34.01	51.20	74.00	-22.80	Vertical
2400.00	60.83	27.58	5.39	34.01	59.79	74.00	-14.21	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.69	27.59	5.38	34.01	36.65	54.00	-17.35	Horizontal
2400.00	45.87	27.58	5.39	34.01	44.83	54.00	-9.17	Horizontal
2390.00	39.43	27.59	5.38	34.01	38.39	54.00	-15.61	Vertical
2400.00	46.92	27.58	5.39	34.01	45.88	54.00	-8.12	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.85	27.53	5.47	33.92	49.93	74.00	-24.07	Horizontal
2500.00	47.01	27.55	5.49	29.93	50.12	74.00	-23.88	Horizontal
2483.50	52.90	27.53	5.47	33.92	51.98	74.00	-22.02	Vertical
2500.00	49.32	27.55	5.49	29.93	52.43	74.00	-21.57	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.90	27.53	5.47	33.92	36.98	54.00	-17.02	Horizontal
2500.00	34.19	27.55	5.49	29.93	37.30	54.00	-16.70	Horizontal
2483.50	39.75	27.53	5.47	33.92	38.83	54.00	-15.17	Vertical
2500.00	36.03	27.55	5.49	29.93	39.14	54.00	-14.86	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	50.70	27.59	5.38	34.01	49.66	74.00	-24.34	Horizontal
2400.00	59.40	27.58	5.39	34.01	58.36	74.00	-15.64	Horizontal
2390.00	52.32	27.59	5.38	34.01	51.28	74.00	-22.72	Vertical
2400.00	60.94	27.58	5.39	34.01	59.90	74.00	-14.10	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.74	27.59	5.38	34.01	36.70	54.00	-17.30	Horizontal
2400.00	45.93	27.58	5.39	34.01	44.89	54.00	-9.11	Horizontal
2390.00	39.48	27.59	5.38	34.01	38.44	54.00	-15.56	Vertical
2400.00	46.98	27.58	5.39	34.01	45.94	54.00	-8.06	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.95	27.53	5.47	33.92	50.03	74.00	-23.97	Horizontal
2500.00	47.08	27.55	5.49	29.93	50.19	74.00	-23.81	Horizontal
2483.50	53.02	27.53	5.47	33.92	52.10	74.00	-21.90	Vertical
2500.00	49.41	27.55	5.49	29.93	52.52	74.00	-21.48	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.96	27.53	5.47	33.92	37.04	54.00	-16.96	Horizontal
2500.00	34.24	27.55	5.49	29.93	37.35	54.00	-16.65	Horizontal
2483.50	39.82	27.53	5.47	33.92	38.90	54.00	-15.10	Vertical
2500.00	36.08	27.55	5.49	29.93	39.19	54.00	-14.81	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	49.91	27.59	5.38	34.01	48.87	74.00	-25.13	Horizontal
2400.00	58.34	27.58	5.39	34.01	57.30	74.00	-16.70	Horizontal
2390.00	51.47	27.59	5.38	34.01	50.43	74.00	-23.57	Vertical
2400.00	59.67	27.58	5.39	34.01	58.63	74.00	-15.37	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.17	27.59	5.38	34.01	36.13	54.00	-17.87	Horizontal
2400.00	45.28	27.58	5.39	34.01	44.24	54.00	-9.76	Horizontal
2390.00	38.85	27.59	5.38	34.01	37.81	54.00	-16.19	Vertical
2400.00	46.27	27.58	5.39	34.01	45.23	54.00	-8.77	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.82	27.53	5.47	33.92	48.90	74.00	-25.10	Horizontal
2500.00	46.20	27.55	5.49	29.93	49.31	74.00	-24.69	Horizontal
2483.50	51.72	27.53	5.47	33.92	50.80	74.00	-23.20	Vertical
2500.00	48.39	27.55	5.49	29.93	51.50	74.00	-22.50	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	37.27	27.53	5.47	33.92	36.35	54.00	-17.65	Horizontal
2500.00	33.71	27.55	5.49	29.93	36.82	54.00	-17.18	Horizontal
2483.50	39.06	27.53	5.47	33.92	38.14	54.00	-15.86	Vertical
2500.00	35.52	27.55	5.49	29.93	38.63	54.00	-15.37	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7 Spurious Emission

7.7.1 Conducted Emission Method

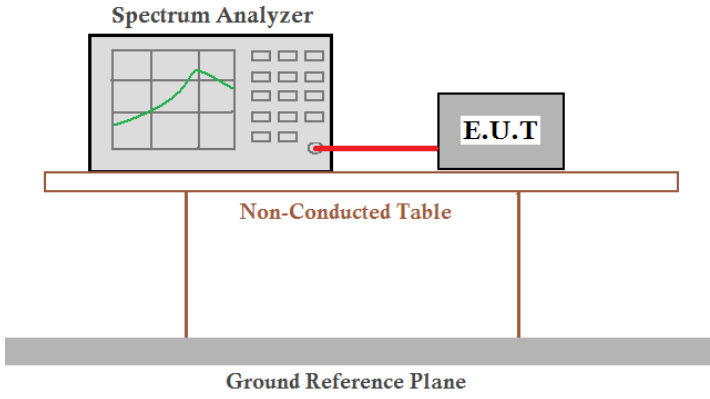
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by two vertical legs. Below the table is a Ground Reference Plane, represented by a thick grey bar.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Antenna 1:


Test plot as follows:

Test mode:	802.11b
------------	---------

Lowest channel

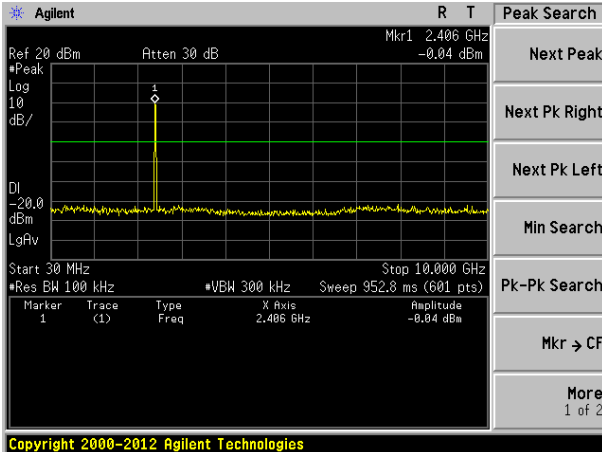


30MHz~10GHz

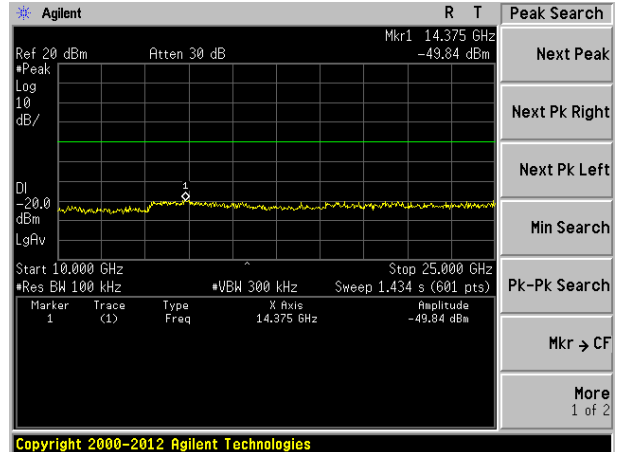


10GHz~25GHz

Middle channel

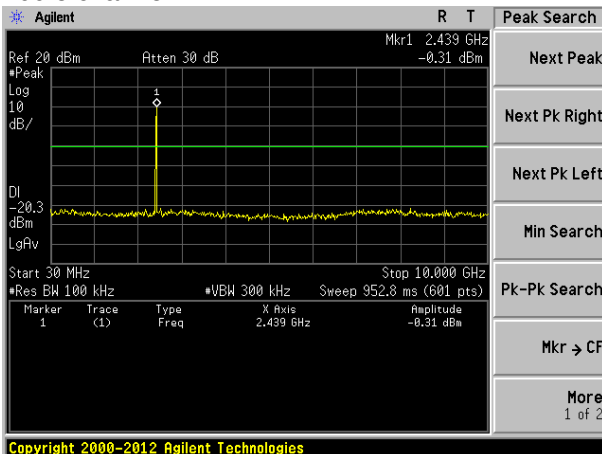


30MHz~10GHz

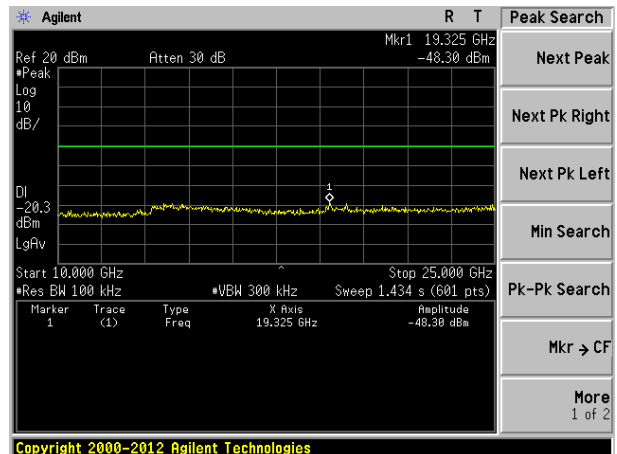


10GHz~25GHz

Highest channel

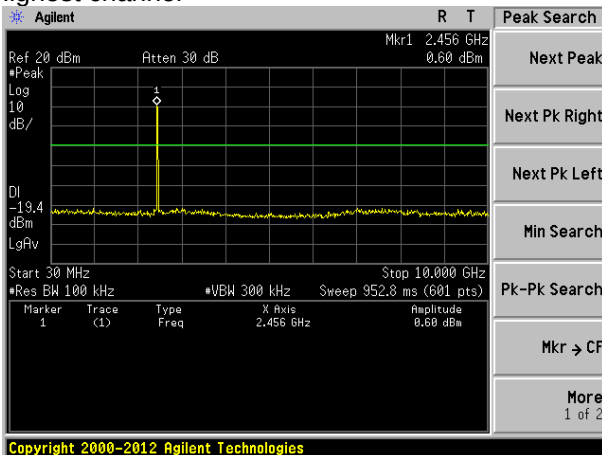


30MHz~10GHz

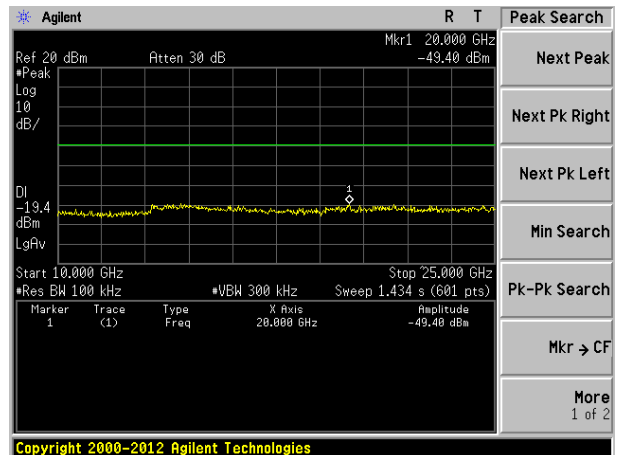


10GHz~25GHz

Test mode:	802.11g
------------	---------

Lowest channel

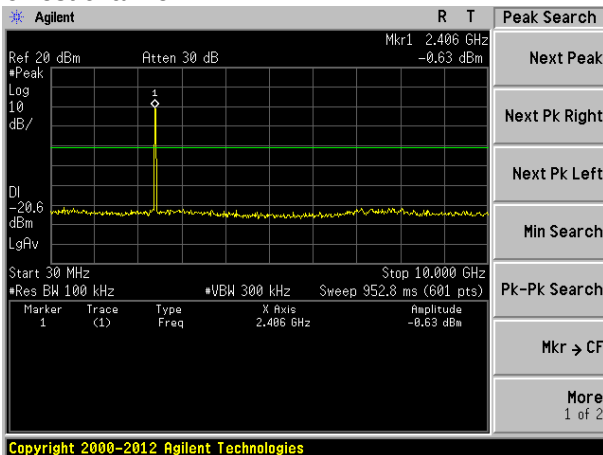


30MHz~10GHz

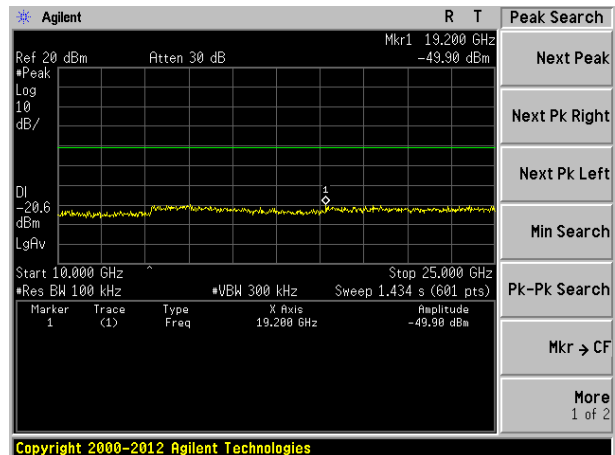


10GHz~25GHz

Middle channel

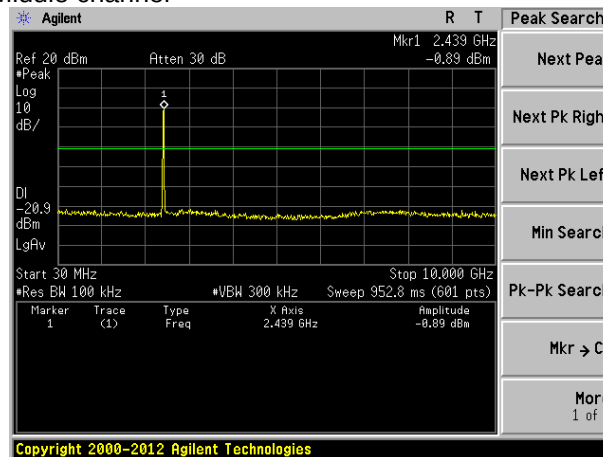


30MHz~10GHz

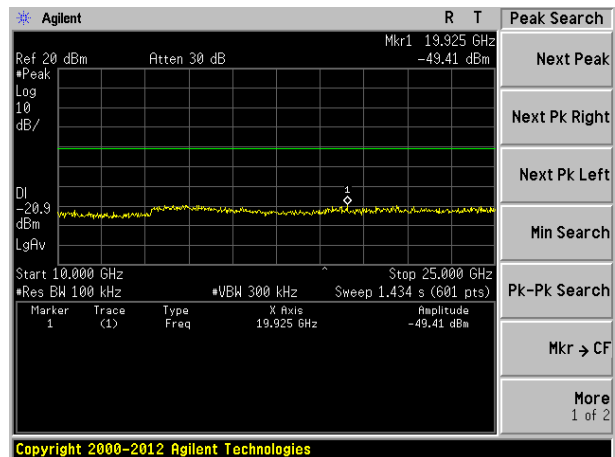


10GHz~25GHz

Highest channel

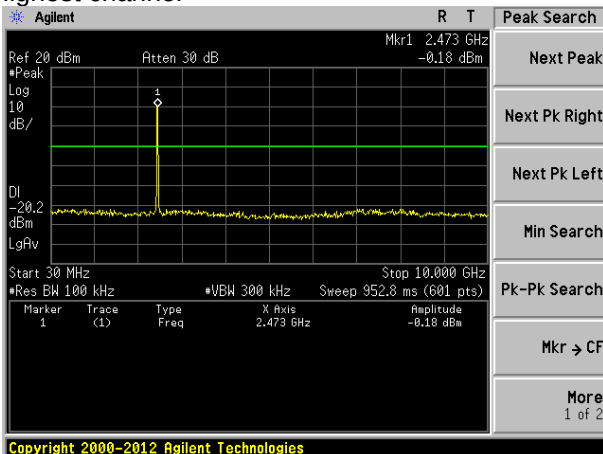


30MHz~10GHz

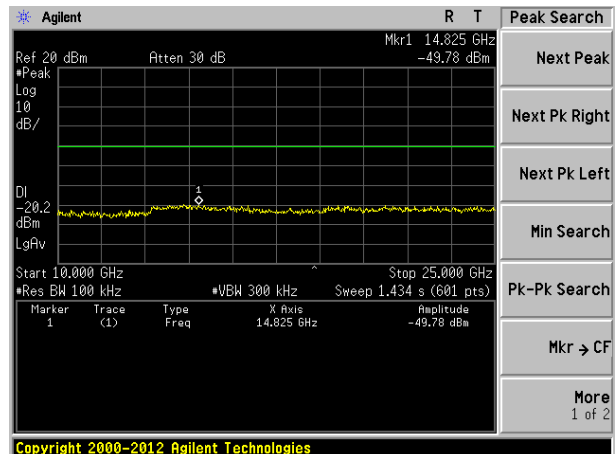

10GHz~25GHz


Test mode:	802.11n(HT20)
------------	---------------

Lowest channel

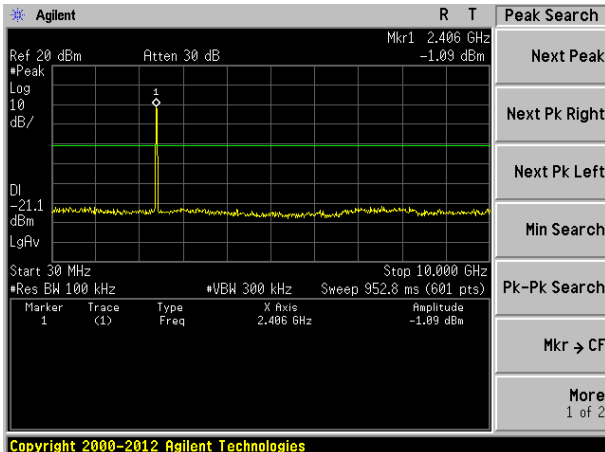

Copyright 2000-2012 Agilent Technologies


30MHz~10GHz

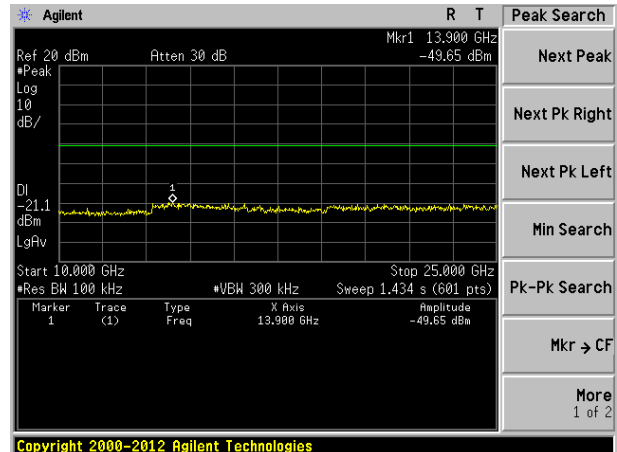

Copyright 2000-2012 Agilent Technologies


10GHz~25GHz

Middle channel

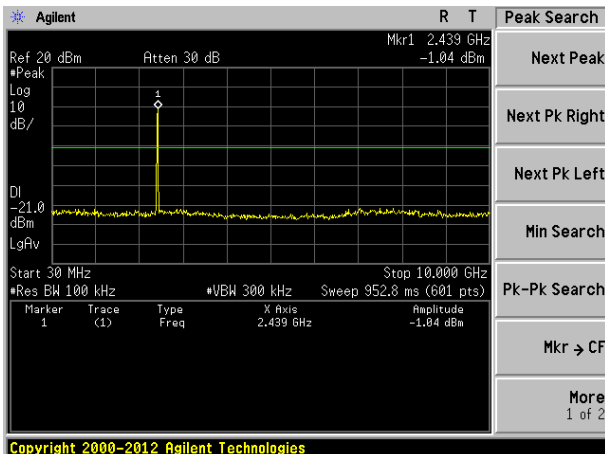

Copyright 2000-2012 Agilent Technologies


30MHz~10GHz

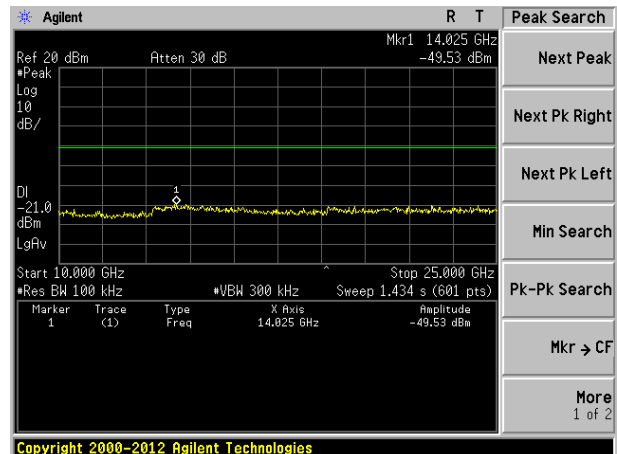

Copyright 2000-2012 Agilent Technologies


10GHz~25GHz

Highest channel

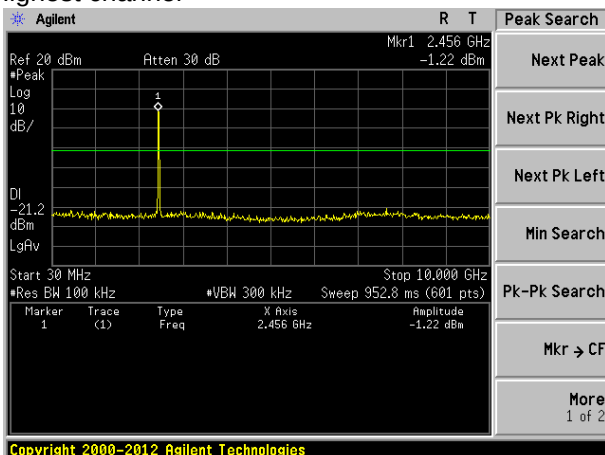

Copyright 2000-2012 Agilent Technologies

30MHz~10GHz

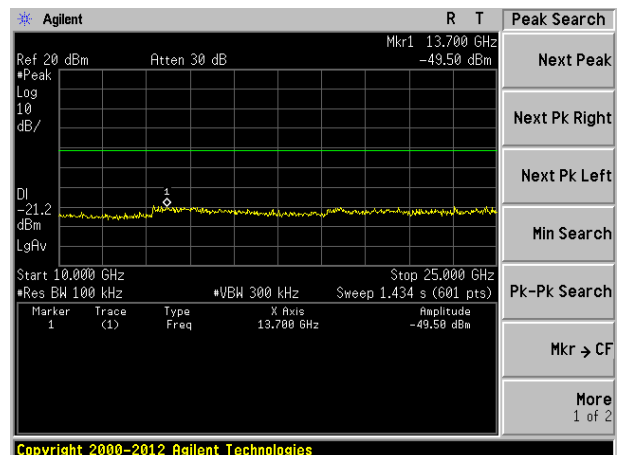


Copyright 2000-2012 Agilent Technologies

10GHz~25GHz


Test mode:	802.11n(HT40)
------------	---------------

Lowest channel

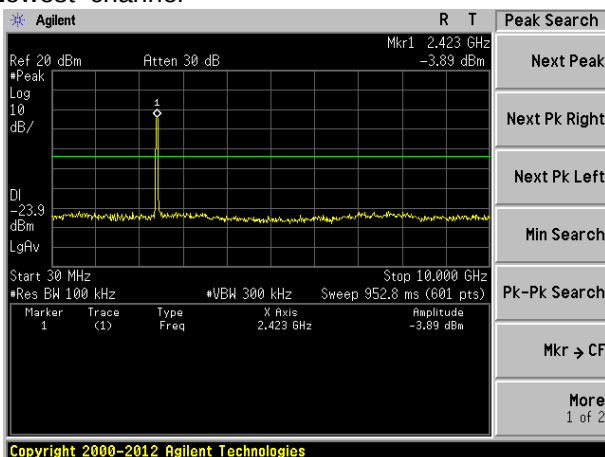

Copyright 2000-2012 Agilent Technologies


30MHz~10GHz

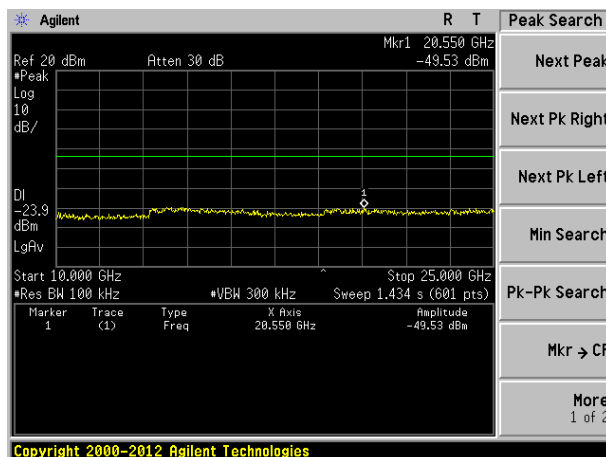

Copyright 2000-2012 Agilent Technologies


10GHz~25GHz

Middle channel

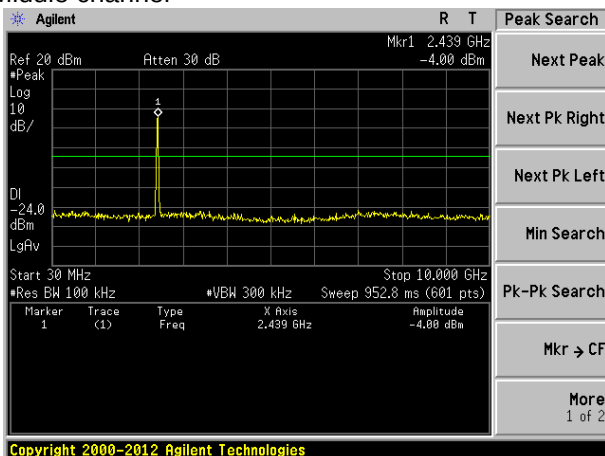

Copyright 2000-2012 Agilent Technologies


30MHz~10GHz

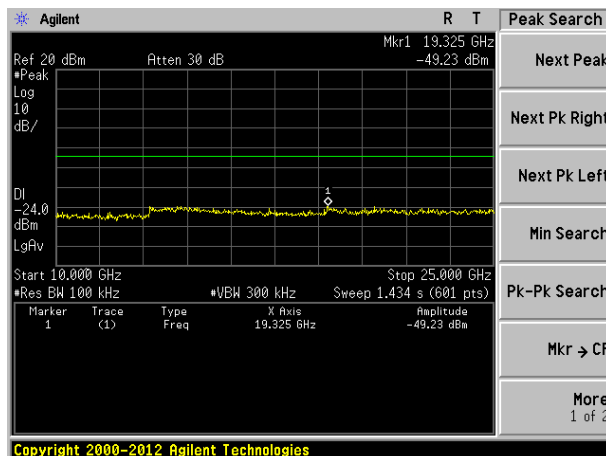

Copyright 2000-2012 Agilent Technologies


10GHz~25GHz

Highest channel

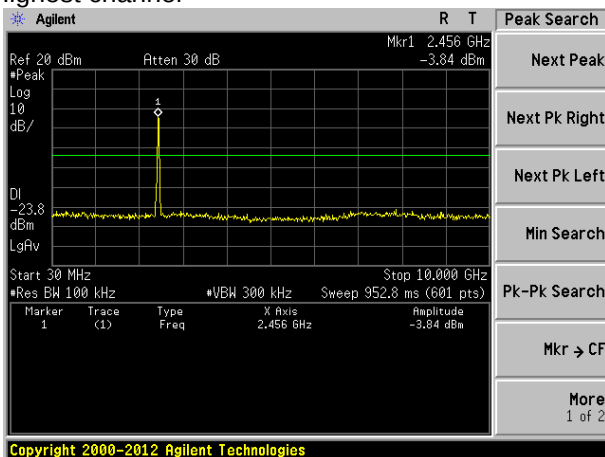

Copyright 2000-2012 Agilent Technologies

30MHz~10GHz

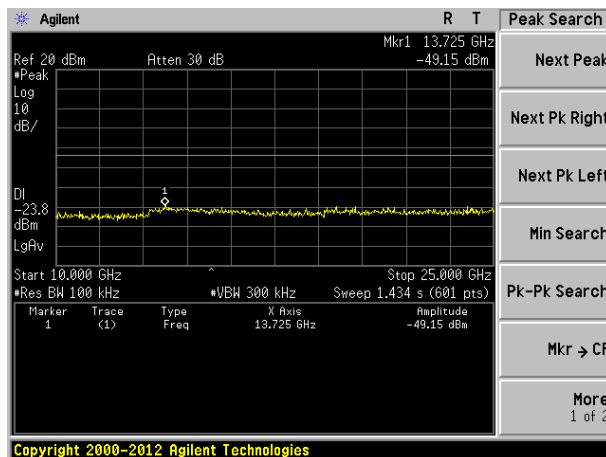

Copyright 2000-2012 Agilent Technologies


10GHz~25GHz

Antenna 2:


Test plot as follows:

Test mode:	802.11b
------------	---------

Lowest channel

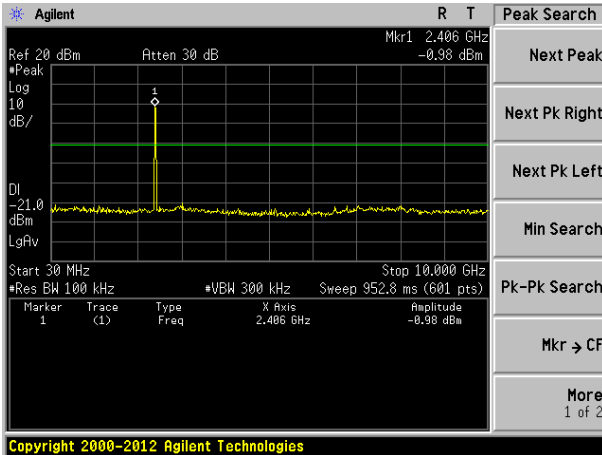


30MHz~10GHz

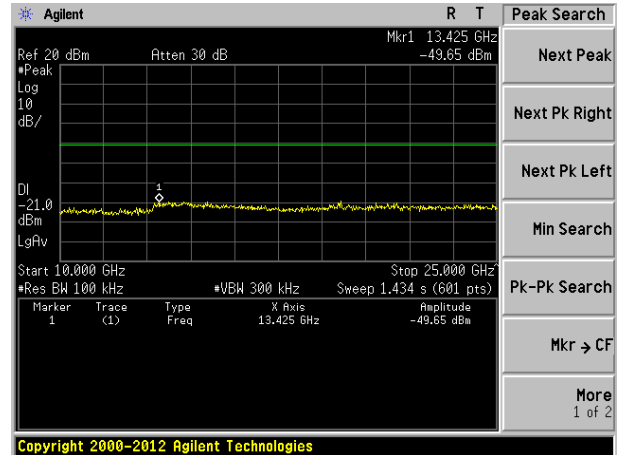


10GHz~25GHz

Middle channel

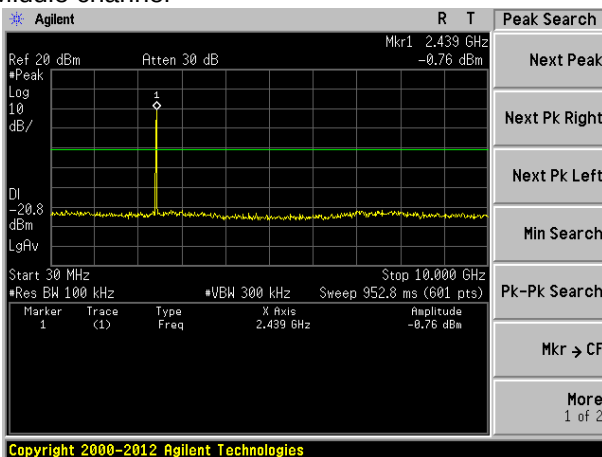


30MHz~10GHz

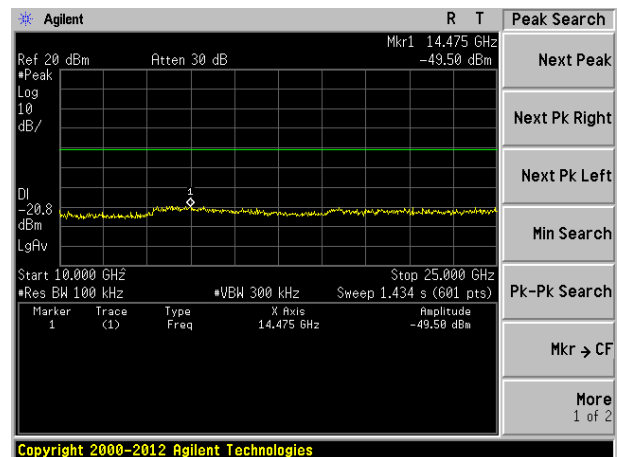


10GHz~25GHz

Highest channel

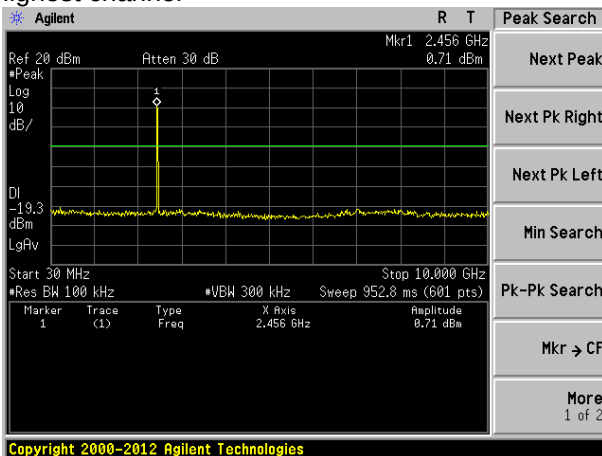


30MHz~10GHz

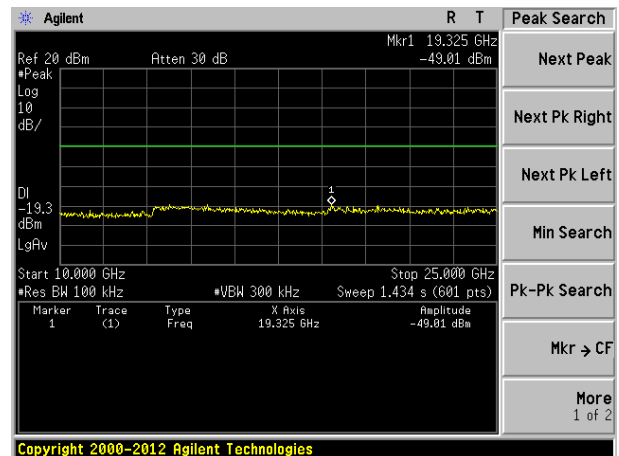


10GHz~25GHz

Test mode:	802.11g
------------	---------

Lowest channel

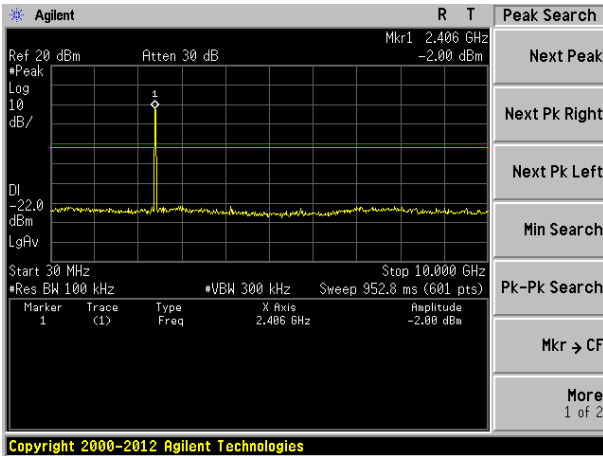


30MHz~10GHz

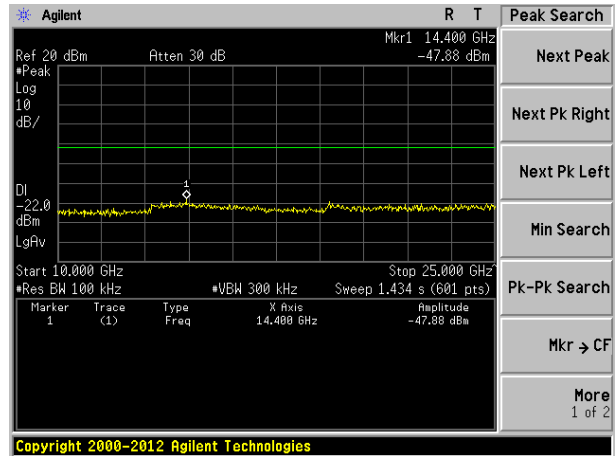


10GHz~25GHz

Middle channel

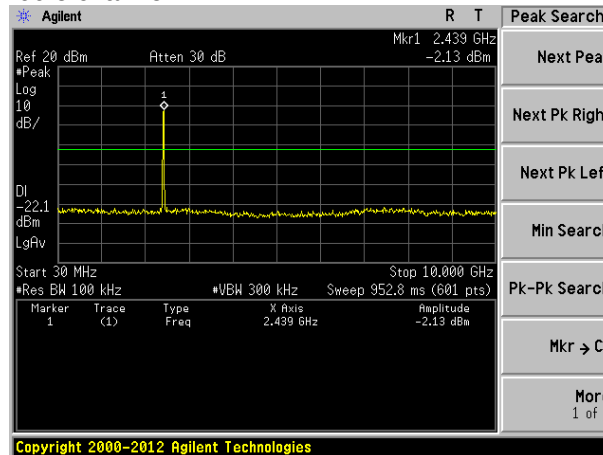


30MHz~10GHz

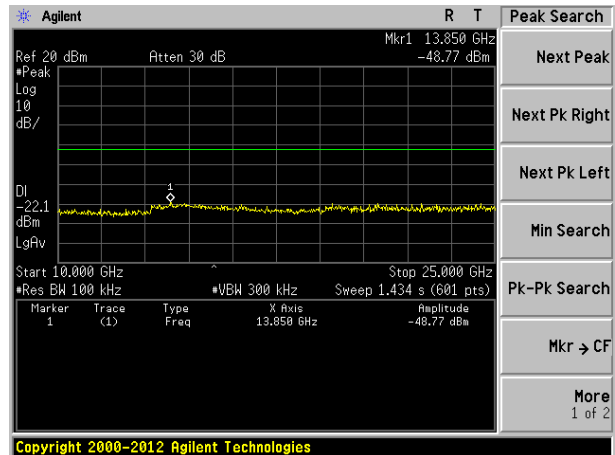


10GHz~25GHz

Highest channel

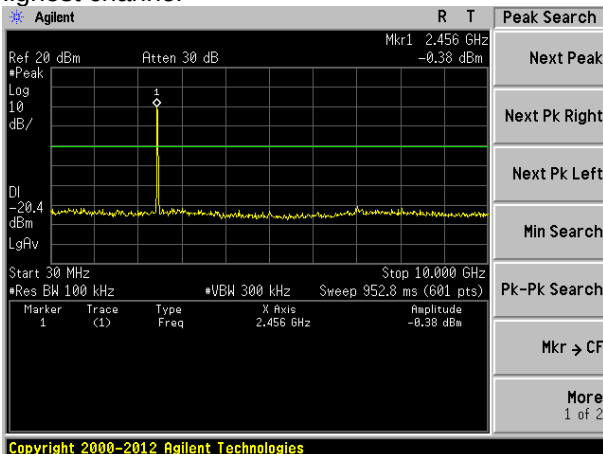


30MHz~10GHz

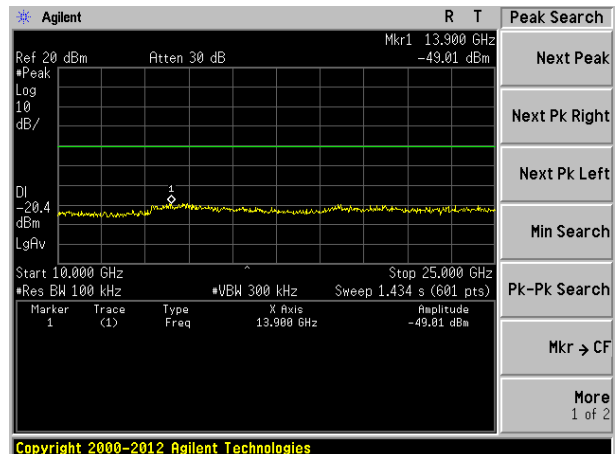


10GHz~25GHz

Test mode:	802.11n(HT20)
------------	---------------

Lowest channel

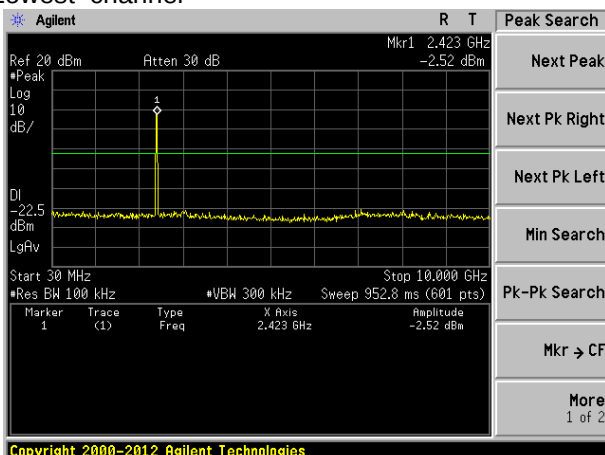


30MHz~10GHz

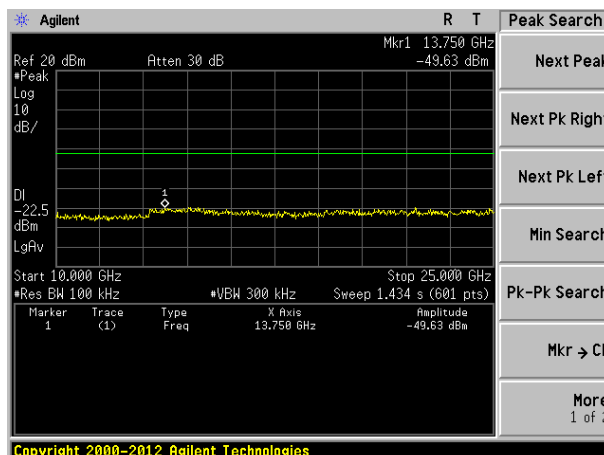


10GHz~25GHz

Middle channel

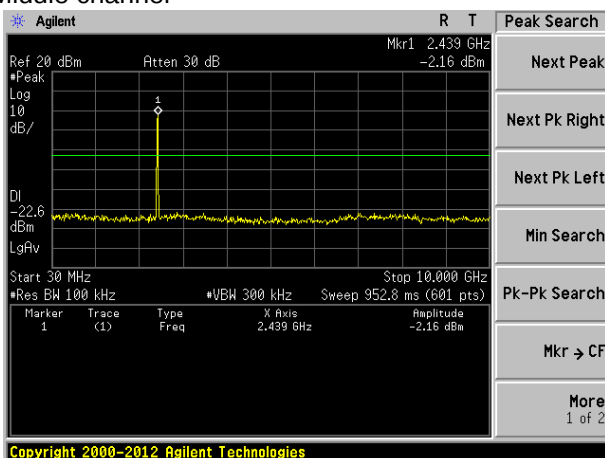


30MHz~10GHz

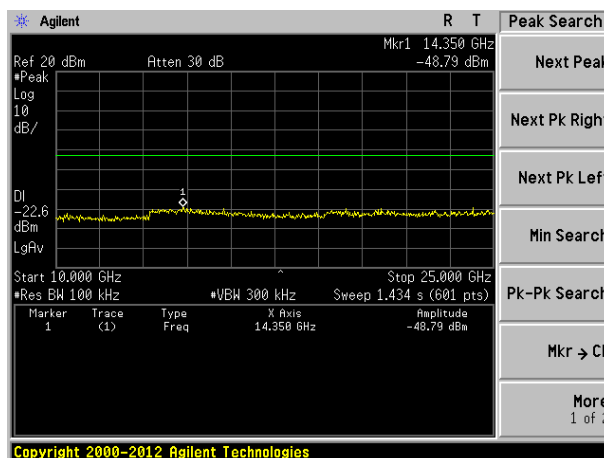


10GHz~25GHz

Highest channel

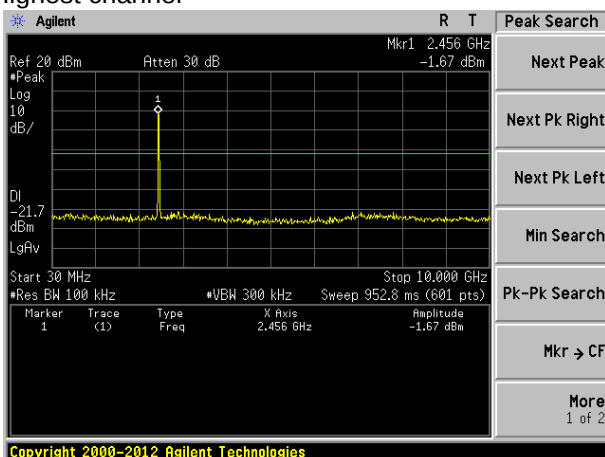


30MHz~10GHz

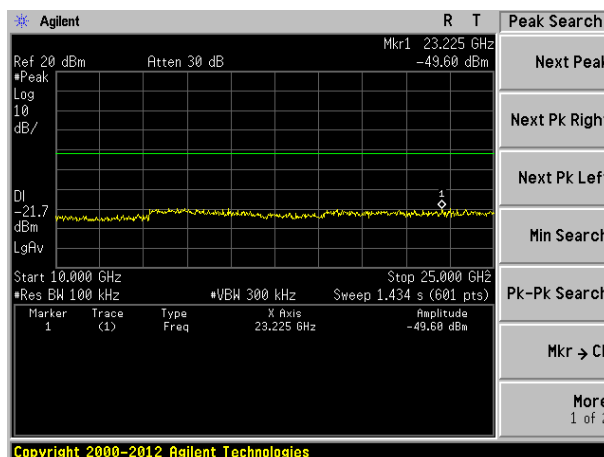


10GHz~25GHz

Test mode:	802.11n(HT40)
------------	---------------

Lowest channel

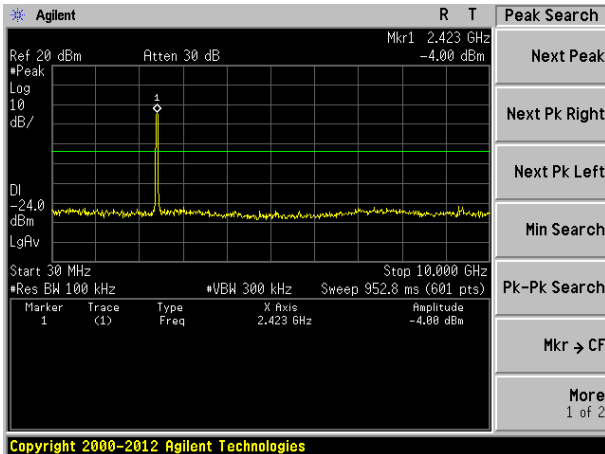


30MHz~10GHz

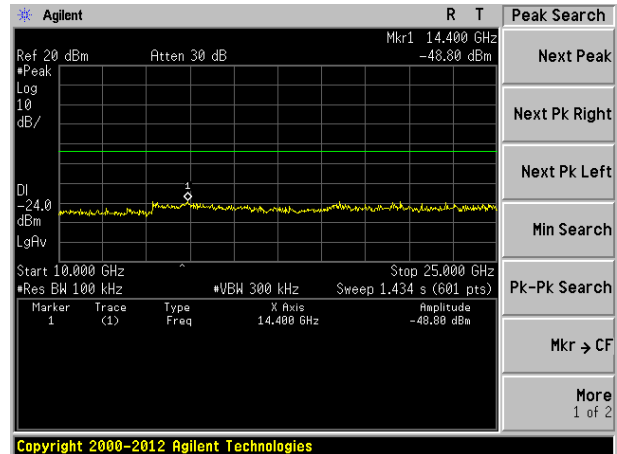


10GHz~25GHz

Middle channel

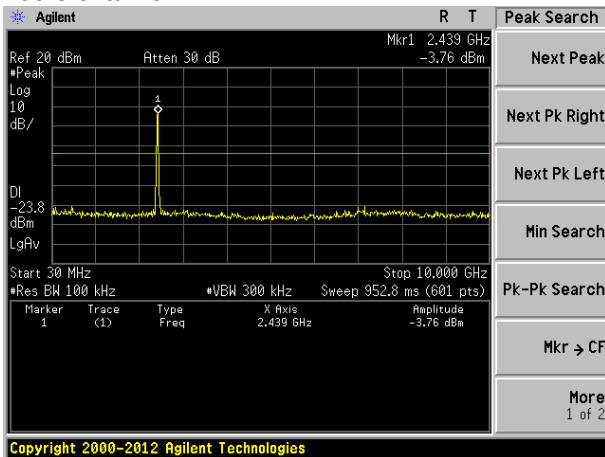


30MHz~10GHz

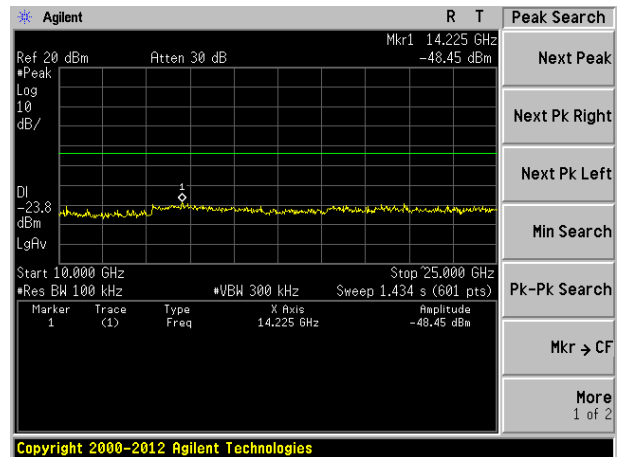


10GHz~25GHz

Highest channel

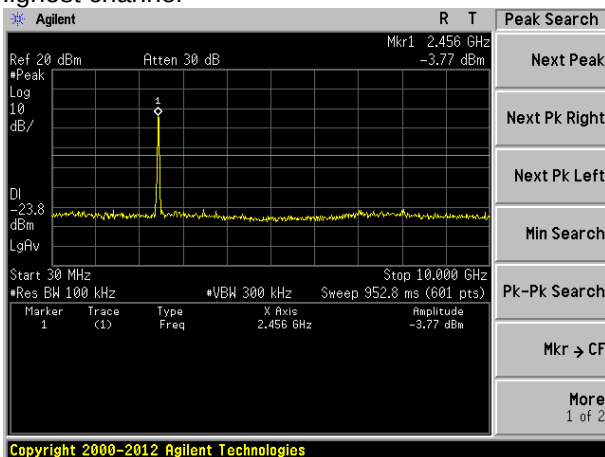



30MHz~10GHz

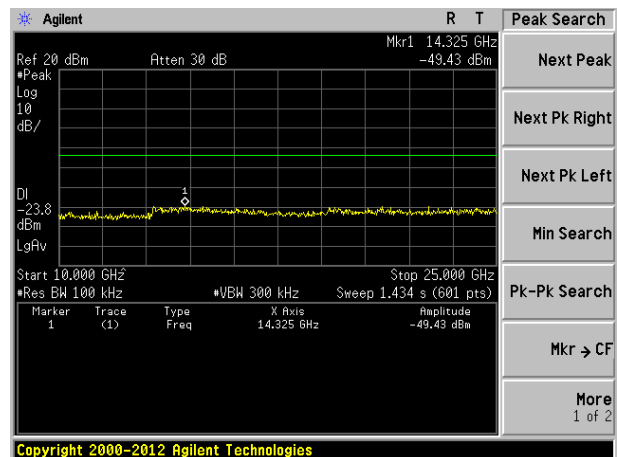

10GHz~25GHz

7.7.2 Radiated Emission Method

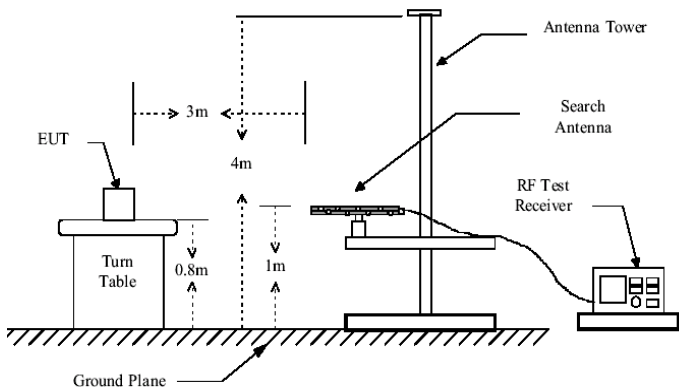Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	30MHz-88MHz		40.00		Quasi-peak
	88MHz-216MHz		43.50		Quasi-peak
	216MHz-960MHz		46.00		Quasi-peak
	960MHz-1GHz		54.00		Quasi-peak
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:	Below 1GHz				
					
	Above 1GHz				

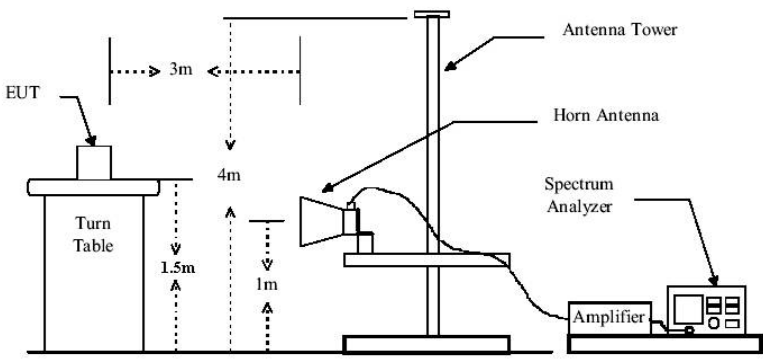	 The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a Turn Table. The Turn Table is positioned 3m away from an Antenna Tower. The Antenna Tower has a Horn Antenna mounted on it. The Horn Antenna is at a height of 4m. The EUT is at a height of 1.5m. The Antenna Tower is also at a height of 1m. A Spectrum Analyzer is connected to the Antenna Tower via an Amplifier.
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Keeping MIMO TX mode
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
40.14	45.83	15.58	0.66	30.04	32.03	40.00	-7.97	Vertical
53.51	40.56	15.08	0.80	29.97	26.47	40.00	-13.53	Vertical
89.59	38.65	13.76	1.11	29.75	23.77	43.50	-19.73	Vertical
133.15	47.01	10.67	1.46	29.49	29.65	43.50	-13.85	Vertical
169.60	47.11	10.95	1.69	29.32	30.43	43.50	-13.07	Vertical
325.60	40.69	15.59	2.49	29.85	28.92	46.00	-17.08	Vertical
43.51	31.28	15.56	0.70	30.03	17.51	40.00	-22.49	Horizontal
89.59	32.11	13.76	1.11	29.75	17.23	43.50	-26.27	Horizontal
166.65	38.70	10.87	1.67	29.33	21.91	43.50	-21.59	Horizontal
261.06	36.40	14.09	2.18	29.73	22.94	46.00	-23.06	Horizontal
308.91	35.90	15.17	2.41	29.95	23.53	46.00	-22.47	Horizontal
586.84	35.88	20.24	3.67	29.30	30.49	46.00	-15.51	Horizontal

■ Above 1GHz

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	40.73	31.79	8.62	32.10	49.04	74.00	-24.96	Vertical
7236.00	34.49	36.19	11.68	31.97	50.39	74.00	-23.61	Vertical
9648.00	32.91	38.07	14.16	31.56	53.58	74.00	-20.42	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	39.33	31.79	8.62	32.10	47.64	74.00	-26.36	Horizontal
7236.00	34.21	36.19	11.68	31.97	50.11	74.00	-23.89	Horizontal
9648.00	32.47	38.07	14.16	31.56	53.14	74.00	-20.86	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.78	31.79	8.62	32.10	38.09	54.00	-15.91	Vertical
7236.00	23.35	36.19	11.68	31.97	39.25	54.00	-14.75	Vertical
9648.00	23.25	38.07	14.16	31.56	43.92	54.00	-10.08	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.85	31.79	8.62	32.10	37.16	54.00	-16.84	Horizontal
7236.00	22.78	36.19	11.68	31.97	38.68	54.00	-15.32	Horizontal
9648.00	22.21	38.07	14.16	31.56	42.88	54.00	-11.12	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	39.71	31.85	8.66	32.12	48.10	74.00	-25.90	Vertical
7311.00	34.52	36.37	11.71	31.91	50.69	74.00	-23.31	Vertical
9748.00	33.90	38.27	14.25	31.56	54.86	74.00	-19.14	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	40.13	31.85	8.66	32.12	48.52	74.00	-25.48	Horizontal
7311.00	33.13	36.37	11.71	31.91	49.30	74.00	-24.70	Horizontal
9748.00	33.77	38.27	14.25	31.56	54.73	74.00	-19.27	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	30.54	31.85	8.66	32.12	38.93	54.00	-15.07	Vertical
7311.00	22.83	36.37	11.71	31.91	39.00	54.00	-15.00	Vertical
9748.00	23.14	38.27	14.25	31.56	44.10	54.00	-9.90	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	30.23	31.85	8.66	32.12	38.62	54.00	-15.38	Horizontal
7311.00	22.21	36.37	11.71	31.91	38.38	54.00	-15.62	Horizontal
9748.00	23.48	38.27	14.25	31.56	44.44	54.00	-9.56	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	45.50	31.90	8.70	32.15	53.95	74.00	-20.05	Vertical
7386.00	35.36	36.49	11.76	31.83	51.78	74.00	-22.22	Vertical
9848.00	37.31	38.62	14.31	31.77	58.47	74.00	-15.53	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	44.71	31.90	8.70	32.15	53.16	74.00	-20.84	Horizontal
7386.00	34.21	36.49	11.76	31.83	50.63	74.00	-23.37	Horizontal
9848.00	33.46	38.62	14.31	31.77	54.62	74.00	-19.38	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	36.37	31.90	8.70	32.15	44.82	54.00	-9.18	Vertical
7386.00	25.26	36.49	11.76	31.83	41.68	54.00	-12.32	Vertical
9848.00	25.80	38.62	14.31	31.77	46.96	54.00	-7.04	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	35.04	31.90	8.70	32.15	43.49	54.00	-10.51	Horizontal
7386.00	23.59	36.49	11.76	31.83	40.01	54.00	-13.99	Horizontal
9848.00	22.71	38.62	14.31	31.77	43.87	54.00	-10.13	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.77	31.79	8.62	32.10	48.08	74.00	-25.92	Vertical
7236.00	33.88	36.19	11.68	31.97	49.78	74.00	-24.22	Vertical
9648.00	32.48	38.07	14.16	31.56	53.15	74.00	-20.85	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.52	31.79	8.62	32.10	46.83	74.00	-27.17	Horizontal
7236.00	33.68	36.19	11.68	31.97	49.58	74.00	-24.42	Horizontal
9648.00	32.07	38.07	14.16	31.56	52.74	74.00	-21.26	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	28.89	31.79	8.62	32.10	37.20	54.00	-16.80	Vertical
7236.00	22.76	36.19	11.68	31.97	38.66	54.00	-15.34	Vertical
9648.00	22.83	38.07	14.16	31.56	43.50	54.00	-10.50	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.08	31.79	8.62	32.10	36.39	54.00	-17.61	Horizontal
7236.00	22.27	36.19	11.68	31.97	38.17	54.00	-15.83	Horizontal
9648.00	21.83	38.07	14.16	31.56	42.50	54.00	-11.50	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.91	31.85	8.66	32.12	47.30	74.00	-26.70	Vertical
7311.00	34.01	36.37	11.71	31.91	50.18	74.00	-23.82	Vertical
9748.00	33.54	38.27	14.25	31.56	54.50	74.00	-19.50	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.46	31.85	8.66	32.12	47.85	74.00	-26.15	Horizontal
7311.00	32.69	36.37	11.71	31.91	48.86	74.00	-25.14	Horizontal
9748.00	33.44	38.27	14.25	31.56	54.40	74.00	-19.60	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.80	31.85	8.66	32.12	38.19	54.00	-15.81	Vertical
7311.00	22.34	36.37	11.71	31.91	38.51	54.00	-15.49	Vertical
9748.00	22.80	38.27	14.25	31.56	43.76	54.00	-10.24	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.60	31.85	8.66	32.12	37.99	54.00	-16.01	Horizontal
7311.00	21.78	36.37	11.71	31.91	37.95	54.00	-16.05	Horizontal
9748.00	23.16	38.27	14.25	31.56	44.12	54.00	-9.88	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	44.13	31.90	8.70	32.15	52.58	74.00	-21.42	Vertical
7386.00	34.49	36.49	11.76	31.83	50.91	74.00	-23.09	Vertical
9848.00	36.69	38.62	14.31	31.77	57.85	74.00	-16.15	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.55	31.90	8.70	32.15	52.00	74.00	-22.00	Horizontal
7386.00	33.45	36.49	11.76	31.83	49.87	74.00	-24.13	Horizontal
9848.00	32.89	38.62	14.31	31.77	54.05	74.00	-19.95	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	35.10	31.90	8.70	32.15	43.55	54.00	-10.45	Vertical
7386.00	24.42	36.49	11.76	31.83	40.84	54.00	-13.16	Vertical
9848.00	25.20	38.62	14.31	31.77	46.36	54.00	-7.64	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	33.95	31.90	8.70	32.15	42.40	54.00	-11.60	Horizontal
7386.00	22.85	36.49	11.76	31.83	39.27	54.00	-14.73	Horizontal
9848.00	22.16	38.62	14.31	31.77	43.32	54.00	-10.68	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	39.90	31.79	8.62	32.10	48.21	74.00	-25.79	Vertical
7236.00	33.97	36.19	11.68	31.97	49.87	74.00	-24.13	Vertical
9648.00	32.54	38.07	14.16	31.56	53.21	74.00	-20.79	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4824.00	38.63	31.79	8.62	32.10	46.94	74.00	-27.06	Horizontal
7236.00	33.75	36.19	11.68	31.97	49.65	74.00	-24.35	Horizontal
9648.00	32.13	38.07	14.16	31.56	52.80	74.00	-21.20	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824.00	29.02	31.79	8.62	32.10	37.33	54.00	-16.67	Vertical
7236.00	22.85	36.19	11.68	31.97	38.75	54.00	-15.25	Vertical
9648.00	22.89	38.07	14.16	31.56	43.56	54.00	-10.44	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4824.00	28.19	31.79	8.62	32.10	36.50	54.00	-17.50	Horizontal
7236.00	22.34	36.19	11.68	31.97	38.24	54.00	-15.76	Horizontal
9648.00	21.88	38.07	14.16	31.56	42.55	54.00	-11.45	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT20)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	39.03	31.85	8.66	32.12	47.42	74.00	-26.58	Vertical
7311.00	34.09	36.37	11.71	31.91	50.26	74.00	-23.74	Vertical
9748.00	33.59	38.27	14.25	31.56	54.55	74.00	-19.45	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	39.56	31.85	8.66	32.12	47.95	74.00	-26.05	Horizontal
7311.00	32.75	36.37	11.71	31.91	48.92	74.00	-25.08	Horizontal
9748.00	33.49	38.27	14.25	31.56	54.45	74.00	-19.55	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.91	31.85	8.66	32.12	38.30	54.00	-15.70	Vertical
7311.00	22.41	36.37	11.71	31.91	38.58	54.00	-15.42	Vertical
9748.00	22.85	38.27	14.25	31.56	43.81	54.00	-10.19	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.69	31.85	8.66	32.12	38.08	54.00	-15.92	Horizontal
7311.00	21.85	36.37	11.71	31.91	38.02	54.00	-15.98	Horizontal
9748.00	23.21	38.27	14.25	31.56	44.17	54.00	-9.83	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *"*", means this data is the too weak instrument of signal is unable to test.*

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	44.32	31.90	8.70	32.15	52.77	74.00	-21.23	Vertical
7386.00	34.61	36.49	11.76	31.83	51.03	74.00	-22.97	Vertical
9848.00	36.78	38.62	14.31	31.77	57.94	74.00	-16.06	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4924.00	43.72	31.90	8.70	32.15	52.17	74.00	-21.83	Horizontal
7386.00	33.56	36.49	11.76	31.83	49.98	74.00	-24.02	Horizontal
9848.00	32.97	38.62	14.31	31.77	54.13	74.00	-19.87	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924.00	35.28	31.90	8.70	32.15	43.73	54.00	-10.27	Vertical
7386.00	24.54	36.49	11.76	31.83	40.96	54.00	-13.04	Vertical
9848.00	25.29	38.62	14.31	31.77	46.45	54.00	-7.55	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4924.00	34.11	31.90	8.70	32.15	42.56	54.00	-11.44	Horizontal
7386.00	22.96	36.49	11.76	31.83	39.38	54.00	-14.62	Horizontal
9848.00	22.24	38.62	14.31	31.77	43.40	54.00	-10.60	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	38.99	31.81	8.63	32.11	47.32	74.00	-26.68	Vertical
7266.00	33.40	36.28	11.69	31.94	49.43	74.00	-24.57	Vertical
9688.00	32.13	38.13	14.21	31.52	52.95	74.00	-21.05	Vertical
12060.00	*					74.00		Vertical
14472.00	*					74.00		Vertical
16884.00	*					74.00		Vertical
4844.00	37.86	31.81	8.63	32.11	46.19	74.00	-27.81	Horizontal
7266.00	33.25	36.28	11.69	31.94	49.28	74.00	-24.72	Horizontal
9688.00	31.75	38.13	14.21	31.52	52.57	74.00	-21.43	Horizontal
12060.00	*					74.00		Horizontal
14472.00	*					74.00		Horizontal
16884.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4844.00	28.18	31.81	8.63	32.11	36.51	54.00	-17.49	Vertical
7266.00	22.29	36.28	11.69	31.94	38.32	54.00	-15.68	Vertical
9688.00	22.50	38.13	14.21	31.52	43.32	54.00	-10.68	Vertical
12060.00	*					54.00		Vertical
14472.00	*					54.00		Vertical
16884.00	*					54.00		Vertical
4844.00	27.47	31.81	8.63	32.11	35.80	54.00	-18.20	Horizontal
7266.00	21.85	36.28	11.69	31.94	37.88	54.00	-16.12	Horizontal
9688.00	21.52	38.13	14.21	31.52	42.34	54.00	-11.66	Horizontal
12060.00	*					54.00		Horizontal
14472.00	*					54.00		Horizontal
16884.00	*					54.00		Horizontal

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Middle
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	38.27	31.85	8.66	32.12	46.66	74.00	-27.34	Vertical
7311.00	33.61	36.37	11.71	31.91	49.78	74.00	-24.22	Vertical
9748.00	33.25	38.27	14.25	31.56	54.21	74.00	-19.79	Vertical
12185.00	*					74.00		Vertical
14622.00	*					74.00		Vertical
17059.00	*					74.00		Vertical
4874.00	38.92	31.85	8.66	32.12	47.31	74.00	-26.69	Horizontal
7311.00	32.34	36.37	11.71	31.91	48.51	74.00	-25.49	Horizontal
9748.00	33.17	38.27	14.25	31.56	54.13	74.00	-19.87	Horizontal
12185.00	*					74.00		Horizontal
14622.00	*					74.00		Horizontal
17059.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874.00	29.21	31.85	8.66	32.12	37.60	54.00	-16.40	Vertical
7311.00	21.95	36.37	11.71	31.91	38.12	54.00	-15.88	Vertical
9748.00	22.52	38.27	14.25	31.56	43.48	54.00	-10.52	Vertical
12185.00	*					54.00		Vertical
14622.00	*					54.00		Vertical
17059.00	*					54.00		Vertical
4874.00	29.09	31.85	8.66	32.12	37.48	54.00	-16.52	Horizontal
7311.00	21.44	36.37	11.71	31.91	37.61	54.00	-16.39	Horizontal
9748.00	22.90	38.27	14.25	31.56	43.86	54.00	-10.14	Horizontal
12185.00	*					54.00		Horizontal
14622.00	*					54.00		Horizontal
17059.00	*					54.00		Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*”*, means this data is the too weak instrument of signal is unable to test.

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	43.03	31.88	8.68	32.13	51.46	74.00	-22.54	Vertical
7356.00	33.79	36.45	11.75	31.86	50.13	74.00	-23.87	Vertical
9808.00	36.19	38.43	14.29	31.68	57.23	74.00	-16.77	Vertical
12310.00	*					74.00		Vertical
14772.00	*					74.00		Vertical
17234.00	*					74.00		Vertical
4904.00	42.62	31.88	8.68	32.13	51.05	74.00	-22.95	Horizontal
7356.00	32.84	36.45	11.75	31.86	49.18	74.00	-24.82	Horizontal
9808.00	32.43	38.43	14.29	31.68	53.47	74.00	-20.53	Horizontal
12310.00	*					74.00		Horizontal
14772.00	*					74.00		Horizontal
17234.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904.00	34.09	31.88	8.68	32.13	42.52	54.00	-11.48	Vertical
7356.00	23.75	36.45	11.75	31.86	40.09	54.00	-13.91	Vertical
9808.00	24.73	38.43	14.29	31.68	45.77	54.00	-8.23	Vertical
12310.00	*					54.00		Vertical
14772.00	*					54.00		Vertical
17234.00	*					54.00		Vertical
4904.00	33.08	31.88	8.68	32.13	41.51	54.00	-12.49	Horizontal
7356.00	22.26	36.45	11.75	31.86	38.60	54.00	-15.40	Horizontal
9808.00	21.71	38.43	14.29	31.68	42.75	54.00	-11.25	Horizontal
12310.00	*					54.00		Horizontal
14772.00	*					54.00		Horizontal
17234.00	*					54.00		Horizontal

Remark:

- 1 Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2 “*”, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo


Radiated Emission

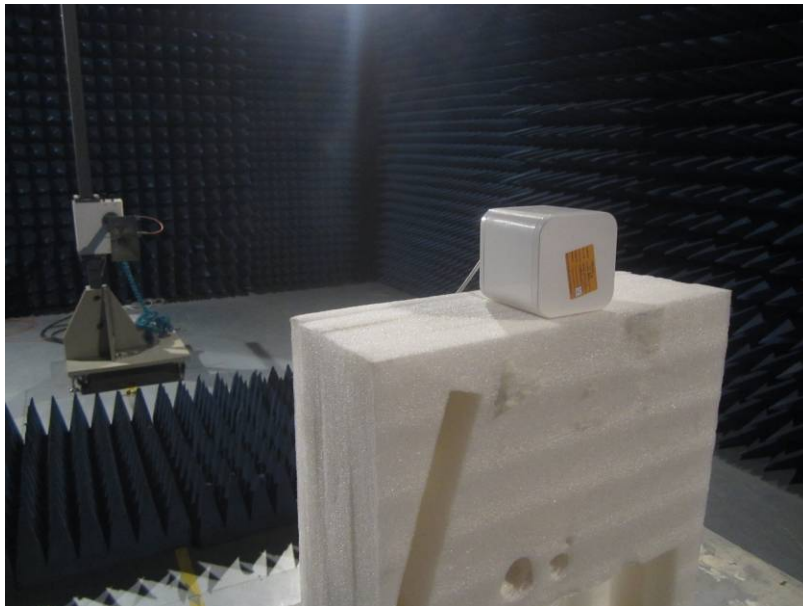
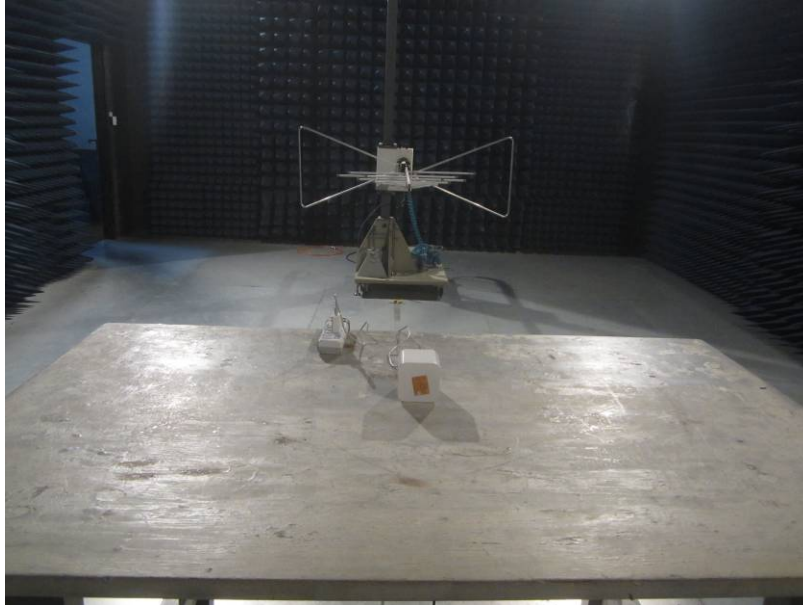




Conducted Emission







9 EUT Constructional Details

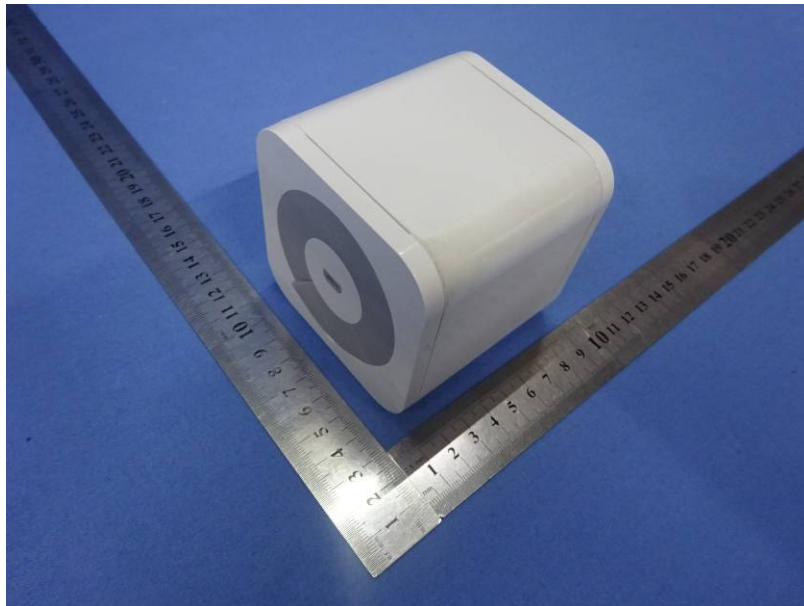


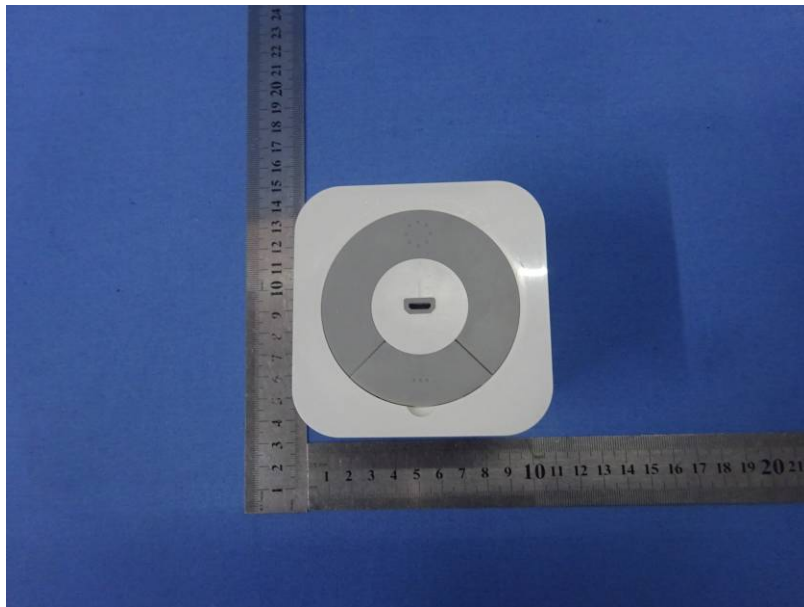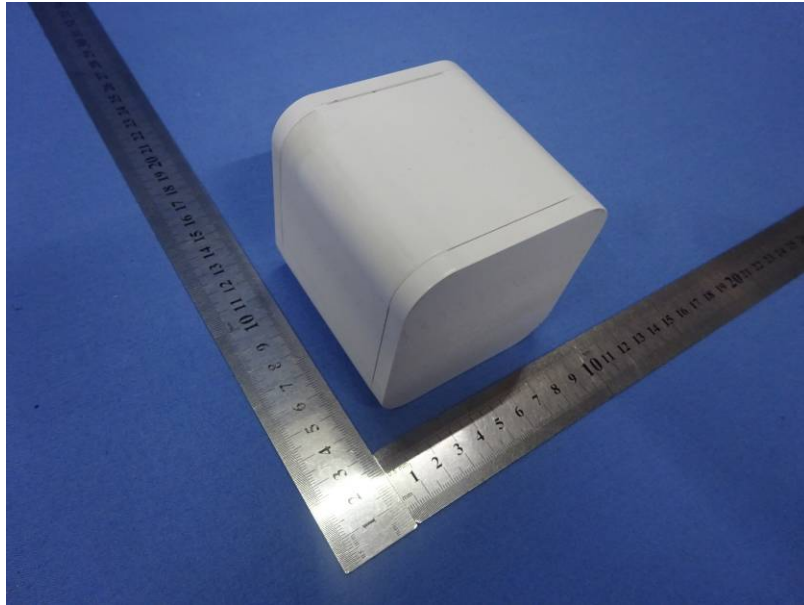

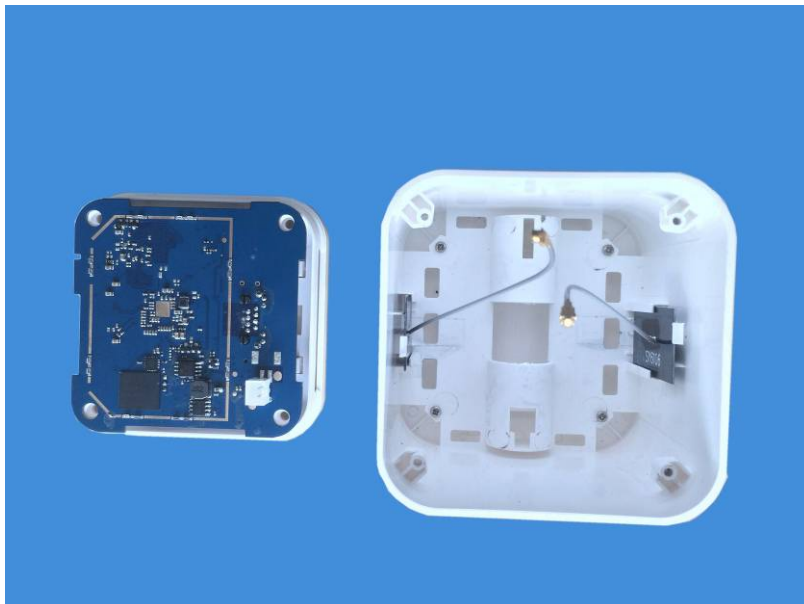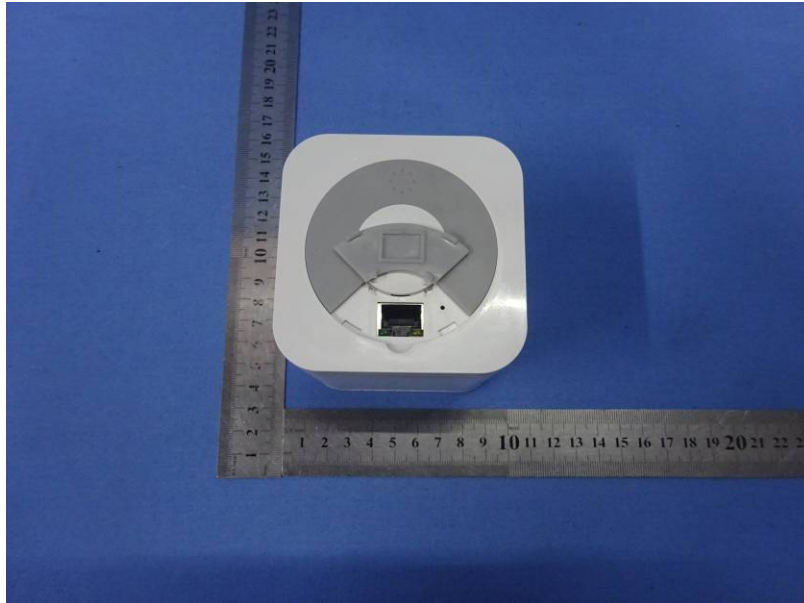

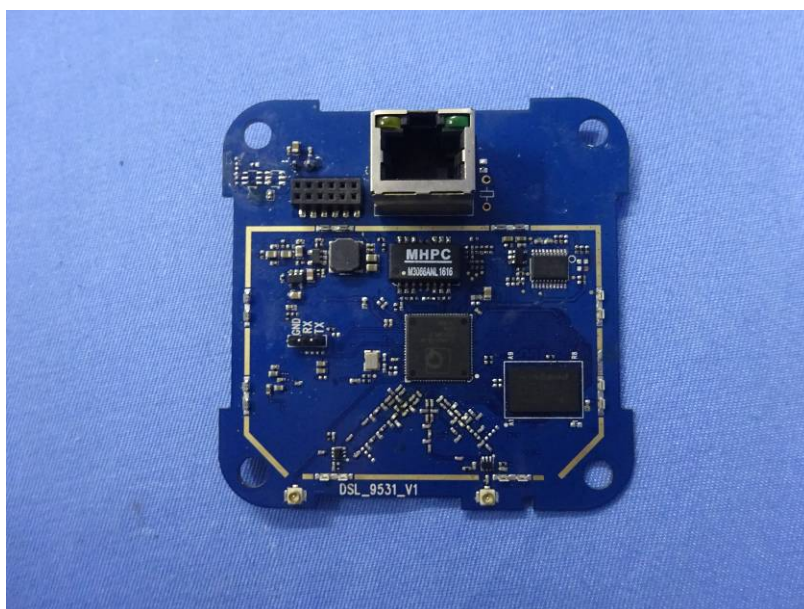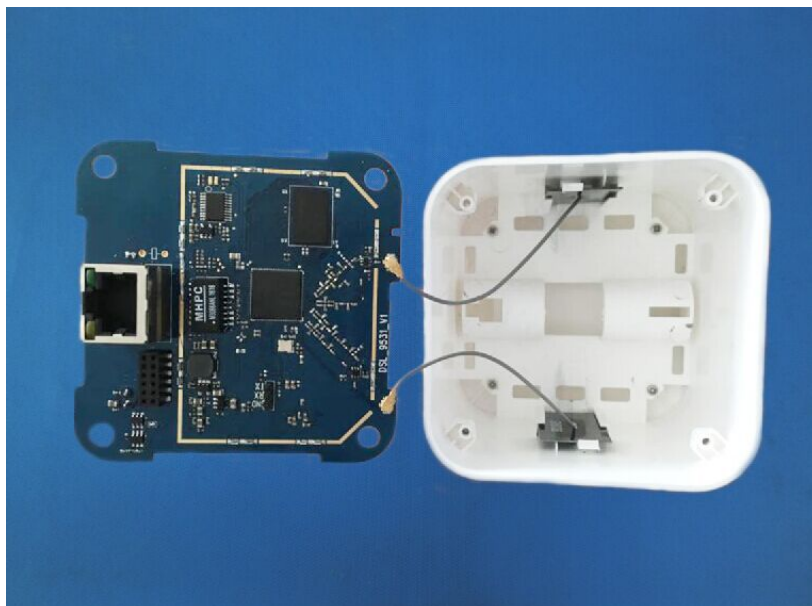

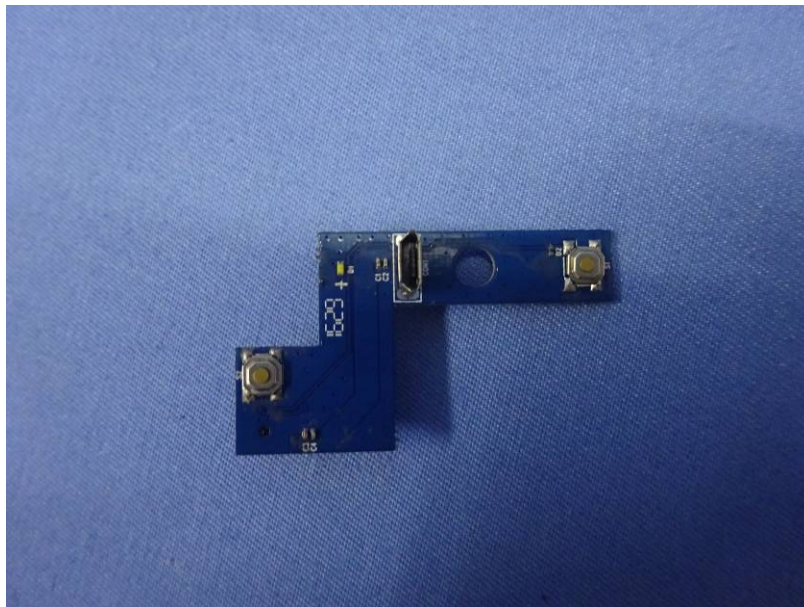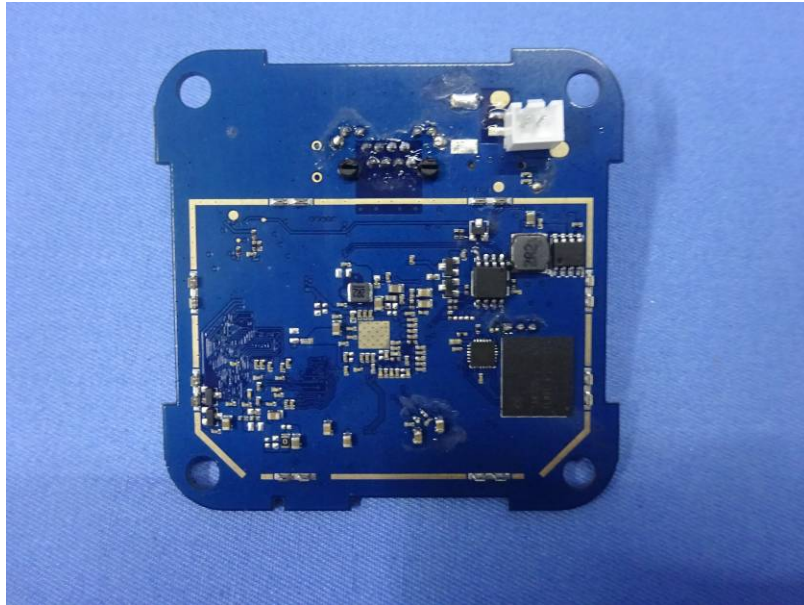

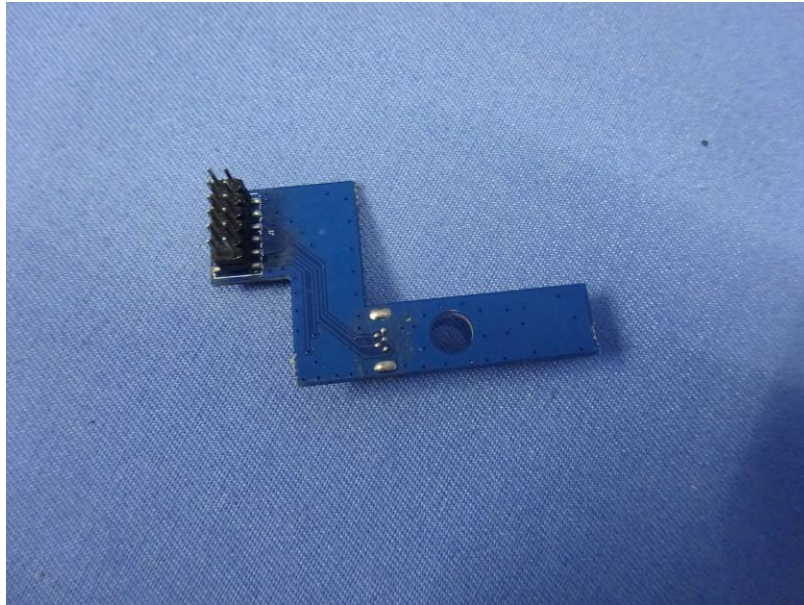

-----End-----