


|           |                          |                      |              |
|-----------|--------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D               | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                 | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

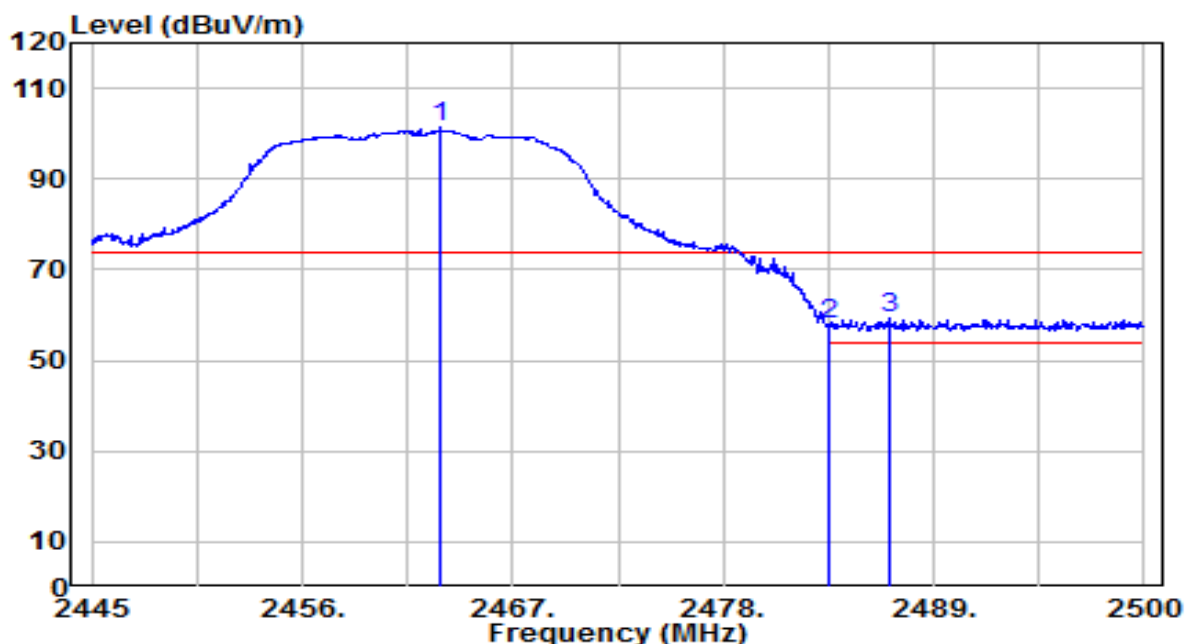


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.260        | 69.27          | 32.12      | 101.39               | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 25.56          | 32.20      | 57.76                | -16.24      | 74.00          | 150         | 210         | Peak              |
| 3  | * 2486.635      | 27.14          | 32.21      | 59.35                | -14.65      | 74.00          | 150         | 210         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                          |                      |              |
|-----------|--------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D               | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                 | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11g_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

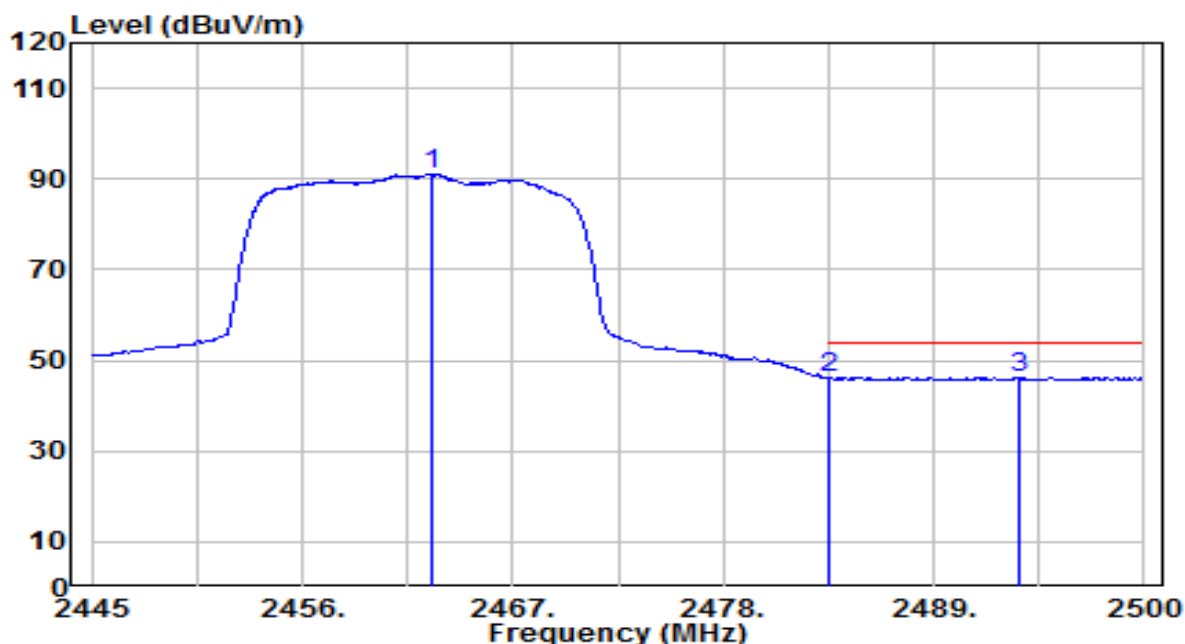


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.710        | 59.00          | 32.12      | 91.12                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | 2483.500        | 13.97          | 32.20      | 46.17                | -7.83       | 54.00          | 150         | 210         | Average           |
| 3  | * 2493.400      | 14.08          | 32.24      | 46.31                | -7.69       | 54.00          | 150         | 210         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

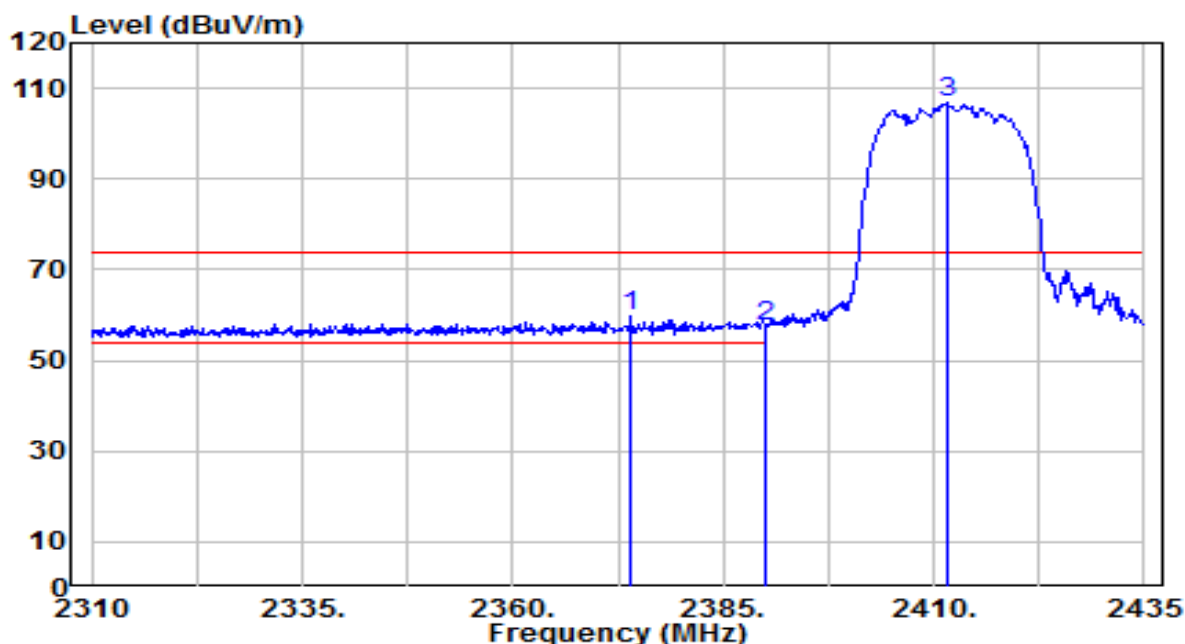


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2374.000      | 27.80          | 31.79      | 59.59                | -14.41      | 74.00          | 155         | 5           | Peak              |
| 2  | 2390.000        | 25.68          | 31.85      | 57.53                | -16.47      | 74.00          | 155         | 5           | Peak              |
| 3  | 2411.625        | 74.74          | 31.93      | 106.67               | N/A         | N/A            | 155         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

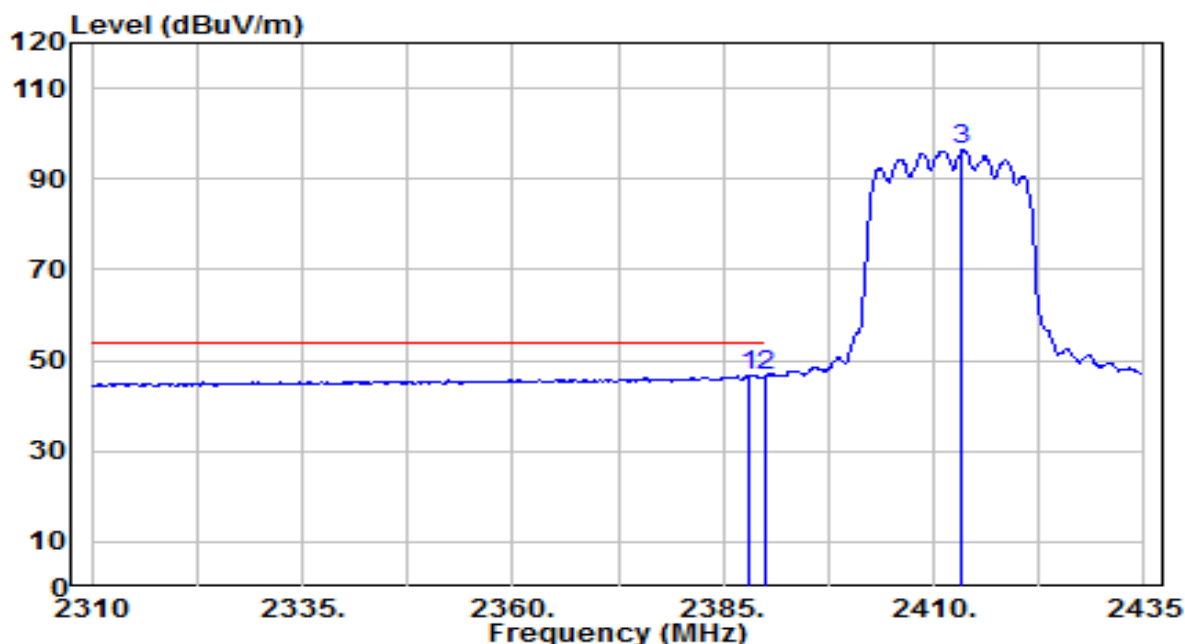


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2388.000      | 14.88          | 31.84      | 46.72                | -7.28       | 54.00          | 155         | 5           | Average           |
| 2  | 2390.000        | 14.66          | 31.85      | 46.51                | -7.49       | 54.00          | 155         | 5           | Average           |
| 3  | 2413.250        | 64.48          | 31.94      | 96.42                | N/A         | N/A            | 155         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

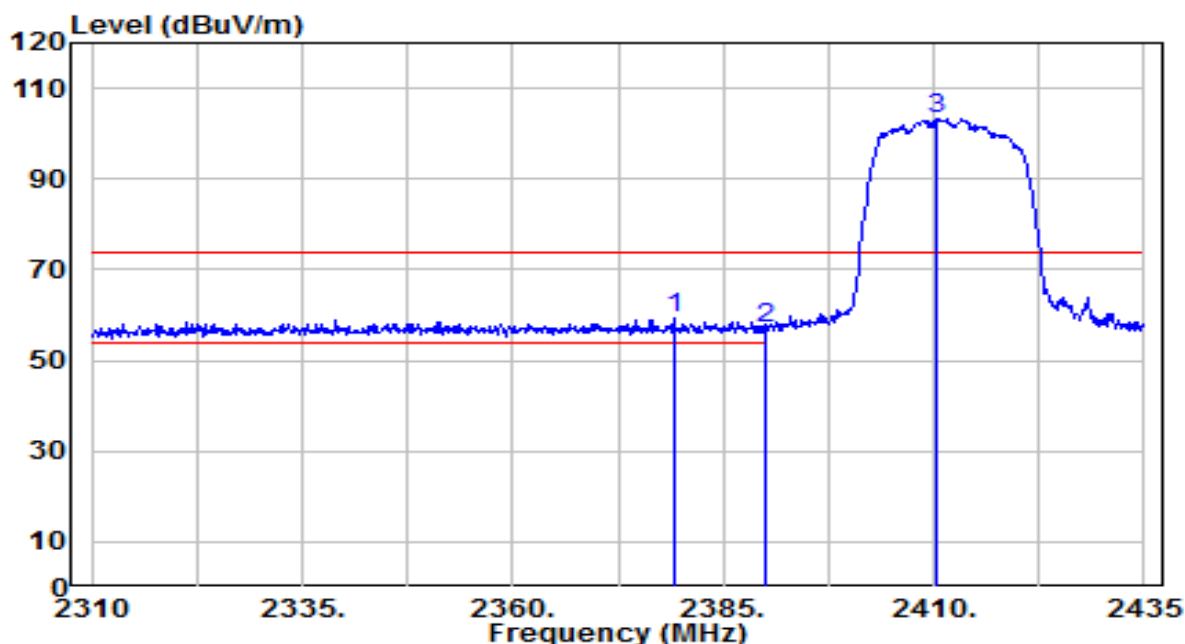


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2379.125      | 27.36          | 31.81      | 59.17                | -14.83      | 74.00          | 150         | 355         | Peak              |
| 2  | 2390.000        | 25.03          | 31.85      | 56.88                | -17.12      | 74.00          | 150         | 355         | Peak              |
| 3  | 2410.250        | 71.26          | 31.92      | 103.18               | N/A         | N/A            | 150         | 355         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

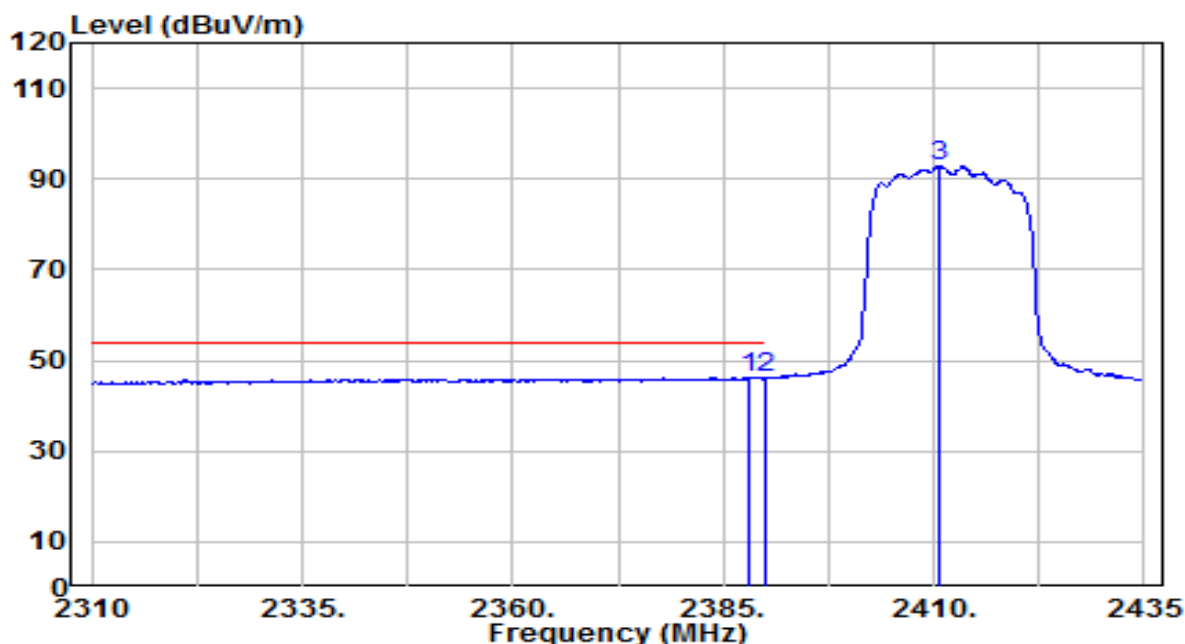


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.000        | 14.24          | 31.84      | 46.08                | -7.92       | 54.00          | 150         | 355         | Average           |
| 2  | * 2390.000      | 14.42          | 31.85      | 46.27                | -7.73       | 54.00          | 150         | 355         | Average           |
| 3  | 2410.500        | 61.13          | 31.93      | 93.06                | N/A         | N/A            | 150         | 355         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

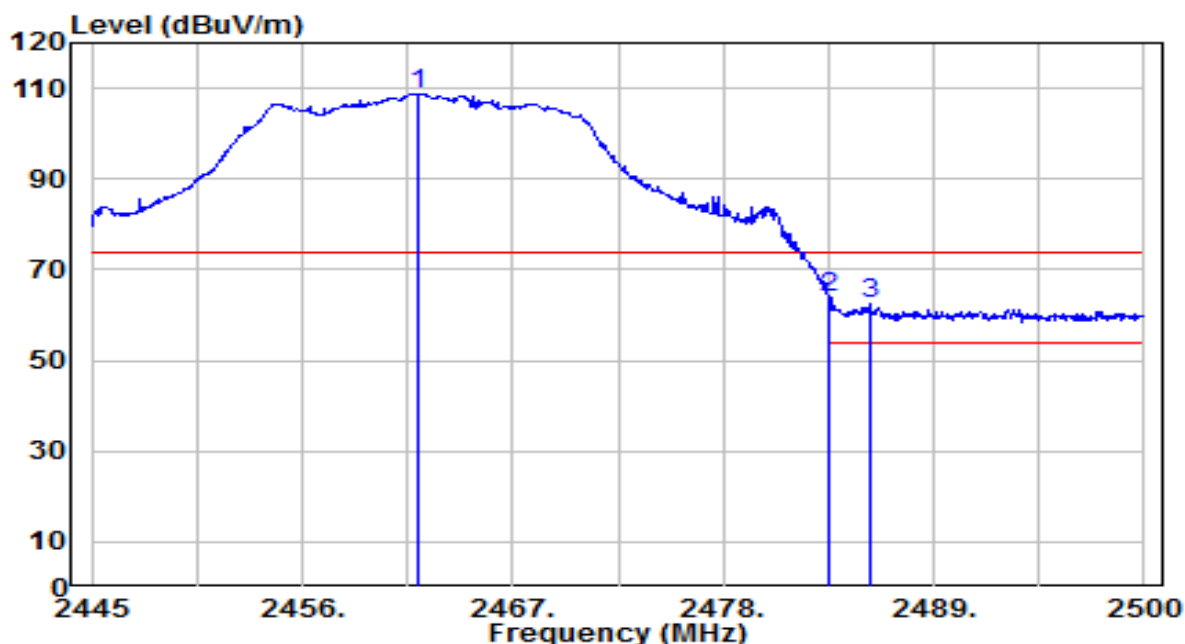


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2462.105        | 76.73          | 32.12      | 108.85               | N/A         | N/A            | 125         | 10          | Peak              |
| 2  | * 2483.500      | 31.63          | 32.20      | 63.82                | -10.18      | 74.00          | 125         | 10          | Peak              |
| 3  | 2485.700        | 30.32          | 32.21      | 62.52                | -11.48      | 74.00          | 125         | 10          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

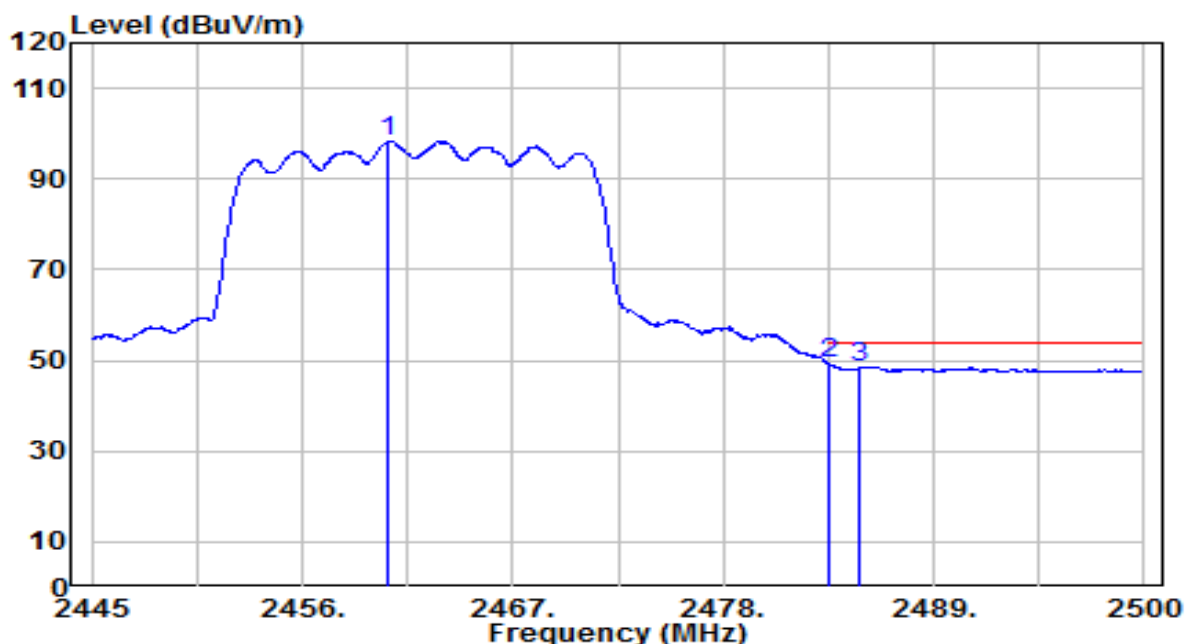


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.455        | 66.29          | 32.11      | 98.40                | N/A         | N/A            | 125         | 10          | Average           |
| 2  | * 2483.500      | 17.21          | 32.20      | 49.40                | -4.60       | 54.00          | 125         | 10          | Average           |
| 3  | 2485.150        | 16.30          | 32.20      | 48.50                | -5.50       | 54.00          | 125         | 10          | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

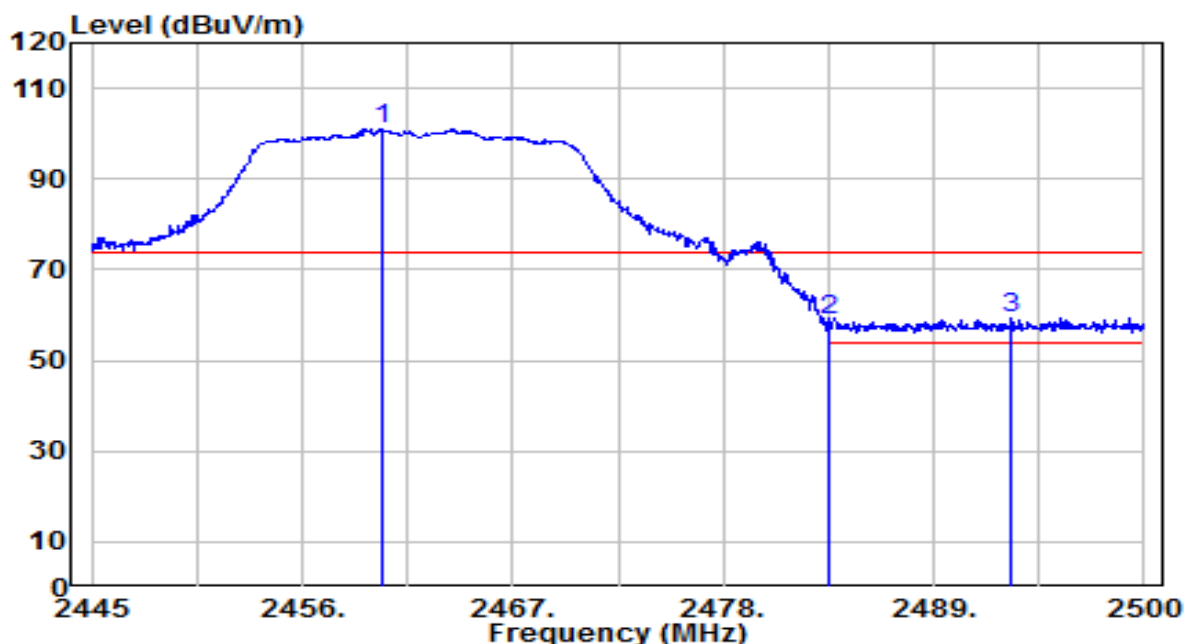


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.235        | 68.94          | 32.11      | 101.05               | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 26.68          | 32.20      | 58.88                | -15.12      | 74.00          | 150         | 210         | Peak              |
| 3  | * 2493.015      | 27.16          | 32.23      | 59.40                | -14.60      | 74.00          | 150         | 210         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

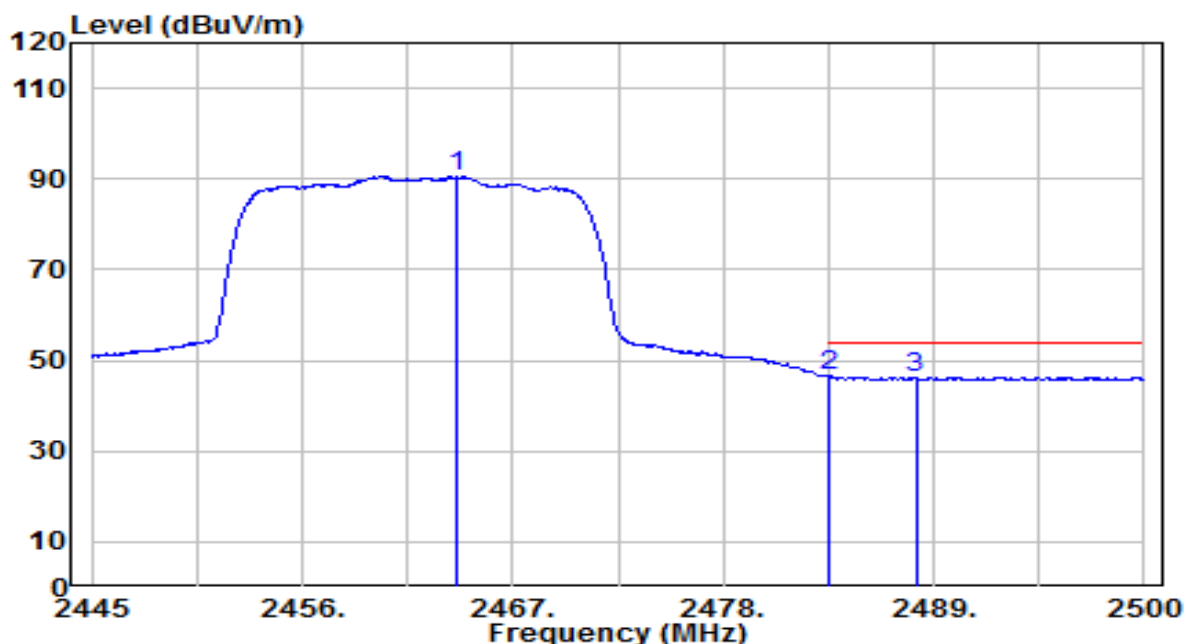


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2464.085        | 58.43          | 32.13      | 90.55                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | * 2483.500      | 14.24          | 32.20      | 46.44                | -7.56       | 54.00          | 150         | 210         | Average           |
| 3  | 2488.065        | 14.13          | 32.22      | 46.35                | -7.65       | 54.00          | 150         | 210         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

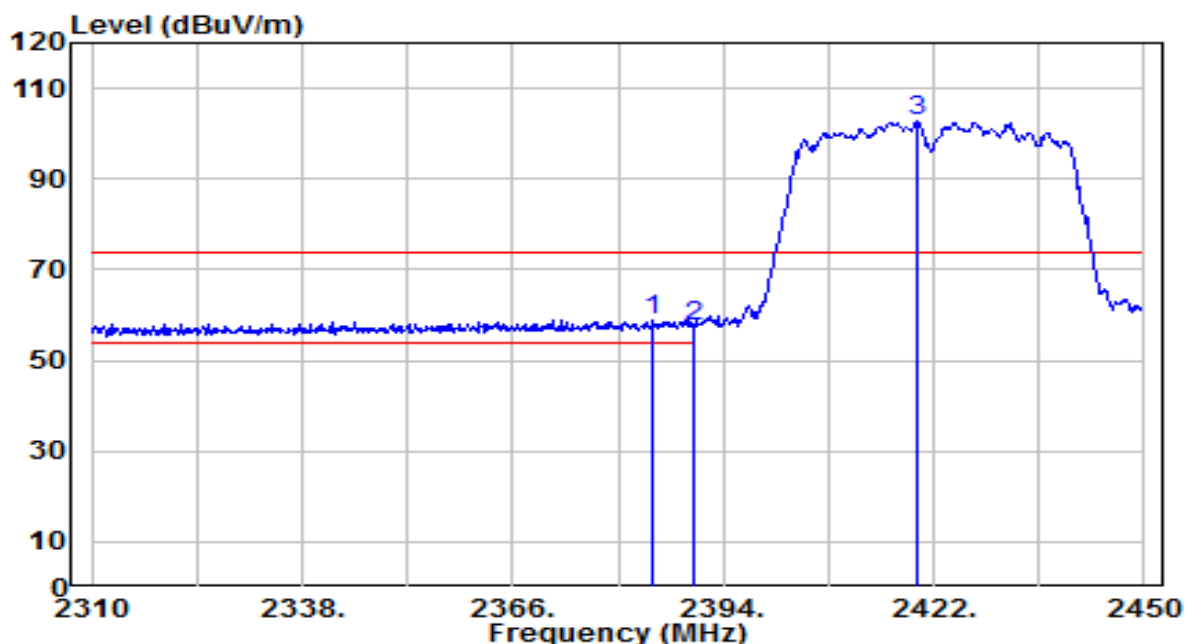


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2384.760      | 26.98          | 31.83      | 58.80                | -15.20      | 74.00          | 155         | 5           | Peak              |
| 2  | 2390.000        | 25.70          | 31.85      | 57.55                | -16.45      | 74.00          | 155         | 5           | Peak              |
| 3  | 2419.900        | 70.61          | 31.96      | 102.57               | N/A         | N/A            | 155         | 5           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

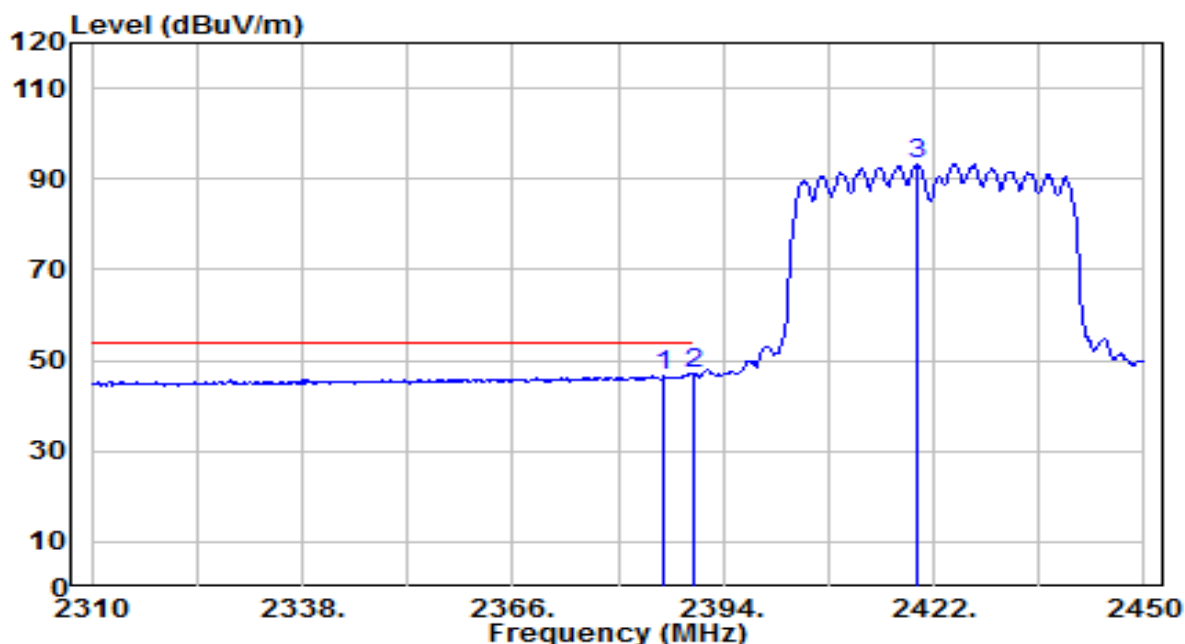


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2386.020        | 14.70          | 31.83      | 46.54                | -7.46       | 54.00          | 155         | 5           | Average           |
| 2  | * 2390.000      | 15.26          | 31.85      | 47.11                | -6.89       | 54.00          | 155         | 5           | Average           |
| 3  | 2419.760        | 61.40          | 31.96      | 93.36                | N/A         | N/A            | 155         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

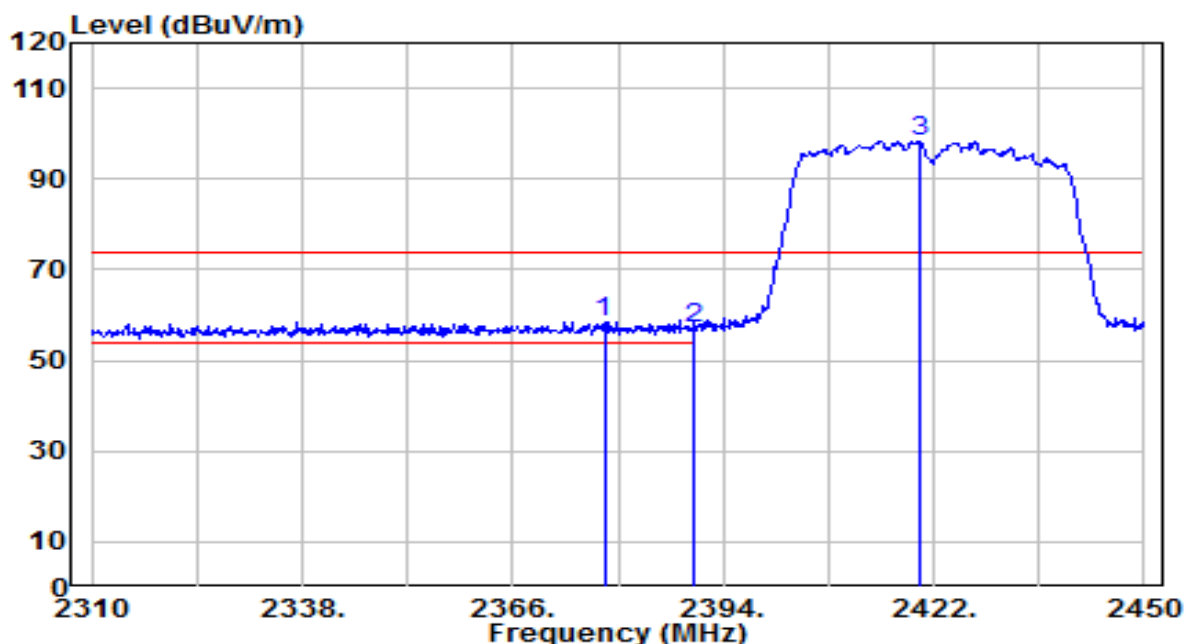


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2378.180      | 26.76          | 31.80      | 58.56                | -15.44      | 74.00          | 150         | 355         | Peak              |
| 2  | 2390.000        | 25.33          | 31.85      | 57.18                | -16.82      | 74.00          | 150         | 355         | Peak              |
| 3  | 2420.320        | 66.49          | 31.96      | 98.45                | N/A         | N/A            | 150         | 355         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

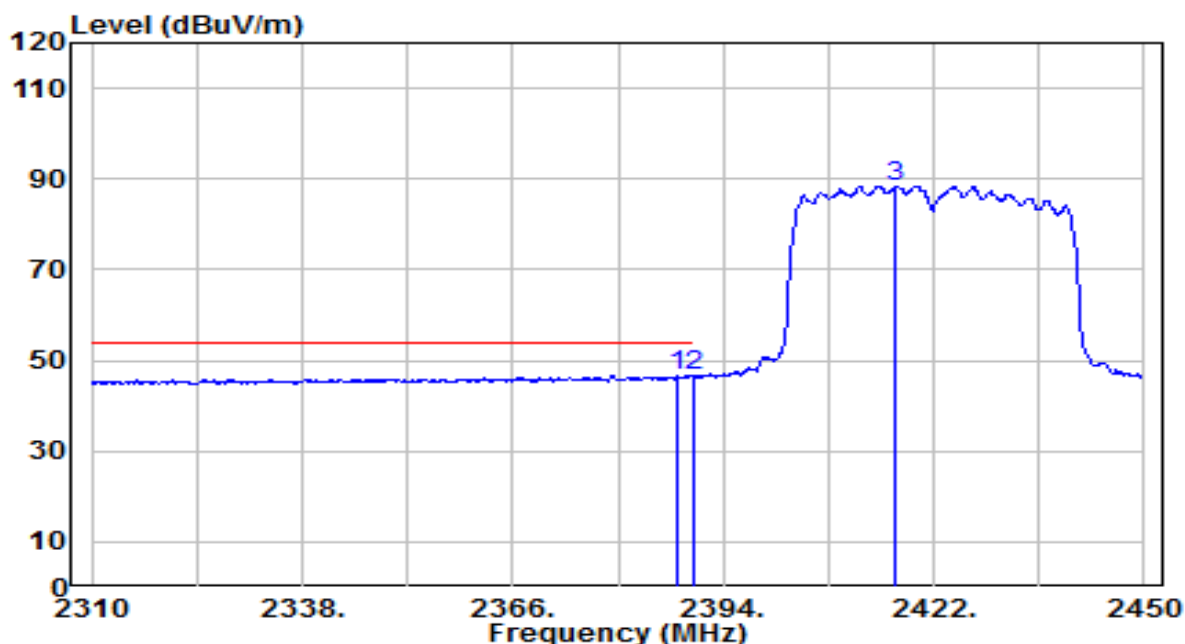


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.840        | 14.67          | 31.84      | 46.51                | -7.49       | 54.00          | 150         | 355         | Average           |
| 2  | * 2390.000      | 14.70          | 31.85      | 46.55                | -7.45       | 54.00          | 150         | 355         | Average           |
| 3  | 2416.960        | 56.44          | 31.95      | 88.39                | N/A         | N/A            | 150         | 355         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

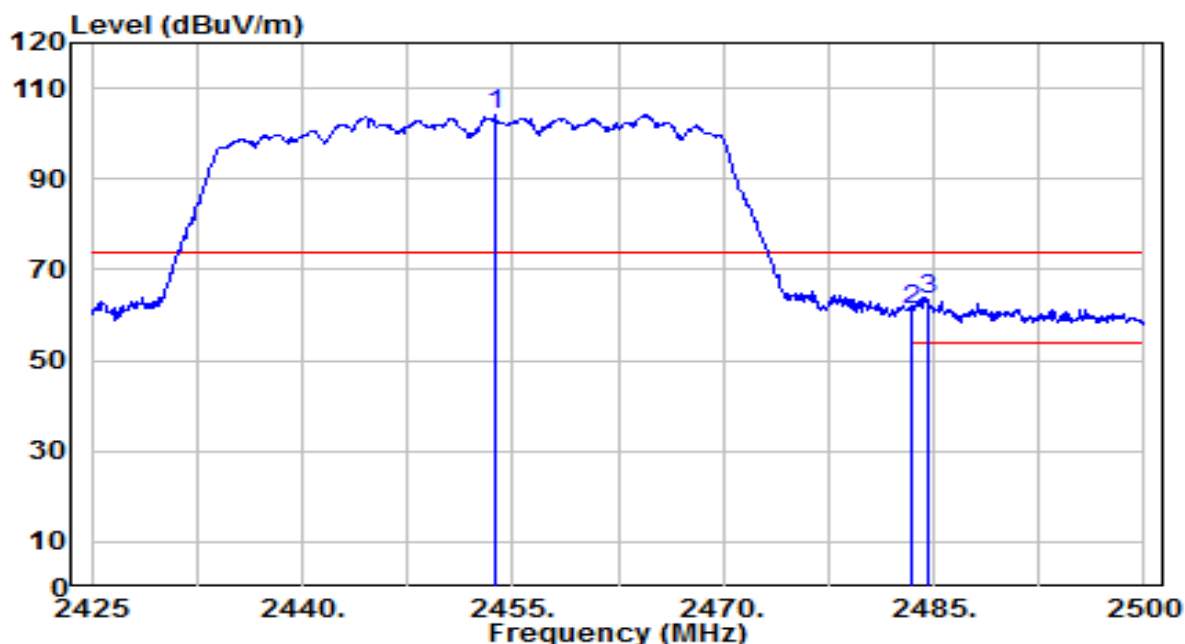


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2453.725        | 71.88          | 32.09      | 103.97               | N/A         | N/A            | 125         | 10          | Peak              |
| 2  | 2483.500        | 28.96          | 32.20      | 61.16                | -12.84      | 74.00          | 125         | 10          | Peak              |
| 3  | * 2484.625      | 31.11          | 32.20      | 63.31                | -10.69      | 74.00          | 125         | 10          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                    | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

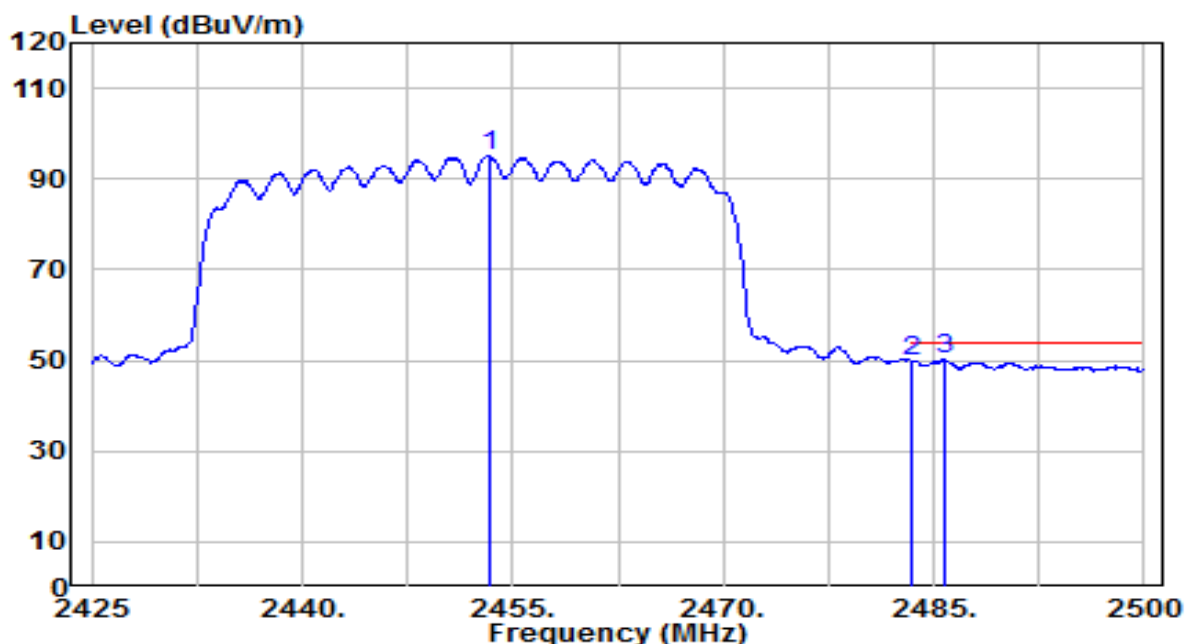


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2453.350        | 63.10          | 32.09      | 95.19                | N/A         | N/A            | 125         | 10          | Average           |
| 2  | 2483.500        | 17.57          | 32.20      | 49.77                | -4.23       | 54.00          | 125         | 10          | Average           |
| 3  | * 2485.750      | 18.06          | 32.21      | 50.27                | -3.73       | 54.00          | 125         | 10          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

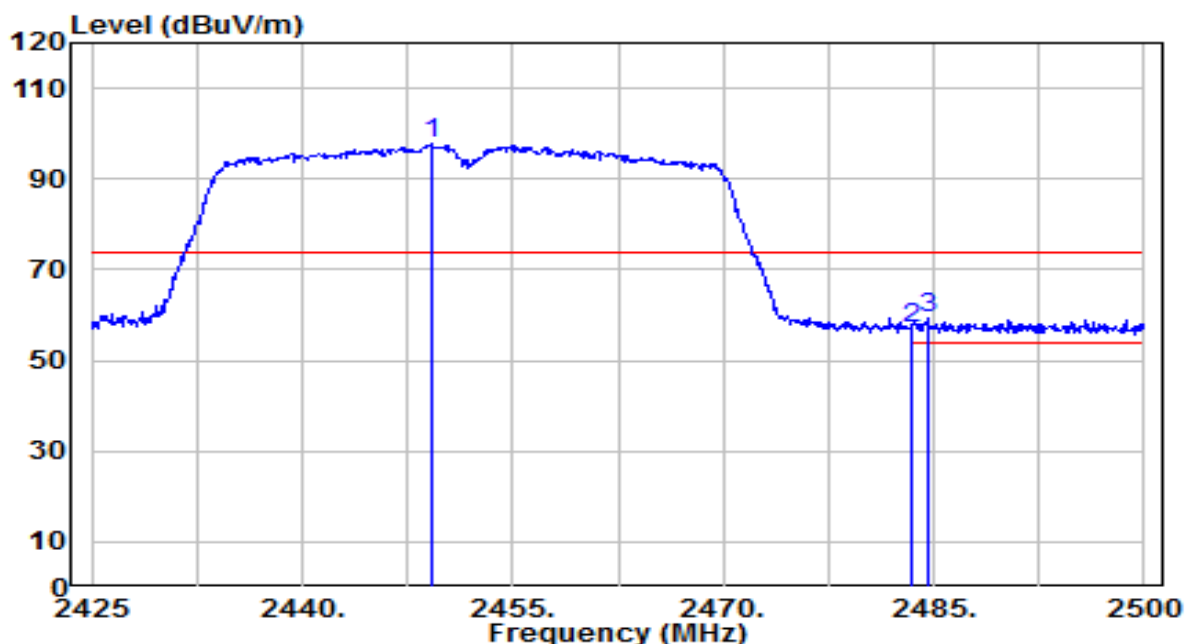


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.150        | 65.65          | 32.07      | 97.72                | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 24.65          | 32.20      | 56.85                | -17.15      | 74.00          | 150         | 210         | Peak              |
| 3  | * 2484.625      | 26.92          | 32.20      | 59.12                | -14.88      | 74.00          | 150         | 210         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                               |                      |              |
|-----------|-------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet      | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                    | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11n-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

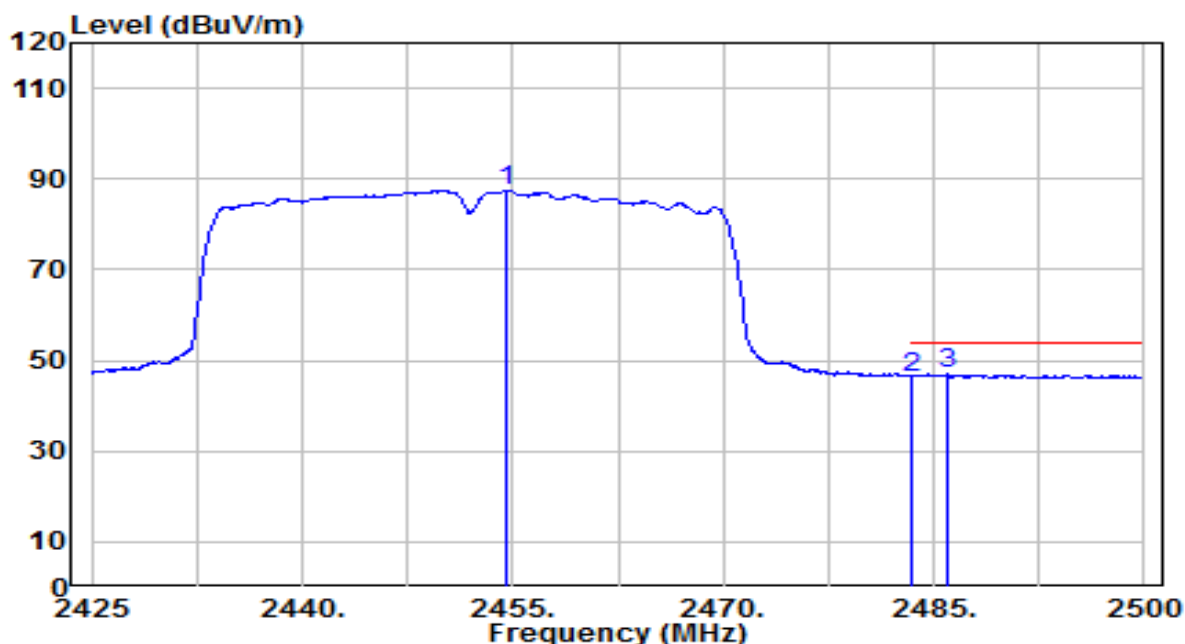


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2454.475        | 55.37          | 32.09      | 87.46                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | 2483.500        | 14.18          | 32.20      | 46.38                | -7.62       | 54.00          | 150         | 210         | Average           |
| 3  | * 2485.975      | 14.77          | 32.21      | 46.97                | -7.03       | 54.00          | 150         | 210         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

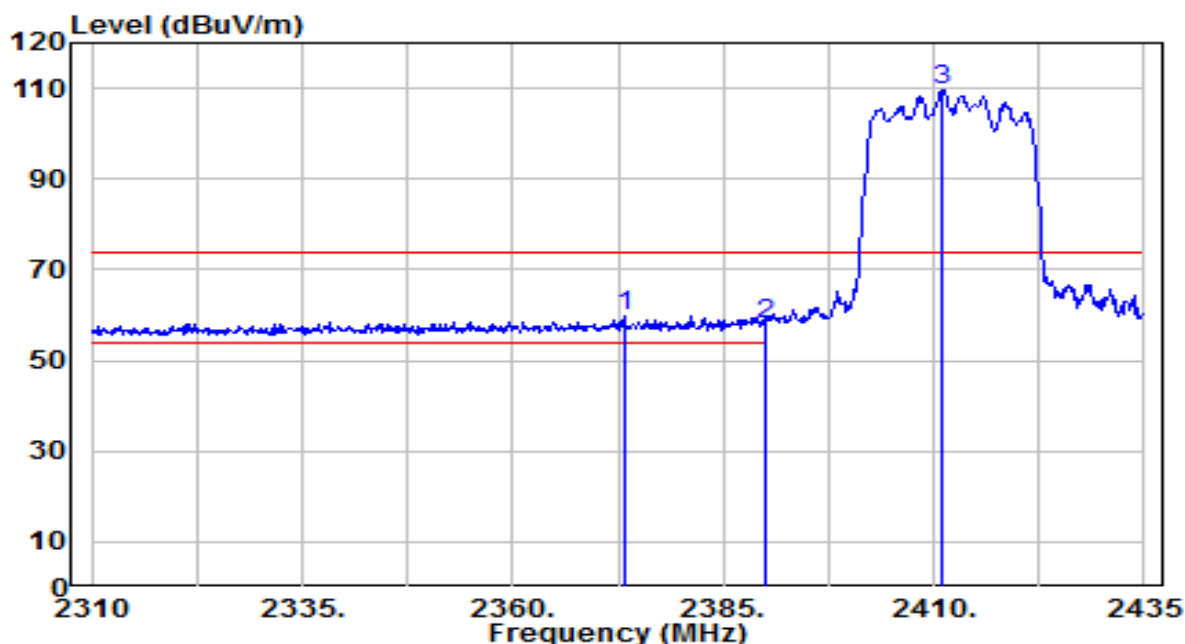


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 2373.250        | 28.20          | 31.79      | 59.99                | -14.01      | 74.00          | 155         | 5           | Peak              |
| 2  |   | 2390.000        | 25.97          | 31.85      | 57.82                | -16.18      | 74.00          | 155         | 5           | Peak              |
| 3  |   | 2411.125        | 77.76          | 31.93      | 109.68               | N/A         | N/A            | 155         | 5           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

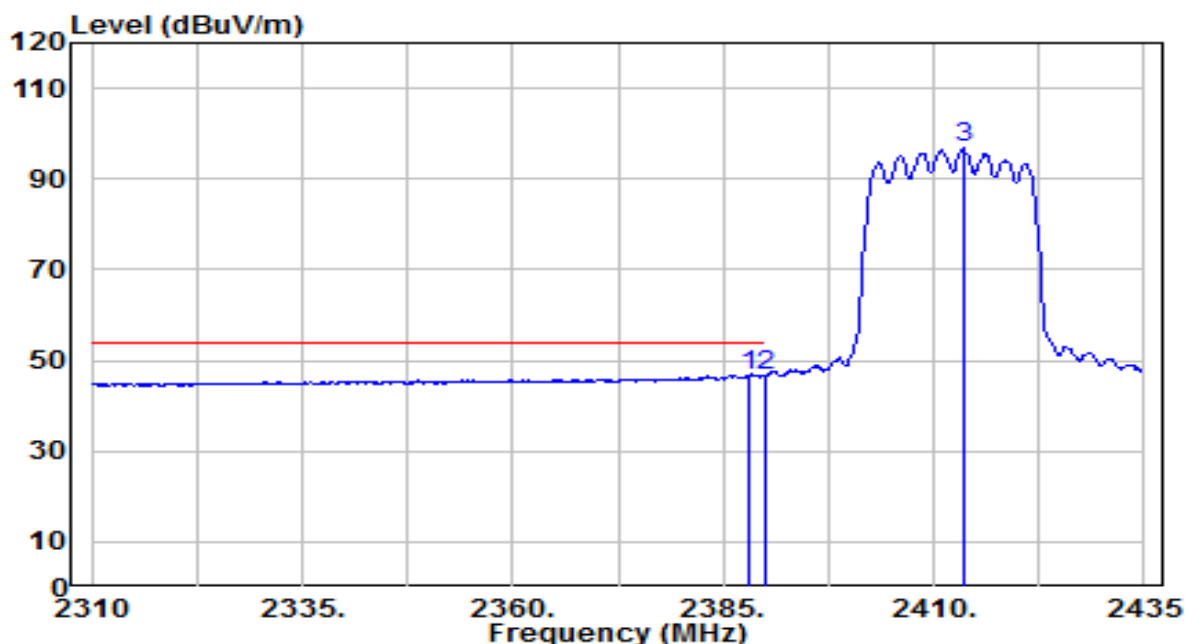


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2388.000        | 14.88          | 31.84      | 46.72                | -7.28       | 54.00          | 155         | 5           | Average           |
| 2  | * 2390.000      | 14.93          | 31.85      | 46.78                | -7.22       | 54.00          | 155         | 5           | Average           |
| 3  | 2413.500        | 64.79          | 31.94      | 96.72                | N/A         | N/A            | 155         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

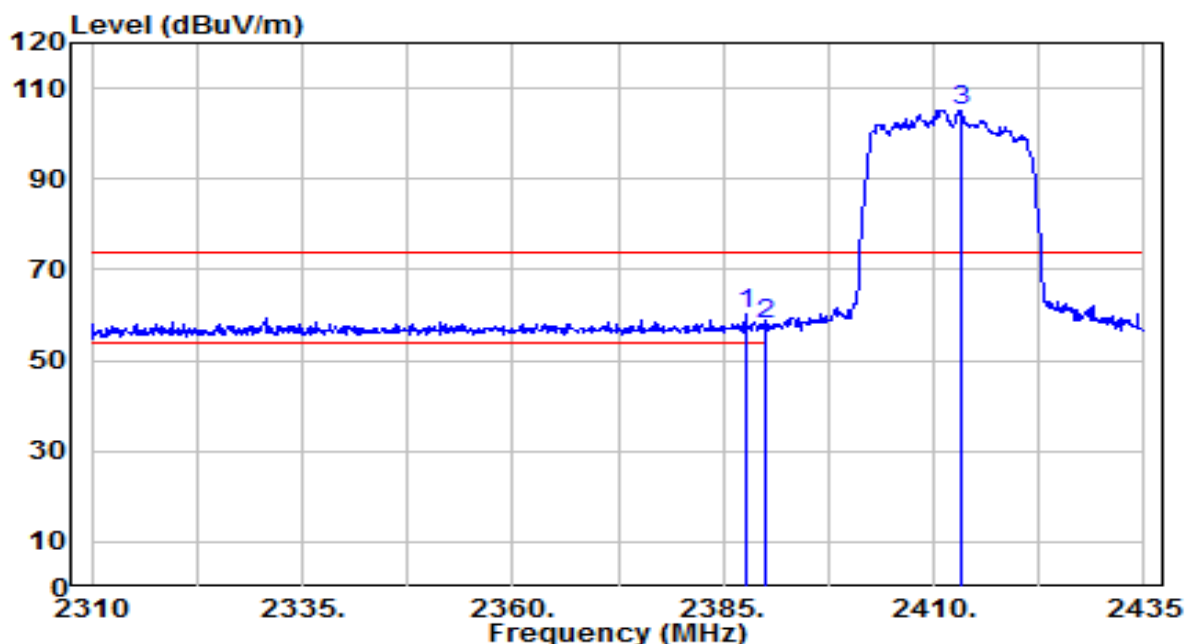


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 2387.625           | 28.20             | 31.84         | 60.04                   | -13.96         | 74.00             | 150            | 355            | Peak                 |
| 2  |   | 2390.000           | 26.30             | 31.85         | 58.15                   | -15.85         | 74.00             | 150            | 355            | Peak                 |
| 3  |   | 2413.125           | 73.26             | 31.94         | 105.19                  | N/A            | N/A               | 150            | 355            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 1_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

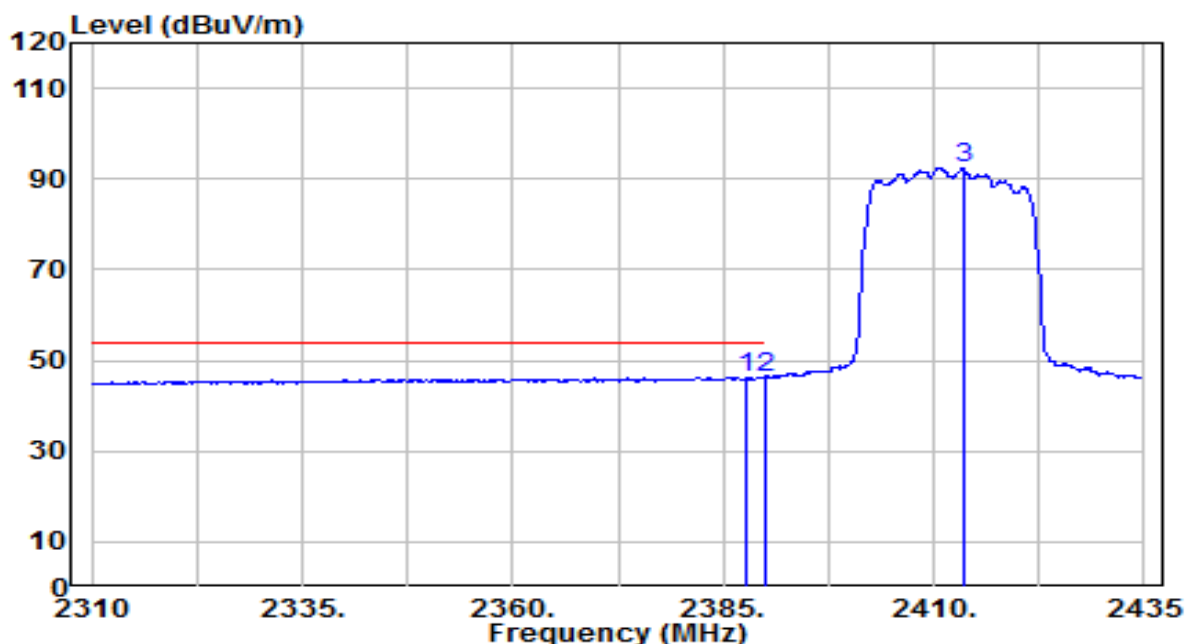


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.875        | 14.38          | 31.84      | 46.22                | -7.78       | 54.00          | 150         | 355         | Average           |
| 2  | * 2390.000      | 14.47          | 31.85      | 46.32                | -7.68       | 54.00          | 150         | 355         | Average           |
| 3  | 2413.500        | 60.55          | 31.94      | 92.49                | N/A         | N/A            | 150         | 355         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                 |                      |              |
|-----------|---------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet        | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                      | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

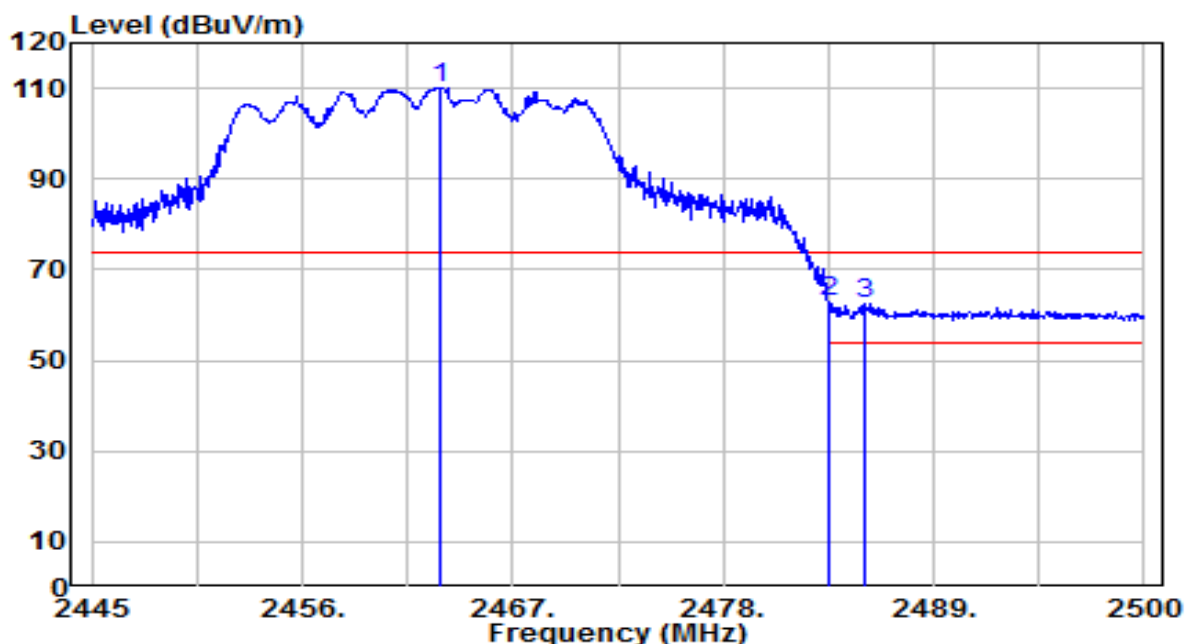


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.205        | 78.13          | 32.12      | 110.25               | N/A         | N/A            | 125         | 10          | Peak              |
| 2  | * 2483.500      | 30.68          | 32.20      | 62.88                | -11.12      | 74.00          | 125         | 10          | Peak              |
| 3  | 2485.370        | 30.21          | 32.21      | 62.42                | -11.58      | 74.00          | 125         | 10          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                 |                      |              |
|-----------|---------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet        | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                      | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                      | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

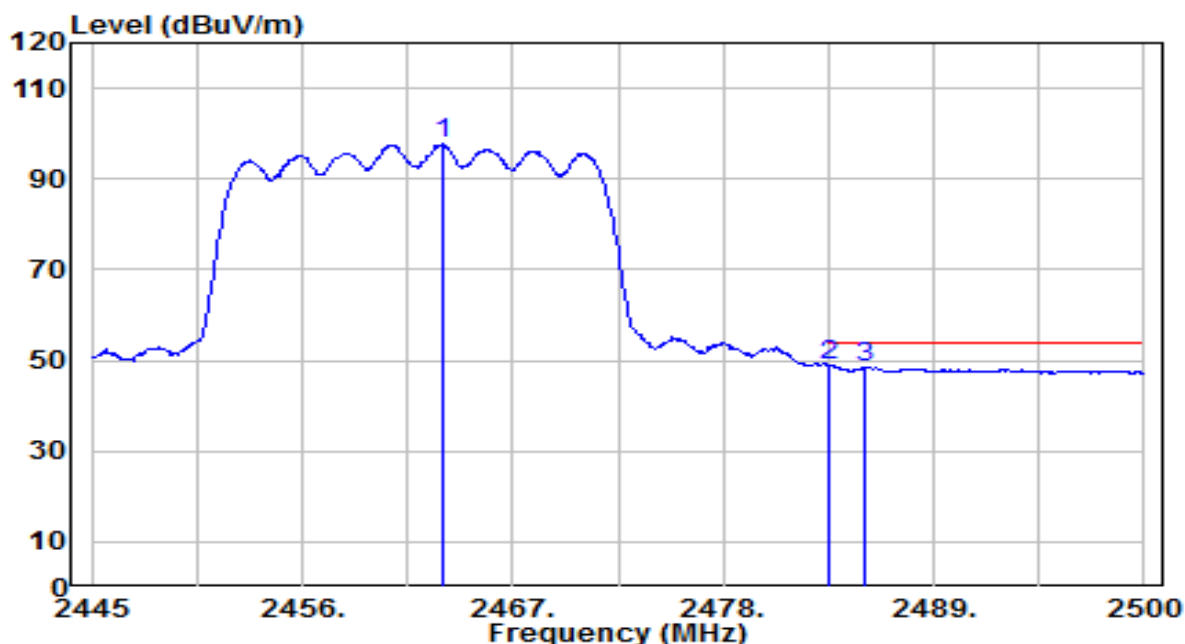


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2463.370        | 65.49          | 32.12      | 97.62                | N/A         | N/A            | 125         | 10          | Average           |
| 2  | * 2483.500      | 16.78          | 32.20      | 48.98                | -5.02       | 54.00          | 125         | 10          | Average           |
| 3  | 2485.370        | 16.21          | 32.21      | 48.41                | -5.59       | 54.00          | 125         | 10          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                 |                      |              |
|-----------|---------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet        | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                      | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                        | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

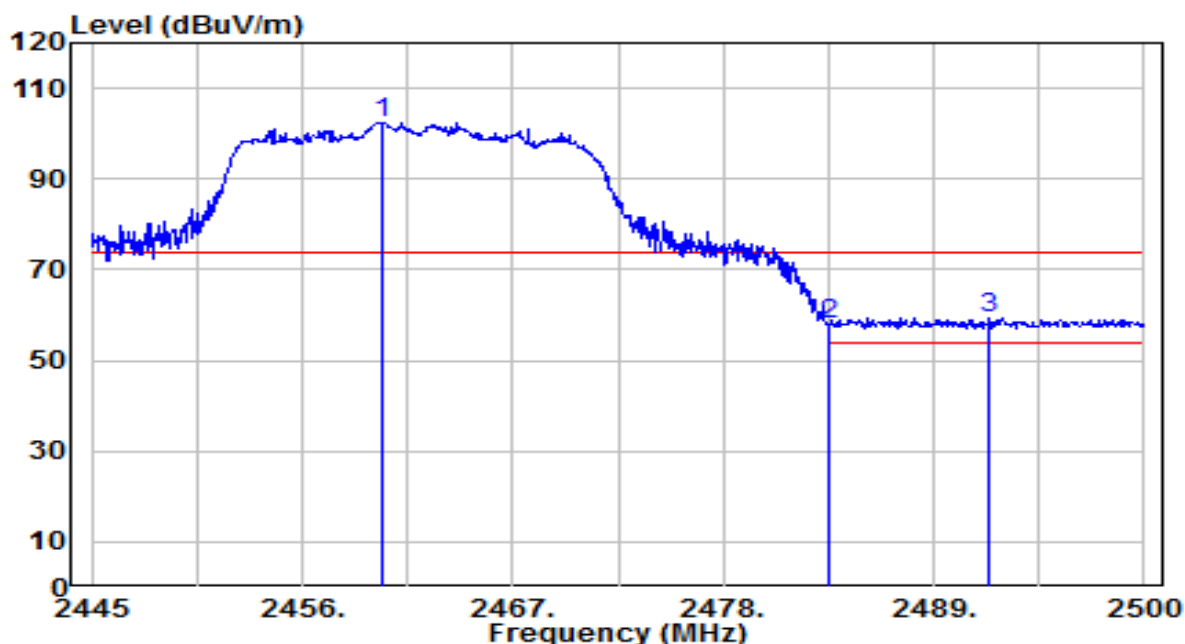


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2460.125        | 70.41          | 32.11      | 102.52               | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 25.80          | 32.20      | 58.00                | -16.00      | 74.00          | 150         | 210         | Peak              |
| 3  | * 2491.915      | 27.12          | 32.23      | 59.35                | -14.65      | 74.00          | 150         | 210         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                 |                      |              |
|-----------|---------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet        | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                      | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                        | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-20MHz_TX_CH 11_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

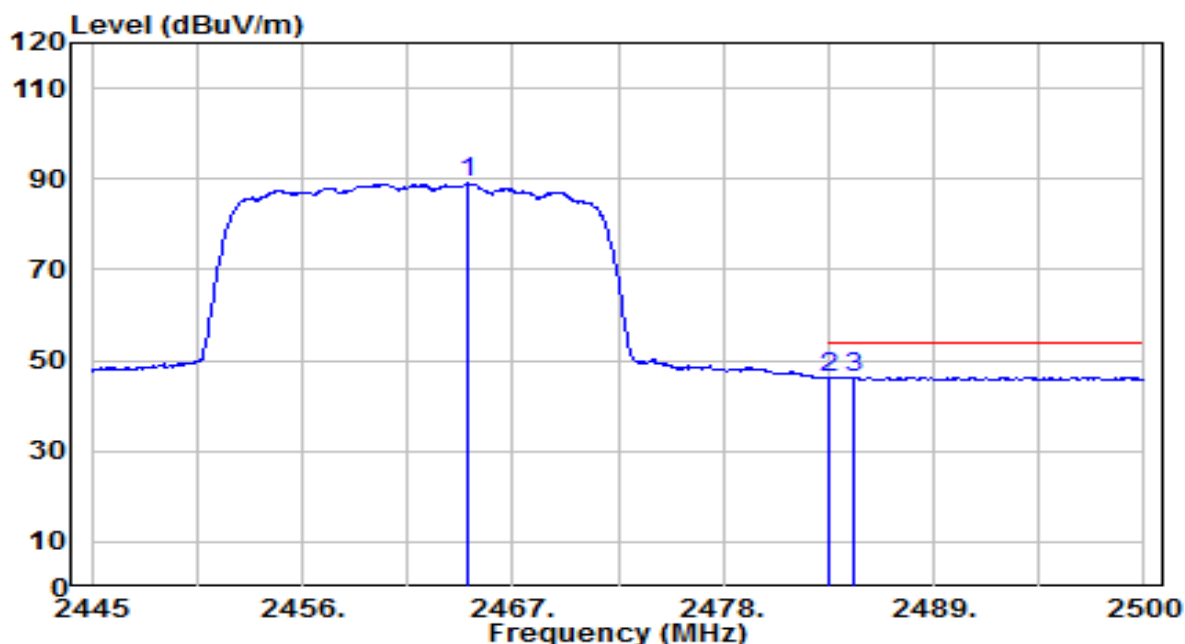


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2464.690        | 56.88          | 32.13      | 89.01                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | 2483.500        | 13.88          | 32.20      | 46.08                | -7.92       | 54.00          | 150         | 210         | Average           |
| 3  | * 2484.820      | 14.13          | 32.20      | 46.34                | -7.66       | 54.00          | 150         | 210         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

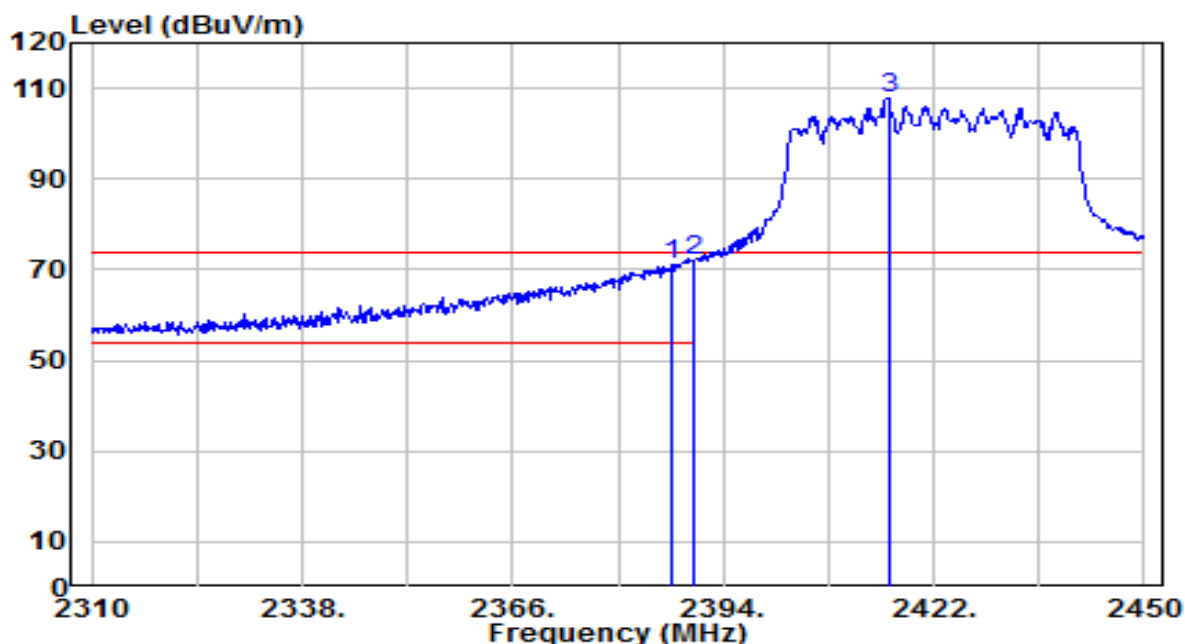


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.280        | 39.44          | 31.84      | 71.28                | -2.72       | 74.00          | 155         | 5           | Peak              |
| 2  | * 2390.000      | 40.30          | 31.85      | 72.15                | -1.85       | 74.00          | 155         | 5           | Peak              |
| 3  | 2415.980        | 75.79          | 31.95      | 107.74               | N/A         | N/A            | 155         | 5           | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

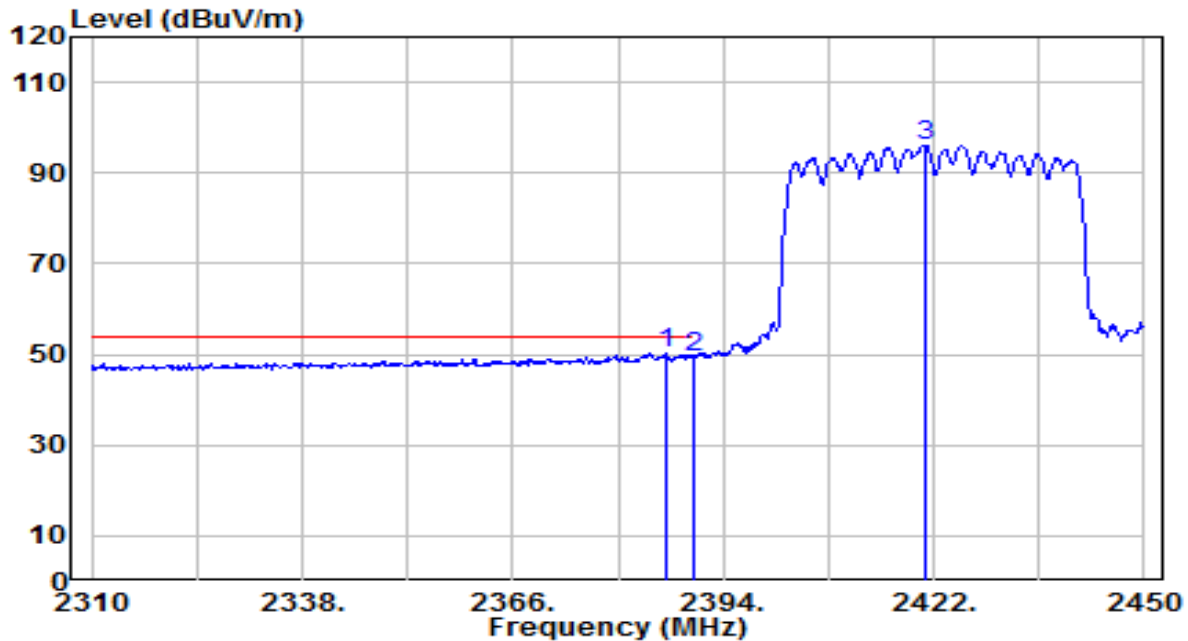


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2386.300      | 18.61          | 31.83      | 50.45                | -3.55       | 54.00          | 155         | 5           | Average           |
| 2  | 2390.000        | 17.58          | 31.85      | 49.43                | -4.57       | 54.00          | 155         | 5           | Average           |
| 3  | 2420.880        | 64.23          | 31.96      | 96.20                | N/A         | N/A            | 155         | 5           | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

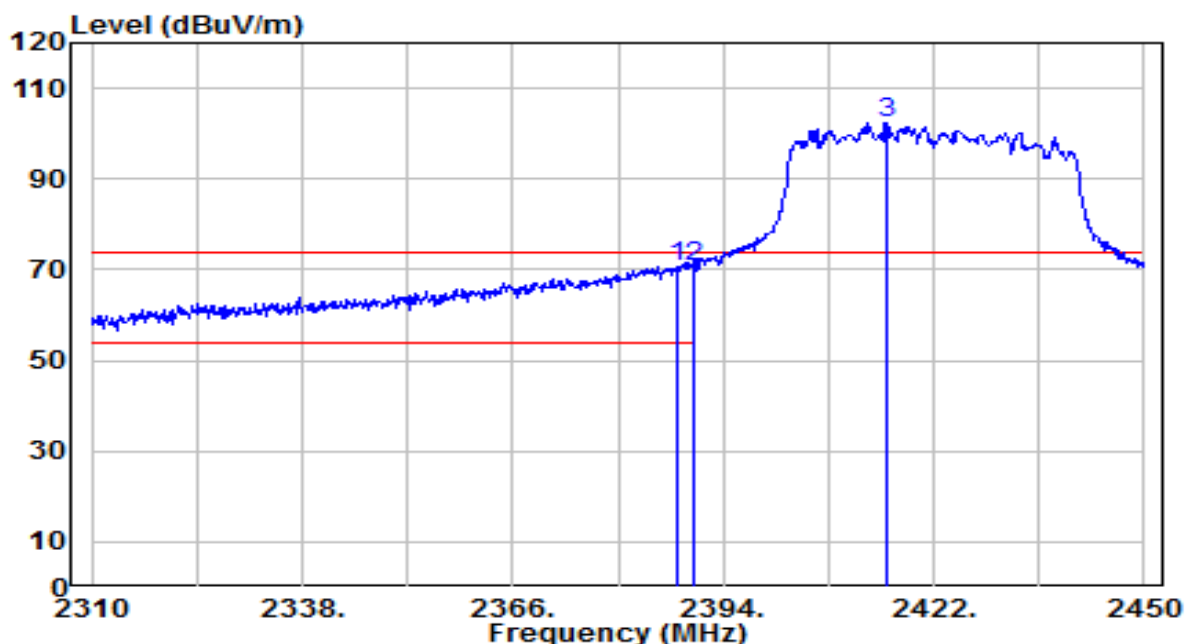


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2387.980        | 38.91          | 31.84      | 70.75                | -3.25       | 74.00          | 150         | 355         | Peak              |
| 2  | * 2390.000      | 39.00          | 31.85      | 70.85                | -3.15       | 74.00          | 150         | 355         | Peak              |
| 3  | 2415.700        | 70.57          | 31.94      | 102.51               | N/A         | N/A            | 150         | 355         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 3_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

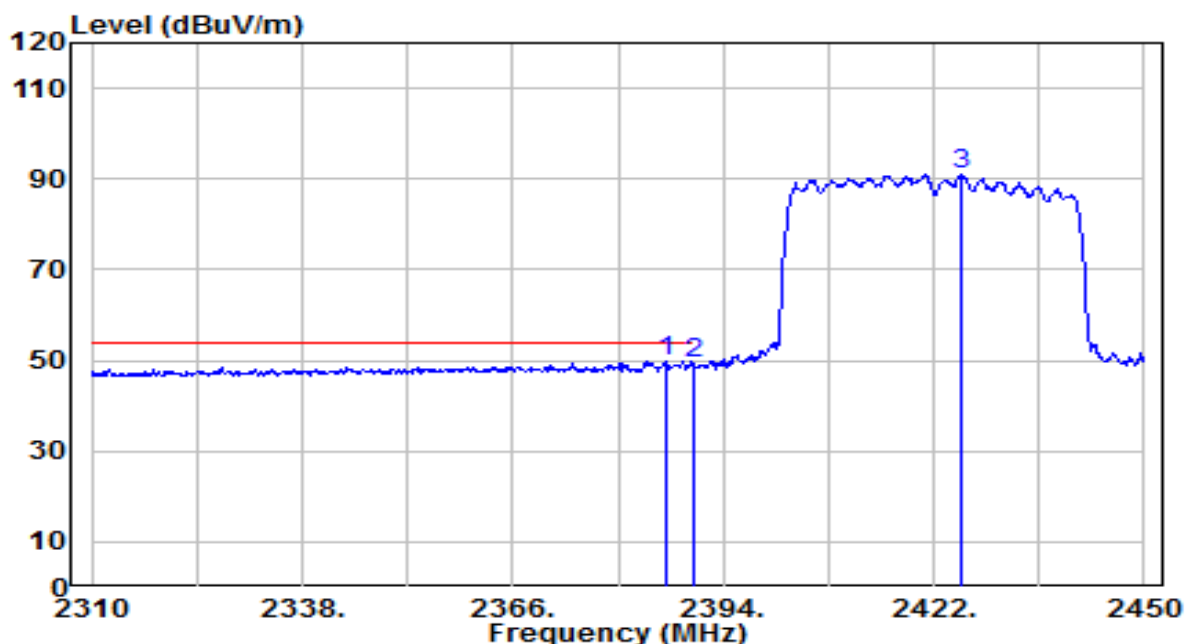


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * 2386.580      | 17.92          | 31.84      | 49.76                | -4.24       | 54.00          | 150         | 355         | Average           |
| 2  | 2390.000        | 17.47          | 31.85      | 49.32                | -4.68       | 54.00          | 150         | 355         | Average           |
| 3  | 2425.640        | 59.04          | 31.98      | 91.02                | N/A         | N/A            | 150         | 355         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

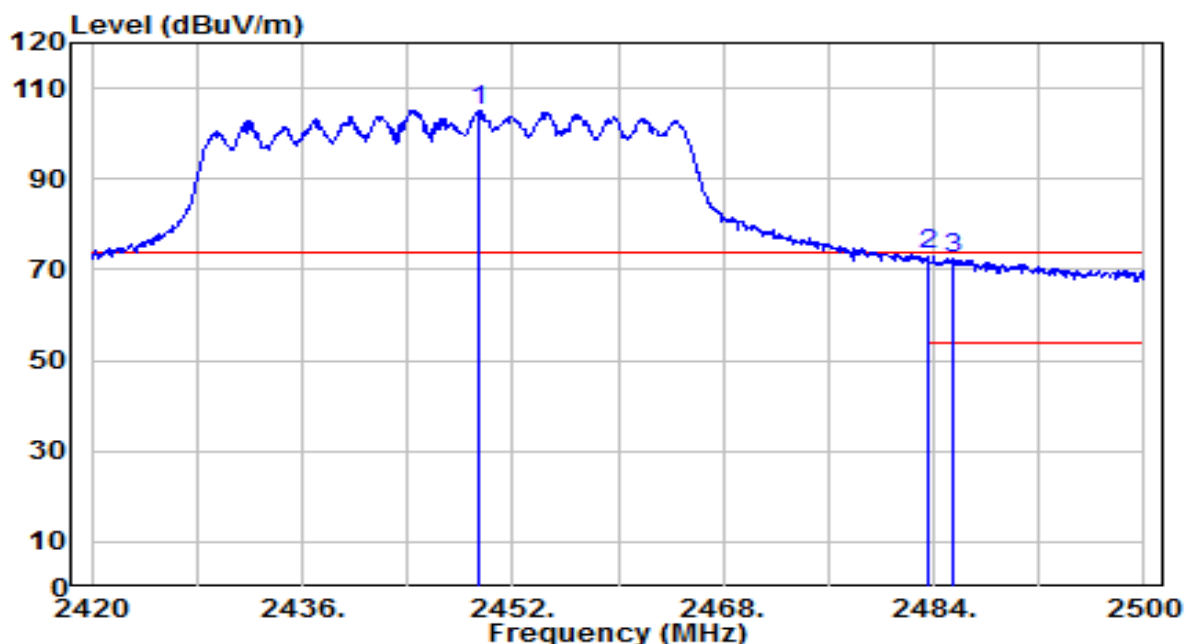


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.440        | 73.03          | 32.07      | 105.10               | N/A         | N/A            | 125         | 10          | Peak              |
| 2  | * 2483.500      | 41.08          | 32.20      | 73.28                | -0.72       | 74.00          | 125         | 10          | Peak              |
| 3  | 2485.520        | 40.45          | 32.21      | 72.65                | -1.35       | 74.00          | 125         | 10          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

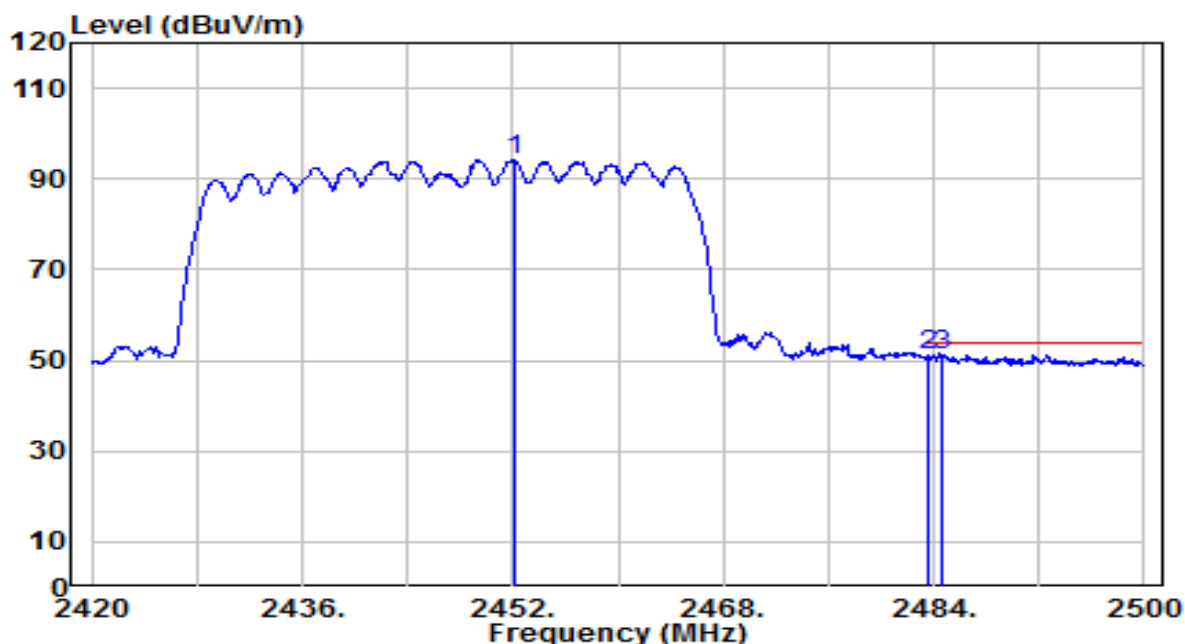


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2452.160        | 62.04          | 32.08      | 94.12                | N/A         | N/A            | 125         | 10          | Average           |
| 2  | 2483.500        | 18.84          | 32.20      | 51.04                | -2.96       | 54.00          | 125         | 10          | Average           |
| 3  | * 2484.640      | 19.00          | 32.20      | 51.20                | -2.80       | 54.00          | 125         | 10          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

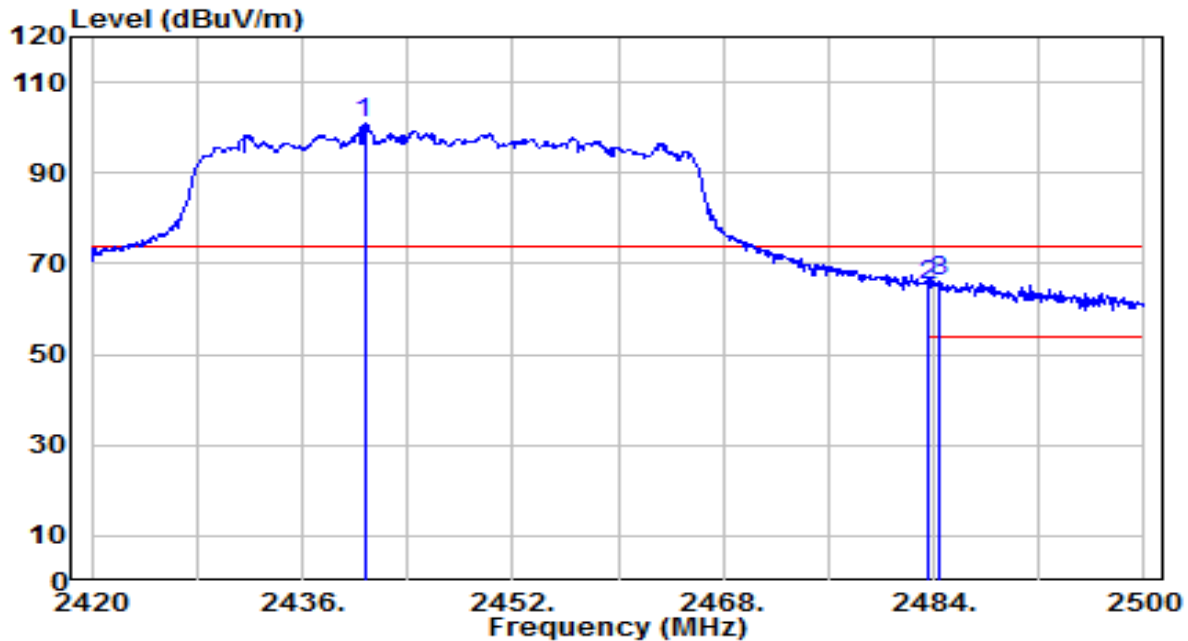


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2440.720        | 68.77          | 32.04      | 100.80               | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 33.08          | 32.20      | 65.28                | -8.72       | 74.00          | 150         | 210         | Peak              |
| 3  | * 2484.480      | 33.94          | 32.20      | 66.14                | -7.86       | 74.00          | 150         | 210         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 8_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

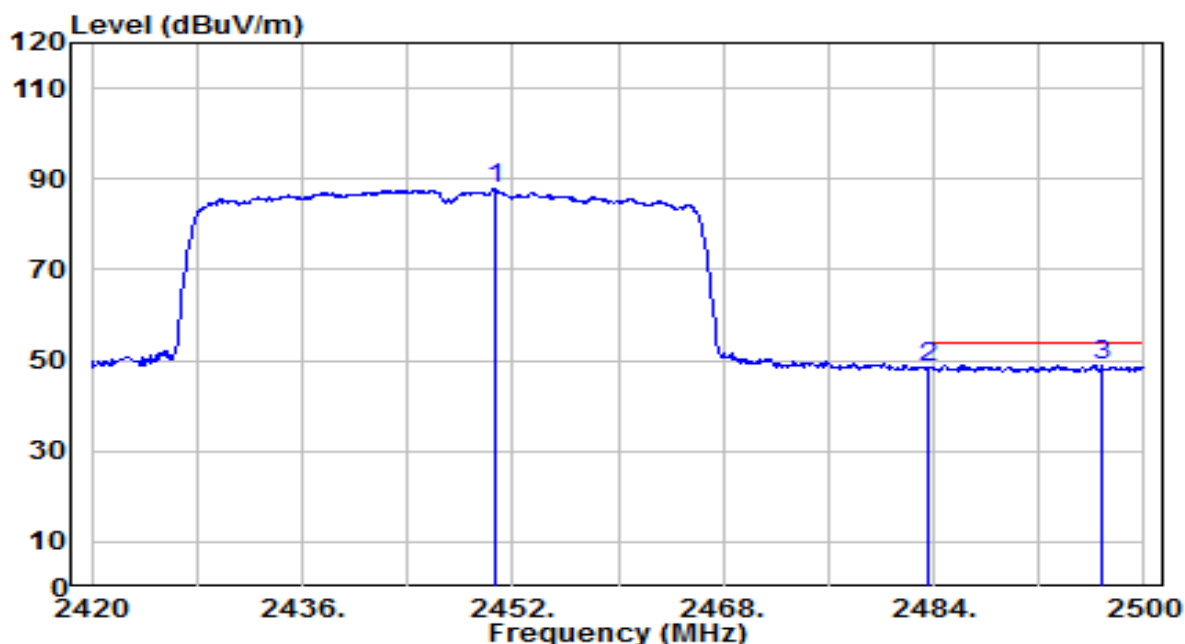


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2450.640        | 55.81          | 32.08      | 87.89                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | 2483.500        | 16.30          | 32.20      | 48.50                | -5.50       | 54.00          | 150         | 210         | Average           |
| 3  | * 2496.880      | 16.77          | 32.25      | 49.02                | -4.98       | 54.00          | 150         | 210         | Average           |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

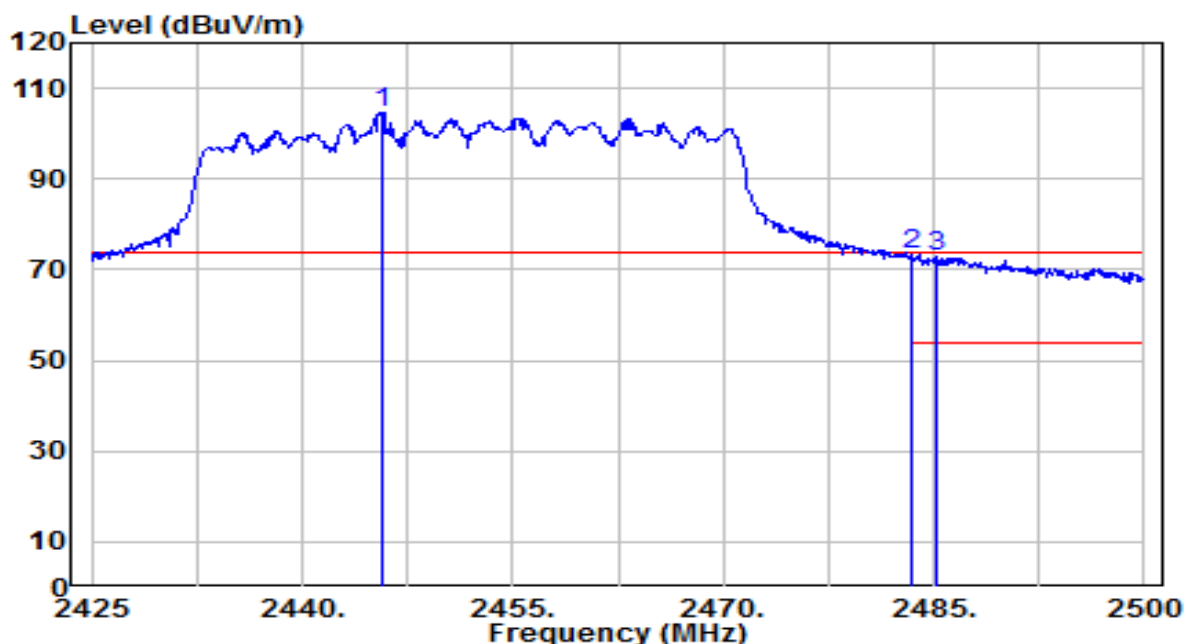


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2445.775        | 72.60          | 32.06      | 104.66               | N/A         | N/A            | 125         | 10          | Peak              |
| 2  | * 2483.500      | 40.94          | 32.20      | 73.14                | -0.86       | 74.00          | 125         | 10          | Peak              |
| 3  | 2485.150        | 40.55          | 32.20      | 72.76                | -1.24       | 74.00          | 125         | 10          | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Horizontal                     | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

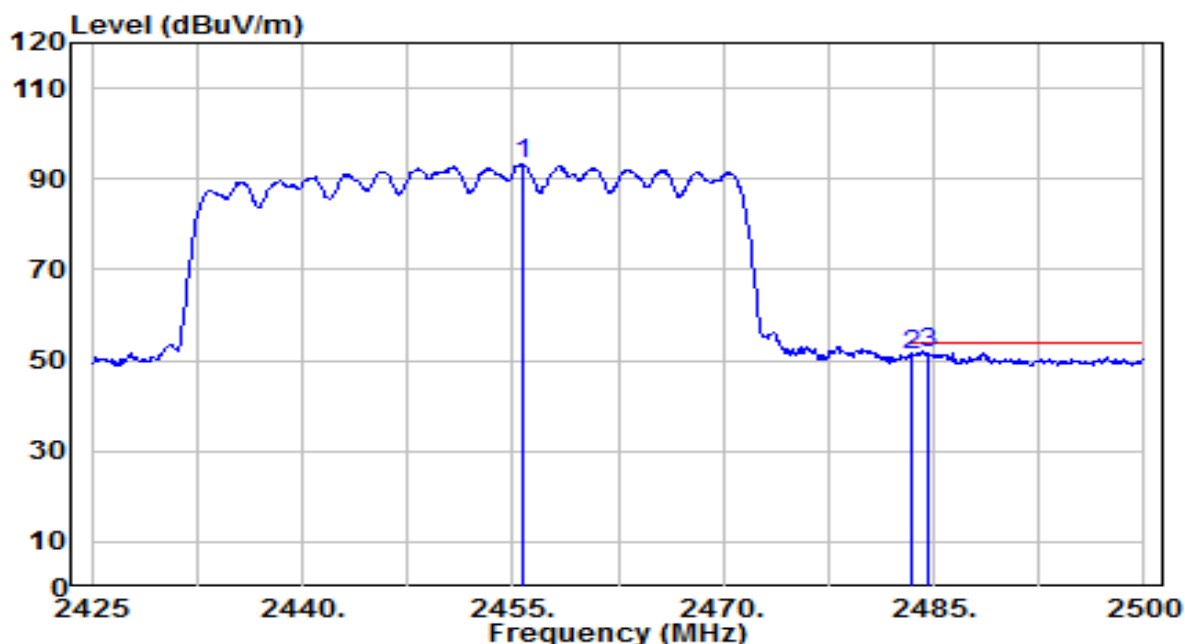


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2455.750        | 61.35          | 32.09      | 93.44                | N/A         | N/A            | 125         | 10          | Average           |
| 2  | 2483.500        | 19.04          | 32.20      | 51.24                | -2.76       | 54.00          | 125         | 10          | Average           |
| 3  | * 2484.625      | 19.48          | 32.20      | 51.69                | -2.31       | 54.00          | 125         | 10          | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

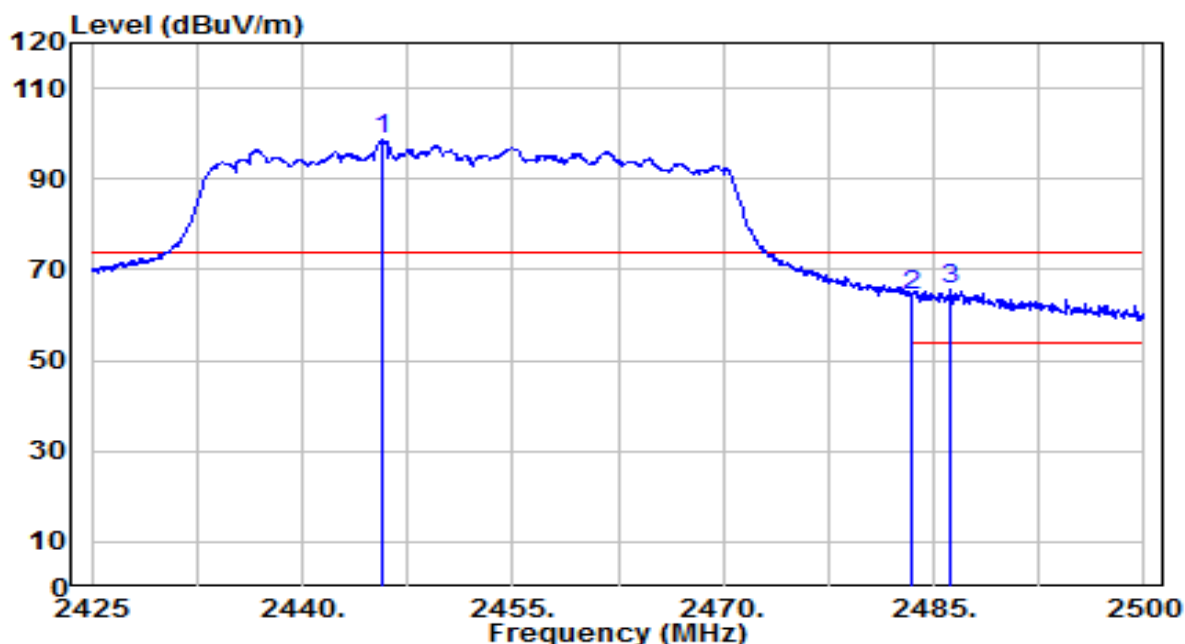


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2445.700        | 66.50          | 32.06      | 98.55                | N/A         | N/A            | 150         | 210         | Peak              |
| 2  | 2483.500        | 32.32          | 32.20      | 64.52                | -9.48       | 74.00          | 150         | 210         | Peak              |
| 3  | * 2486.125      | 33.29          | 32.21      | 65.50                | -8.50       | 74.00          | 150         | 210         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                |                      |              |
|-----------|--------------------------------|----------------------|--------------|
| EUT       | Smart touch panel tablet       | Date of Test         | 2025-04-02   |
| Factor    | BBHA 9120D                     | Temp. / Humidity     | 21°C /61%    |
| Polarity  | Vertical                       | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ax-40MHz_TX_CH 9_ANT 0+1 | Test Voltage         | AC 120V/60Hz |

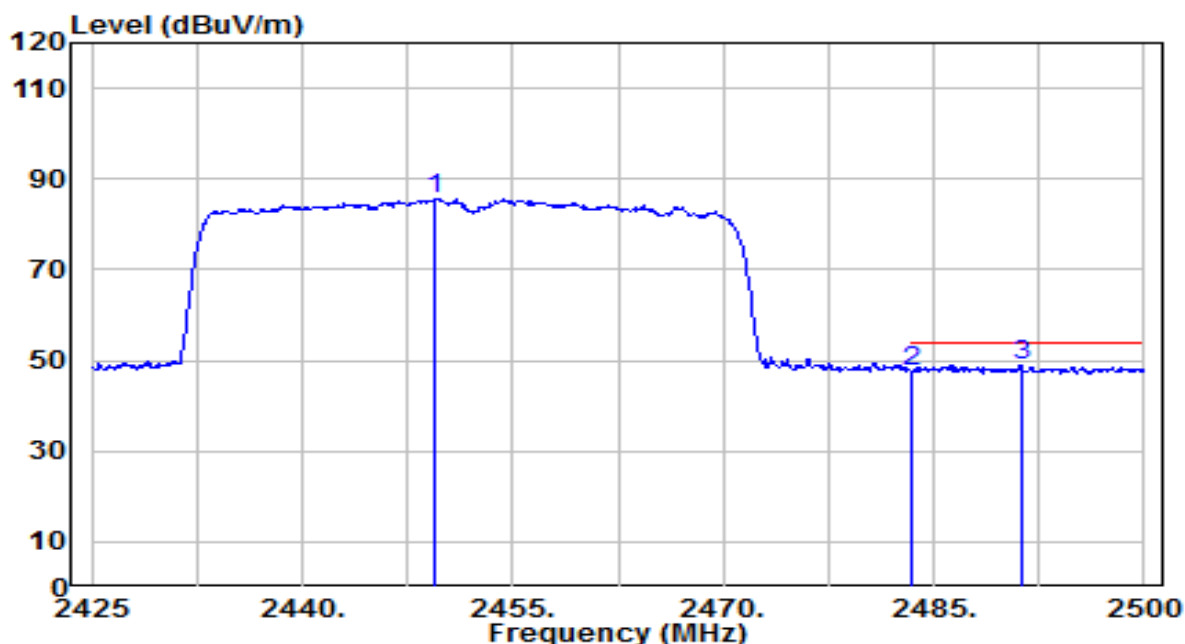

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 2449.525        | 53.63          | 32.07      | 85.70                | N/A         | N/A            | 150         | 210         | Average           |
| 2  | 2483.500        | 15.46          | 32.20      | 47.66                | -6.34       | 54.00          | 150         | 210         | Average           |
| 3  | * 2491.225      | 16.66          | 32.23      | 48.89                | -5.11       | 54.00          | 150         | 210         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.8. AC Conducted Emissions Measurement


### 7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 / RSS-Gen Limits |              |                   |
|---------------------------------------------------------|--------------|-------------------|
| Frequency<br>(MHz)                                      | QP<br>(dBµV) | Average<br>(dBµV) |
| 0.15 - 0.50                                             | 66 - 56      | 56 - 46           |
| 0.50 - 5.0                                              | 56           | 46                |
| 5.0 - 30                                                | 60           | 50                |

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.8.2. Test Setup

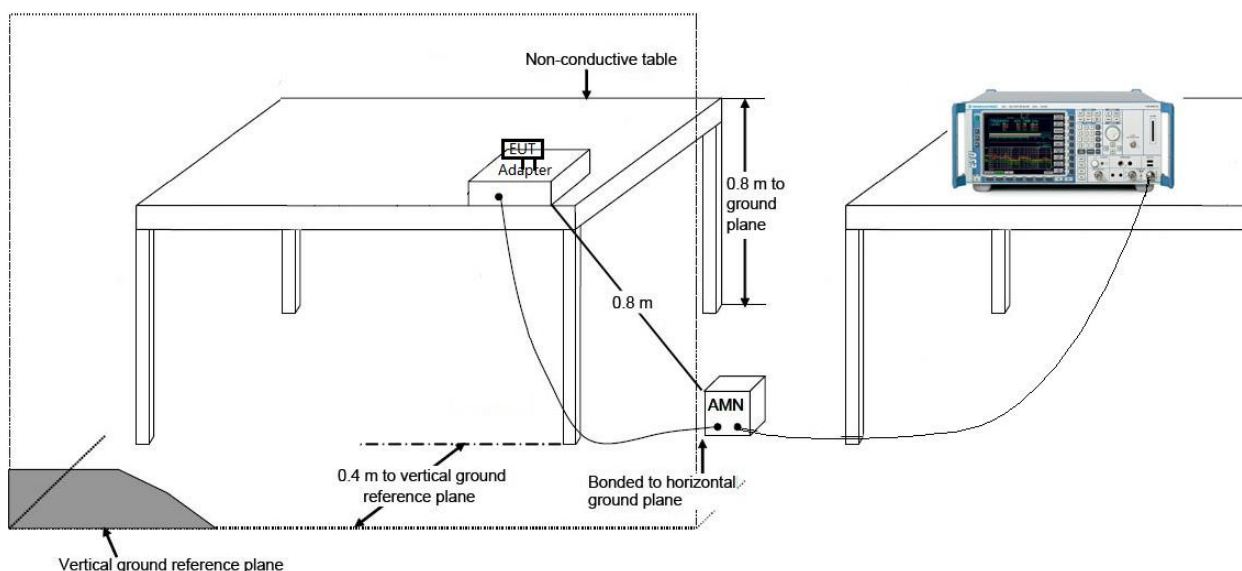

### 7.8.3. Test Result

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Smart touch panel table      | Date of Test         | 2025-02-25   |
| Factor    | CE_ENV216-L1 (Filter ON)     | Temp. / Humidity     | 21.0°C /58%  |
| Polarity  | Line1                        | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 120V/60Hz |

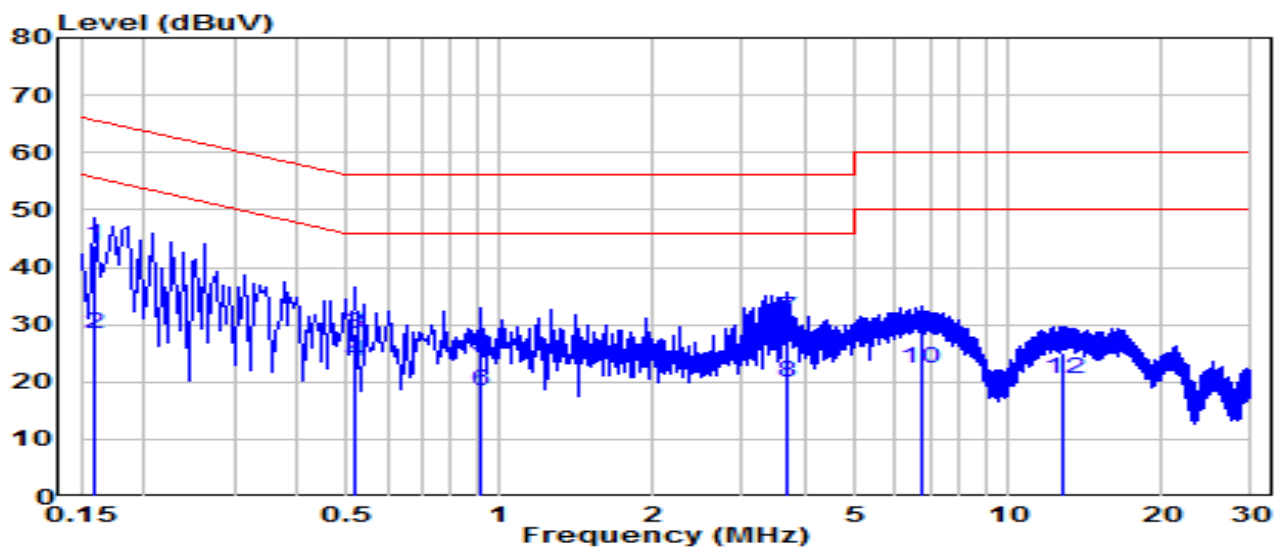


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  | * | 0.159           | 34.17          | 9.63     | 43.80              | -21.72      | 65.52        | QP                |
| 2  | * | 0.159           | 18.62          | 9.63     | 28.25              | -27.26      | 55.52        | Average           |
| 3  |   | 0.519           | 18.67          | 9.65     | 28.32              | -27.68      | 56.00        | QP                |
| 4  |   | 0.519           | 13.94          | 9.65     | 23.60              | -22.40      | 46.00        | Average           |
| 5  |   | 0.910           | 14.68          | 9.67     | 24.36              | -31.64      | 56.00        | QP                |
| 6  |   | 0.910           | 8.67           | 9.67     | 18.35              | -27.65      | 46.00        | Average           |
| 7  |   | 3.651           | 21.27          | 9.72     | 30.99              | -25.01      | 56.00        | QP                |
| 8  |   | 3.651           | 10.17          | 9.72     | 19.90              | -26.10      | 46.00        | Average           |
| 9  |   | 6.719           | 18.58          | 9.79     | 28.37              | -31.63      | 60.00        | QP                |
| 10 |   | 6.719           | 12.46          | 9.79     | 22.25              | -27.75      | 50.00        | Average           |
| 11 |   | 12.749          | 15.23          | 9.89     | 25.12              | -34.88      | 60.00        | QP                |
| 12 |   | 12.749          | 10.66          | 9.89     | 20.55              | -29.45      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

|           |                              |                      |              |
|-----------|------------------------------|----------------------|--------------|
| EUT       | Smart touch panel table      | Date of Test         | 2025-02-25   |
| Factor    | CE_ENV216-N (Filter ON)      | Temp. / Humidity     | 21.0°C /58%  |
| Polarity  | Neutral                      | Site / Test Engineer | SR2 / Ryan   |
| Test Mode | 802.11n-20MHz_TX_CH6_Ant 0+1 | Test Voltage         | AC 120V/60Hz |

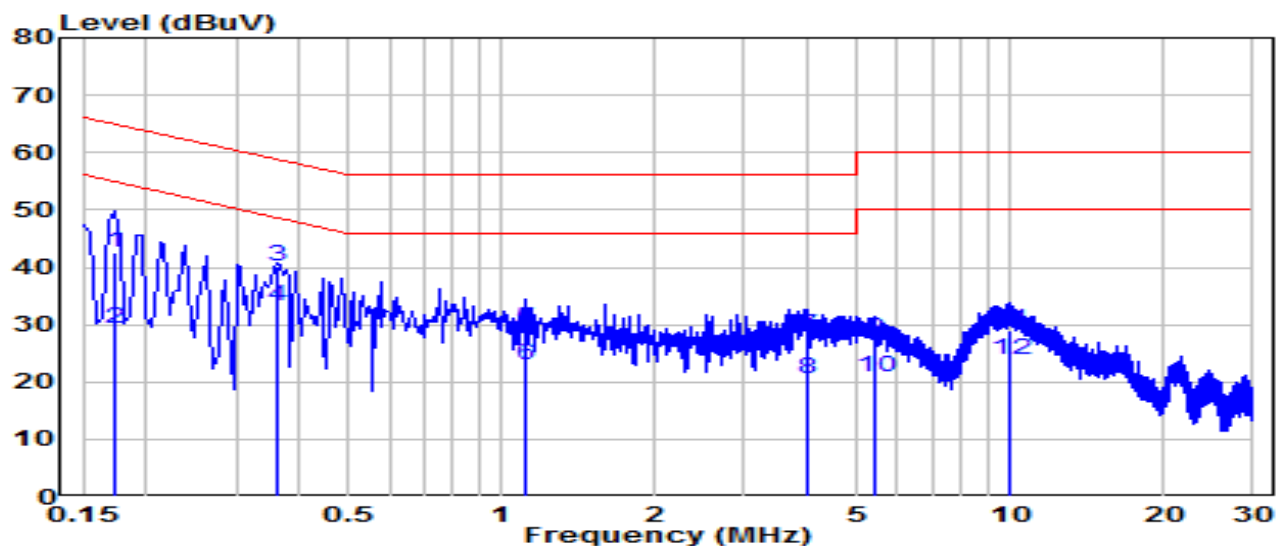

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1  |   | 0.172           | 32.86          | 9.63     | 42.49              | -22.34      | 64.84        | QP                |
| 2  |   | 0.172           | 19.68          | 9.63     | 29.31              | -25.53      | 54.84        | Average           |
| 3  | * | 0.361           | 30.44          | 9.64     | 40.08              | -18.61      | 58.69        | QP                |
| 4  | * | 0.361           | 23.49          | 9.64     | 33.13              | -15.57      | 48.69        | Average           |
| 5  |   | 1.113           | 19.62          | 9.68     | 29.30              | -26.70      | 56.00        | QP                |
| 6  |   | 1.113           | 13.11          | 9.68     | 22.79              | -23.21      | 46.00        | Average           |
| 7  |   | 3.966           | 18.35          | 9.74     | 28.09              | -27.91      | 56.00        | QP                |
| 8  |   | 3.966           | 10.86          | 9.74     | 20.60              | -25.40      | 46.00        | Average           |
| 9  |   | 5.405           | 17.59          | 9.77     | 27.36              | -32.64      | 60.00        | QP                |
| 10 |   | 5.405           | 10.95          | 9.77     | 20.72              | -29.28      | 50.00        | Average           |
| 11 |   | 9.946           | 19.13          | 9.89     | 29.02              | -30.98      | 60.00        | QP                |
| 12 |   | 9.946           | 13.90          | 9.89     | 23.78              | -26.22      | 50.00        | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Smart touch panel tablet**, is in compliance with Part 15C of the FCC Rules.

## **Appendix A : Test Photograph**

Refer to “2502TWN801-UT” file.

## **Appendix B : External Photograph**

Refer to “2502TWN801-UE” file.

## **Appendix C : Internal Photograph**

Refer to “2502TWN801-UI” file.

\_\_\_\_\_ The End \_\_\_\_\_