

TEST REPORT

Reference No...... : WTD18S03104412-2W
FCC ID : 2AF8QU8
Applicant..... : Shenzhen Na Yin Technology Co.,LTD.
Address..... : 6F,Building A,De Bao Li Industrial park,Ji Hua Road
No.312Bantian,LonggangDistrict ,Shenzhen City,China
Manufacturer : The same as above
Address..... : The same as above
Product..... : Headset
Model(s). : U8, U9, U10, U13, U14, U17, U18, U19, U20, U21, U22, U23, U24, U8i
Standards..... : FCC CFR47 Part 15.247:2016
Date of Receipt sample : 2018-03-08
Date of Test..... : 2018-03-09 to 2018-03-19
Date of Issue..... : 2018-03-22
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

**Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District,
Shenzhen, Guangdong, China**

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

Jack Wen

Jack Wen / Project Engineer

Approved by:



Philo Zhong

Philo Zhong / Manager

2 Laboratories Introduction

Waltek Services (Shenzhen) Co., Ltd is a professional third-party testing and certification laboratory with multi-year product testing and certification experience, established strictly in accordance with ISO/IEC 17025 requirements, and accredited by ILAC (International Laboratory Accreditation Cooperation) member. A2LA (American Association for Laboratory Accreditation) of USA, Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CEC(California energy efficiency), IC(Industry Canada). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as Intertek(ETL-SEMKO), TÜV Rheinland, TÜV SÜD, etc.



Waltek Services (Shenzhen) Co., Ltd is one of the largest and the most comprehensive third party testing laboratory in China. Our test capability covered four large fields: safety test. ElectroMagnetic Compatibility(EMC), and energy performance, wireless radio. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

2.1 Test Facility

A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note
USA	A2LA (Certificate No.: 4243.01)	FCC ID \ DOC \ VOC	1
Canada		IC ID \ VOC	2
Japan		MIC-T \ MIC-R	-
Europe		EMCD \ RED	-
Taiwan		NCC	-
Hong Kong		OFCA	-
Australia		RCM	-
India		International Services	WPC
Thailand	NTC		-
Singapore	IDA		-
Note:			
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.			
2. IC Canada Registration No.: 7760A			

B.TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

2 Contents

	Page
1 COVER PAGE.....	1
2 LABORATORIES INTRODUCTION.....	2
2.1 TEST FACILITY.....	3
2 CONTENTS.....	4
3 REVISION HISTORY.....	6
4 GENERAL INFORMATION.....	7
4.1 GENERAL DESCRIPTION OF E.U.T.	7
4.2 DETAILS OF E.U.T.....	7
4.3 CHANNEL LIST.....	8
4.4 TEST MODE.....	9
5 TEST SUMMARY.....	10
6 EQUIPMENT USED DURING TEST.....	11
6.1 EQUIPMENTS LIST.....	11
6.2 DESCRIPTION OF SUPPORT UNITS.....	12
6.3 MEASUREMENT UNCERTAINTY.....	12
6.4 TEST EQUIPMENT CALIBRATION.....	12
7 CONDUCTED EMISSION.....	13
7.1 E.U.T. OPERATION.....	13
7.2 EUT SETUP.....	13
7.3 MEASUREMENT DESCRIPTION.....	13
7.4 CONDUCTED EMISSION TEST RESULT.....	14
8 RADIATED EMISSIONS.....	16
8.1 EUT OPERATION.....	16
8.2 TEST SETUP.....	17
8.3 SPECTRUM ANALYZER SETUP.....	18
8.4 TEST PROCEDURE.....	19
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
8.6 SUMMARY OF TEST RESULTS.....	20
9 CONDUCTED SPURIOUS EMISSIONS.....	23
9.1 TEST PROCEDURE.....	23
9.2 TEST RESULT.....	24
10 BAND EDGE MEASUREMENT.....	27
10.1 TEST PRODUCE.....	27
10.2 TEST RESULT.....	28
11 6 DB BANDWIDTH MEASUREMENT.....	29
11.1 TEST PROCEDURE:.....	29
11.2 TEST RESULT:.....	29
12 MAXIMUM PEAK OUTPUT POWER.....	32
12.1 TEST PROCEDURE:.....	32
12.2 TEST RESULT:.....	33
13 POWER SPECTRAL DENSITY.....	35
13.1 TEST PROCEDURE:.....	35
13.2 TEST RESULT:.....	35
14 ANTENNA REQUIREMENT.....	38

15 RF EXPOSURE..... 39

15.1 REQUIREMENTS..... 39

15.2 TEST RESULT 39

16 PHOTOGRAPHS OF TEST SETUP AND EUT..... 40

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD18S03104412-2W	2018-03-08	2018-03-09 to 2018-03-19	2018-03-22	original	-	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Headset
Model(s):	U8, U9, U10, U13, U14, U17, U18, U19, U20, U21, U22, U23, U24, U8i
Model Description:	Only the model names are different, the model: U8 is the tested sample.
Bluetooth version:	Bluetooth v4.1 with EDR
Hardware Version:	V1.0
Software Version:	V1.0
The Lowest Oscillator:	26MHz

4.2 Details of E.U.T

Operation Frequency:	2402~2480MHz
Type of Modulation:	GFSK
Antenna installation:	Ceramic Antenna
Antenna Gain:	3.78dBi
Ratings:	Battery DC 3.7V, 100mAh

4.3 Channel List

BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.4 Test Mode

Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	2017-09-12	2018-09-11
2.	LISN	R&S	ENV216	101215	2017-09-12	2018-09-11
3.	Cable	Top	TYPE16(3.5M)	-	2017-09-12	2018-09-11
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	2017-09-12	2018-09-11
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	2017-09-12	2018-09-11
3.	Limiter	York	MTS-IMP-136	261115-001-0024	2017-09-12	2018-09-11
4.	Cable	LARGE	RF300	-	2017-09-12	2018-09-11
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2018-04-28
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	2017-04-09	2018-04-08
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-04-09	2018-04-08
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-09	2018-04-08
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2017-04-09	2018-04-08
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-13	2018-04-12
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	2017-04-13	2018-04-12
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-13	2018-04-12
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-09	2018-04-08
3	Amplifier	Compliance direction systems inc	PAP-0203	22024	2017-04-13	2018-04-12
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-13	2018-04-12

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	2017-09-12	2018-09-11
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64 dB(AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 × 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor:k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave,Tianhe District, Guangzhou, Guangdong, China.

7 Conducted Emission

Test Requirement: FCC CFR 47 Part 15 Section 15.207
Test Method: ANSI C63.10:2013
Test Result: PASS
Frequency Range: 150kHz to 30MHz
Class/Severity: Class B
Limit:

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 to 0.5	66 □ to 56*	56 to 46*
0.5 to 5	56	46
5 to 30	60	50


7.1 E.U.T. Operation

Operating Environment :
Temperature: 21.5 °C
Humidity: 51.9 % RH
Atmospheric Pressure: 101.2kPa
EUT Operation :

The test was performed in TX transmitting mode, the worst data were shown in the report.

7.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

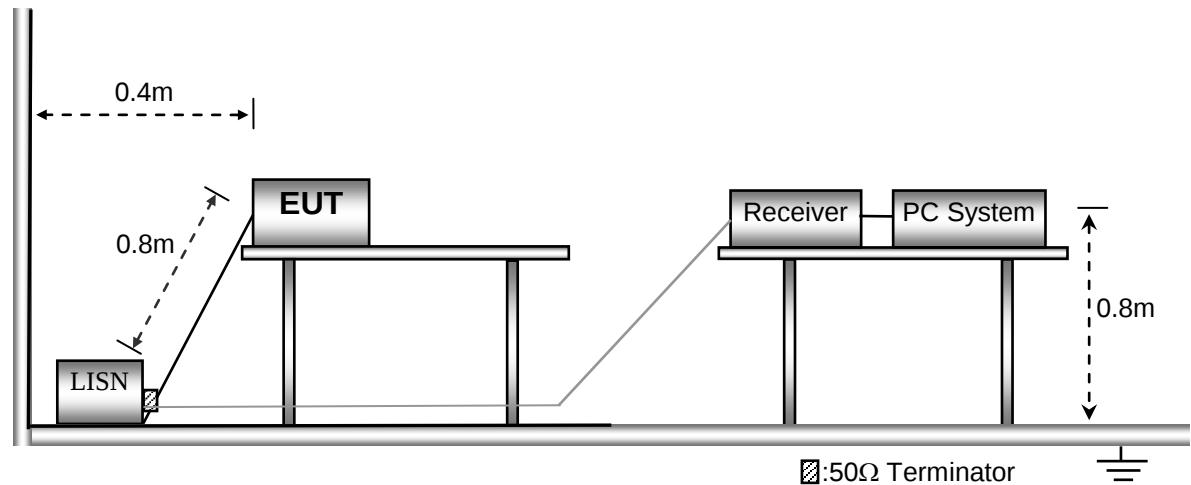


7.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.4 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Live line:

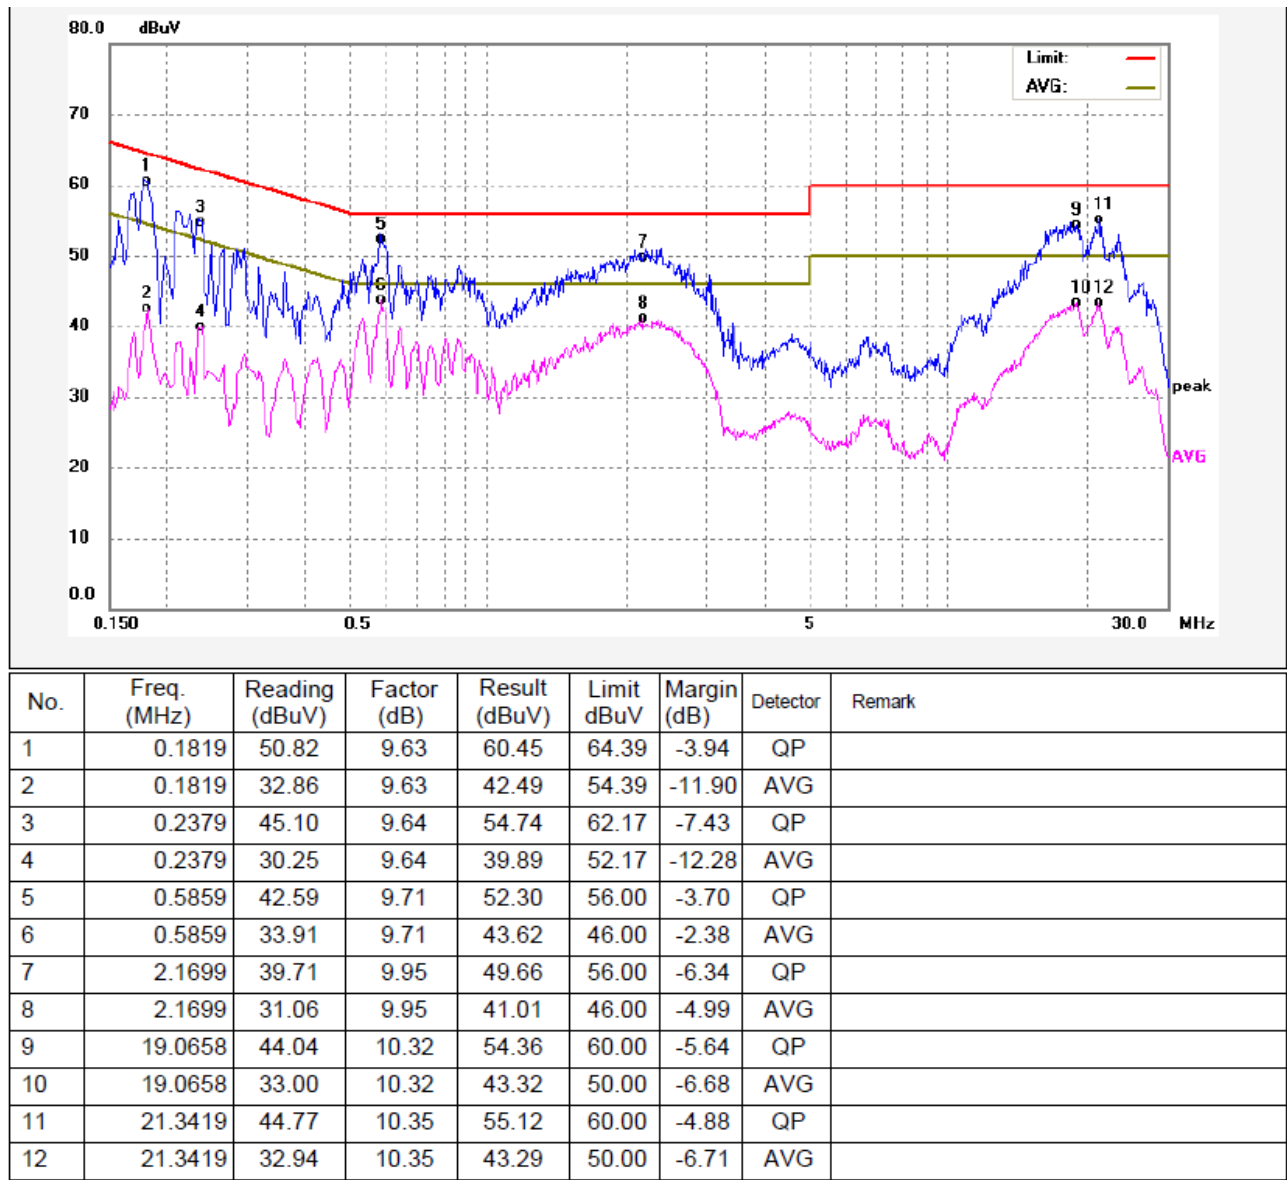

Neutral line:

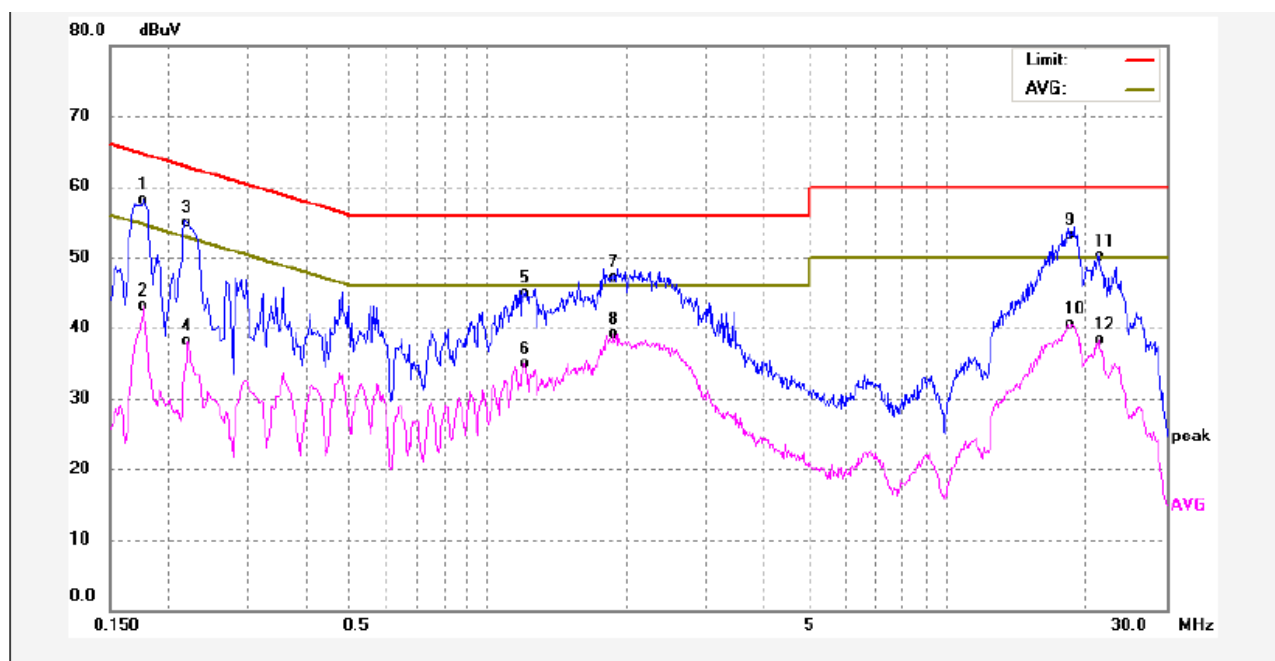

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1779	48.57	9.63	58.20	64.58	-6.38	QP	
2	0.1779	33.40	9.63	43.03	54.58	-11.55	AVG	
3	0.2220	45.28	9.63	54.91	62.74	-7.83	QP	
4	0.2220	28.44	9.63	38.07	52.74	-14.67	AVG	
5	1.1979	35.02	9.87	44.89	56.00	-11.11	QP	
6	1.1979	25.03	9.87	34.90	46.00	-11.10	AVG	
7	1.8700	37.15	9.94	47.09	56.00	-8.91	QP	
8	1.8700	29.14	9.94	39.08	46.00	-6.92	AVG	
9	18.6938	42.76	10.31	53.07	60.00	-6.93	QP	
10	18.6938	30.28	10.31	40.59	50.00	-9.41	AVG	
11	21.4259	39.83	10.35	50.18	60.00	-9.82	QP	
12	21.4259	27.86	10.35	38.21	50.00	-11.79	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

8.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in TX transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

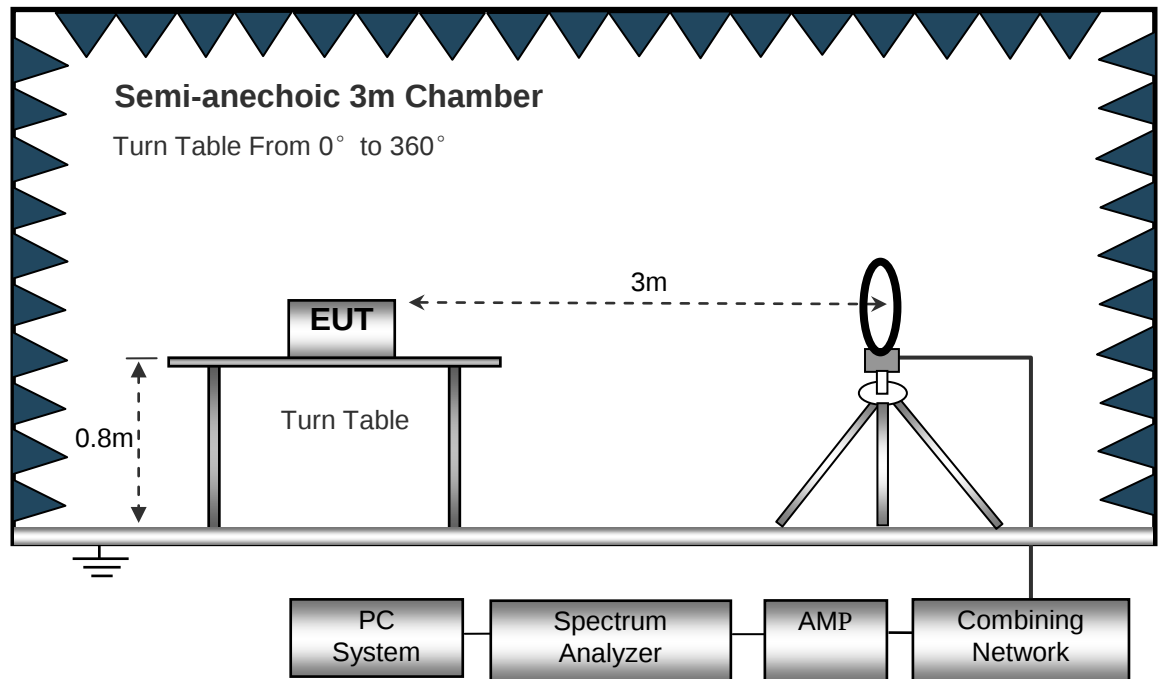

The test setup for emission measurement from 30 MHz to 1 GHz.

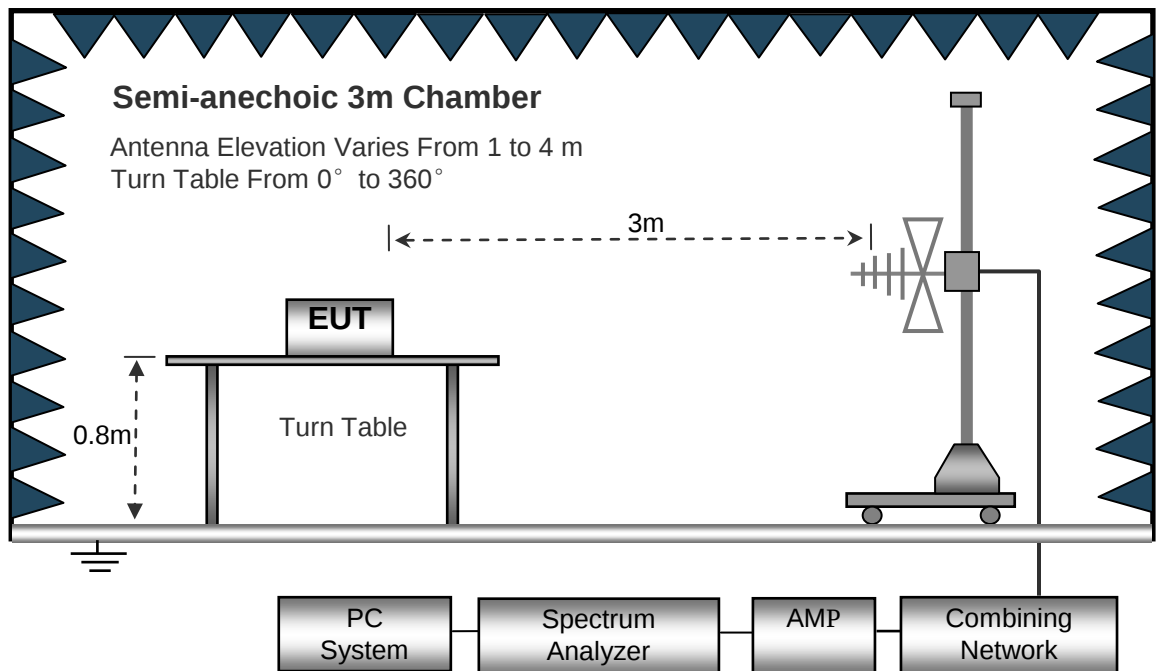

The test setup for emission measurement above 1 GHz.

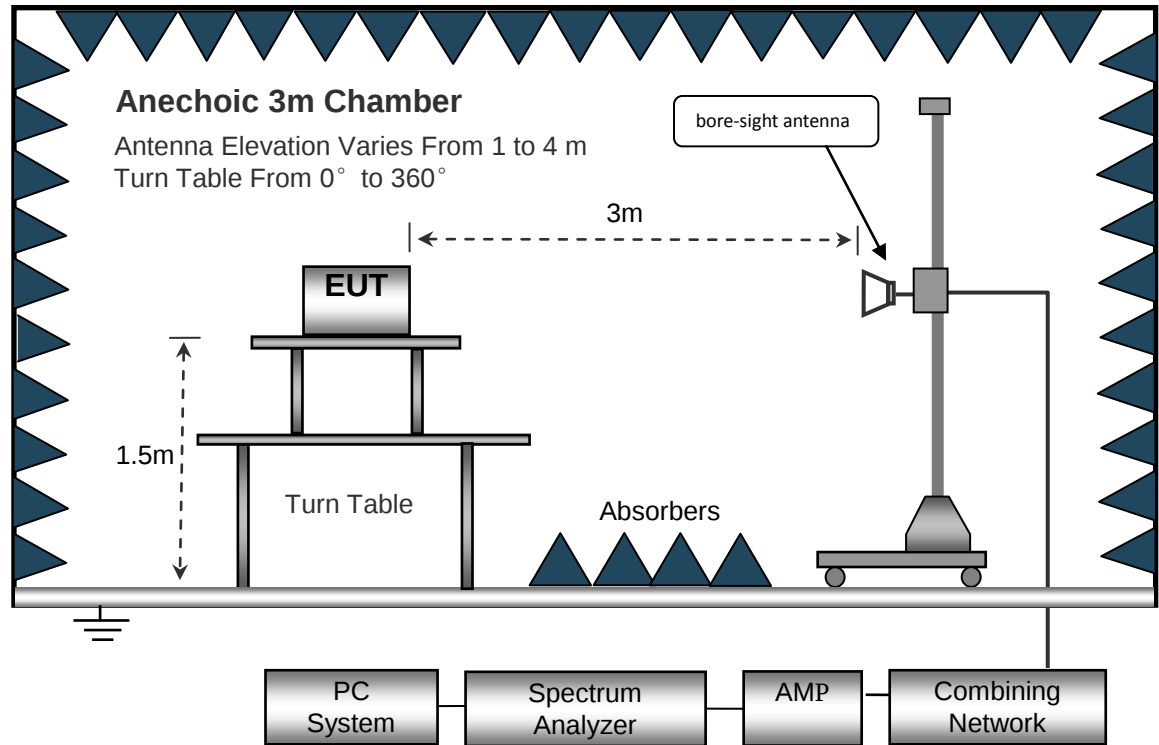

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
Detector PK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
Detector Ave.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Test Frequency: 26MHz~30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Low Channel 2402MHz									
267.24	35.47	QP	126	2.0	H	-13.35	22.12	46.00	-23.88
267.24	40.36	QP	145	1.9	V	-13.35	27.01	46.00	-18.99
4804.00	44.97	PK	332	1.2	V	-1.06	43.91	74.00	-30.09
4804.00	43.67	Ave	266	1.7	V	-1.06	42.61	54.00	-11.39
7206.00	44.30	PK	180	1.5	H	1.33	45.63	74.00	-28.37
7206.00	36.70	Ave	34	1.2	H	1.33	38.03	54.00	-15.97
2343.26	46.50	PK	209	1.6	V	-13.19	33.31	74.00	-40.69
2343.26	39.50	Ave	253	1.7	V	-13.19	26.31	54.00	-27.69
2368.71	41.71	PK	92	1.9	H	-13.14	28.57	74.00	-45.43
2368.71	38.03	Ave	140	1.1	H	-13.14	24.89	54.00	-29.11
2499.14	44.91	PK	113	1.8	V	-13.08	31.83	74.00	-42.17
2499.14	38.44	Ave	208	1.8	V	-13.08	25.36	54.00	-28.64

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel 2440MHz									
267.24	34.83	QP	276	1.7	H	-13.35	21.48	46.00	-24.52
267.24	40.21	QP	278	1.3	V	-13.35	26.86	46.00	-19.14
4880.00	44.23	PK	19	1.8	V	-0.62	43.61	74.00	-30.39
4880.00	43.32	Ave	136	1.1	V	-0.62	42.70	54.00	-11.30
7320.00	43.27	PK	241	1.8	H	2.21	45.48	74.00	-28.52
7320.00	35.25	Ave	201	1.0	H	2.21	37.46	54.00	-16.54
2326.48	45.82	PK	284	1.1	V	-13.19	32.63	74.00	-41.37
2326.48	39.15	Ave	250	1.3	V	-13.19	25.96	54.00	-28.04
2352.04	43.55	PK	141	1.1	H	-13.14	30.41	74.00	-43.59
2352.04	38.27	Ave	214	1.5	H	-13.14	25.13	54.00	-28.87
2487.56	43.11	PK	20	1.0	V	-13.08	30.03	74.00	-43.97
2487.56	36.97	Ave	139	1.5	V	-13.08	23.89	54.00	-30.11

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel 2480MHz									
267.24	34.91	QP	154	1.7	H	-13.35	21.56	46.00	-24.44
267.24	39.34	QP	313	1.5	V	-13.35	25.99	46.00	-20.01
4960.00	44.65	PK	49	1.6	V	-0.24	44.41	74.00	-29.59
4960.00	44.53	Ave	138	1.2	V	-0.24	44.29	54.00	-9.71
7440.00	43.93	PK	171	1.1	H	2.84	46.77	74.00	-27.23
7440.00	38.26	Ave	117	1.5	H	2.84	41.10	54.00	-12.90
2340.58	46.17	PK	226	1.6	V	-13.19	32.98	74.00	-41.02
2340.56	39.81	Ave	13	1.5	V	-13.19	26.62	54.00	-27.38
2373.78	44.02	PK	241	1.6	H	-13.14	30.88	74.00	-43.12
2373.78	39.81	Ave	36	1.3	H	-13.14	26.67	54.00	-27.33
2492.71	42.55	PK	215	1.0	V	-13.08	29.47	74.00	-44.53
2492.71	35.57	Ave	66	1.8	V	-13.08	22.49	54.00	-31.51

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Conducted Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Result: PASS
Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto



Detector function = peak, Trace = max hold


Above 30MHz:

RBW = 1MHz, VBW = 3MHz, Sweep = auto

Detector function = peak, Trace = max hold


9.2 Test Result

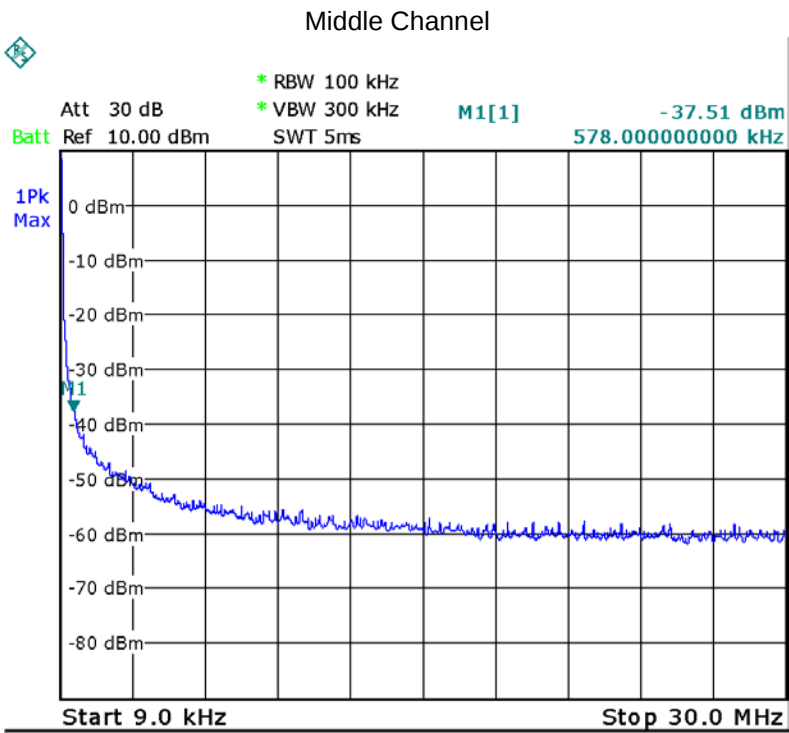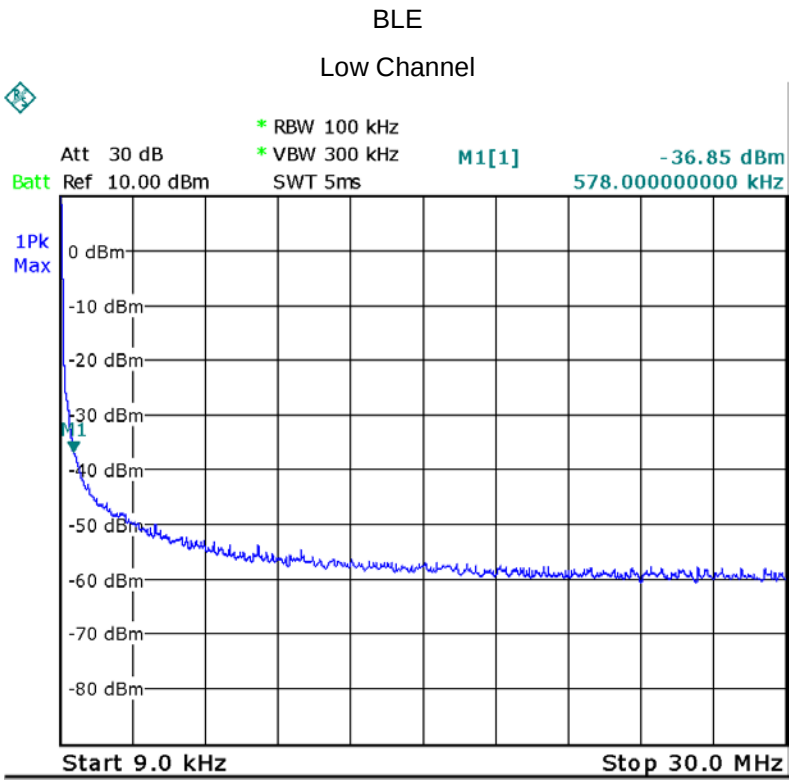

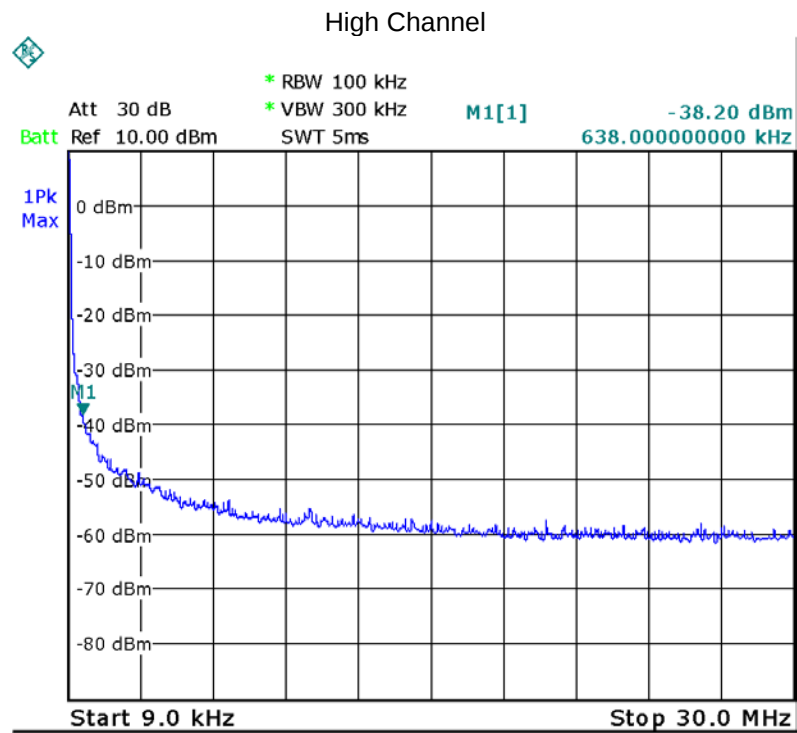


BLE
Low Channel

Fundamental

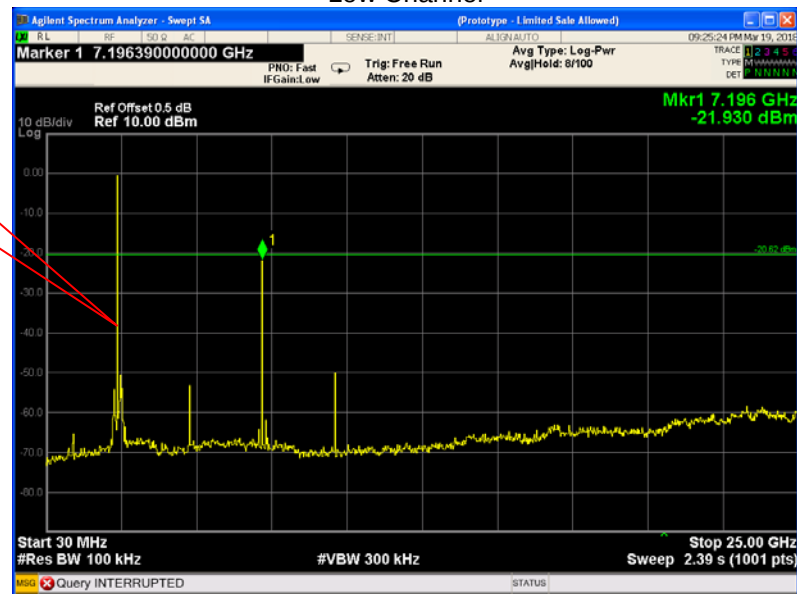

Middle Channel

Fundamental

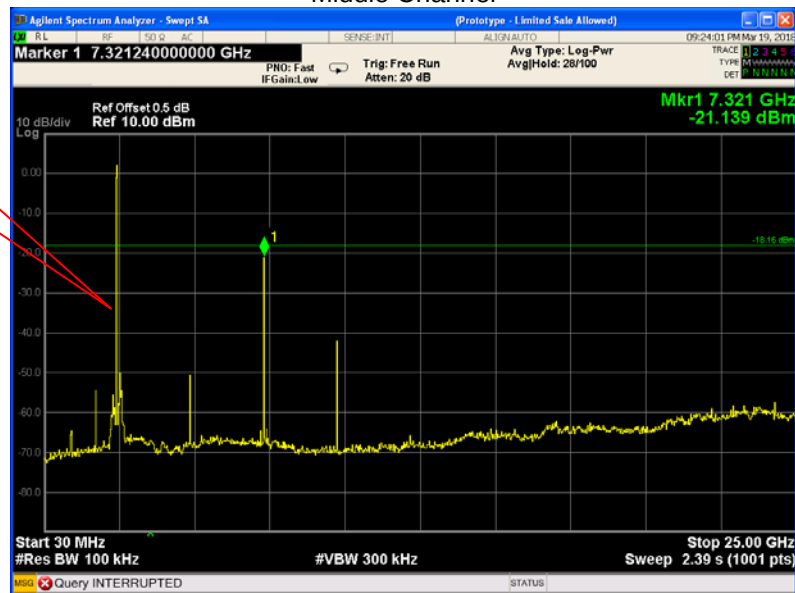

High Channel

Fundamental



10 Band Edge Measurement

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting


10.1 Test Produce

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


10.2 Test Result

Test result plots shown as follows:

BLE: Band edge-left side

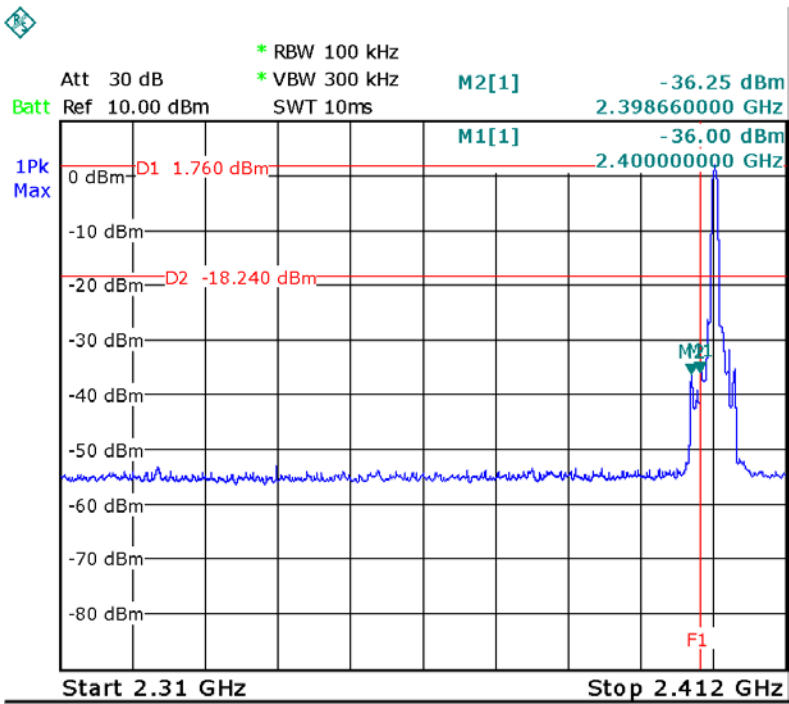

BLE: Band edge-right side

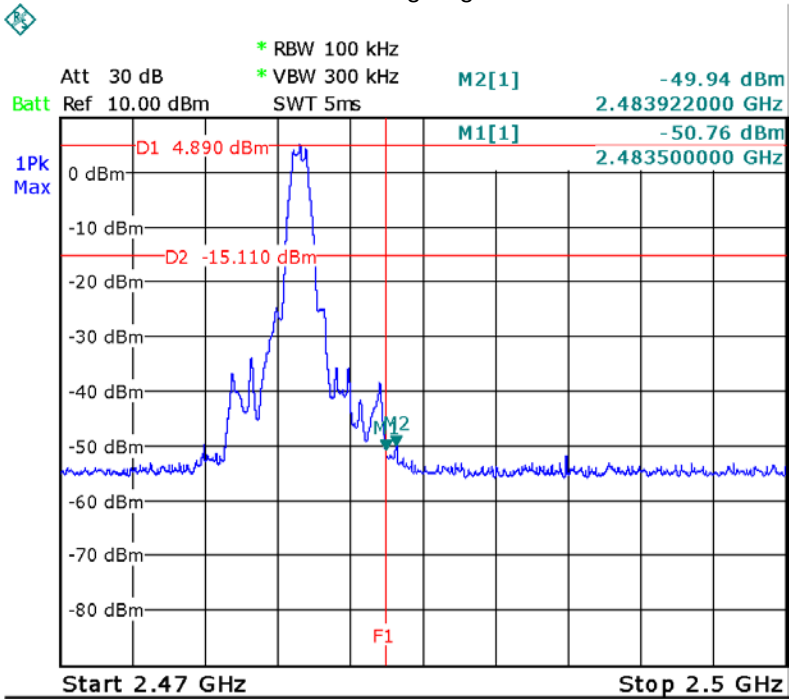

11 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:


Operation mode	Test Channel	Bandwidth (MHz)	Limit (kHz)
BLE	Channel 0	0.707	≥ 500
	Channel 19	0.701	≥ 500
	Channel 39	0.695	≥ 500


Test result plot:

BLE: channel 0

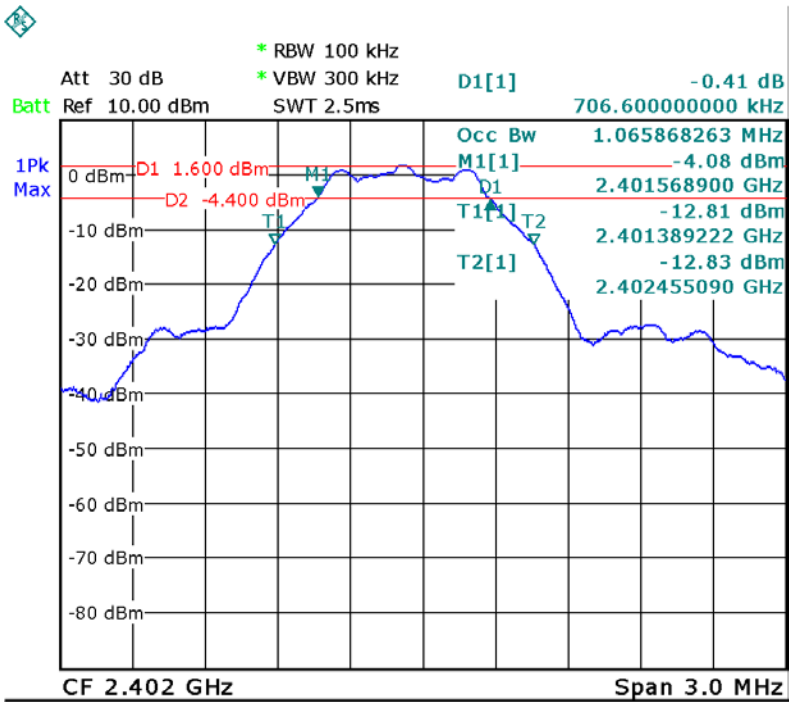

BLE: channel 19

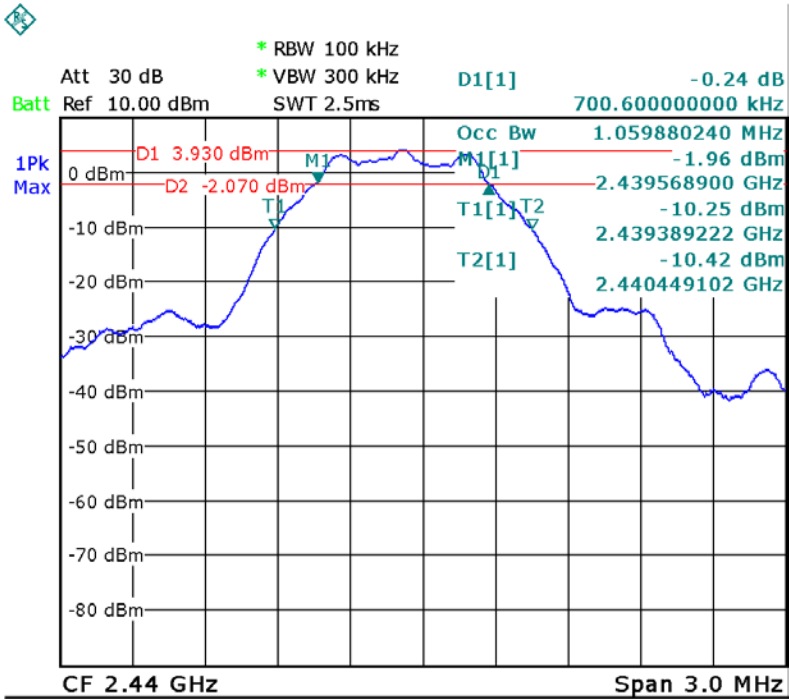

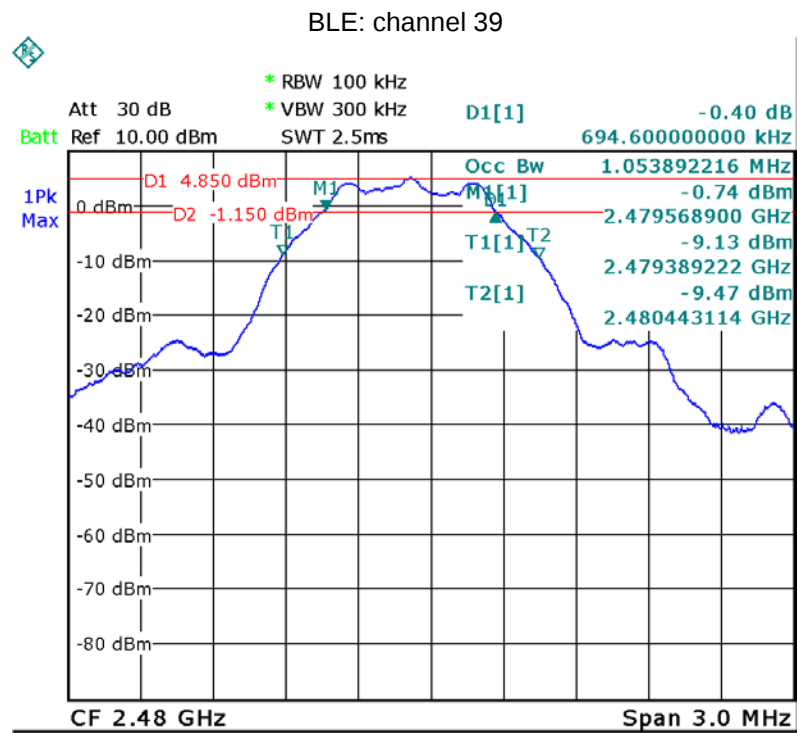

12 Maximum Peak Output Power

Test Requirement:

FCC CFR47 Part 15 Section 15.247

Test Method:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

12.1 Test Procedure:

KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016

section 9.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

a) Set the $RBW \geq DTS \text{ bandwidth}$.

b) Set $VBW \geq 3 \square RBW$.

c) Set $\text{span} \geq 3 \times RBW$

d) Sweep time = auto couple.

e) Detector = peak.

f) Trace mode = max hold.

g) Allow trace to fully stabilize.

h) Use peak marker function to determine the peak amplitude level.

section 9.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

a) Set the $RBW = 1 \text{ MHz}$.

b) Set the $VBW \geq 3 \square RBW$

c) Set the $\text{span} \geq 1.5 \times DTS \text{ bandwidth}$.

d) Detector = peak.

e) Sweep time = auto couple.


f) Trace mode = max hold.



g) Allow trace to fully stabilize.

h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select peak detector). If the instrument does not have a band power function, sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS bandwidth.

12.2 Test Result:

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
BLE	Low-2402	1.69	1W/30dBm
	Middle-2440	4.00	1W/30dBm
	High-2480	4.96	1W/30dBm

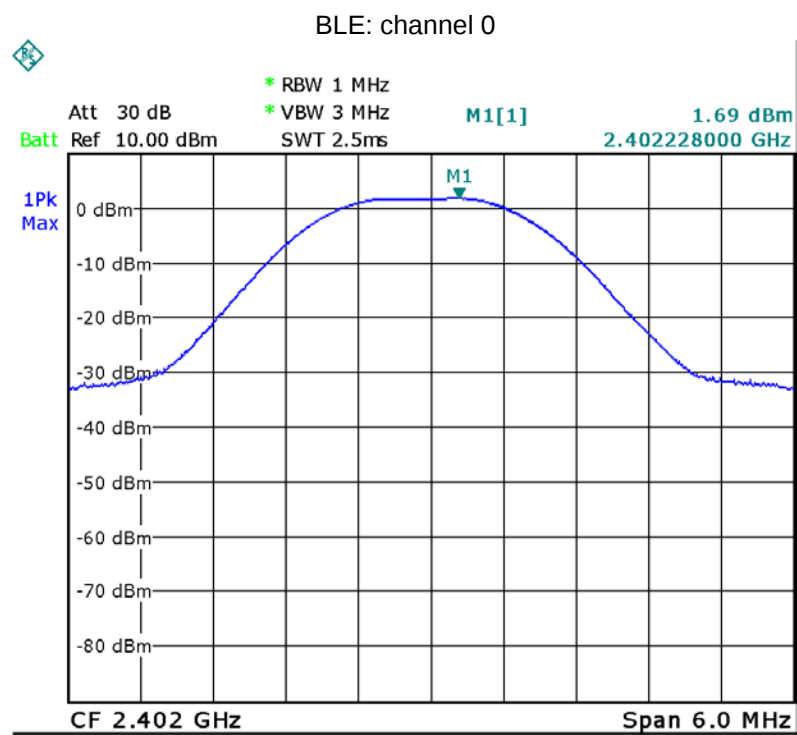

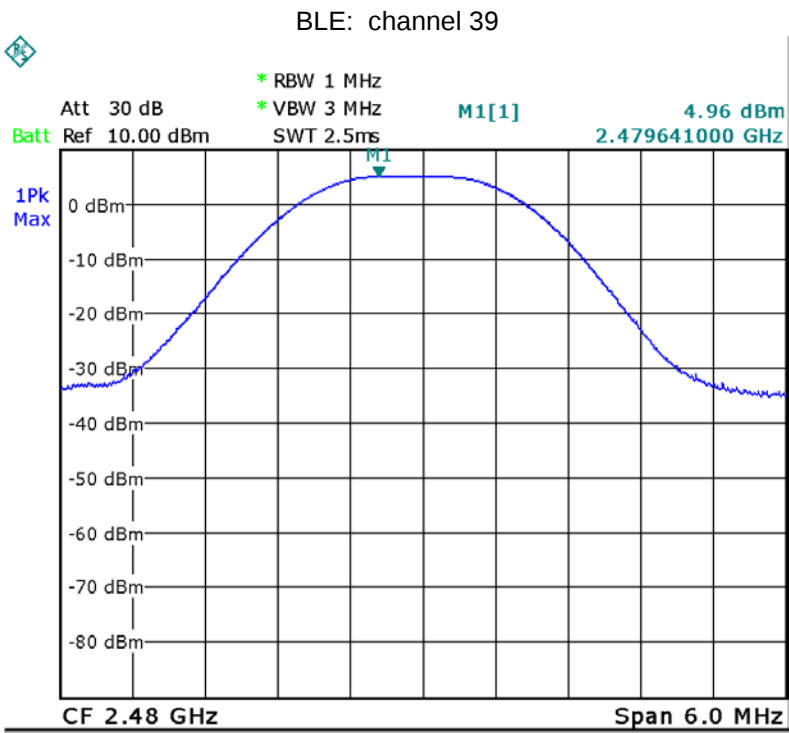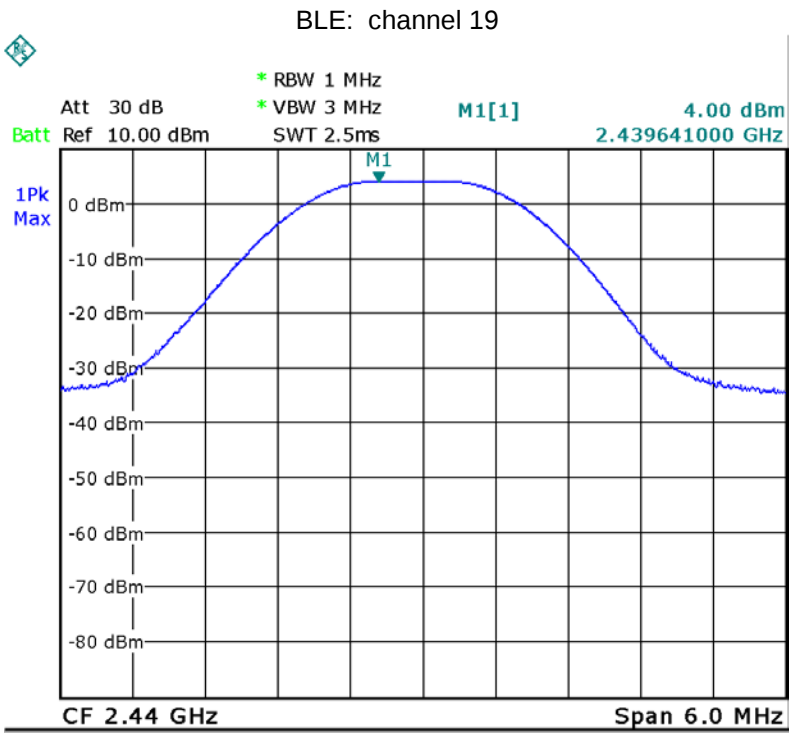

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016



13.1 Test Procedure:


KDB 558074 D01 DTS Meas Guidance v03r05 April 8, 2016 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.

13.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
BLE	Low-2402	-13.35	8dBm per 3kHz
	Middle-2440	-11.50	8dBm per 3kHz
	High-2480	-10.16	8dBm per 3kHz

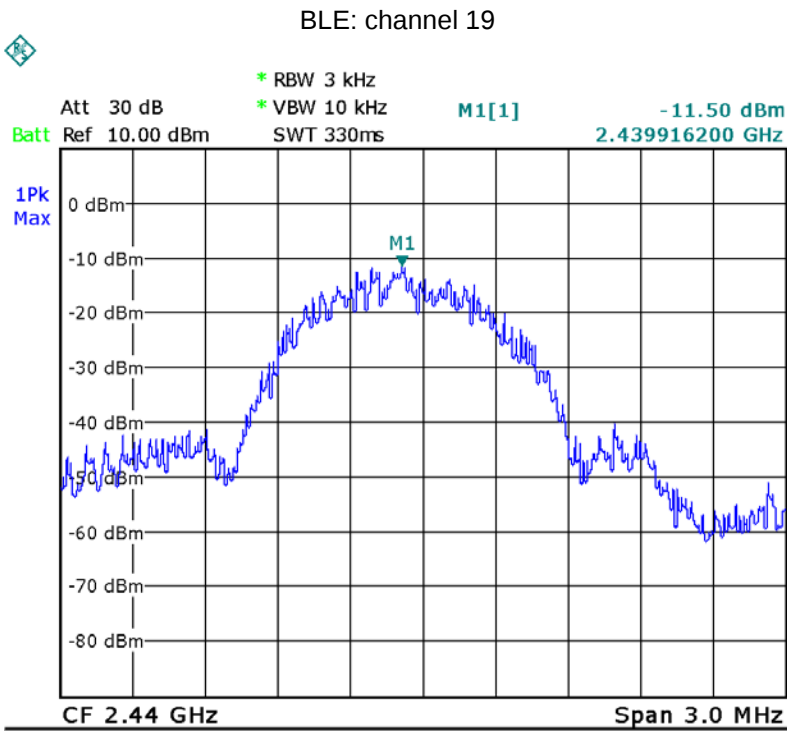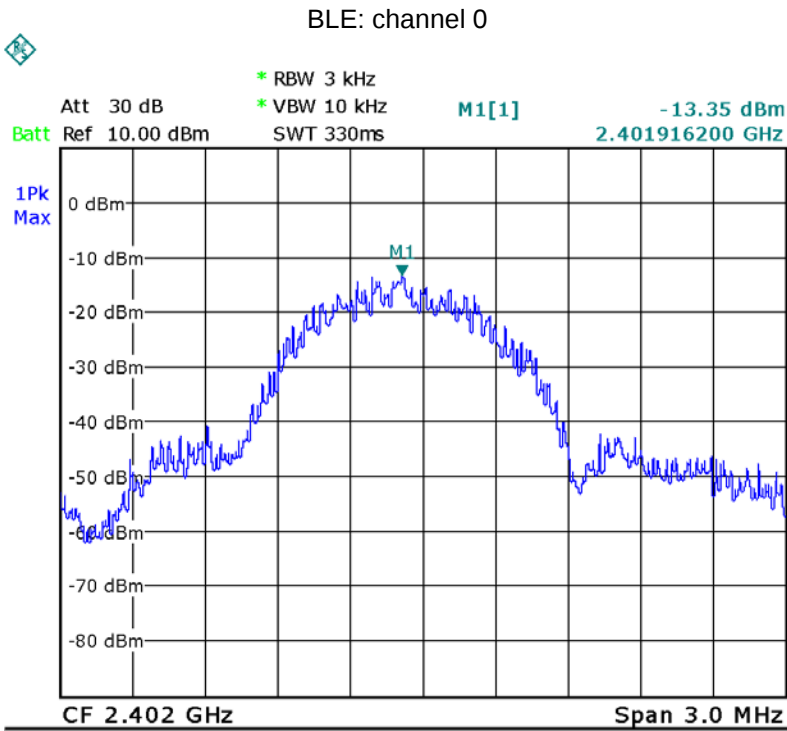

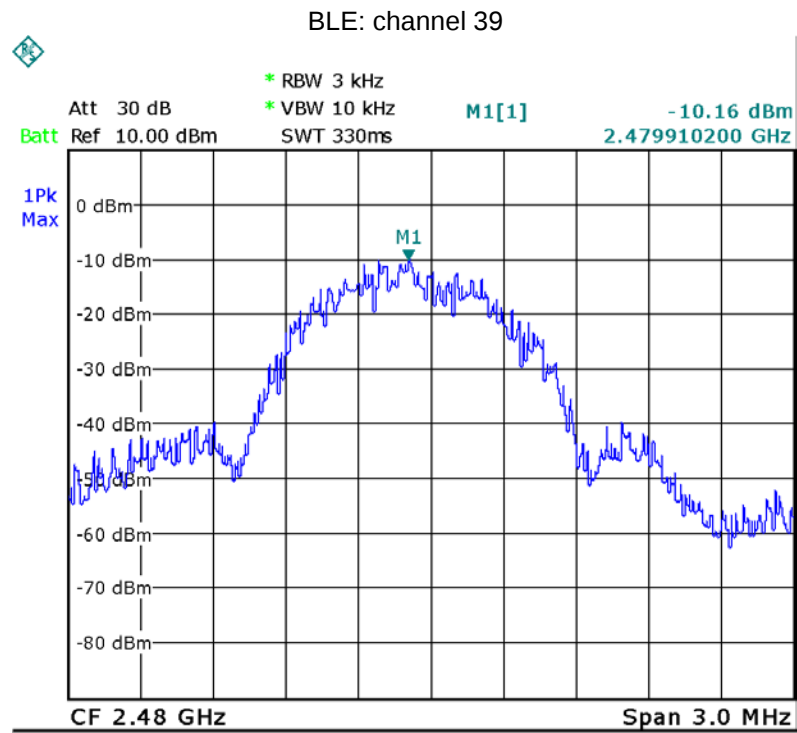

14 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has a Ceramic Antenna, meets the requirements of FCC 15.203.



15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1093 & KDB 447498 D01 General RF Exposure Guidance v06

15.1 Requirements

1) The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz
2. Power and distance are rounded to the nearest mW and mm before calculation
3. The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

15.2 Test result

Conducted Peak power(dBm)	Conducted Peak power(mW)	Source-based time-averaged maximum conducted output power(mW)	Minimum test separation distance required for the exposure conditions (mm)	SAR Test Exclusion Thresholds Calculation Value	SAR Test Exclusion Thresholds Limit	Result
4.96	3.13	3.13	5	0.98	3.0	Compliance
Note: No SAR measurement is required.						

16 Photographs of test setup and EUT.

Refer to the file U8_Ext Photos, U8_Int Photos and U8_Tsup Photos.

===== End of Report =====