

TEST REPORT

Reference No...... : WTS16S0652789-3E
FCC ID : 2AF9R-WETEKHUB
Applicant..... : WeTek Electronics Limited
Address..... : Level 10, Central Building, 1-3 Pedder Street, Central, Hong Kong.
Manufacturer : WeTek Electronics Limited
Address..... : Level 10, Central Building, 1-3 Pedder Street, Central, Hong Kong.
Product Name..... : Android TV BOX
Model No..... : Wetek Hub, Wetek Cube, Wetek Nano, Wetek Core, Wetek Play, Wetek play2, Wetek Play2S, Wetek Streamer, Wetek Streamer 4K
Brand..... : N/A
Standards..... : FCC CFR47 Part 15 Section 15.247:2015
Date of Receipt sample : Jun. 08, 2016
Date of Test : Jun. 09 – Jul. 05, 2016
Date of Issue..... : Jul. 06, 2016
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033


Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	6
4.4 TEST MODE	7
4.5 TEST FACILITY	7
5 EQUIPMENT USED DURING TEST	8
5.1 EQUIPMENTS LIST	8
5.2 MEASUREMENT UNCERTAINTY	9
5.3 TEST EQUIPMENT CALIBRATION	9
6 CONDUCTED EMISSION	10
6.1 E.U.T. OPERATION	10
6.2 EUT SETUP	10
6.3 MEASUREMENT DESCRIPTION	10
6.4 CONDUCTED EMISSION TEST RESULT	11
7 RADIATED SPURIOUS EMISSIONS.....	13
7.1 EUT OPERATION.....	13
7.2 TEST SETUP	14
7.3 SPECTRUM ANALYZER SETUP	15
7.4 TEST PROCEDURE	16
7.5 SUMMARY OF TEST RESULTS	17
8 BAND EDGE MEASUREMENT	20
8.1 TEST PROCEDURE	20
8.2 TEST RESULT	21
9 20 DB BANDWIDTH MEASUREMENT	27
9.1 TEST PROCEDURE	27
9.2 TEST RESULT	27
10 MAXIMUM PEAK OUTPUT POWER	33
10.1 TEST PROCEDURE.....	33
10.2 TEST RESULT	33
11 HOPPING CHANNEL SEPARATION	39
11.1 TEST PROCEDURE.....	39
11.2 TEST RESULT	39
12 NUMBER OF HOPPING FREQUENCY.....	45
12.1 TEST PROCEDURE.....	45
12.2 TEST RESULT	45
13 DWELL TIME	47
13.1 TEST PROCEDURE.....	47
13.2 TEST RESULT	47
14 ANTENNA REQUIREMENT	53

15 RF EXPOSURE.....54

15.1 REQUIREMENTS.....54

15.2 THE PROCEDURES / LIMIT54

15.3 MPE CALCULATION METHOD55

4 General Information

4.1 General Description of E.U.T.

Product Name:	Android TV BOX
Model No.:	Wetek Hub, Wetek Cube, Wetek Nano, Wetek Core, Wetek Play, Wetek play2, Wetek Play2S, Wetek Streamer, Wetek Streamer 4K
Model Description:	Only the appearance is different. The model Wetek Hub is the tested sample.
Operation Frequency:	IEEE 802.11b/g/n(HT20):2412MHz ~ 2462MHz IEEE 802.11a/ n(HT20)/ac(HT20/40/80): 5150MHz to 5250MHz IEEE 802.11a/ n(HT20)/ac(HT20/40/80): 5725MHz to 5850MHz BT: 2402-2480MHz
The Lowest Oscillator:	12MHz
Antenna Gain:	2.4GHz WIFI:2.0 dBi 5.2GHz WIFI:2.0 dBi 5.8GHz WIFI:2.0 dBi 2.4GHz BT:2.0 dBi
Type of modulation:	IEEE 802.11b DSSS(CCK/QPSK/BPSK) IEEE 802.11g OFDM(BPSK/QPSK/16QAM/64QAM) IEEE 802.11n OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11a: OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11n : OFDM(BPSK/QPSK/16QAM/64QAM) IEEE for 802.11ac : OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) BT: GFSK,PI/4-DQPSK,8DPSK
Number of transmitter chains:	BT/ WIFI: 1

4.2 Details of E.U.T.

Technical Data:	Input: DC5V powered by adapter adapter input: 100-240V 50/60Hz, 0.35A outup: 5V, 2000mA adapter manufacturer: SHEN ZHEN KEYU POWER SUPPLY TECHNOLOGY CO.,LTD
-----------------	---

4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Transmitting duty cycle is normal.

The software is installed in operation system, named "RFTestTool.apk", Version 1, date 20160518.

Table 1 Tests carried out under FCC part 15.247

Test mode	Low channel	Middle channel	High channel
Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests carried out under FCC part 15.207& FCC part 15.209

Test Item	Test Mode
Conducted Emissions	Communication
Radiated Emissions	Communication

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A-1, July 12, 2012.

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.14,2015	Sep.13,2016
2.	LISN	R&S	ENV216	101215	Sep.14,2015	Sep.13,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.14,2015	Sep.13,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.14,2015	Sep.13,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.14,2015	Sep.13,2016
3.	Limiter	York	MTS-IMP-136	261115-001-0024	Sep.14,2015	Sep.13,2016
4.	Cable	LARGE	RF300	-	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Sep.14,2015	Sep.13,2016
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Sep.14,2015	Sep.13,2016
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Sep.14,2015	Sep.13,2016
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Sep.14,2015	Sep.13,2016
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Sep.14,2015	Sep.13,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2009
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	25.5 °C
Humidity:	51 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in transmitting mode, the worst test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2009.

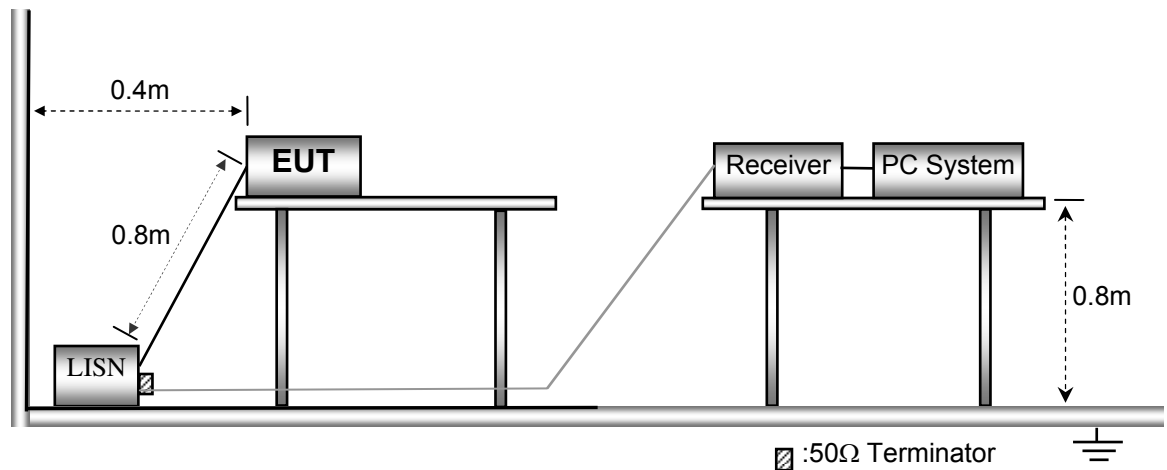


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.4 Conducted Emission Test Result

Live line:

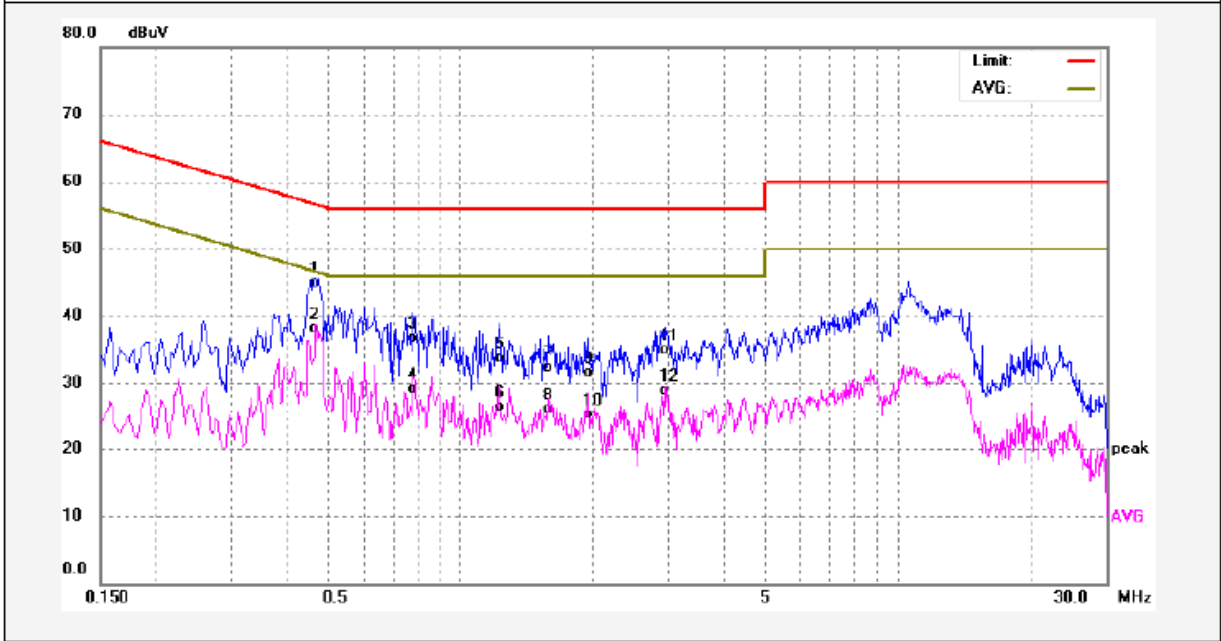

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4620	34.68	10.26	44.94	56.66	-11.72	QP	
2	0.4620	27.76	10.26	38.02	46.66	-8.64	AVG	
3	0.7780	26.44	10.36	36.80	56.00	-19.20	QP	
4	0.7780	18.76	10.36	29.12	46.00	-16.88	AVG	
5	1.2260	23.28	10.41	33.69	56.00	-22.31	QP	
6	1.2260	16.16	10.41	26.57	46.00	-19.43	AVG	
7	1.5859	21.89	10.44	32.33	56.00	-23.67	QP	
8	1.5859	15.72	10.44	26.16	46.00	-19.84	AVG	
9	1.9580	21.03	10.47	31.50	56.00	-24.50	QP	
10	1.9580	14.79	10.47	25.26	46.00	-20.74	AVG	
11	2.9260	24.35	10.50	34.85	56.00	-21.15	QP	
12	2.9260	18.44	10.50	28.94	46.00	-17.06	AVG	

Neutral line:

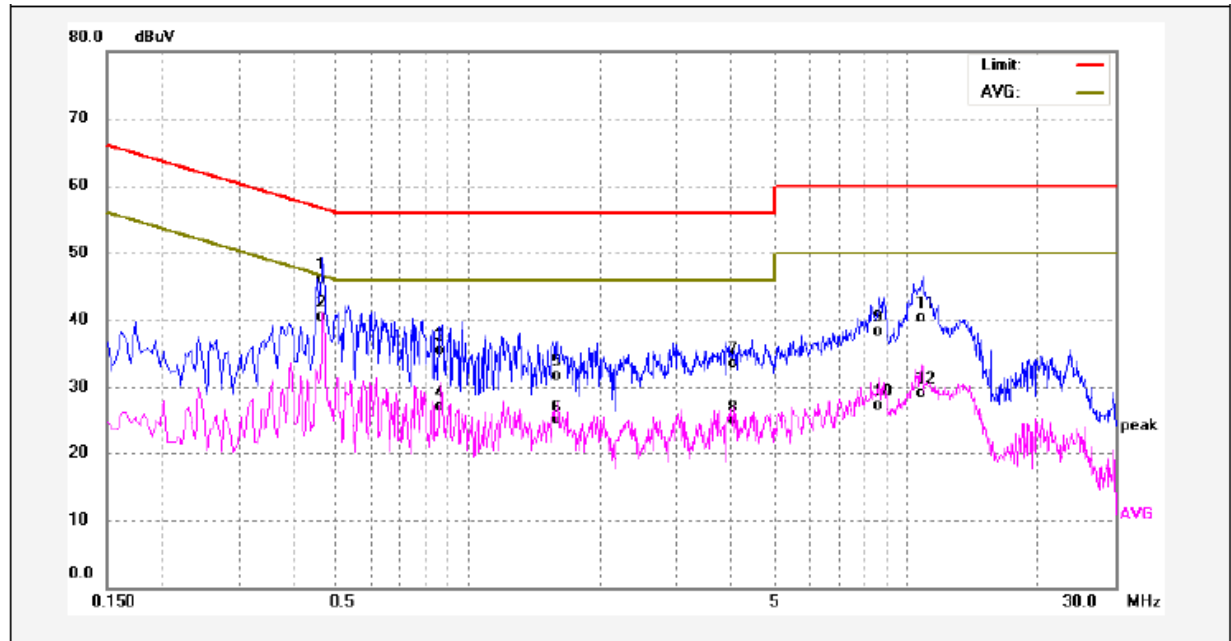

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.4660	35.84	10.26	46.10	56.58	-10.48	QP	
2	0.4660	30.16	10.26	40.42	46.58	-6.16	AVG	
3	0.8700	25.14	10.37	35.51	56.00	-20.49	QP	
4	0.8700	16.72	10.37	27.09	46.00	-18.91	AVG	
5	1.6060	21.35	10.44	31.79	56.00	-24.21	QP	
6	1.6060	14.44	10.44	24.88	46.00	-21.12	AVG	
7	4.0180	22.97	10.51	33.48	56.00	-22.52	QP	
8	4.0180	14.47	10.51	24.98	46.00	-21.02	AVG	
9	8.6500	27.60	10.67	38.27	60.00	-21.73	QP	
10	8.6500	16.62	10.67	27.29	50.00	-22.71	AVG	
11	10.9020	29.62	10.73	40.35	60.00	-19.65	QP	
12	10.9020	18.35	10.73	29.08	50.00	-20.92	AVG	

7 Radiated Spurious Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 51.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2009.


The test setup for emission measurement below 30MHz.

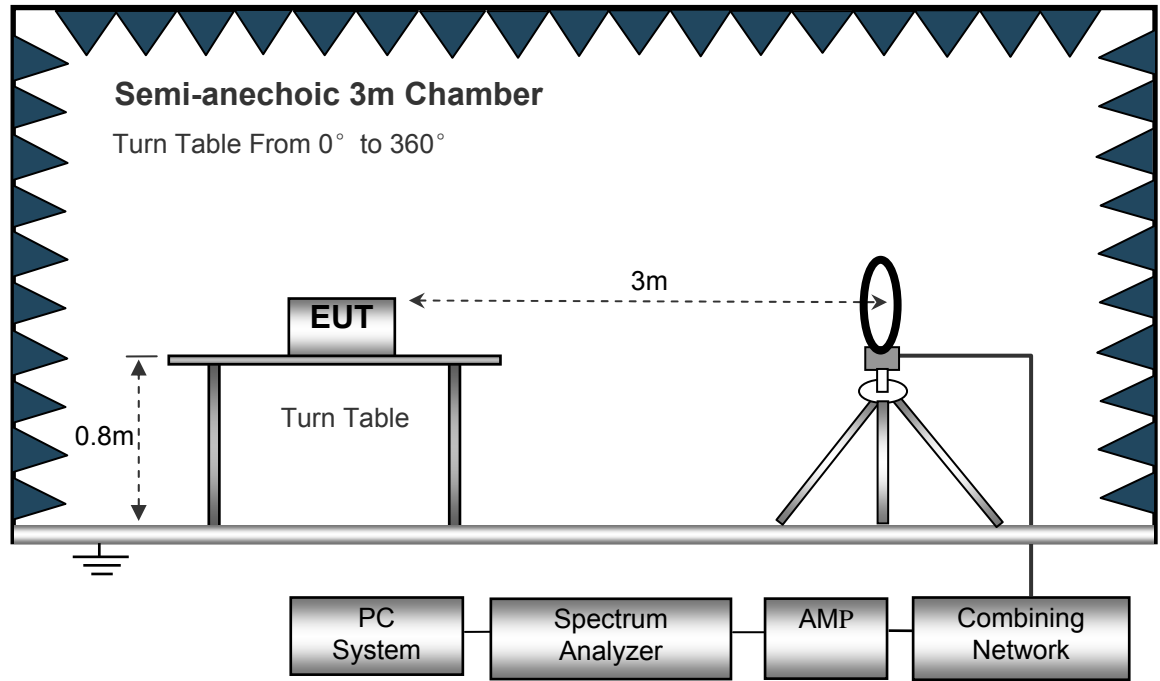

The test setup for emission measurement from 30 MHz to 1 GHz.

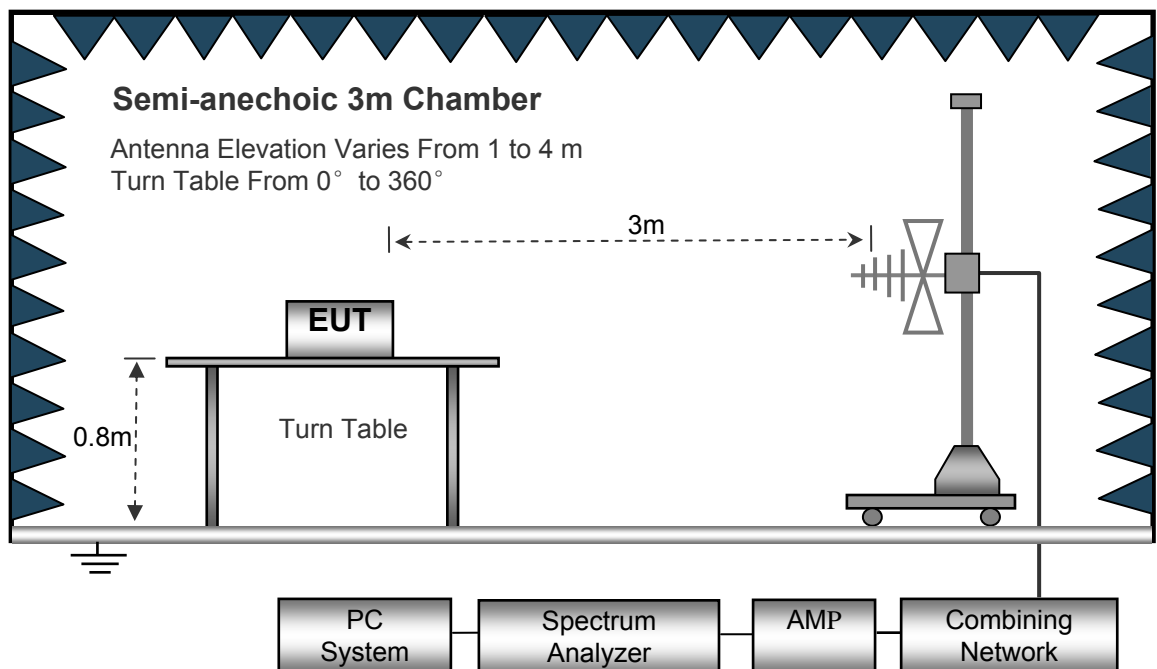

The test setup for emission measurement above 1 GHz.

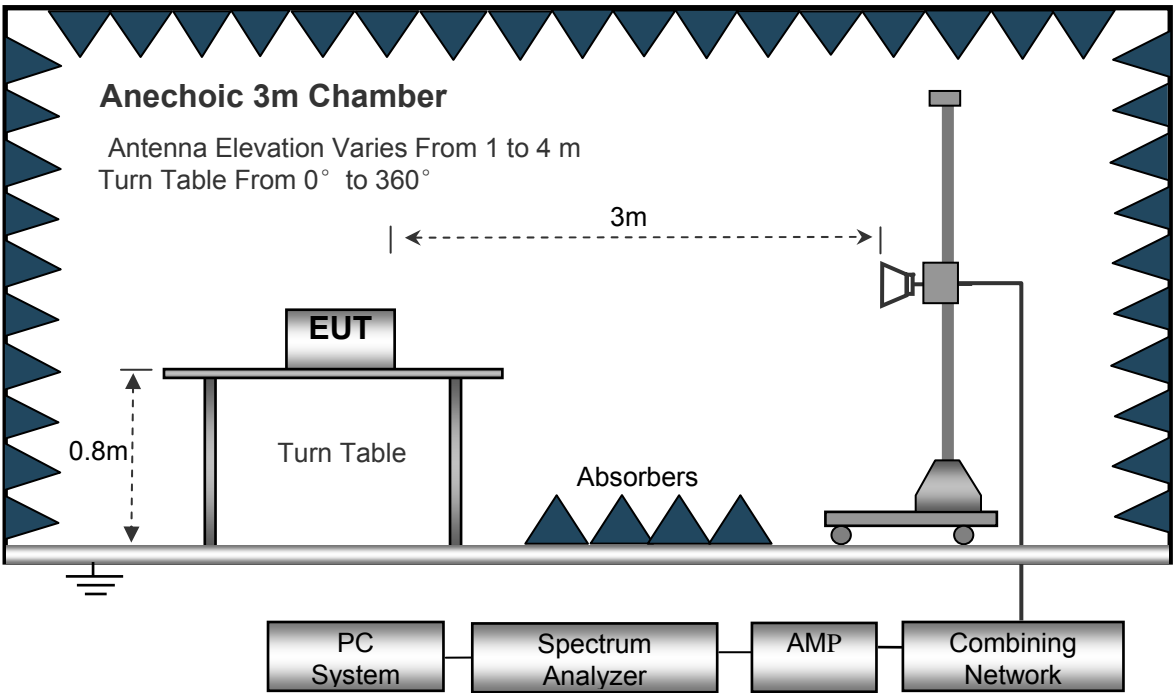

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
IF Bandwidth.....10kHz
Video Bandwidth.....10kHz
Resolution Bandwidth.....10kHz

30MHz ~ 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....100kHz
Video Bandwidth.....300kHz

Above 1GHz

Sweep Speed Auto
DetectorPK
Resolution Bandwidth.....1MHz
Video Bandwidth.....3MHz
DetectorAve.
Resolution Bandwidth.....1MHz
Video Bandwidth.....10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 12MHz~30MHz

Frequency (MHz)	Measurement results	Detector	Correct factor	Extrapolation factor	Measurement results (calculated)	Limits	Margin
	dB μ V @3m	PK/QP	dB/m	dB	dB μ V/m @30m	dB μ V/m @30m	dB
25.840	26.00	QP	19.90	40.00	5.90	29.54	-23.64

Test Frequency: 30MHz ~ 18GHz

Remark: only the worst data(GFSK modulation mode) were reported.

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	Height	Polar	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel									
268.32	37.71	QP	319	1.9	H	-13.35	24.36	46.00	-21.64
268.32	40.65	QP	353	1.7	V	-13.35	27.30	46.00	-18.70
4804.00	45.04	PK	146	1.2	V	-1.06	43.98	74.00	-30.02
4804.00	43.62	Ave	146	1.2	V	-1.06	42.56	54.00	-11.44
7206.00	40.31	PK	269	1.8	H	1.33	41.64	74.00	-32.36
7206.00	35.38	Ave	269	1.8	H	1.33	36.71	54.00	-17.29
2315.60	46.61	PK	157	1.9	V	-13.19	33.42	74.00	-40.58
2315.60	39.46	Ave	157	1.9	V	-13.19	26.27	54.00	-27.73
2383.40	42.09	PK	213	1.2	H	-13.14	28.95	74.00	-45.05
2383.40	36.57	Ave	213	1.2	H	-13.14	23.43	54.00	-30.57
2483.71	44.20	PK	175	1.4	V	-13.08	31.12	74.00	-42.88
2483.71	36.87	Ave	175	1.4	V	-13.08	23.79	54.00	-30.21

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK Middle Channel									
268.32	38.81	QP	355	1.9	H	-13.35	25.46	46.00	-20.54
268.32	41.93	QP	57	1.9	V	-13.35	28.58	46.00	-17.42
4882.00	43.99	PK	236	1.3	V	-0.62	43.37	74.00	-30.63
4882.00	44.57	Ave	236	1.3	V	-0.62	43.95	54.00	-10.05
7323.00	39.82	PK	83	1.7	H	2.21	42.03	74.00	-31.97
7323.00	35.35	Ave	83	1.7	H	2.21	37.56	54.00	-16.44
2328.34	46.25	PK	146	1.6	V	-13.19	33.06	74.00	-40.94
2328.34	37.81	Ave	146	1.6	V	-13.19	24.62	54.00	-29.38
2354.47	44.96	PK	241	1.1	H	-13.14	31.82	74.00	-42.18
2354.47	38.99	Ave	241	1.1	H	-13.14	25.85	54.00	-28.15
2495.64	43.34	PK	294	1.3	V	-13.08	30.26	74.00	-43.74
2495.64	37.70	Ave	294	1.3	V	-13.08	24.62	54.00	-29.38

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
GFSK High Channel									
268.32	38.30	QP	262	1.8	H	-13.35	24.95	46.00	-21.05
268.32	42.50	QP	105	1.2	V	-13.35	29.15	46.00	-16.85
4960.00	42.72	PK	1	1.3	V	-0.24	42.48	74.00	-31.52
4960.00	43.34	Ave	1	1.3	V	-0.24	43.10	54.00	-10.90
7440.00	39.95	PK	186	1.5	H	2.84	42.79	74.00	-31.21
7440.00	36.66	Ave	186	1.5	H	2.84	39.50	54.00	-14.50
2346.10	46.17	PK	166	1.4	V	-13.19	32.98	74.00	-41.02
2346.10	37.64	Ave	166	1.4	V	-13.19	24.45	54.00	-29.55
2356.14	42.27	PK	236	1.5	H	-13.14	29.13	74.00	-44.87
2356.14	37.43	Ave	236	1.5	H	-13.14	24.29	54.00	-29.71
2484.59	42.05	PK	253	1.2	V	-13.08	28.97	74.00	-45.03
2484.59	36.64	Ave	253	1.2	V	-13.08	23.56	54.00	-30.44

Test Frequency :Above 18GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting and Hopping


8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold


8.2 Test Result



Test plots



GFSK Transmitting Band edge-left side


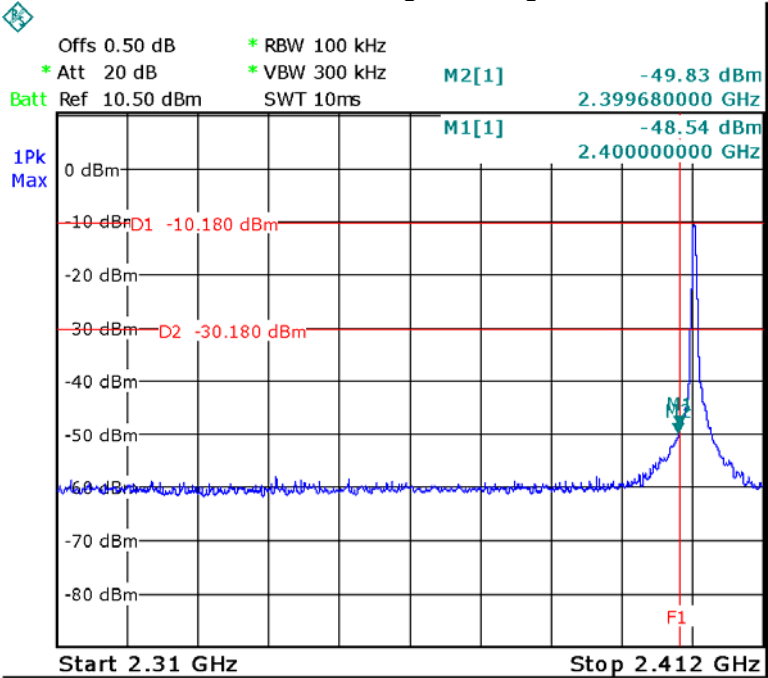




GFSK Hopping Band edge-left side


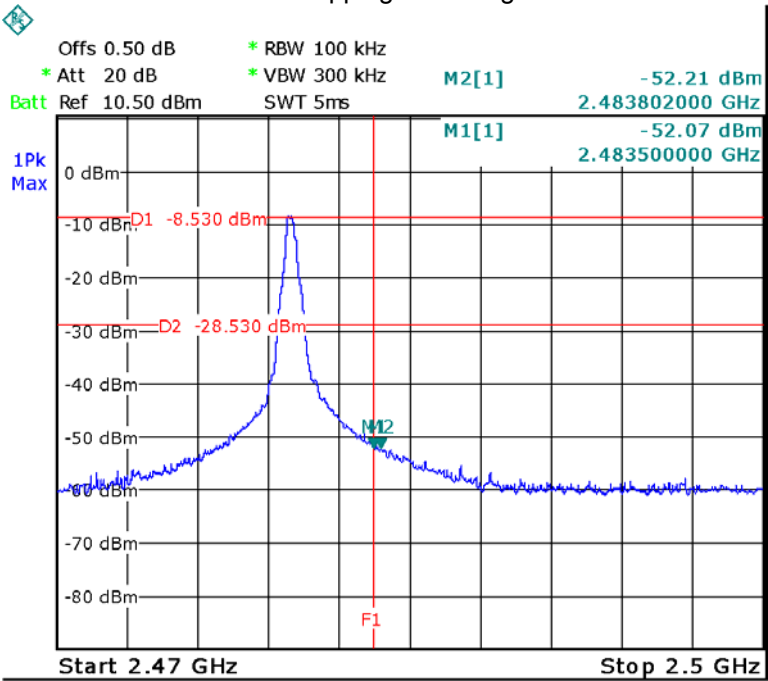


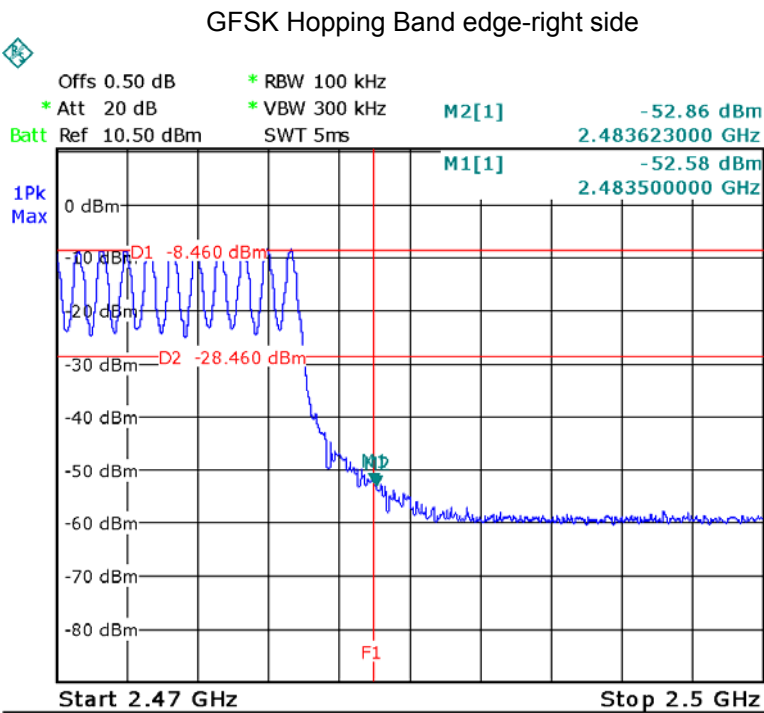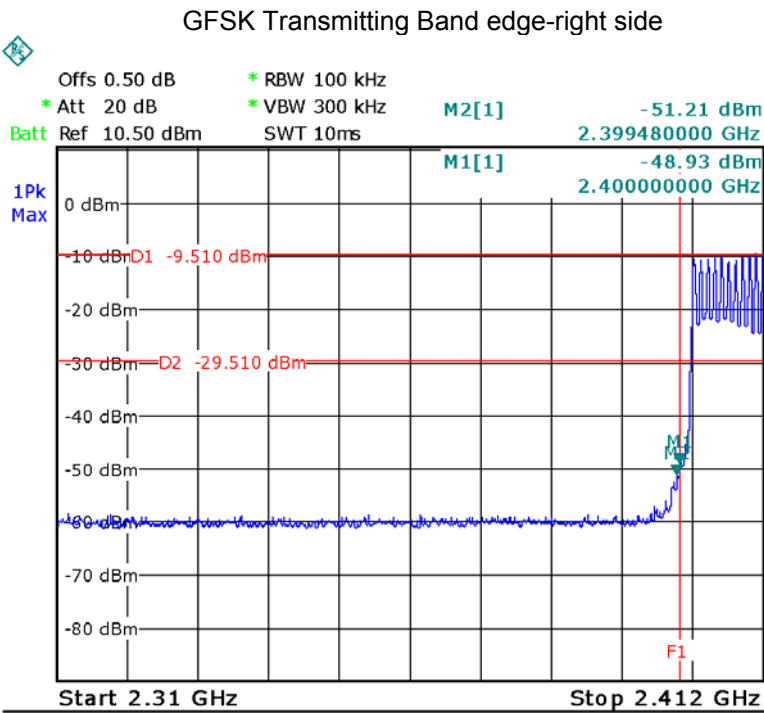

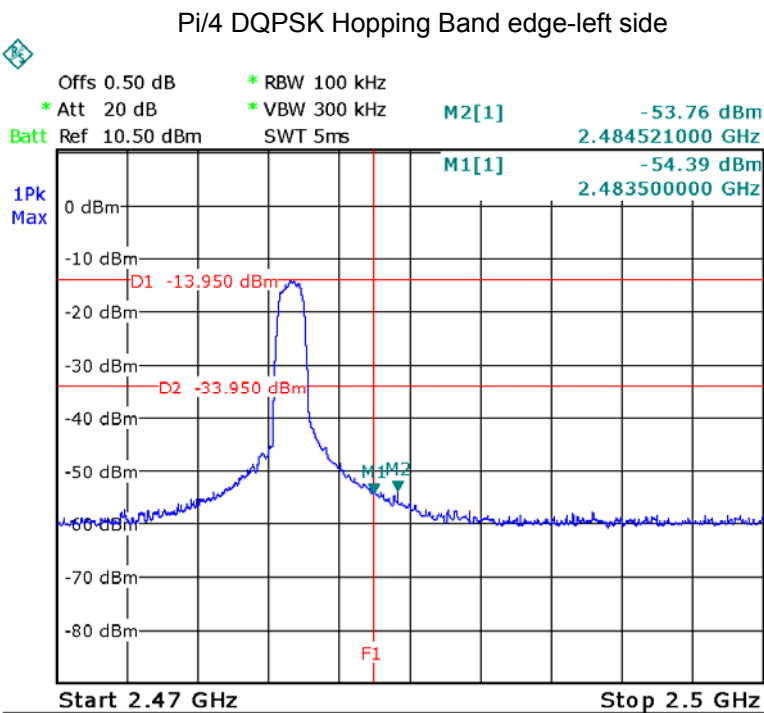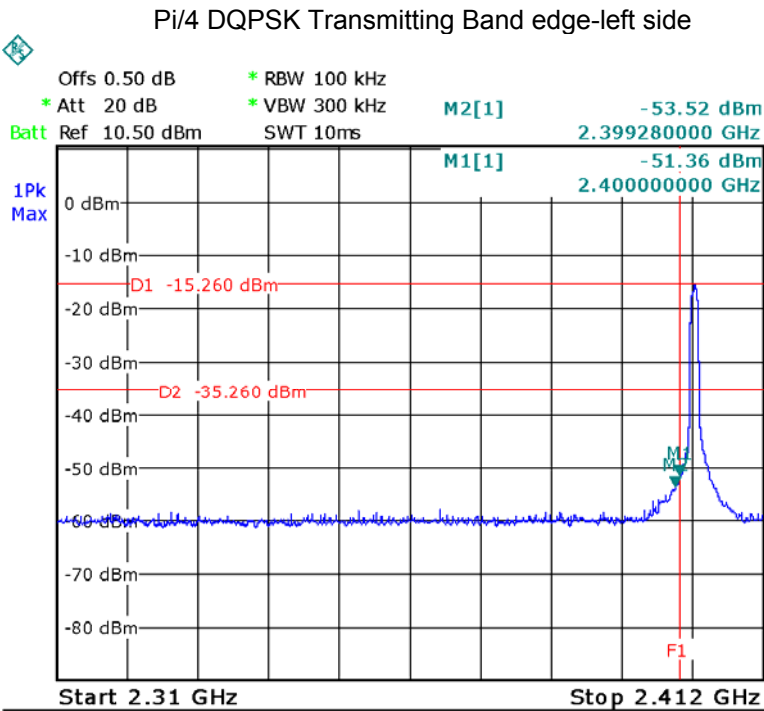

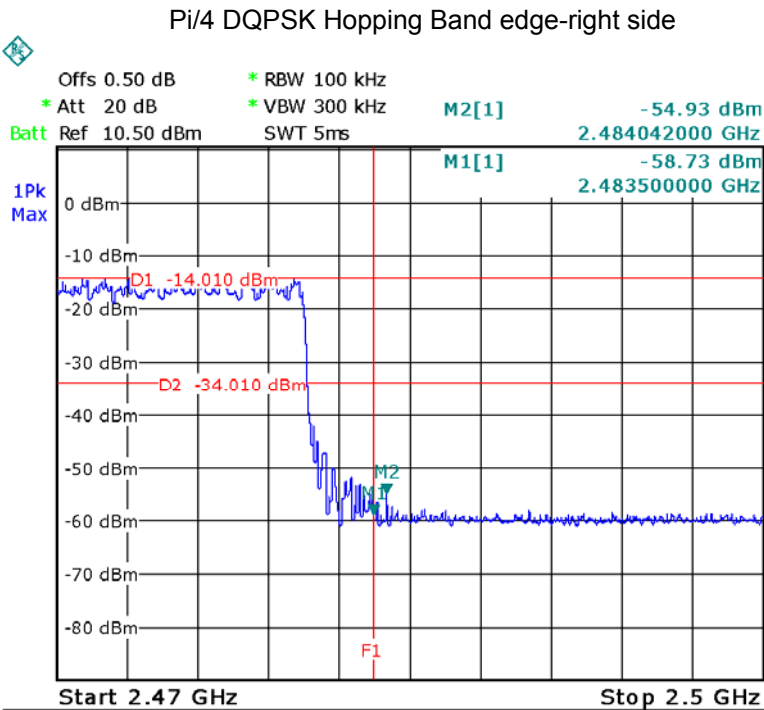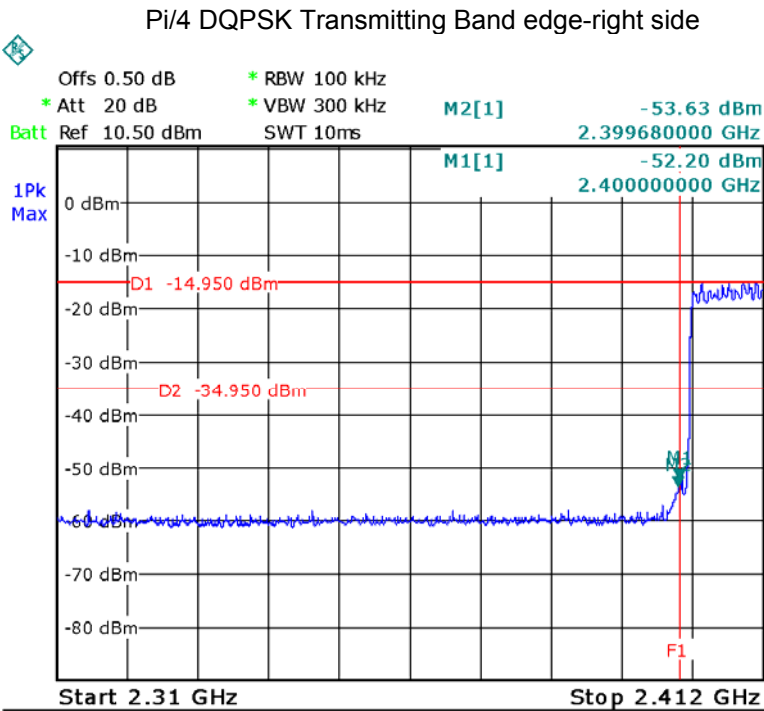

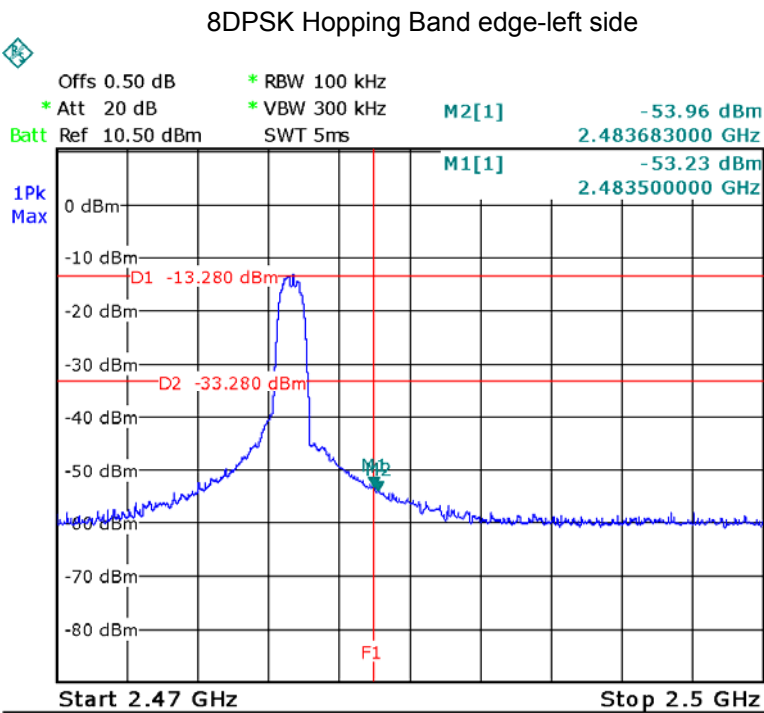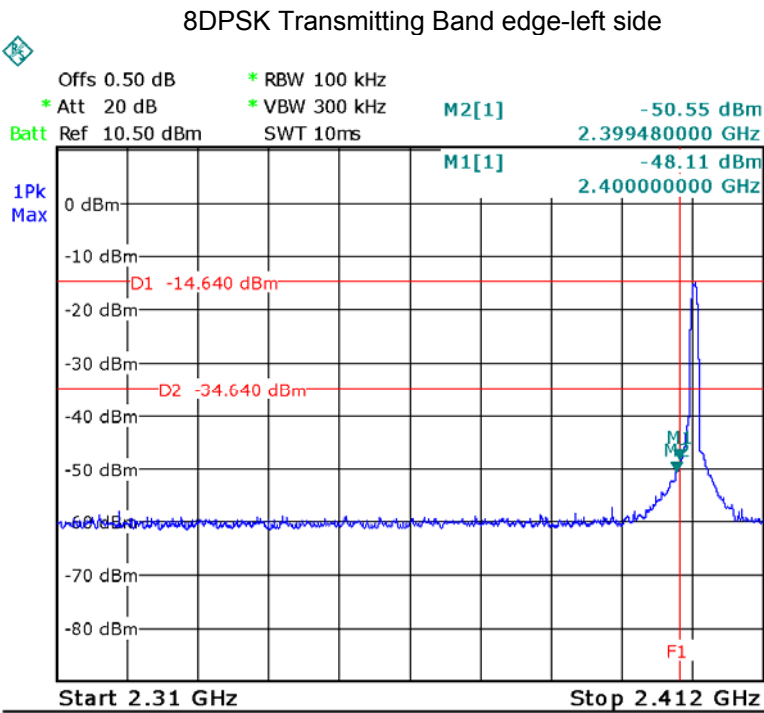

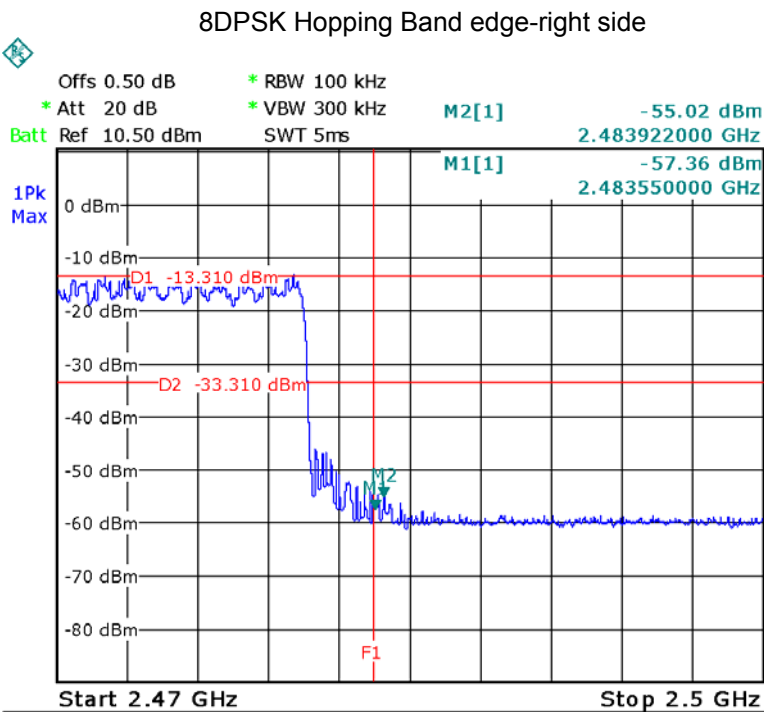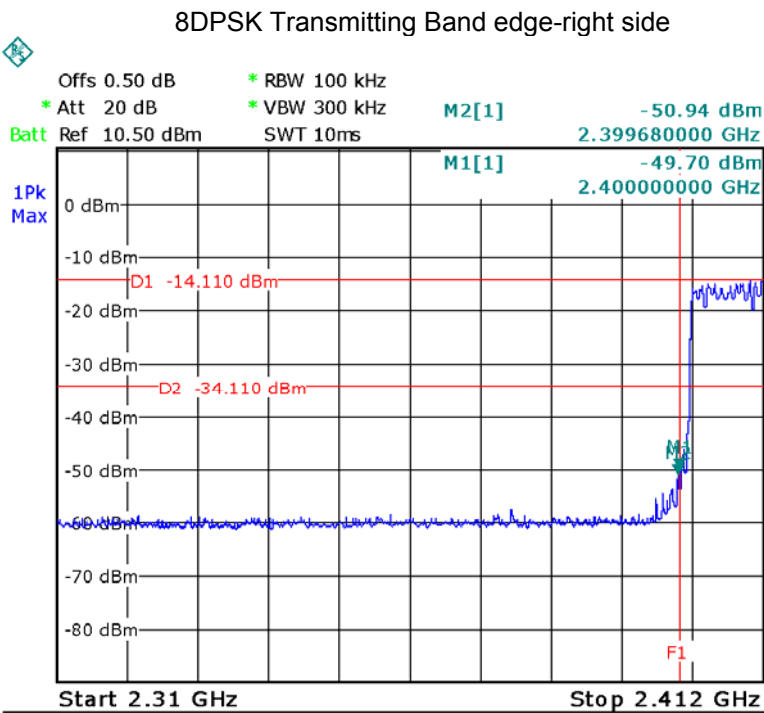

9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: DA 00-705
Test Mode: Test in fixing operating frequency at low, Middle, high channel.

9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

9.2 Test Result


Modulation	Test Channel	Bandwidth
GFSK	Low	1.024MHz
GFSK	Middle	1.024MHz
GFSK	High	1.024MHz
Pi/4 DQPSK	Low	1.389MHz
Pi/4 DQPSK	Middle	1.389MHz
Pi/4 DQPSK	High	1.389MHz
8DPSK	Low	1.377MHz
8DPSK	Middle	1.377MHz
8DPSK	High	1.377MHz



Test plots



GFSK Low Channel


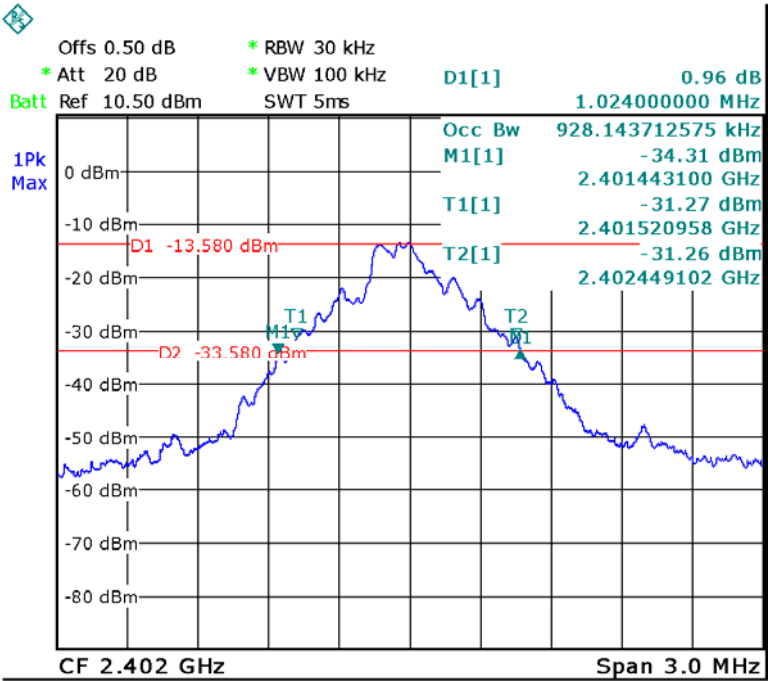



GFSK Middle Channel

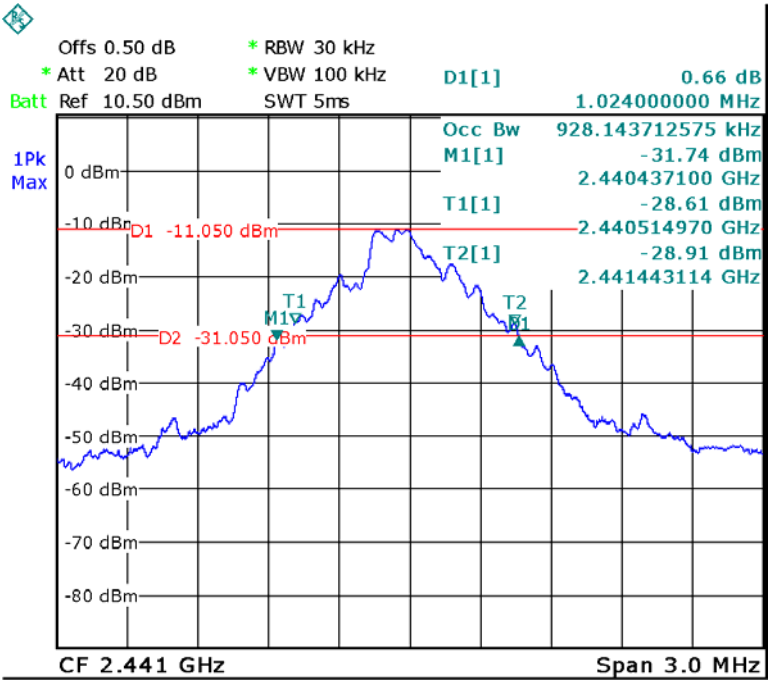

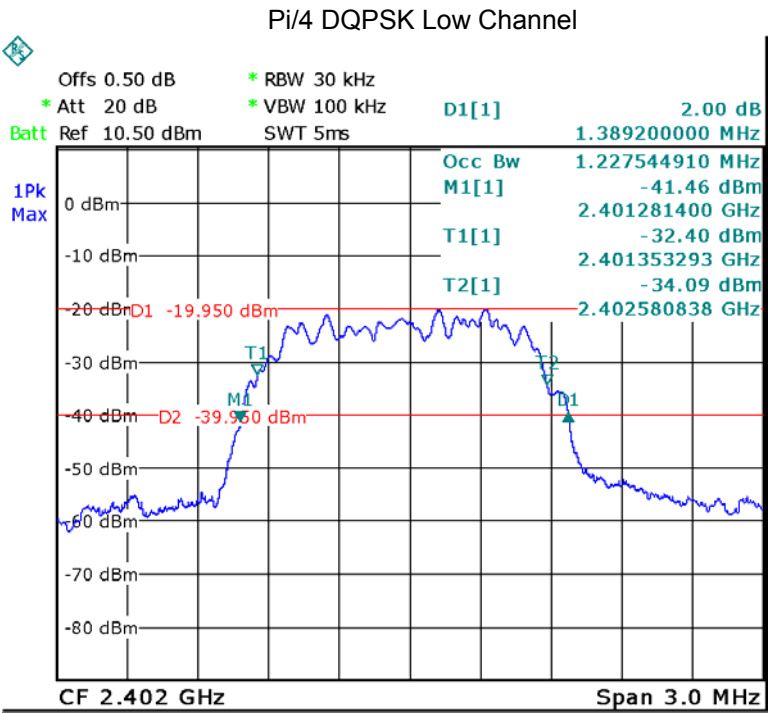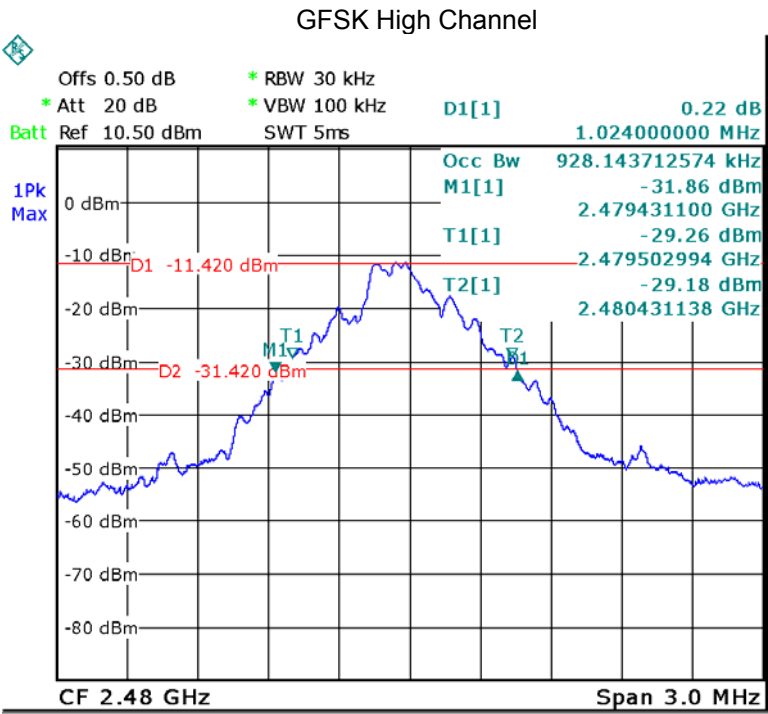

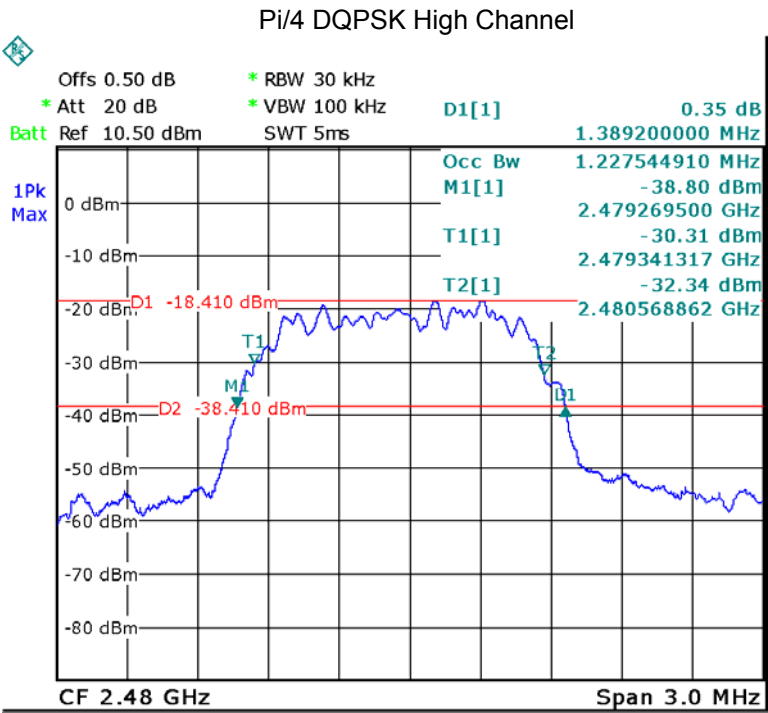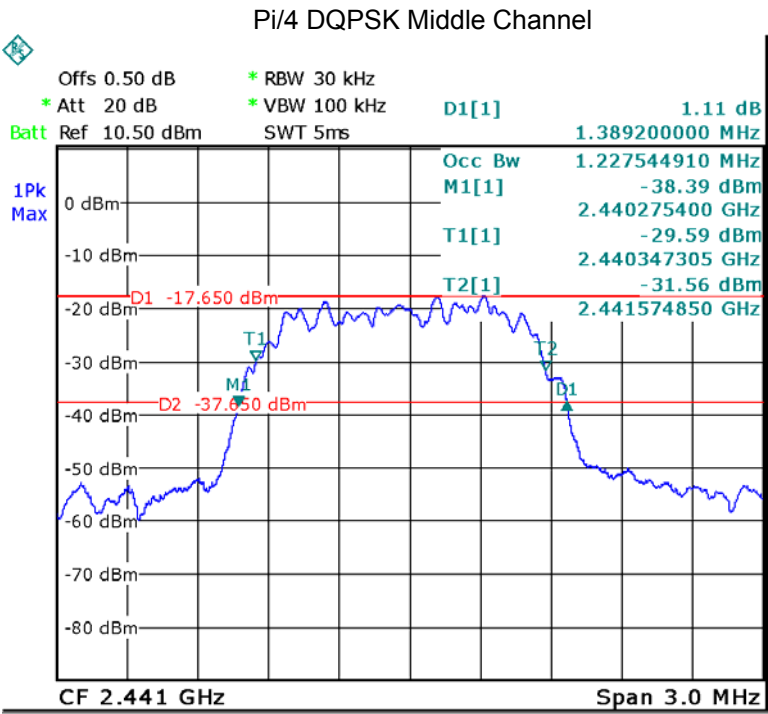

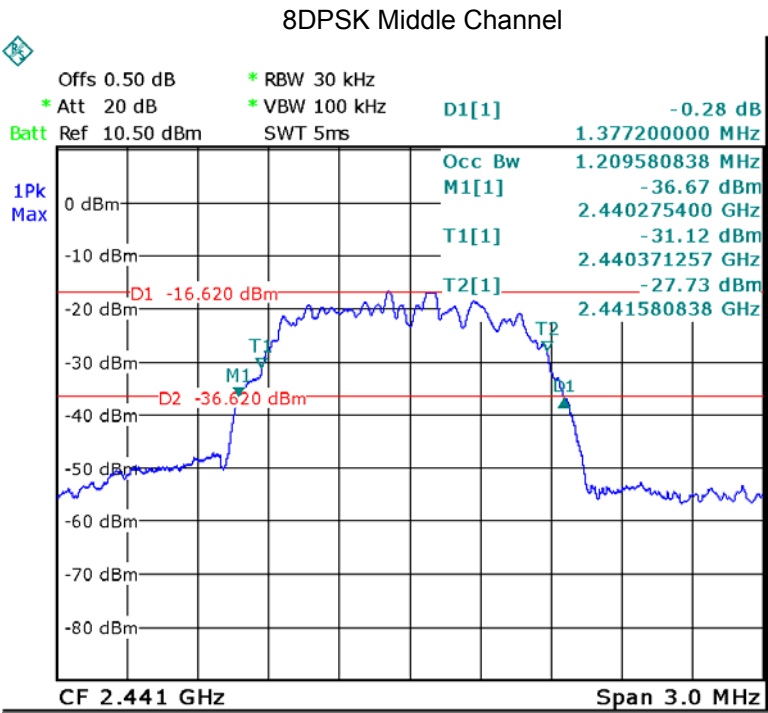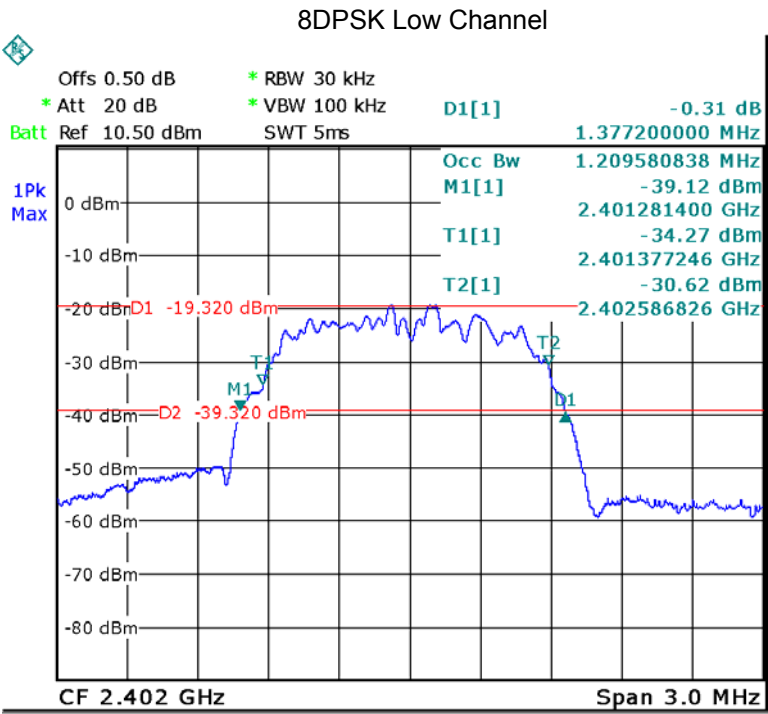

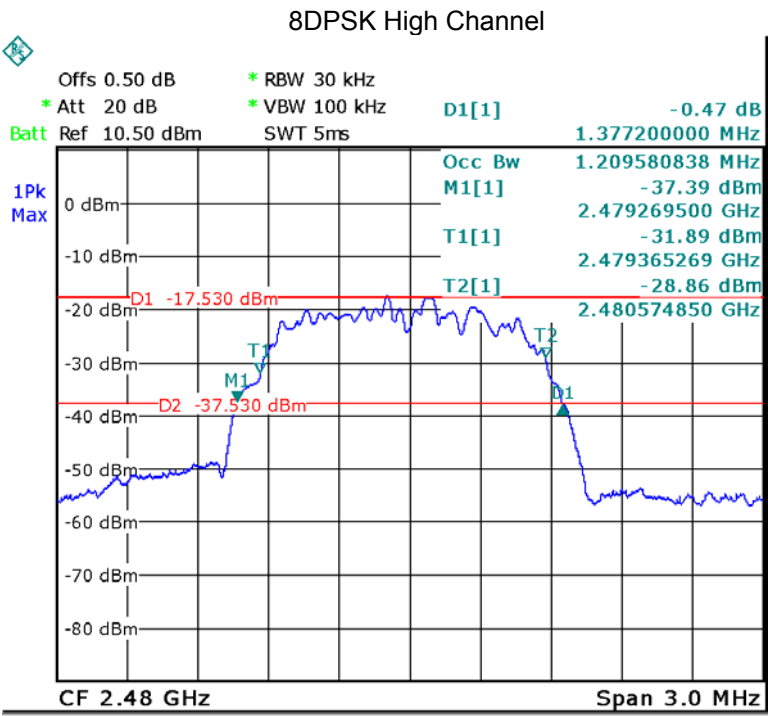

10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

10.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

10.2 Test Result


Test Mode	Data Rate	Peak Power(dBm)		
		CH00	CH39	CH78
GFSK	1Mbps	-9.66	-7.31	-7.59
4* π 4DQPSK	2Mbps	-9.97	-7.62	-7.89
8DPSK	3Mbps	-10.29	-7.82	-8.52



Test plots



GFSK Low Channel


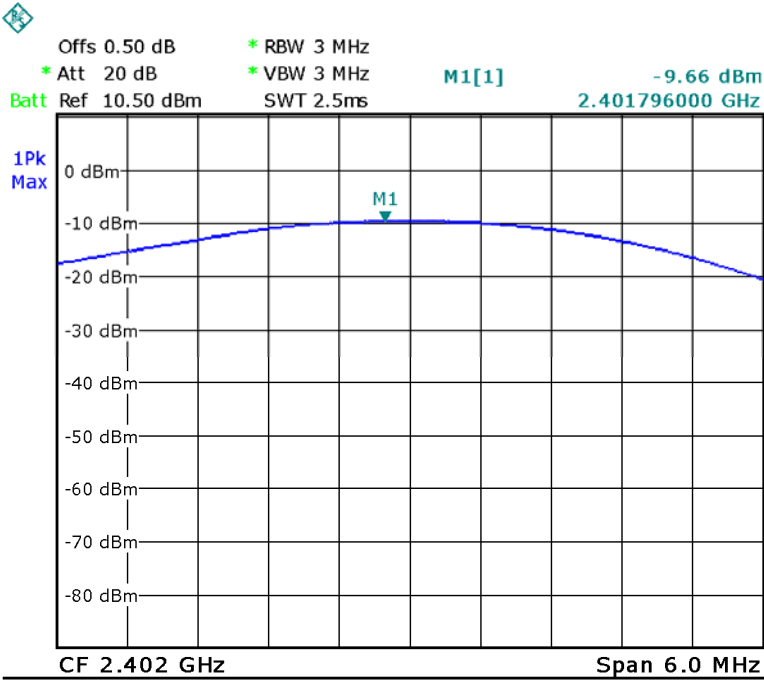



GFSK Channel

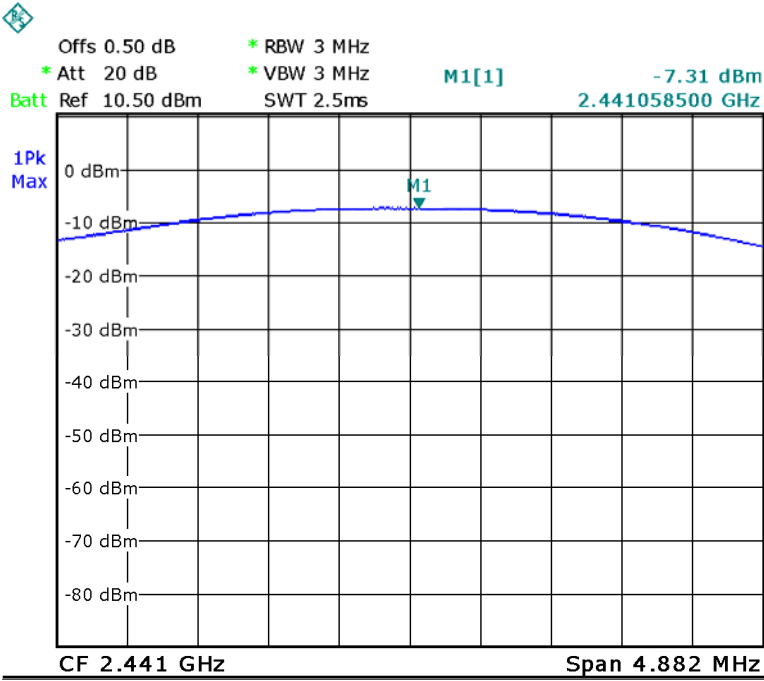

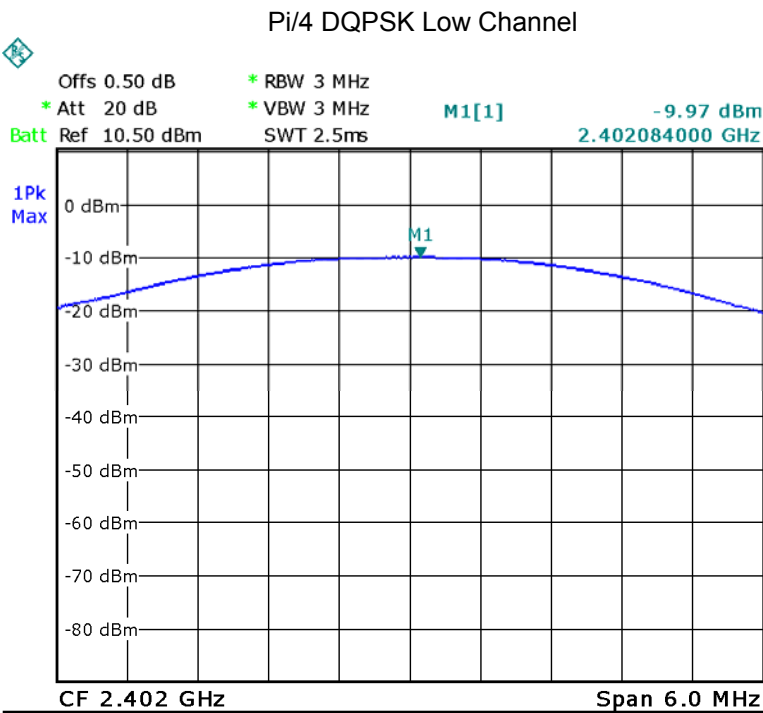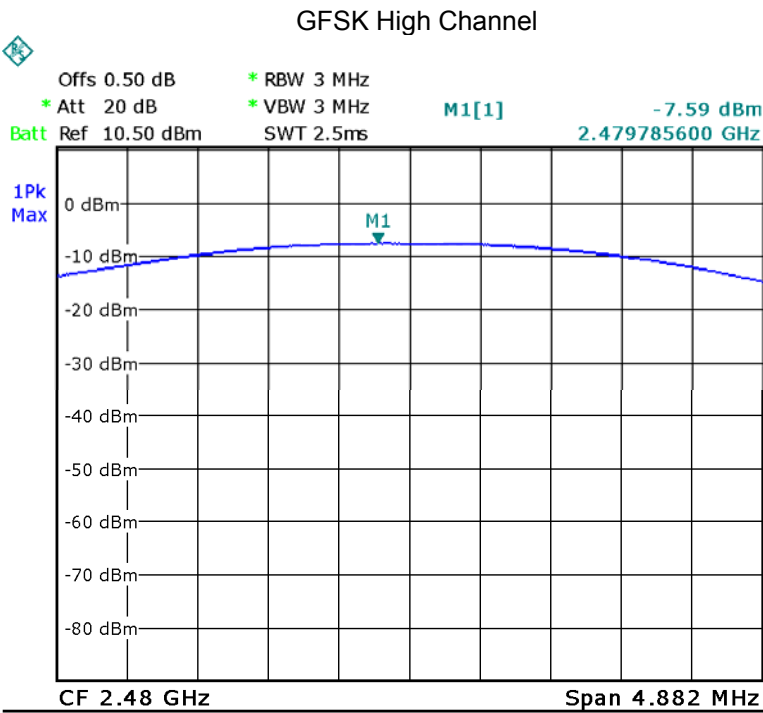

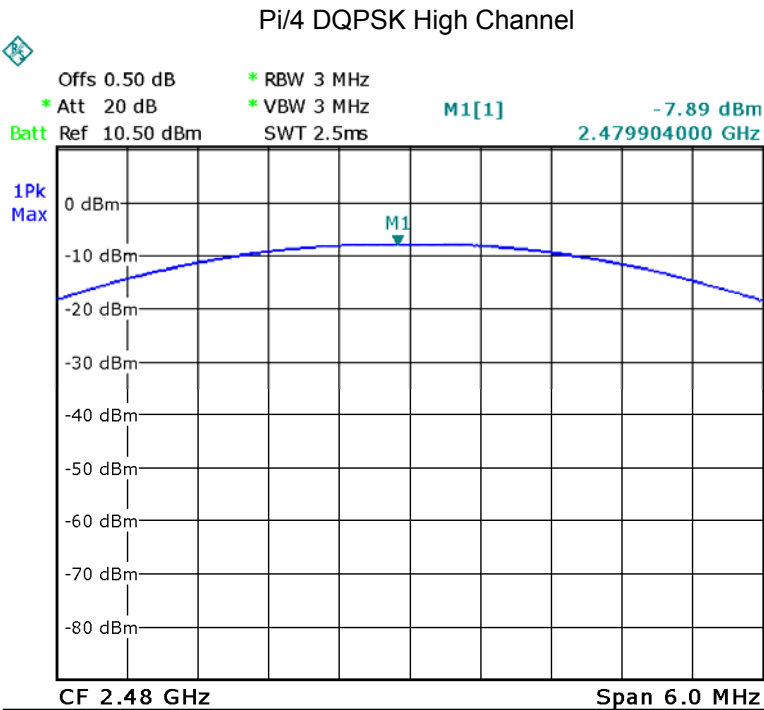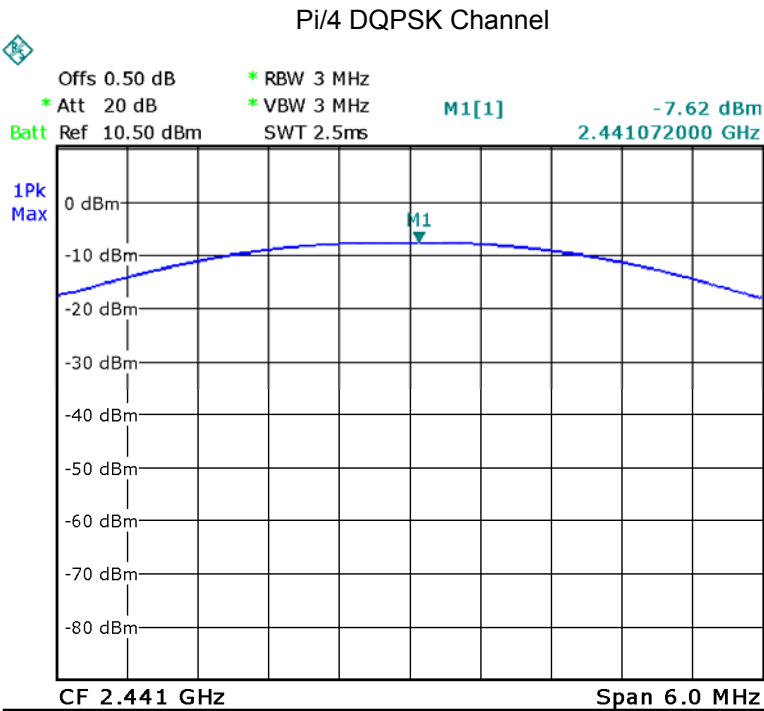

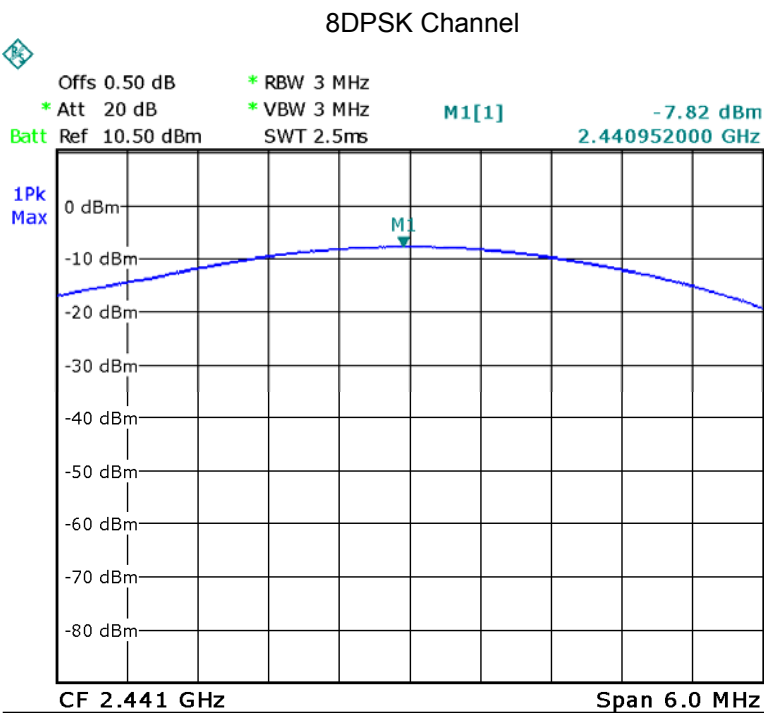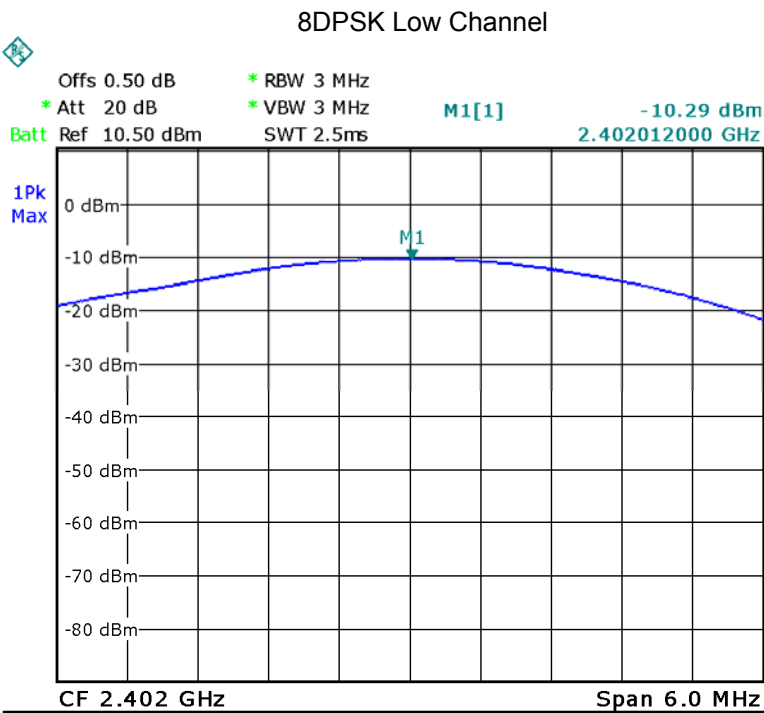

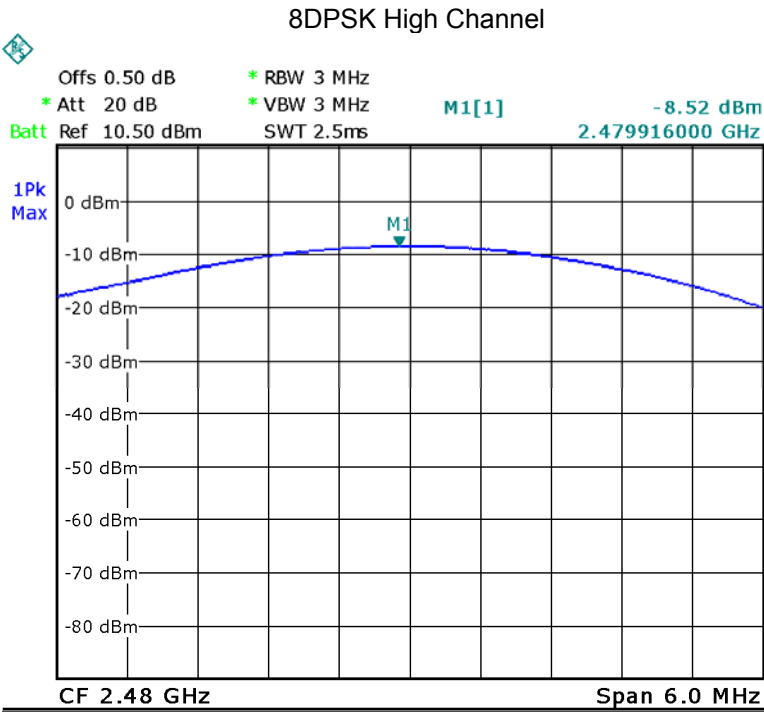

11 Hopping Channel Separation

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode:	Test in hopping transmitting operating mode.

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.2 Test Result


Modulation	Test Channel	Separation (MHz)	Result
GFSK	Low	1.000	PASS
GFSK	Middle	1.000	PASS
GFSK	High	1.000	PASS
Pi/4 DQPSK	Low	1.000	PASS
Pi/4 DQPSK	Middle	1.000	PASS
Pi/4 DQPSK	High	1.000	PASS
8DPSK	Low	1.000	PASS
8DPSK	Middle	1.000	PASS
8DPSK	High	1.000	PASS



Test plots



GFSK Low Channel


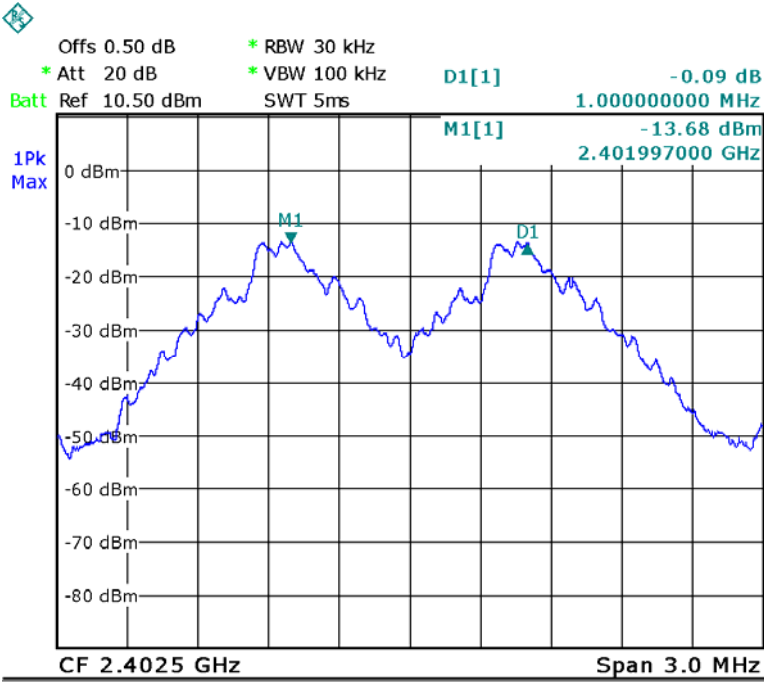



GFSK Middle Channel

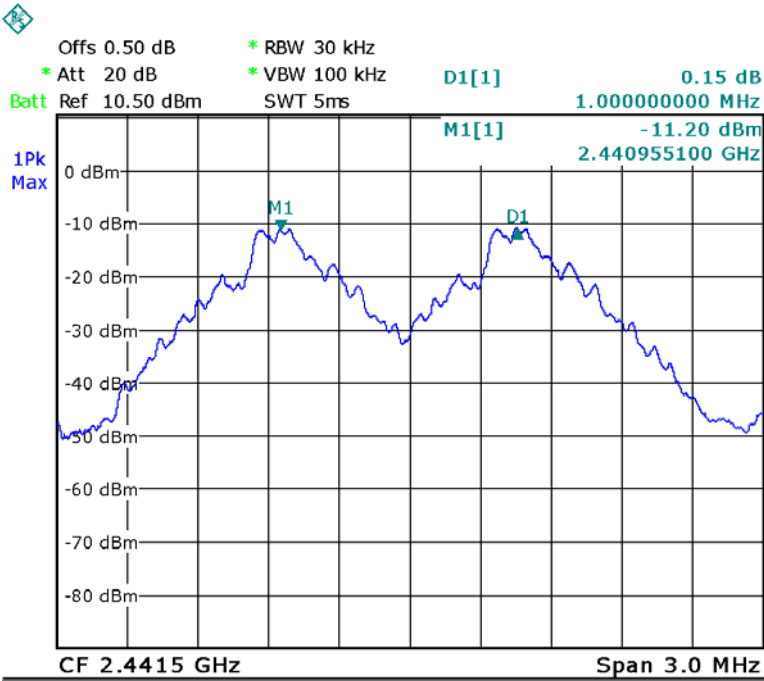

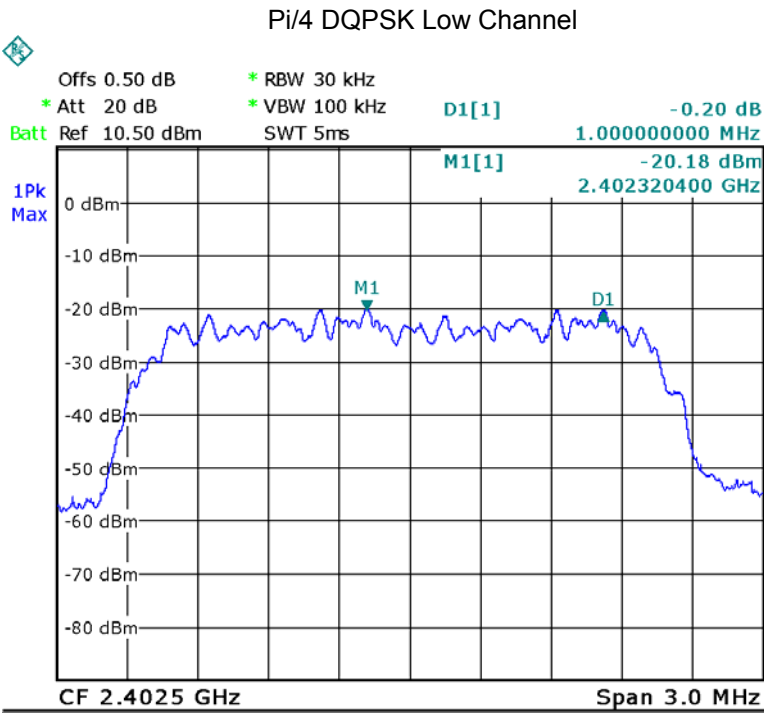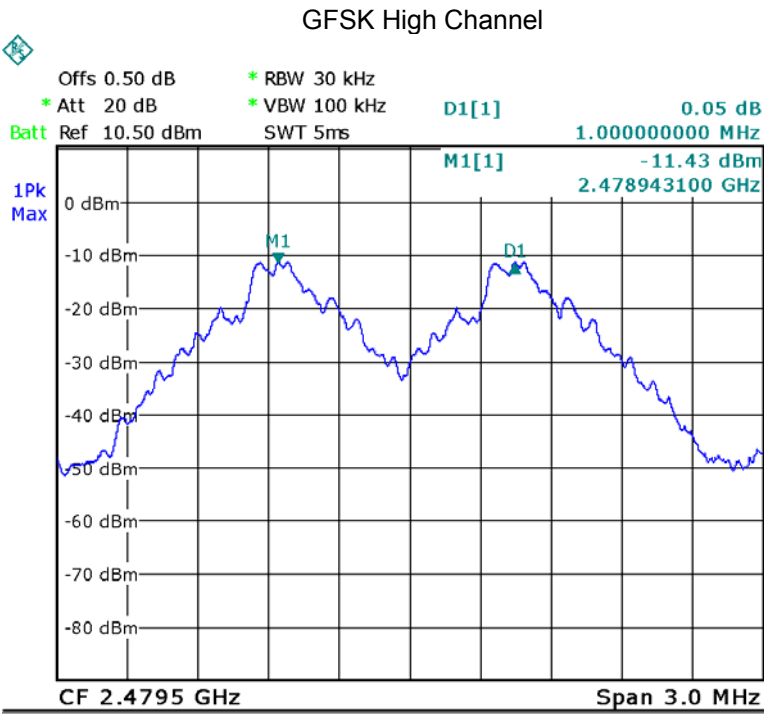

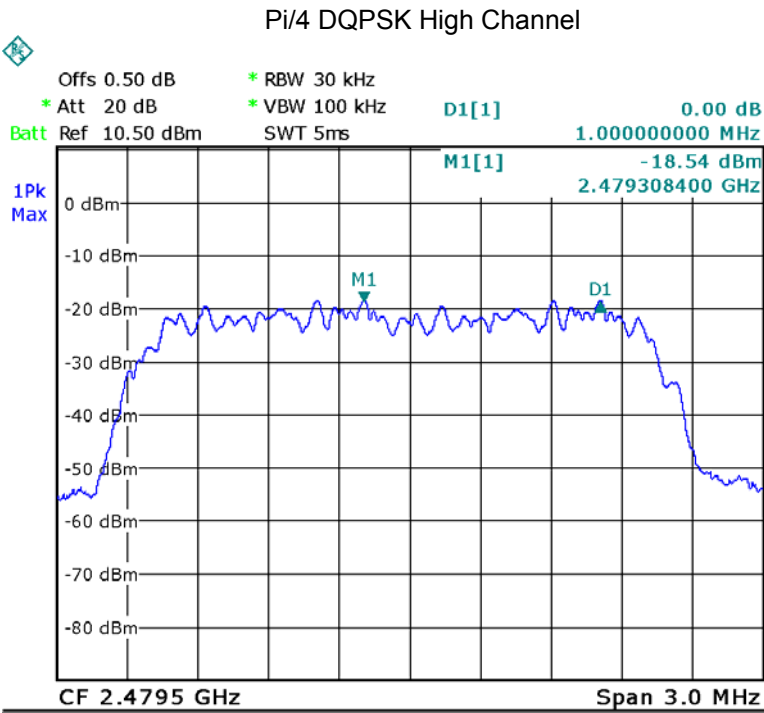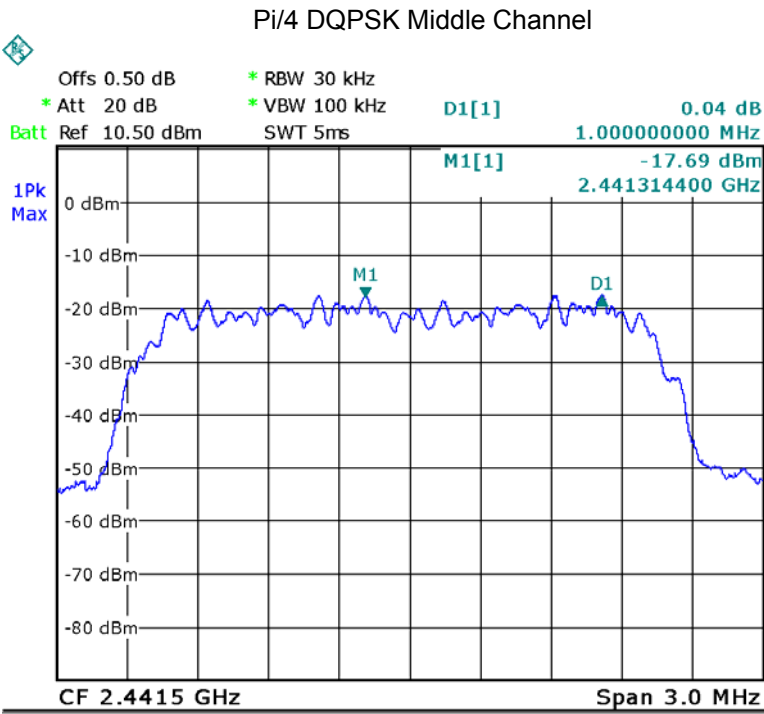

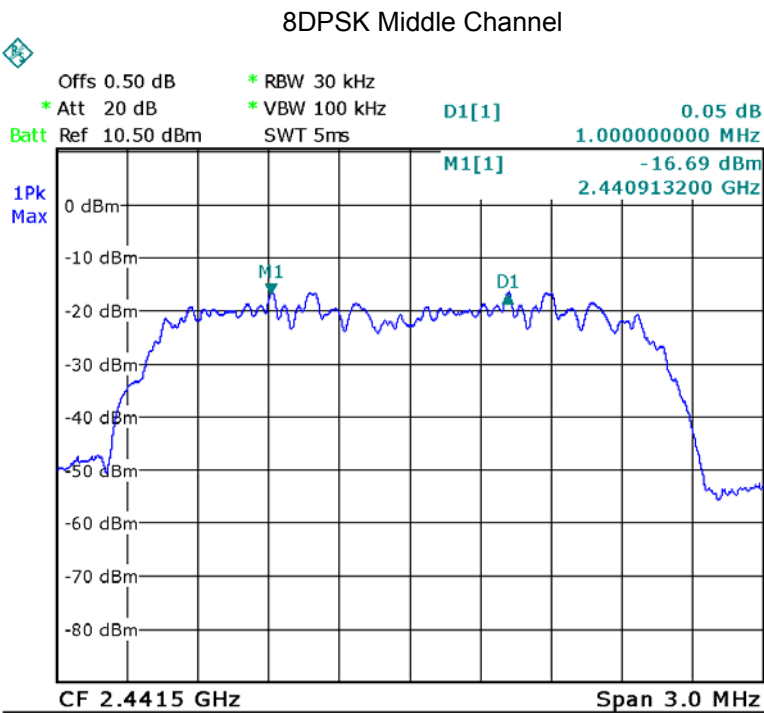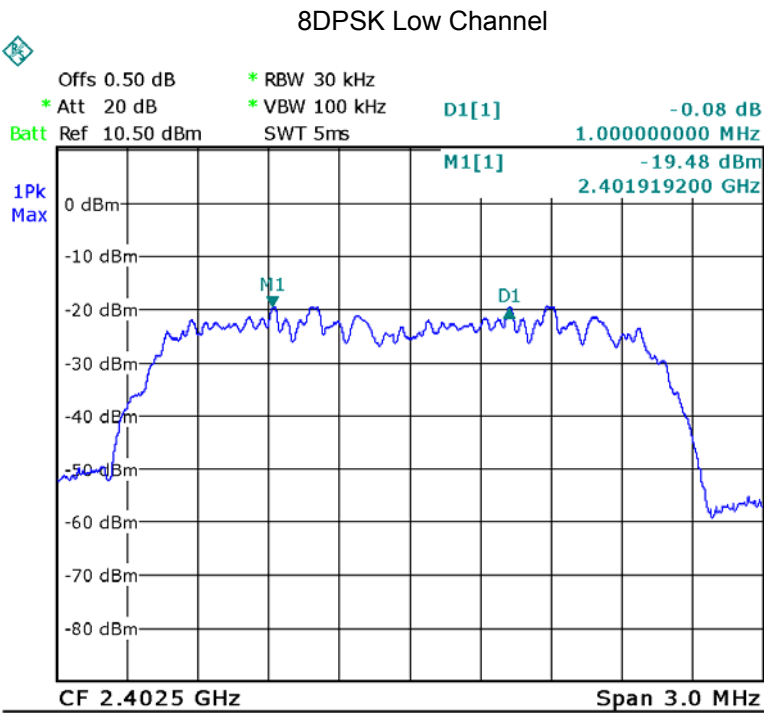

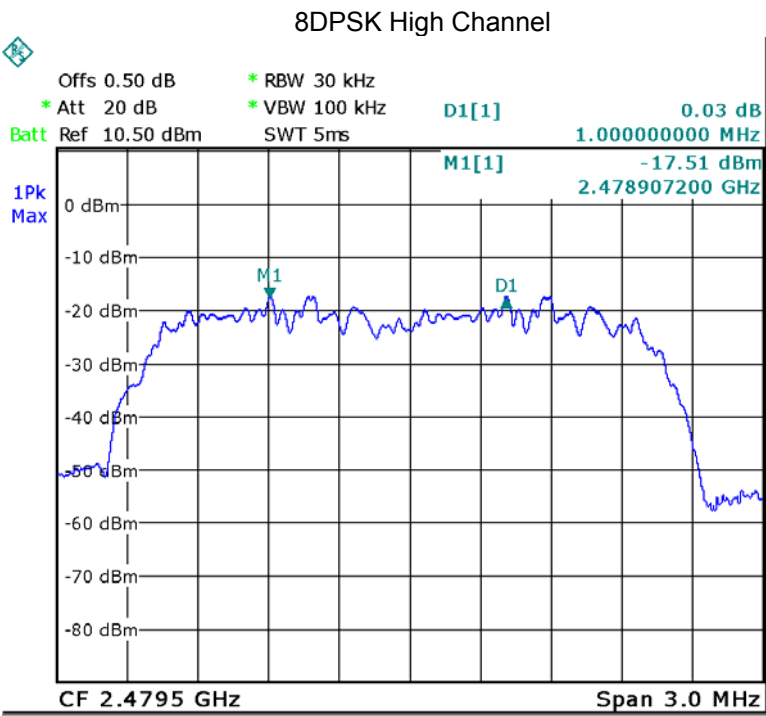

12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.



12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result

Test Plots: 79 Channels in total

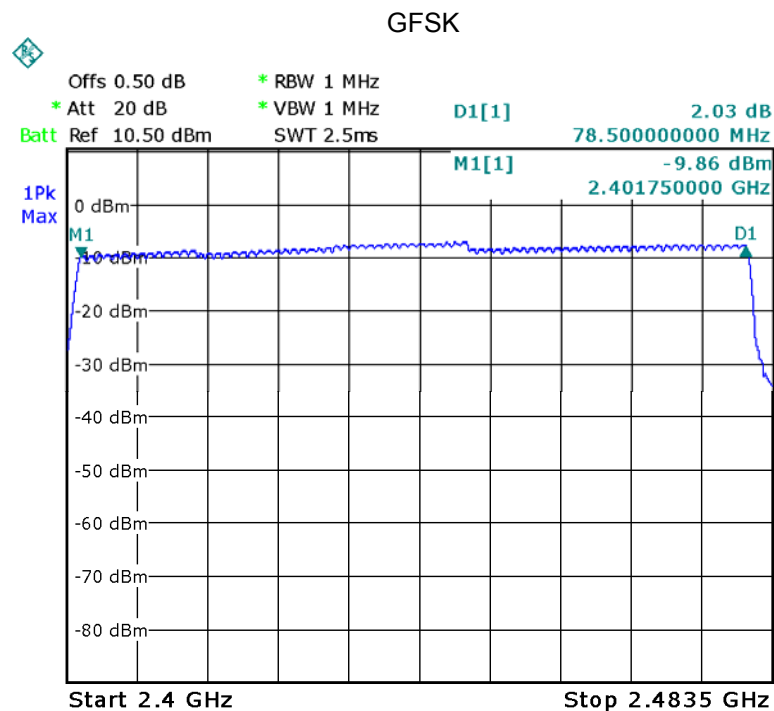

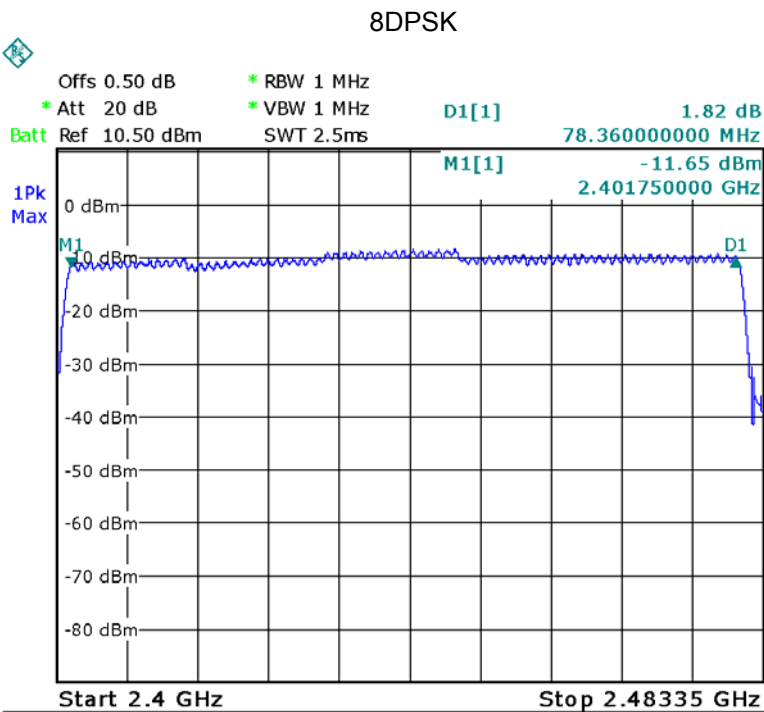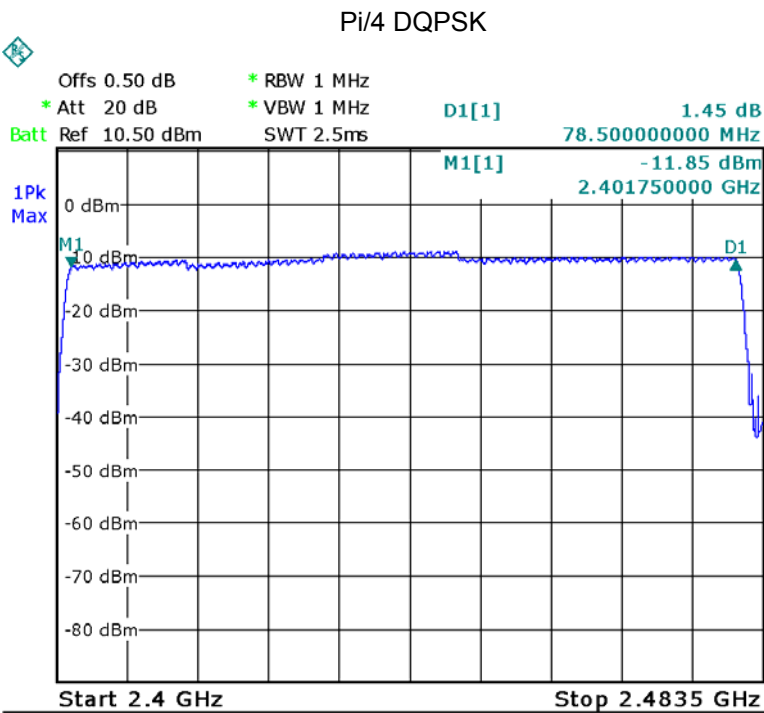

13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result


DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).



DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).



DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:



Data Packet	Dwell Time(s)
DH5	$1600/79/6*0.4*79*(MkrDelta)/1000$
DH3	$1600/79/4*0.4*79*(MkrDelta)/1000$
DH1	$1600/79/2*0.4*79*(MkrDelta)/1000$
Remark: Mkr Delta is once pulse time. Only the worst data(DH5) were show as follow.	



Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.728	0.291	0.4
		middle	2.728	0.291	0.4
		High	2.728	0.291	0.4
Pi/4DQPSK	DH5	Low	2.720	0.290	0.4
		middle	2.720	0.290	0.4
		High	2.720	0.290	0.4
8DPSK	DH5	Low	2.720	0.290	0.4
		middle	2.720	0.290	0.4
		High	2.720	0.290	0.4

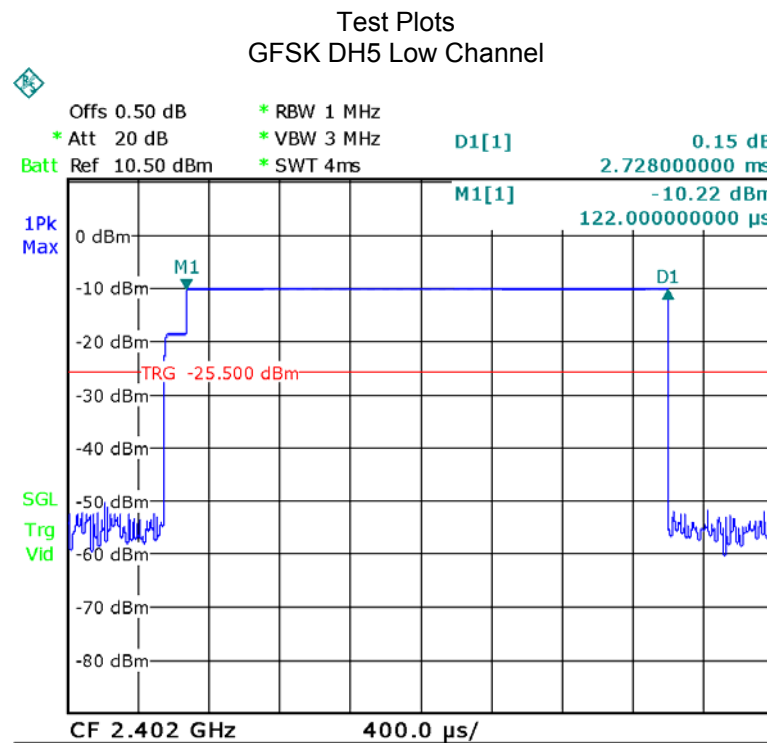

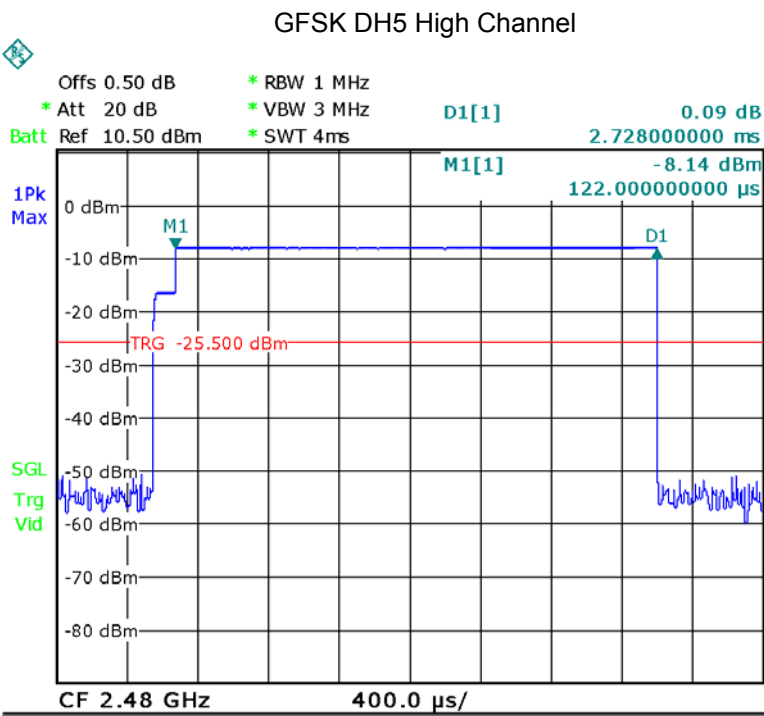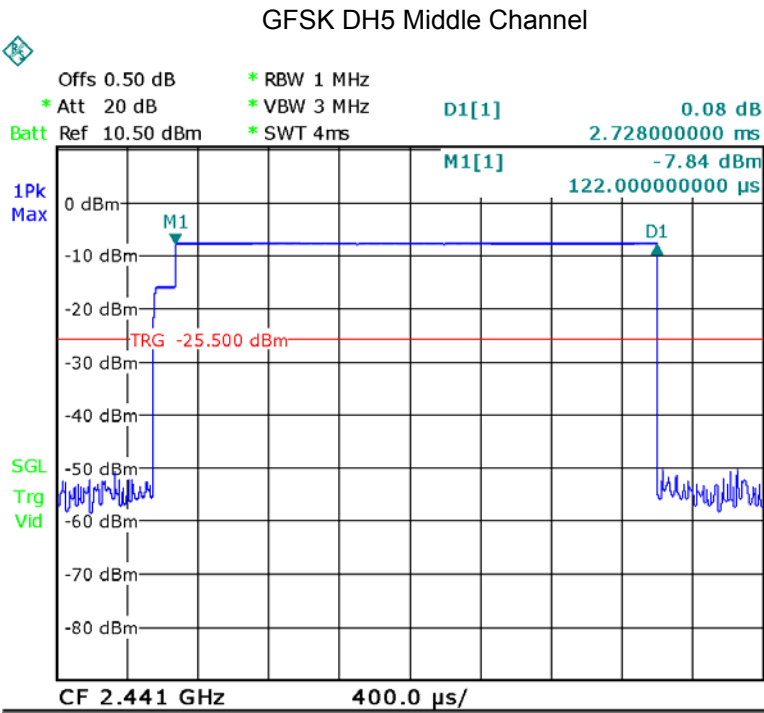

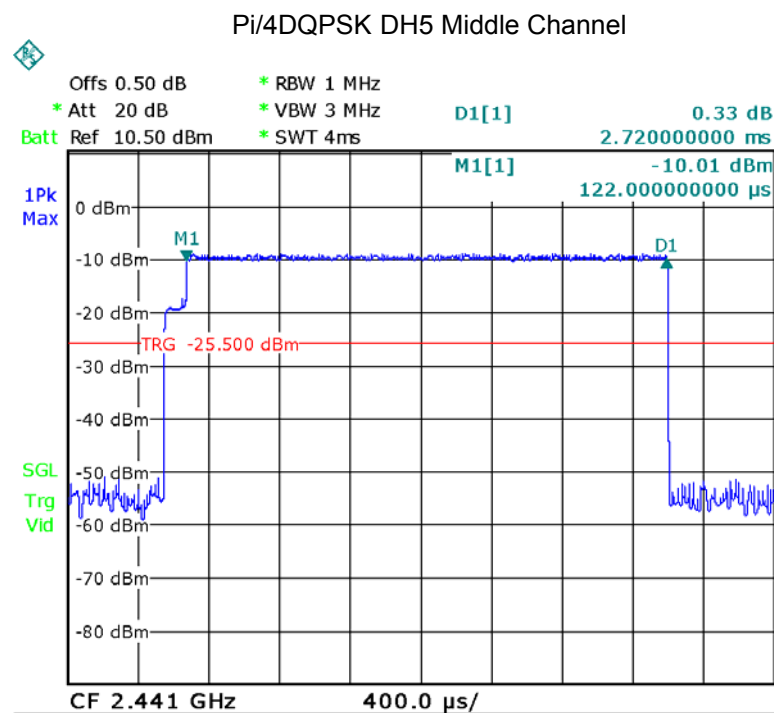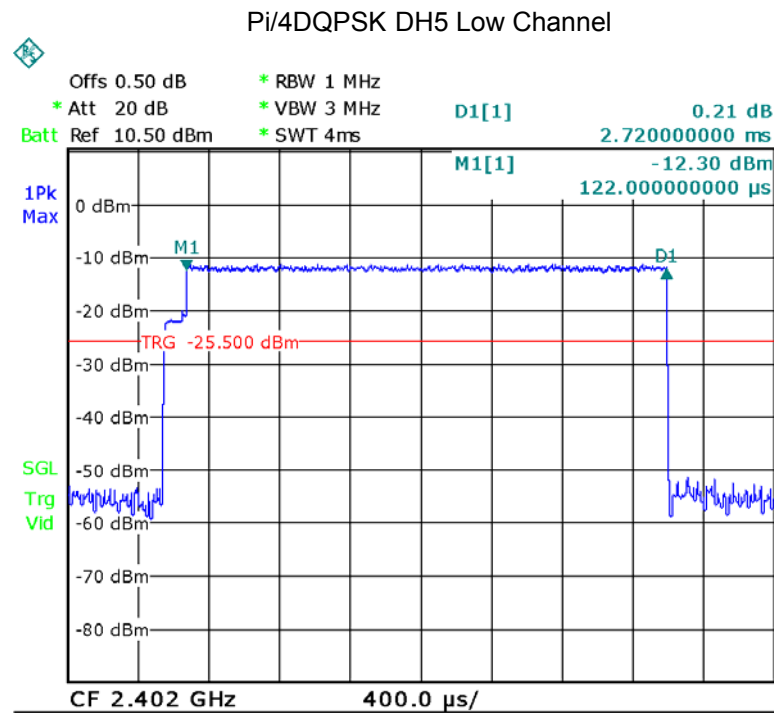

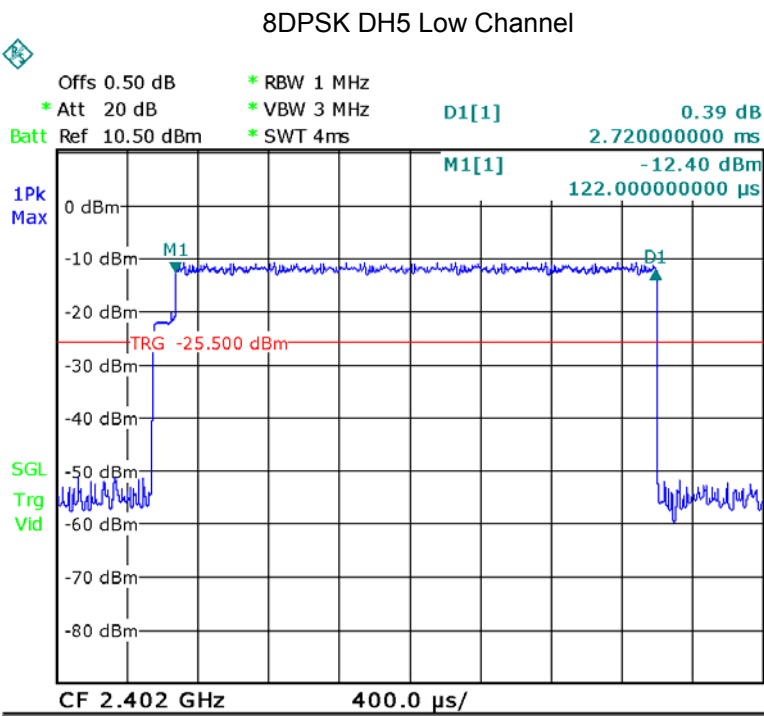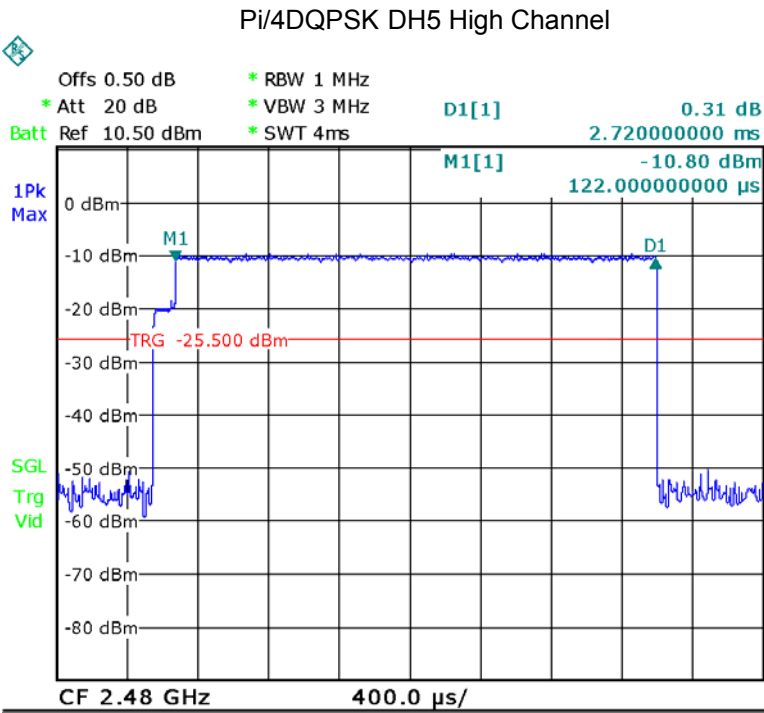

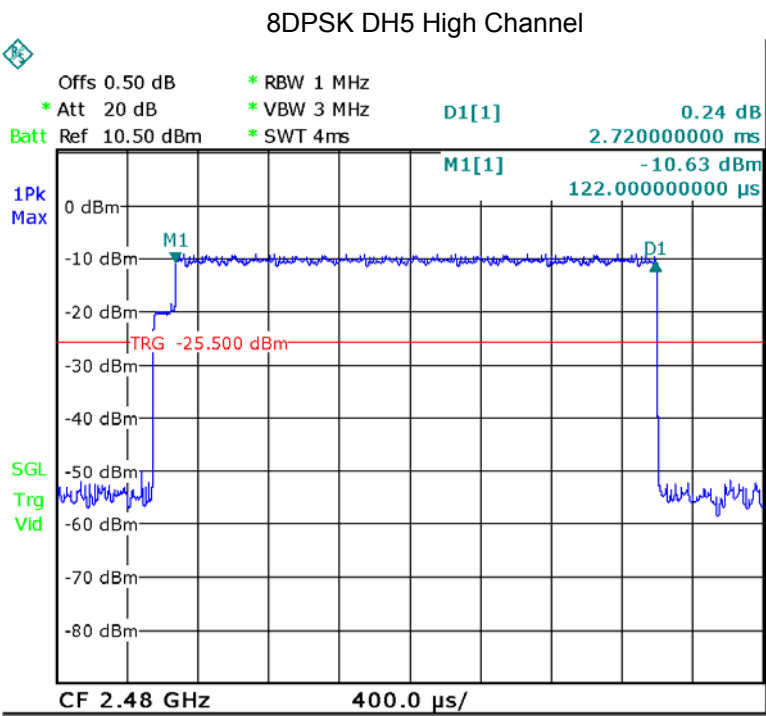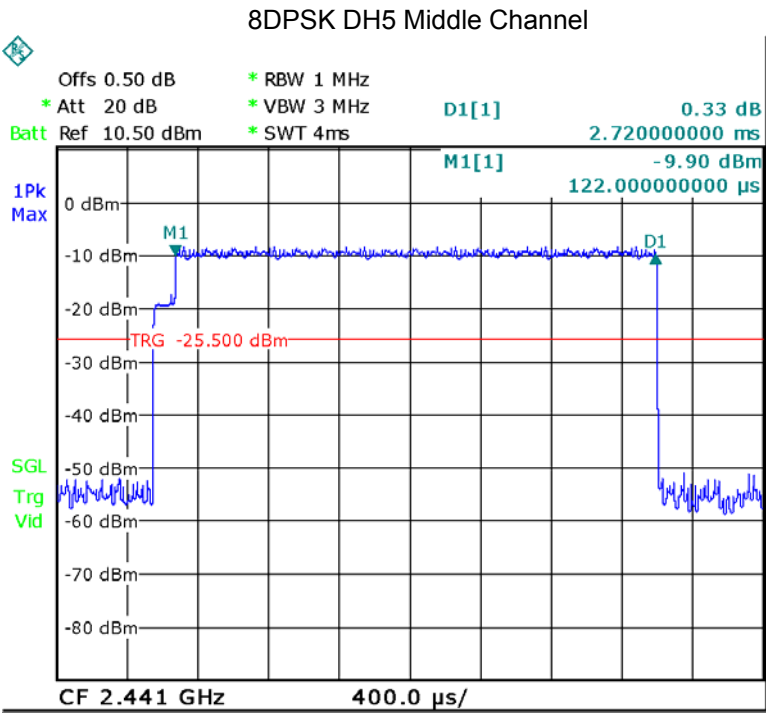

14 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

This device uses of an antenna that uses a unique coupling to the intentional radiator. Antenna connector complied with the requirement.

15 RF Exposure

Test Requirement: FCC Part 1.1307

Evaluation Method: FCC Part 2.1091

15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
2.00	1.585	-7.31	0.19	0.000059	1

===== End of Report =====