

TEST REPORT

Applicant: Guangzhou Chicken Run Network Technology Co., Ltd.
Address: Room 1001&1003, No. 19, Yard 2, Yuancun West Street, Tianhe District, Guangzhou, China
Equipment Type: Game Controller
Model Name: GameSir-G7 Pro 8K
Brand Name: GameSir
FCC ID: 2AF9S-G7PRO8K
ISED Number: 23502-G7PRO8K
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 4
(refer to section 3.1)
Sample Arrival Date: Jan. 26, 2026
Test Date: Jan. 30, 2026 - Apr. 14, 2026
Date of Issue: Apr. 27, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Yang Wenxuan**Checked by:** Ye Hongji**Approved by:** Tolan Tu
(Testing Director)

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Apr. 27, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
2.5	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	9
3.1	Test Standards	9
3.2	Test Verdict	10
4	GENERAL TEST CONFIGURATIONS	11
4.1	Test Environments	11
4.2	Test Equipment List	11
4.3	Test Software List	11
4.4	Measurement Uncertainty	12
4.5	Description of Test Setup	12
4.6	Measurement Results Explanation Example	15
5	TEST ITEMS	16
5.1	Antenna Requirements	16
5.2	Frequency Hopping Systems	17
5.3	Number of Hopping Frequencies	19
5.4	Peak Output Power and E.I.R.P	20

5.5	Occupied Bandwidth	21
5.6	Carrier Frequency Separation	22
5.7	Time of Occupancy (Dwell time)	23
5.8	Conducted Spurious Emission & Authorized-band band-edge	25
5.9	Conducted Emission	26
5.10	Radiated Spurious Emission	27
5.11	Band Edge (Restricted-band band-edge).....	29
ANNEX A	TEST RESULT	30
A.1	Number of Hopping Frequency	30
A.2	Peak Output Power and E.I.R.P	31
A.3	20 dB and 99% bandwidth	34
A.4	Hopping Frequency Separation.....	39
A.5	Average Time of Occupancy	40
A.6	Conducted Spurious Emissions & Authorized-band band-edge	43
A.7	Conducted Emissions.....	50
A.8	Radiated Spurious Emission	52
A.9	Band Edge (Restricted-band band-edge).....	66
ANNEX B	TEST SETUP PHOTOS	70
ANNEX C	EUT EXTERNAL PHOTOS	70
ANNEX D	EUT INTERNAL PHOTOS	70

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☐ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☒ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ Building 2, Intelligent Connected Vehicle Industrial Park, No. 55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong Province, China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The CAB identifier number is CN0030.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Guangzhou Chicken Run Network Technology Co., Ltd.
Address	Room 1001&1003, No. 19, Yard 2, Yuancun West Street, Tianhe District, Guangzhou, China

2.2 Manufacturer Information

Manufacturer	Guangzhou Chicken Run Network Technology Co., Ltd.
Address	Room 1001&1003, No. 19, Yard 2, Yuancun West Street, Tianhe District, Guangzhou, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Game Controller
Model Name Under Test	GameSir-G7 Pro 8K
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	12512366000001
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE)
-----------------------------------	------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Product Type	☐ Mobile ☒ Portable ☐ Fix Location
Transfer Rate	DH5: 1 Mbps 2DH5: 2 Mbps 3DH5: 3 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	79 (at intervals of 1 MHz)
Tested Channel	0 (2402 MHz), 39 (2441 MHz), 78 (2480 MHz)
Antenna Type	Ceramic Antenna
Antenna Gain	3.0 dBi
Antenna Impedance	50 Ω
Antenna System (MIMO Smart Antenna)	N/A

All channel was listed on the following table:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
0	2402	21	2423	42	2444	63	2465
1	2403	22	2424	43	2445	64	2466
2	2404	23	2425	44	2446	65	2467
3	2405	24	2426	45	2447	66	2468
4	2406	25	2427	46	2448	67	2469
5	2407	26	2428	47	2449	68	2470
6	2408	27	2429	48	2450	69	2471
7	2409	28	2430	49	2451	70	2472
8	2410	29	2431	50	2452	71	2473
9	2411	30	2432	51	2453	72	2474
10	2412	31	2433	52	2454	73	2475
11	2413	32	2434	53	2455	74	2476
12	2414	33	2435	54	2456	75	2477
13	2415	34	2436	55	2457	76	2478
14	2416	35	2437	56	2458	77	2479
15	2417	36	2438	57	2459	78	2480
16	2418	37	2439	58	2460	-	-
17	2419	38	2440	59	2461	-	-
18	2420	39	2441	60	2462	-	-
19	2421	40	2442	61	2463	-	-
20	2422	41	2443	62	2464	-	-

2.5 Additional Instructions


EUT Software Settings:

Mode	☒ Bluetooth test mode loop back enabled. EUT is controlled over CBT / CMW.
	☐ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	FCC Assist 1.0.2.2		
Support Units (Software installation media)	Description	Manufacturer	Model
	Notebook	Dell	N/A
Mode	Channel	Frequency (MHz)	Soft Set
DH5	CH0	2402	Power parameter Settings is 4
	CH39	2441	
	CH78	2480	
2DH5	CH0	2402	
	CH39	2441	
	CH78	2480	
3DH5	CH0	2402	
	CH39	2441	
	CH78	2480	

Run Software:

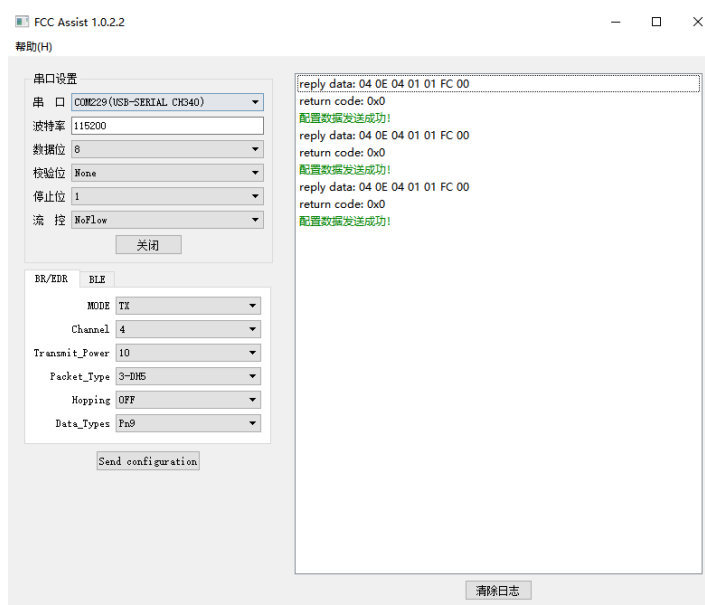

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 4	Digital Transmission Systems, Frequency Hopping Systems and Licence Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
4	ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024	American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict	Remark
1	Antenna Requirement	15.203	RSS-247, 6.5 (c)	N/A	--	Pass	Note ¹
2	Number of Hopping Frequencies	15.247(a)	RSS-247, 6.2.3.1 (b)	Hopping Mode	ANNEX A.1	Pass	Note ²
3	Peak Output Power and E.I.R.P	15.247(b)	RSS-247, 6.2.3.2	Low/Middle/High	ANNEX A.2	Pass	--
4	Occupied Bandwidth	15.247(a)	RSS-247, 6.2.1 (a)	Low/Middle/High	ANNEX A.3	Pass	--
5	Carrier Frequency Separation	15.247(a)	RSS-247, 6.2.3.1 (a)	Hopping Mode	ANNEX A.4	Pass	Note ²
6	Time of Occupancy (Dwell time)	15.247(a)	RSS-247, 6.2.3.1 (b)	Hopping Mode	ANNEX A.5	Pass	Note ²
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	RSS-247, 6.6	Hopping Mode; Low/Middle/High	ANNEX A.6	Pass	Note ²
8	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.7	Pass	Note ²
9	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 6.6	Low/Middle/High	ANNEX A.8	Pass	Note ²
10	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 6.6	Low/High	ANNEX A.9	Pass	Note ²
11	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	--	N/A	Note ³

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: $\pi/4$ -DQPSK is the EDR 2M rate mode, 8-DPSK is the EDR 3M rate mode. The consistency of test results in $\pi/4$ -DQPSK and 8-DPSK is very high. So we chose 8-DPSK as a typical representative to appear on the report. Another we will show all the modes on the RF output power test item.

Note ³: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	46% to 69%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+20.8℃ to +25.1℃
Working Voltage of the EUT	NV (Normal Voltage)	5 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420186	2025.05.21	2026.05.20
Power meter	R&S	NRP8S	101498	2025.07.07	2026.07.06
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Test Antenna-Bi-Log	Schwarzbeck	VULB 9163	01414	2023.11.03	2026.11.02
Test Antenna-Horn	Schwarzbeck	BBHA 9120D	02459	2023.10.26	2026.10.25
Test Antenna-Loop	Schwarzbeck	FMZB 1513-60	00015	2024.05.07	2026.05.06
Anechoic Chamber	YIHENG	C8-966	107	2024.05.12	2027.05.11
EMI Receiver	Keysight	N9038A	MY55330121	2025.04.16	2026.04.15
Filtering unit	balun	SU319F	LW-SZ19D0001F01	N/A	N/A
Switching unit	BALUN	SU319	LW-SZ19D0001S01	N/A	N/A
LISN	SCHWARZBECK MESS- ELEKTRONIK	NSLK8127	01009	2025.07.15	2026.07.14
Shielded Enclosure	YiHeng Electronic Co., Ltd	4.3m*2.9m*2.4 m	235	2024.11.05	2027.11.04
EMI Receiver	ROHDE&SCHWA RZ	ESRP	101036	2025.06.16	2026.06.15
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7. 35m	130	2024.07.13	2027.07.12

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V3.0.1.528	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8℃
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

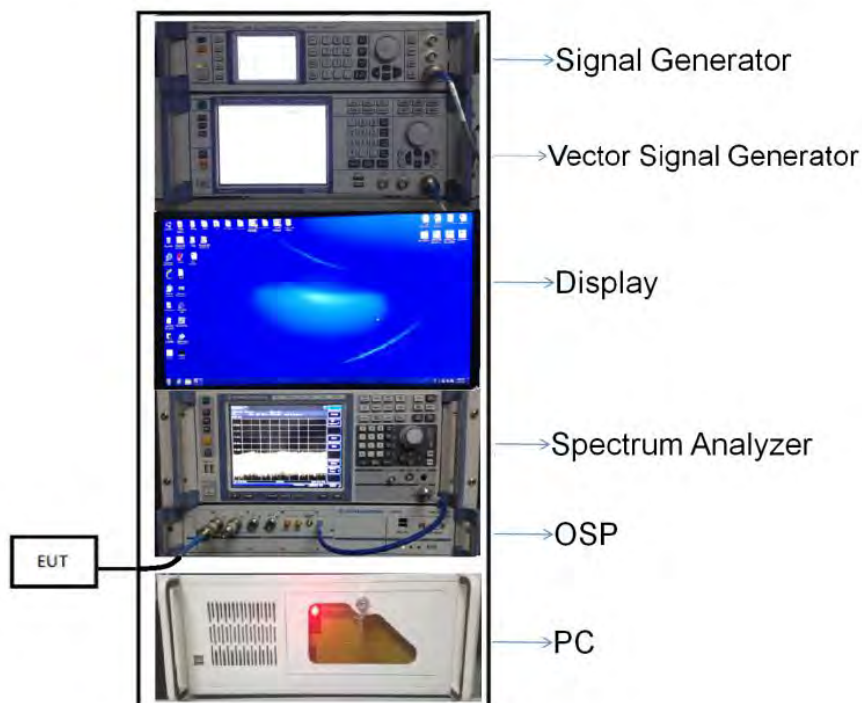


(Diagram 1)

4.5.2 For AC Power Supply Port Test

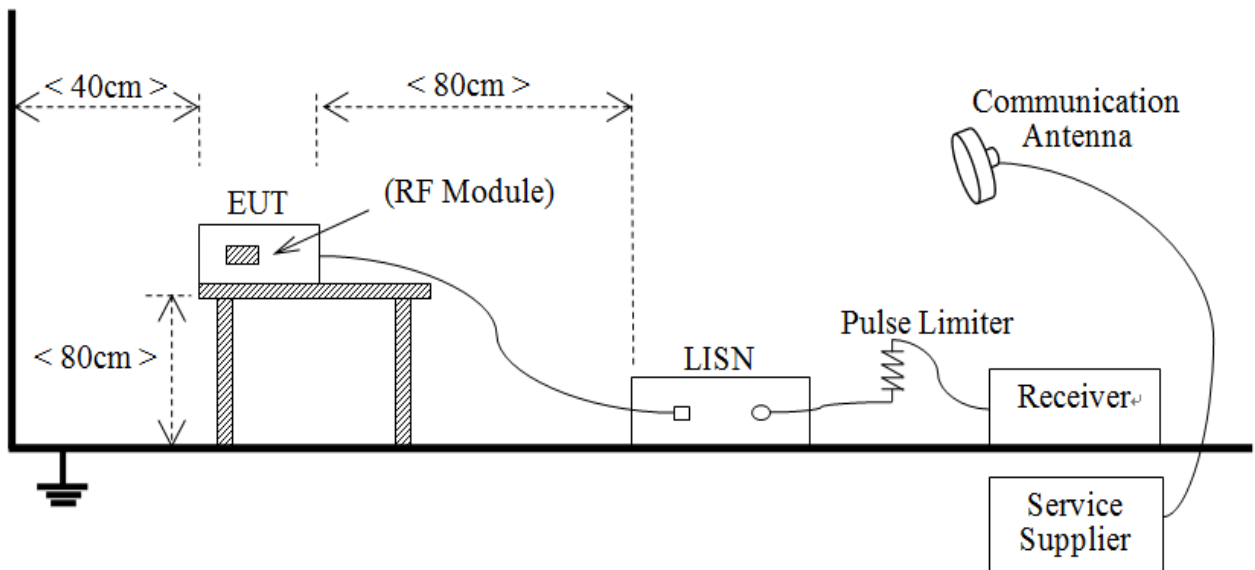


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

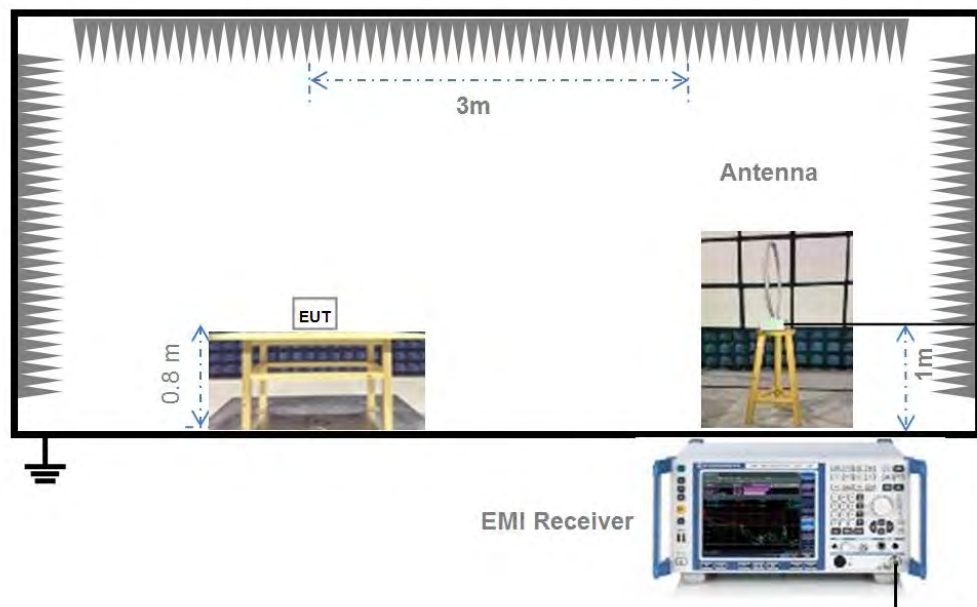


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

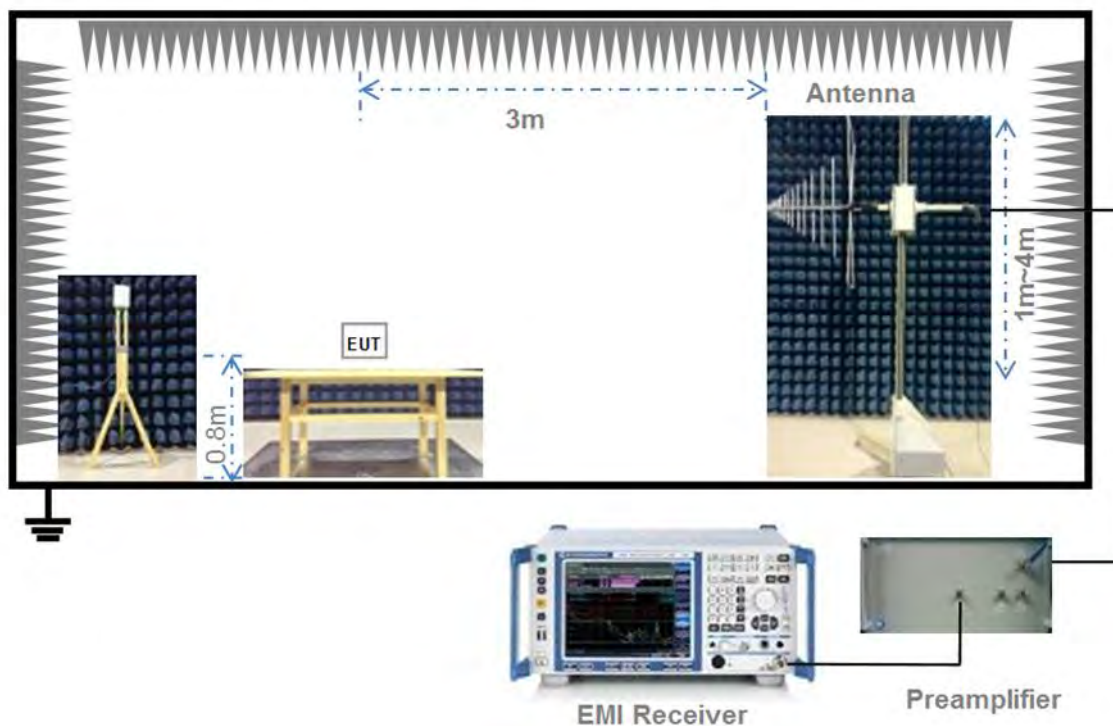

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

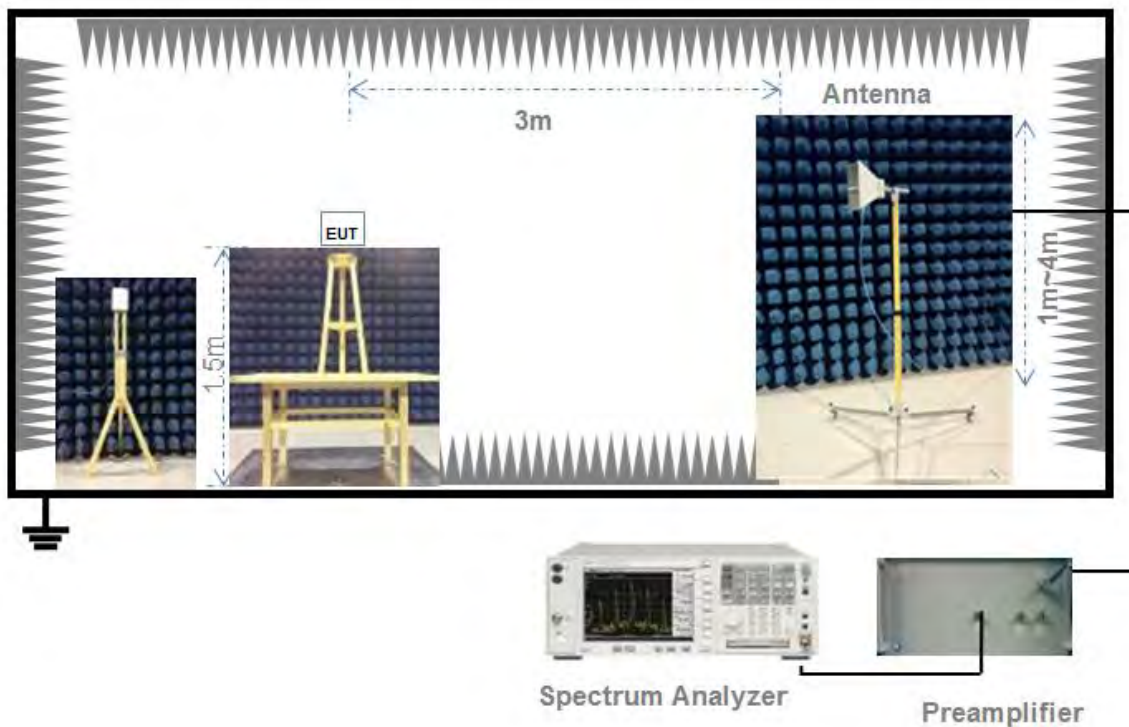

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247,6.5 (c)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Frequency Hopping Systems

5.2.1 Relevant Standards

FCC §15.247(a) (1) (i) (ii) (iii) (iv); FCC §15.247(g); FCC §15.247(h);

Describe how the hopping sequence is generated. Provide an example of the hopping sequence channels, to demonstrate that the sequence meets the requirement specified in the definition of an FHSS system. Per the definition in Section 2.1(c), the hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Describe how each individual EUT meets the requirement that each of its hopping channels is used equally on average (e.g., that each new transmission event begins on the next channel in the hopping sequence after the final channel used in the previous transmission event).

Describe how the associated receiver(s) complies with the requirement that the input bandwidth (either RF or IF) matches the bandwidth of the transmitted signal.

Describe how the associated receiver(s) has the ability to shift frequencies in synchronization with the transmitted signals.


For short burst systems, describe how the EUT complies with the requirement that it be designed to be capable of operating as a true frequency hopping system. Specifically, the device shall comply with the equal frequency use and pseudorandom hopping sequence requirement when transmitting in short bursts, and shall be designed to comply when presented with continuous data (or information) stream.

Describe how the EUT complies with the requirement that it not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

5.2.2 Description of the systems

1. According to the preset procedure of the whole network, all the stations in the automatic control network synchronously change the frequency multiple times within one second, and temporarily stay on each frequency hopping channel. Periodic synchronization signaling is sent from the primary station, instructing all slaves to simultaneously change the operating frequency, then the hopping sequence is generated.
2. The hop set shall appear as random in the near term, shall appear as evenly distributed in the long term, and sequential hops shall be randomly distributed in both direction and magnitude of change.

Reference Documents

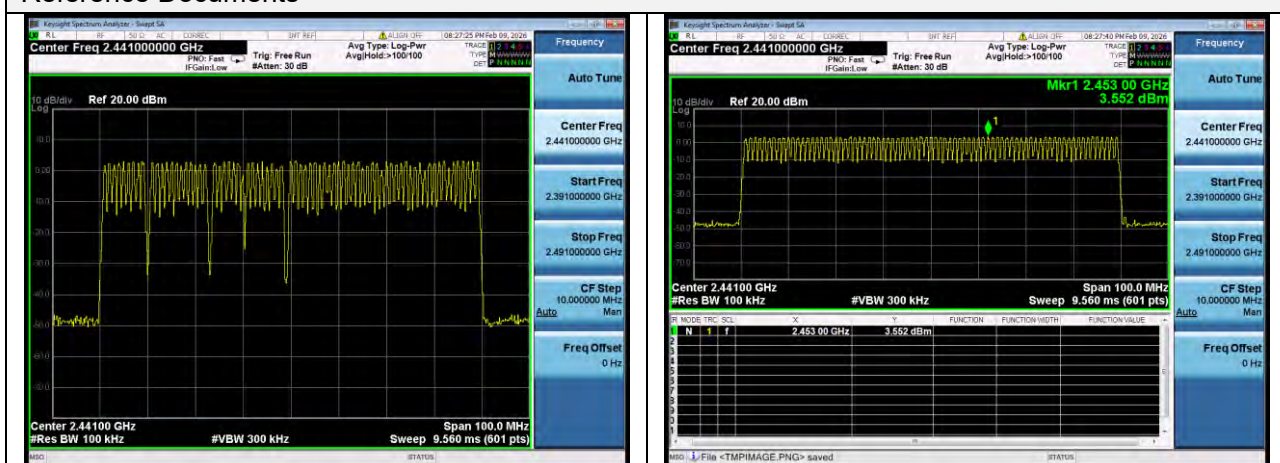

3. Channels are classified into two categories, used and unused, where used channels are part of the hopping sequence and unused channels are replaced in the hopping sequence by used channels in a pseudo-random way. Make each individual EUT meets the requirement that each of its hopping channels is used equally on average.
4. The input bandwidth and transmitted bandwidth are both 1MHz, the associated receiver(s) complies with the requirement that the input bandwidth matches the bandwidth of the transmitted signal.
5. Connected devices communicate on the same physical channel by synchronizing with a common clock and hopping sequence.
6. EUT isn't short burst systems.
7. EUT can't have the ability to be coordinated with other FHSS systems in an effort.

5.3 Number of Hopping Frequencies

5.3.1 Limit

FCC §15.247(a) (1) (iii); RSS-247, 6.2.3.1(b)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = The frequency band of operation

RBW = To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.3.4 Test Result

Please refer to ANNEX A.1.

5.4 Peak Output Power and E.I.R.P

5.4.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

RSS-247, 6.2.3.2

The following transmitter output power and e.i.r.p. requirements shall apply:

- a. if the hopset uses 75 or more hopping channels, the maximum peak conducted output power shall not exceed 1.0 W.
- b. if the hopset uses less than 75 hopping channels the maximum peak conducted output power shall not exceed 0.125 W.
- c. the e.i.r.p. shall not exceed 4 W, except as provided in sections 6.5 a) and b).

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.4.4 Test Result

Please refer to ANNEX A.2.

5.5 Occupied Bandwidth

5.5.1 Limit

FCC §15.247(a); RSS-247, 6.2.1 (a)

Measurement of the 20dB bandwidth of the modulated signal.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel

RBW = in the range of 1% to 5% of the OBW

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.5.4 Test Result

Please refer to ANNEX A.3.

5.6 Carrier Frequency Separation

5.6.1 Limit

FCC §15.247(a); RSS-247, 6.2.3.1(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 2/3 of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.6.4 Test Result

Please refer to ANNEX A.4.

5.7 Time of Occupancy (Dwell time)

5.7.1 Limit

FCC §15.247(a); RSS-247, 6.2.3.1(b)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

Span: Zero span, centered on a hopping channel

RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel

Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel

Detector function: Peak

Trace: Max hold

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

The average time of occupancy on any channel within the Period can be calculated with formulas:

For GFSK and 8-DPSK:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For AFH Mode:

For DH1 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 2) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$

$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH3 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 4) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

For DH5 package type

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (800 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4 \text{ s} * \{\text{Number of Hopping Frequency}\}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.7.4 Test Result

Please refer to ANNEX A.5.

5.8 Conducted Spurious Emission & Authorized-band band-edge

5.8.1 Limit

FCC §15.247(d); RSS-247, 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.8.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW = 300 kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.8.4 Test Result

Please refer to ANNEX A.6.

5.9 Conducted Emission

5.9.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.9.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.9.4 Test Result

Please refer to ANNEX A.7.

5.10 Radiated Spurious Emission

5.10.1 Limit

FCC §15.209&15.247(d); RSS-247, 6.6

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dBμV/m) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Please refer to ANNEX A.8.

5.11 Band Edge (Restricted-band band-edge)

5.11.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.11.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.11.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.11.4 Test Result

Please refer to ANNEX A.9.

ANNEX A TEST RESULT


A.1 Number of Hopping Frequency

Test Data


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	79	15	Pass
8-DPSK	2400 - 2483.5	79	15	Pass

Test Plots


GFSK 2.4 GHz ~ 2.4415 GHz

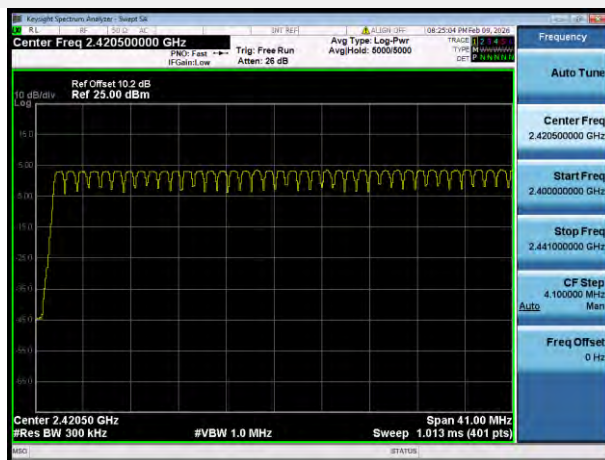

GFSK 2.4415 GHz ~ 2.4835 GHz

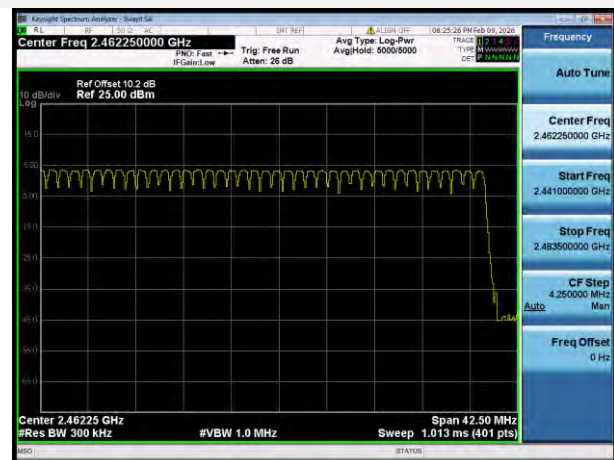

8-DPSK 2.4 GHz ~ 2.4415 GHz

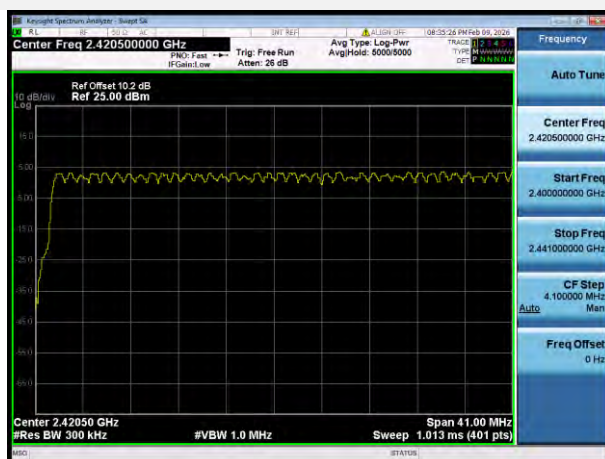

8-DPSK 2.4415 GHz ~ 2.4835 GHz



A.2 Peak Output Power and E.I.R.P

Peak Power Test Data

Channel	Measured Output Peak Power						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	-3.34	0.46	-2.14	0.61	-1.68	0.68	21	125	Pass
Middle	-3.93	0.40	-1.60	0.69	-1.46	0.71			Pass
High	-2.98	0.50	-1.10	0.78	-0.32	0.93			Pass

E.I.R.P Test Data (For ISSED)

Channel	E.I.R.P						Limit		Verdict
	GFSK		$\pi/4$ -DQPSK		8-DPSK		dBm	mW	
	dBm	mW	dBm	mW	dBm	mW			
Low	-0.34	0.92	0.86	1.22	1.32	1.36	36	4000	Pass
Middle	-0.93	0.81	1.40	1.38	1.54	1.43			Pass
High	0.02	1.00	1.90	1.55	2.68	1.85			Pass

Test Plots



GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL

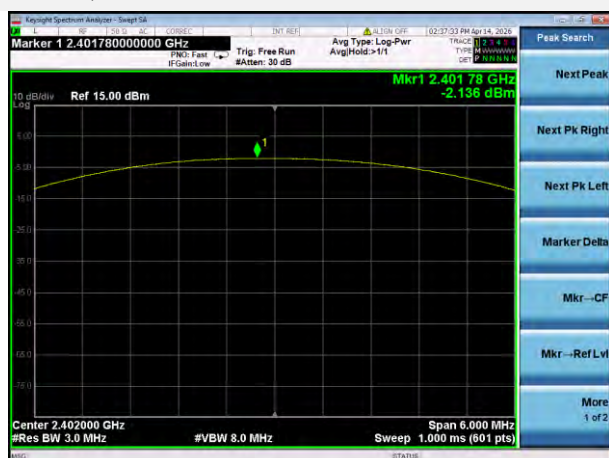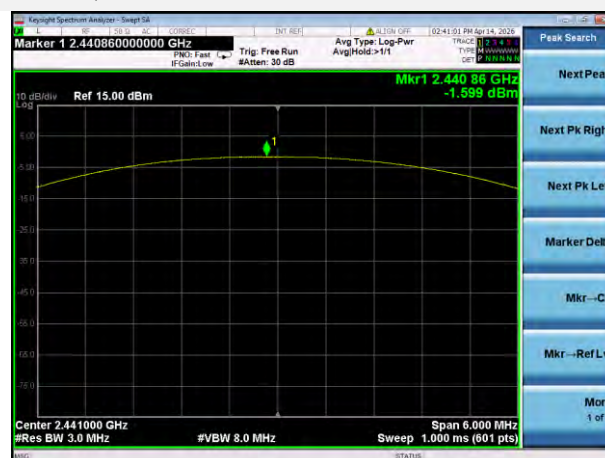 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL


$\pi/4$ -DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL

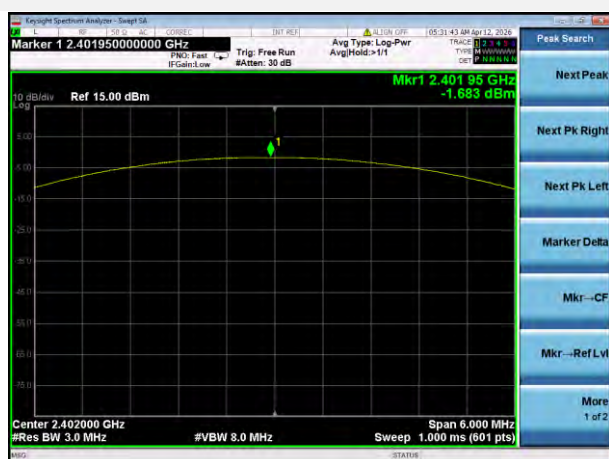

8-DPSK MIDDLE CHANNEL

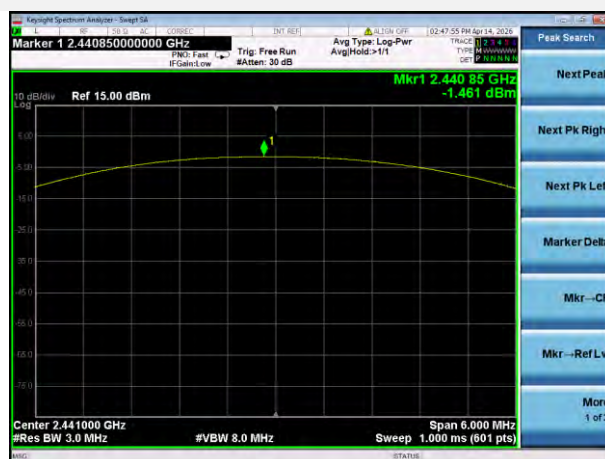

8-DPSK HIGH CHANNEL

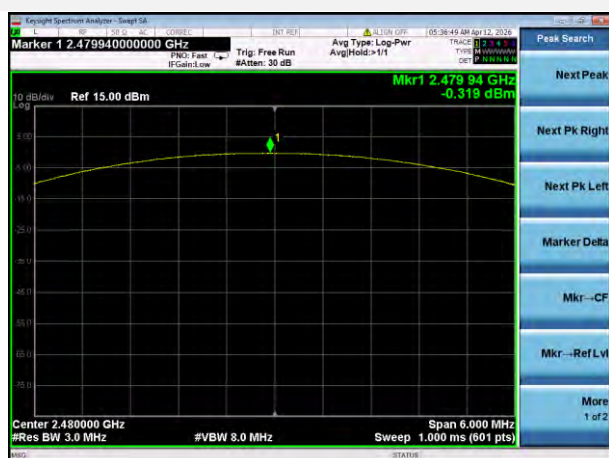

A.3 20 dB and 99% bandwidth

Test Data

GFSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.050000	0.975350
Middle	1.050000	0.975510
High	1.080000	0.977100
$\pi/4$ -DQPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.342500	1.245300
Middle	1.350100	1.249700
High	1.342500	1.245000
8-DPSK		
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	1.297400	1.219300
Middle	1.312500	1.230200
High	1.327400	1.236400


Test Plots

20 dB Bandwidth


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL

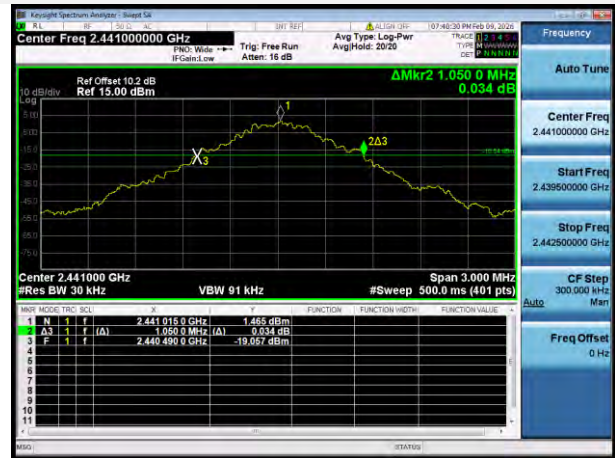

GFSK HIGH CHANNEL

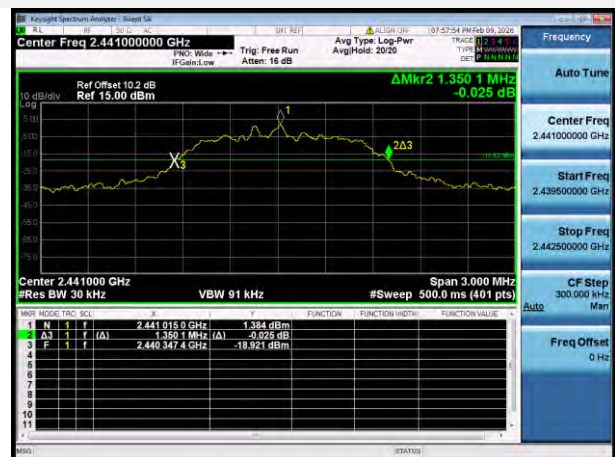 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL

Center Freq 2.480000000 GHz
 Ref Offset 10.2 dB
 Ref 15.00 dBm
 Span 3.000 MHz
 #Sweep 500.0 ms (401 pts)
 BW 30 kHz
 VBW 91 kHz
 243
 1
 X
 10 dBm
 5 dBm
 0 dBm
 -5 dBm
 -10 dBm
 -15 dBm
 -20 dBm
 -25 dBm
 -30 dBm
 -35 dBm
 -40 dBm
 -45 dBm
 -50 dBm
 -55 dBm
 -60 dBm
 -65 dBm
 -70 dBm
 -75 dBm
 -80 dBm
 -85 dBm
 -90 dBm
 -95 dBm
 -100 dBm
 -105 dBm
 -110 dBm
 -115 dBm
 -120 dBm
 -125 dBm
 -130 dBm
 -135 dBm
 -140 dBm
 -145 dBm
 -150 dBm
 -155 dBm
 -160 dBm
 -165 dBm
 -170 dBm
 -175 dBm
 -180 dBm
 -185 dBm
 -190 dBm
 -195 dBm
 -200 dBm
 -205 dBm
 -210 dBm
 -215 dBm
 -220 dBm
 -225 dBm
 -230 dBm
 -235 dBm
 -240 dBm
 -245 dBm
 -250 dBm
 -255 dBm
 -260 dBm
 -265 dBm
 -270 dBm
 -275 dBm
 -280 dBm
 -285 dBm
 -290 dBm
 -295 dBm
 -300 dBm
 -305 dBm
 -310 dBm
 -315 dBm
 -320 dBm
 -325 dBm
 -330 dBm
 -335 dBm
 -340 dBm
 -345 dBm
 -350 dBm
 -355 dBm
 -360 dBm
 -365 dBm
 -370 dBm
 -375 dBm
 -380 dBm
 -385 dBm
 -390 dBm
 -395 dBm
 -400 dBm
 -405 dBm
 -410 dBm
 -415 dBm
 -420 dBm
 -425 dBm
 -430 dBm
 -435 dBm
 -440 dBm
 -445 dBm
 -450 dBm
 -455 dBm
 -460 dBm
 -465 dBm
 -470 dBm
 -475 dBm
 -480 dBm
 -485 dBm
 -490 dBm
 -495 dBm
 -500 dBm
 -505 dBm
 -510 dBm
 -515 dBm
 -520 dBm
 -525 dBm
 -530 dBm
 -535 dBm
 -540 dBm
 -545 dBm
 -550 dBm
 -555 dBm
 -560 dBm
 -565 dBm
 -570 dBm
 -575 dBm
 -580 dBm
 -585 dBm
 -590 dBm
 -595 dBm
 -600 dBm
 -605 dBm
 -610 dBm
 -615 dBm
 -620 dBm
 -625 dBm
 -630 dBm
 -635 dBm
 -640 dBm
 -645 dBm
 -650 dBm
 -655 dBm
 -660 dBm
 -665 dBm
 -670 dBm
 -675 dBm
 -680 dBm
 -685 dBm
 -690 dBm
 -695 dBm
 -700 dBm
 -705 dBm
 -710 dBm
 -715 dBm
 -720 dBm
 -725 dBm
 -730 dBm
 -735 dBm
 -740 dBm
 -745 dBm
 -750 dBm
 -755 dBm
 -760 dBm
 -765 dBm
 -770 dBm
 -775 dBm
 -780 dBm
 -785 dBm
 -790 dBm
 -795 dBm
 -800 dBm
 -805 dBm
 -810 dBm
 -815 dBm
 -820 dBm
 -825 dBm
 -830 dBm
 -835 dBm
 -840 dBm
 -845 dBm
 -850 dBm
 -855 dBm
 -860 dBm
 -865 dBm
 -870 dBm
 -875 dBm
 -880 dBm
 -885 dBm
 -890 dBm
 -895 dBm
 -900 dBm
 -905 dBm
 -910 dBm
 -915 dBm
 -920 dBm
 -925 dBm
 -930 dBm
 -935 dBm
 -940 dBm
 -945 dBm
 -950 dBm
 -955 dBm
 -960 dBm
 -965 dBm
 -970 dBm
 -975 dBm
 -980 dBm
 -985 dBm
 -990 dBm
 -995 dBm
 -1000 dBm
 -1005 dBm
 -1010 dBm
 -1015 dBm
 -1020 dBm
 -1025 dBm
 -1030 dBm
 -1035 dBm
 -1040 dBm
 -1045 dBm
 -1050 dBm
 -1055 dBm
 -1060 dBm
 -1065 dBm
 -1070 dBm
 -1075 dBm
 -1080 dBm
 -1085 dBm
 -1090 dBm
 -1095 dBm
 -1100 dBm
 -1105 dBm
 -1110 dBm
 -1115 dBm
 -1120 dBm
 -1125 dBm
 -1130 dBm
 -1135 dBm
 -1140 dBm
 -1145 dBm
 -1150 dBm
 -1155 dBm
 -1160 dBm
 -1165 dBm
 -1170 dBm
 -1175 dBm
 -1180 dBm
 -1185 dBm
 -1190 dBm
 -1195 dBm
 -1200 dBm
 -1205 dBm
 -1210 dBm
 -1215 dBm
 -1220 dBm
 -1225 dBm
 -1230 dBm
 -1235 dBm
 -1240 dBm
 -1245 dBm
 -1250 dBm
 -1255 dBm
 -1260 dBm
 -1265 dBm
 -1270 dBm
 -1275 dBm
 -1280 dBm
 -1285 dBm
 -1290 dBm
 -1295 dBm
 -1300 dBm
 -1305 dBm
 -1310 dBm
 -1315 dBm
 -1320 dBm
 -1325 dBm
 -1330 dBm
 -1335 dBm
 -1340 dBm
 -1345 dBm
 -1350 dBm
 -1355 dBm
 -1360 dBm
 -1365 dBm
 -1370 dBm
 -1375 dBm
 -1380 dBm
 -1385 dBm
 -1390 dBm
 -1395 dBm
 -1400 dBm
 -1405 dBm
 -1410 dBm
 -1415 dBm
 -1420 dBm
 -1425 dBm
 -1430 dBm
 -1435 dBm
 -1440 dBm
 -1445 dBm
 -1450 dBm
 -1455 dBm
 -1460 dBm
 -1465 dBm
 -1470 dBm
 -1475 dBm
 -1480 dBm
 -1485 dBm
 -1490 dBm
 -1495 dBm
 -1500 dBm
 -1505 dBm
 -1510 dBm
 -1515 dBm
 -1520 dBm
 -1525 dBm
 -1530 dBm
 -1535 dBm
 -1540 dBm
 -1545 dBm
 -1550 dBm
 -1555 dBm
 -1560 dBm
 -1565 dBm
 -1570 dBm
 -1575 dBm
 -1580 dBm
 -1585 dBm
 -1590 dBm
 -1595 dBm
 -1600 dBm
 -1605 dBm
 -1610 dBm
 -1615 dBm
 -1620 dBm
 -1625 dBm
 -1630 dBm
 -1635 dBm
 -1640 dBm
 -1645 dBm
 -1650 dBm
 -1655 dBm
 -1660 dBm
 -1665 dBm
 -1670 dBm
 -1675 dBm
 -1680 dBm
 -1685 dBm
 -1690 dBm
 -1695 dBm
 -1700 dBm
 -1705 dBm
 -1710 dBm
 -1715 dBm
 -1720 dBm
 -1725 dBm
 -1730 dBm
 -1735 dBm
 -1740 dBm
 -1745 dBm
 -1750 dBm
 -1755 dBm
 -1760 dBm
 -1765 dBm
 -1770 dBm
 -1775 dBm
 -1780 dBm
 -1785 dBm
 -1790 dBm
 -1795 dBm
 -1800 dBm
 -1805 dBm
 -1810 dBm

KeySight Spectrum Analyzer - Sweep 2a

Center Freq 2.402000000 GHz

PhD: Wide Trig: Free Run Avg Type: Log-Pwr

IF Gain: 1.0e Attenu: 16 dB AvgHold: 20.20

08:55:33 PM Feb 06, 2020

Frequency

Auto Tune

Center Freq 2.402000000 GHz

Start Freq 2.400500000 GHz

Stop Freq 2.403500000 GHz

CF Step 300.000 MHz

Man

Frequency Offset 0 Hz

Auto

Center 2.402000 GHz Span 3.000 MHz

#Res BW 30 kHz VBW 91 kHz #Sweep 500.0 ms (401 pts)

10 dBm

Ref Offset 10.2 dB Ref 15.00 dBm

ΔMkr2 1.2974 MHz 0.082 dB

2d3

1

2

3

4

5

6

7

8

9

10

11

MNTR	MODE	TRIG	SCN	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	A3	1	f	(A)	2.402 015 6 GHz	1.180 dBm	
2	A3	1	f	(A)	1.297 4 MHz	0.082 dB	
3	F	1	f		2.401 362 5 GHz	-19.414 dB	

M990 (STATUS)

Keysight Spectrum Analyzer - Budget Pak

Center Freq 2.441000000 GHz

Ref Offset 10.2 dB
Ref 15.00 dBm

PRB: Wide →
IF Gain: Low

Trig: Free Run
Amen: 16 dB

ΔMag: 2 1.312 5 MHz;
0.778 dB

10 dB/div

0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
0.08
0.09
0.10

2.440
2.441
2.442
2.443
2.444
2.445
2.446
2.447
2.448
2.449
2.450

Center 2.441000 GHz
#Res BW 30 kHz

VBW 91 kHz

Span 3.000 MHz
#Sweep 500.0 ms (401 pts)

1	NAME	MODE	TYPE	SCN	Δ	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	Δ	1	f	(Δ)	2.441 915.6 GHz	1.438 dBm			
2	Δ	1	f	(Δ)	1.312 5 MHz	0.778 dB			
3	P	1	f		2.440 362.5 GHz	-19.381 dBm			

10
9
8
7
6
5
4
3
2
1

MWD

(STATUS)

Auto Tuning

Center Freq
2.441000000 GHz

Start Freq
2.439500000 GHz

Stop Freq
2.442500000 GHz

CF Step
300.000 MHz

Auto

Freq Offset
0 MHz

Keynote Spectrum Analyzer - Board 5A

Center Freq 2.480000000 GHz

Ref Offset: 10.2 dB
Ref: 15.00 dBm

ΔMkr2 1.327 4 MHz
0.003 dB

Auto Tune

Center Freq
2.48000000 GHz

Start Freq
2.47950000 GHz

Stop Freq
2.48150000 GHz

CF Stop
300.000 MHz

Auto

Freq Offset
0 Hz

Center 2.480000 GHz
BW Res 30 kHz

VBW 91 kHz

#Sweep 500.0 ms (401 pts)


Span 3.000 MHz

Table:

MARK	MODE	FREQ	ACL	A	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	A3	1	f	(Δ)	2.480 015 9 GHz	0.728 dBm	
2	A3	1	f	(Δ)	1.327 4 MHz	0.003 dB	
3	F	1	f		2.479 362 5 GHz	-20.26 dBm	

99% Bandwidth

GFSK LOW CHANNEL

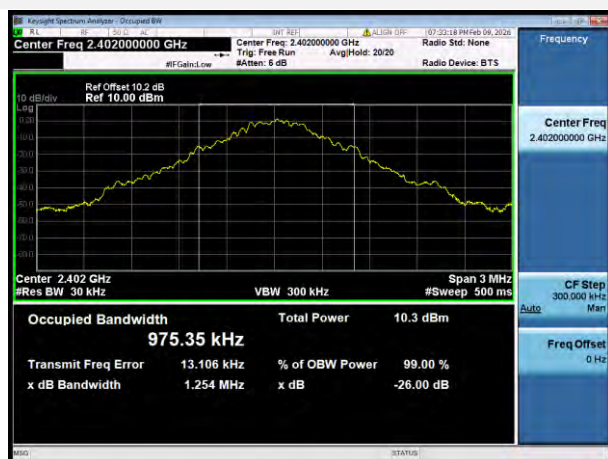

GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL

 $\pi/4$ -DQPSK LOW CHANNEL $\pi/4$ -DQPSK MIDDLE CHANNEL

$\pi/4$ -DQPSK HIGH CHANNEL




8-DPSK LOW CHANNEL



8-DPSK MIDDLE CHANNEL



8-DPSK HIGH CHANNEL

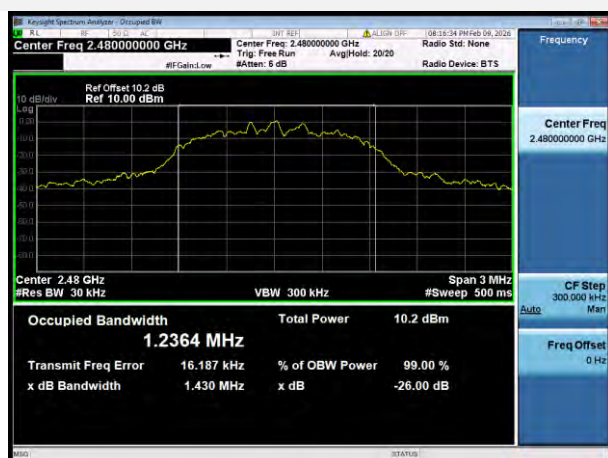


A.4 Hopping Frequency Separation

Test Data


Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	1.000	0.720	Pass
8-DPSK	1.000	0.885	Pass

Test Plots

GFSK

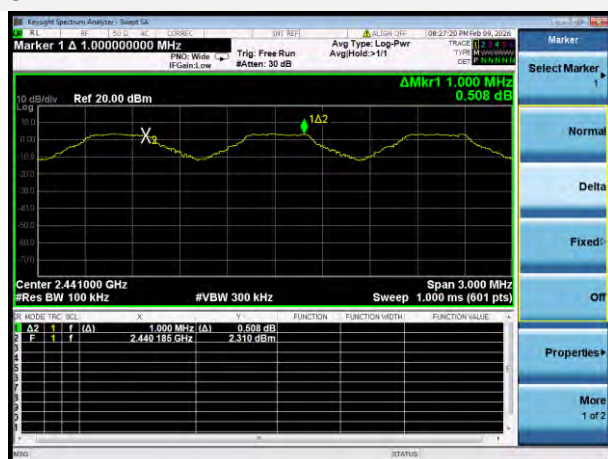

8-DPSK

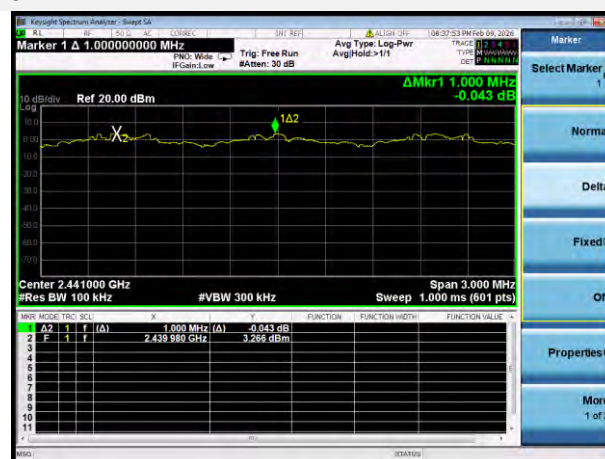


A.5 Average Time of Occupancy

Test Data


GFSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.37920	121.344	0.4	Pass
DH 3	1.63800	262.080	0.4	Pass
DH 5	2.89200	308.480	0.4	Pass
8-DPSK				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
3DH 1	0.38880	124.416	0.4	Pass
3DH 3	1.63800	262.080	0.4	Pass
3DH 5	2.89200	308.480	0.4	Pass
AFH Mode				
DH Packet	Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
DH 1	0.38080	60.928	0.4	Pass
DH 3	1.63800	131.040	0.4	Pass
DH 5	2.88000	153.600	0.4	Pass

Test Plots


GFSK DH1

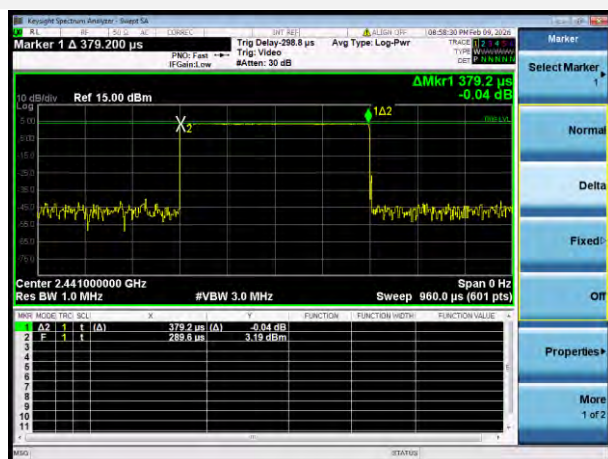


GFSK DH3

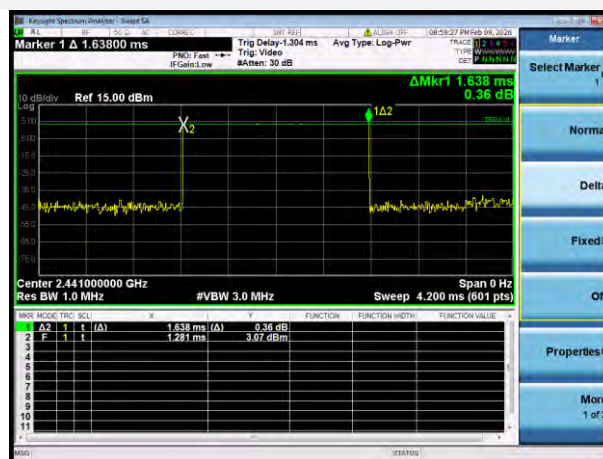


GFSK DH5

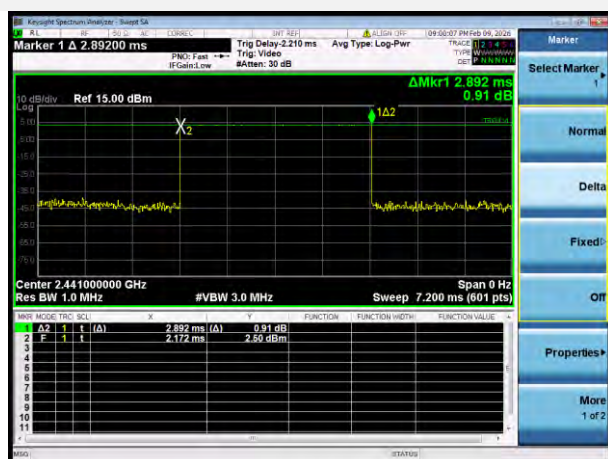


8-DPSK 3DH1

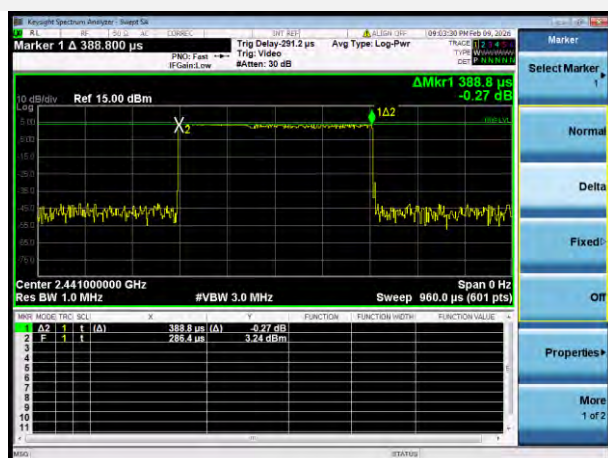


8-DPSK 3DH3

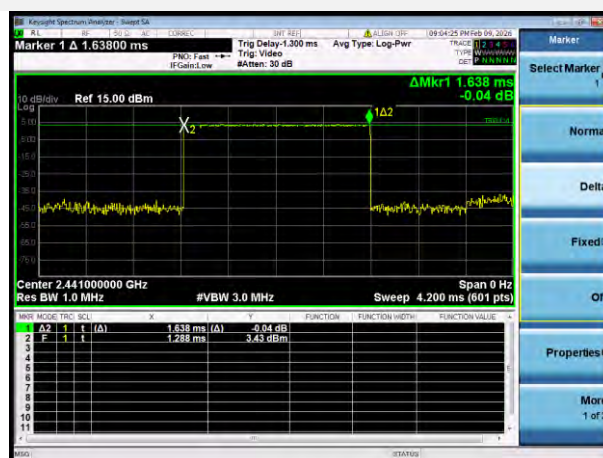


8-DPSK 3DH5

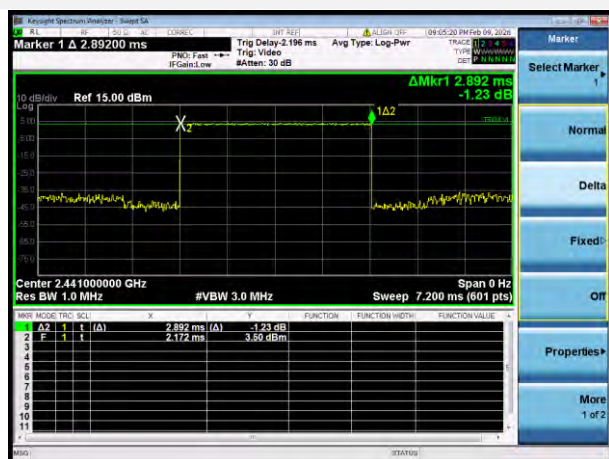


AFH Mode DH1

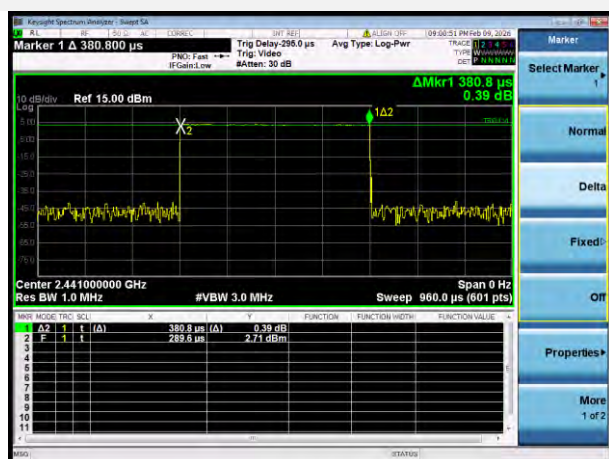

AFH Mode DH3

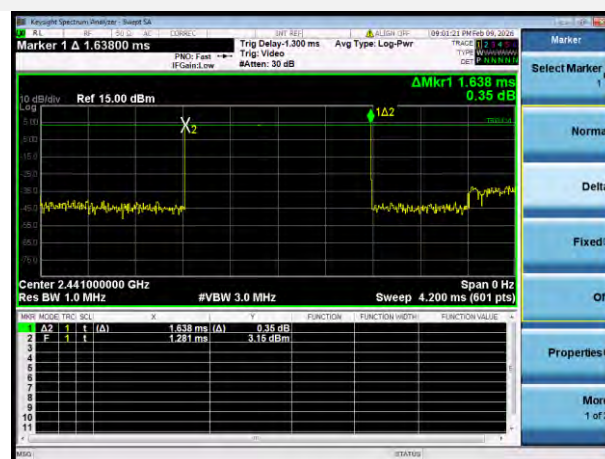

AFH Mode DH5

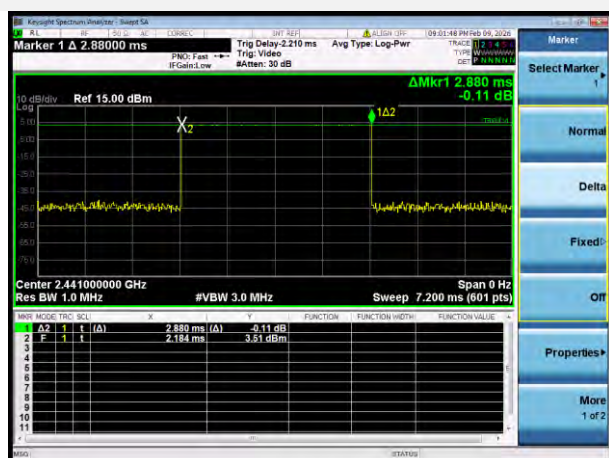

A.6 Conducted Spurious Emissions & Authorized-band band-edge


Test Data

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-36.01	-3.92	-23.92	Pass
Middle	-36.13	-4.84	-24.84	Pass
High	-35.57	-3.65	-23.65	Pass
8-DPSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-35.80	-5.07	-25.07	Pass
Middle	-37.05	-2.28	-22.28	Pass
High	-35.93	-3.79	-23.79	Pass


Hopping Mode				
Mode	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-36.37	-1.07	-21.07	Pass
8-DPSK	-37.11	-4.43	-24.43	Pass

Test Plots


GFSK LOW CHANNEL, CARRIER LEVEL

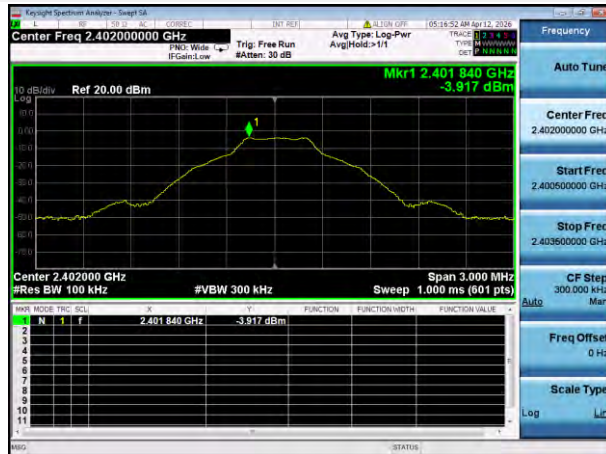


GFSK LOW CHANNEL, BAND EDGE

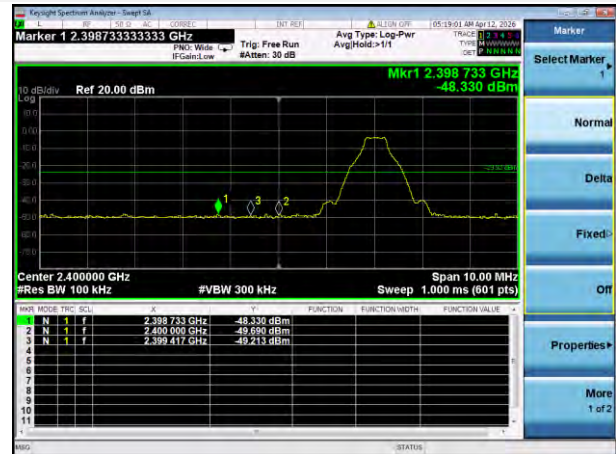


GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

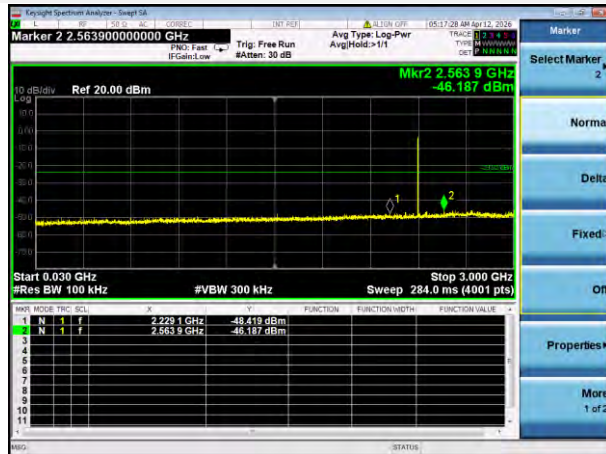


GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

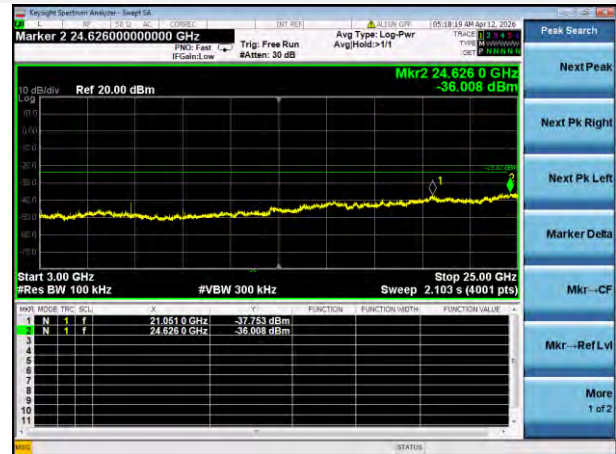


GFSK MIDDLE CHANNEL, CARRIER LEVEL

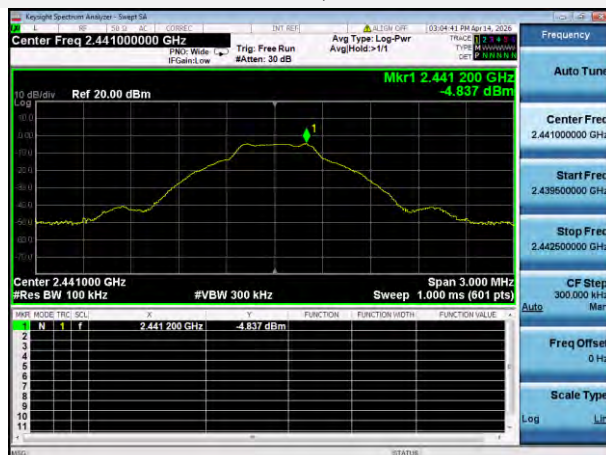


GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

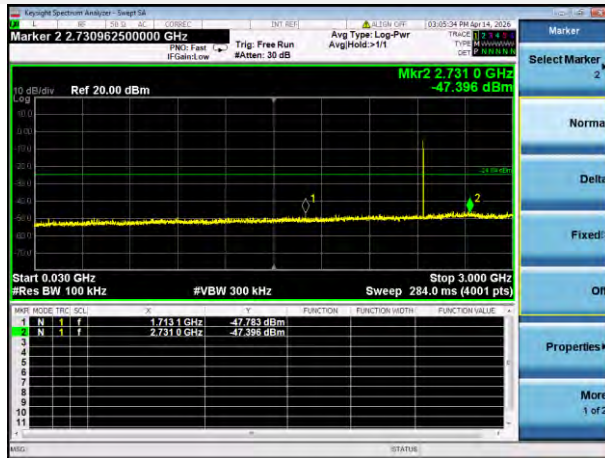


GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

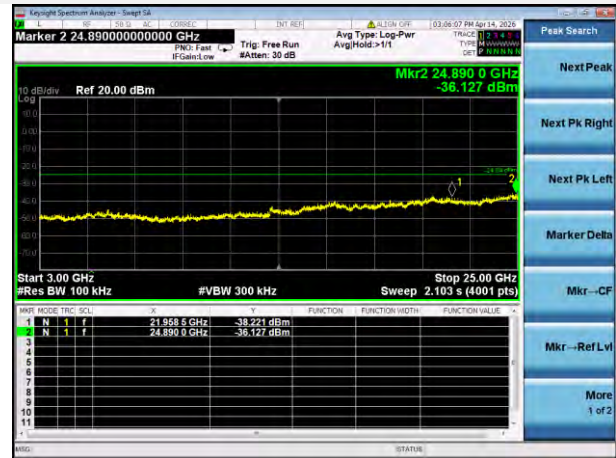


GFSK HIGH CHANNEL, CARRIER LEVEL

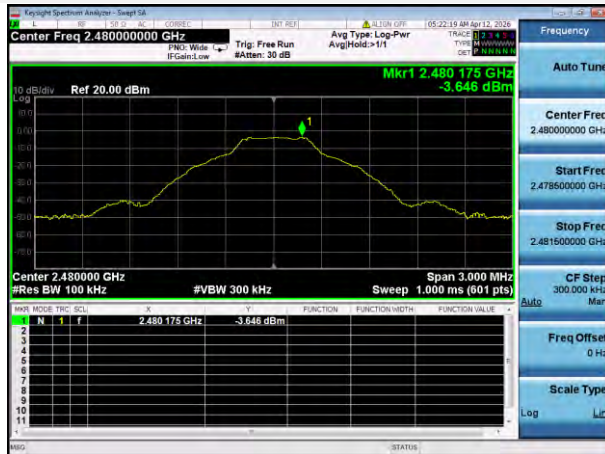


GFSK HIGH CHANNEL, BAND EDGE

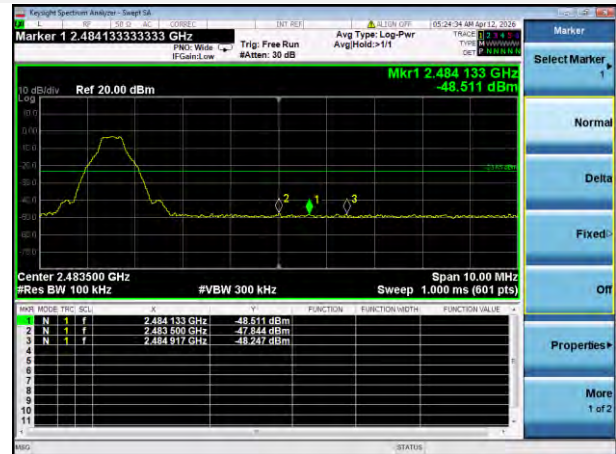


GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

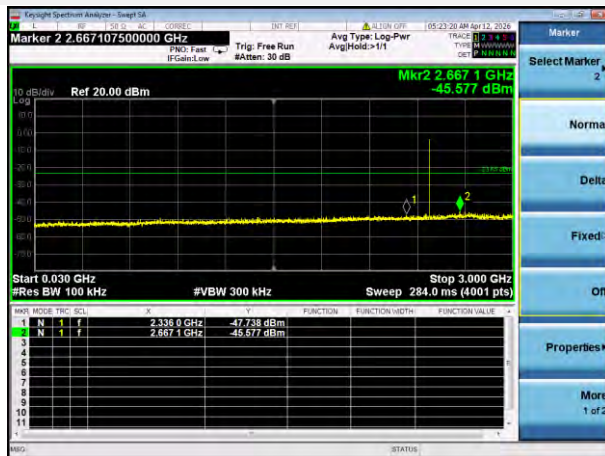


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

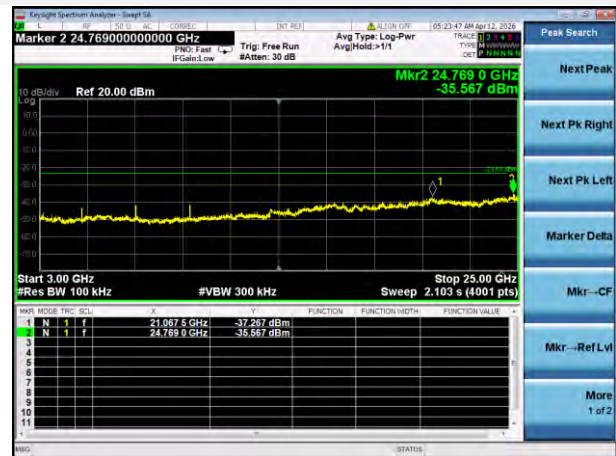

8-DPSK LOW CHANNEL, BAND EDGE

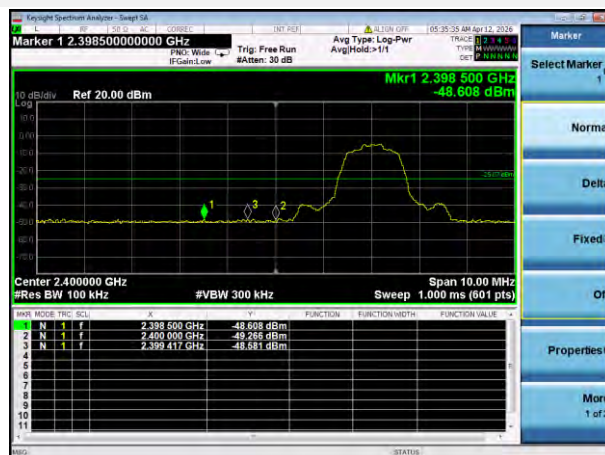

8-DPSK LOW CHANNEL, SPURIOUS
3 GHz ~ 25 GHz

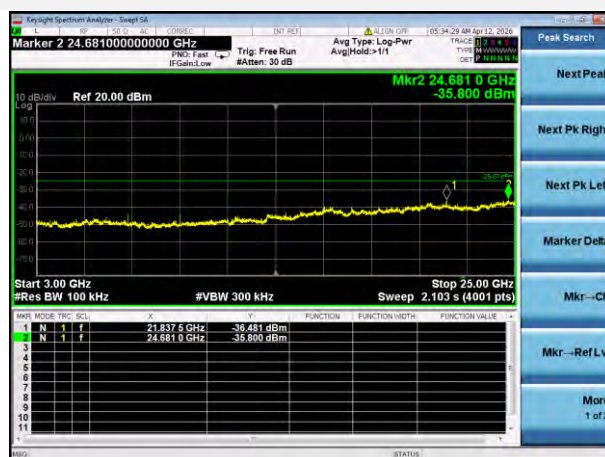

Keysight Spectrum Analyzer - Suite 5a

Center Freq 2.441000000 GHz

Span 3.000 MHz

Ref 20.00 dBm

Mkr1 2.440 825 GHz -2.282 dBm

Center 2.441000 GHz


Span 3.000 MHz

#VBW 300 kHz


Sweep 1.000 ms (601 pts)

MMR	MODE	TRIG	SCN	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	1	2.440 825 GHz	-2.282 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								


8-DPSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

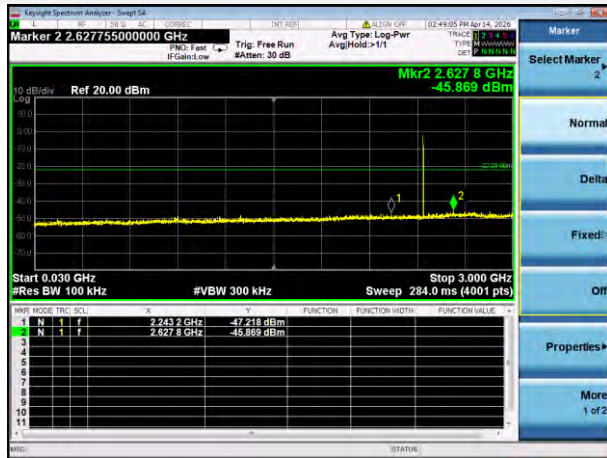


8-DPSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

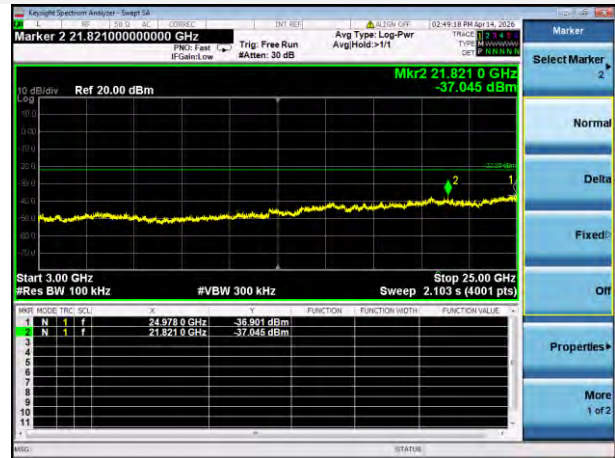


8-DPSK HIGH CHANNEL, CARRIER LEVEL

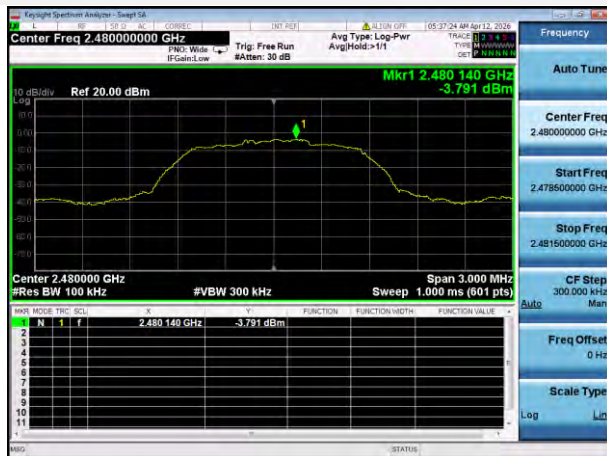


8-DPSK HIGH CHANNEL, BAND EDGE

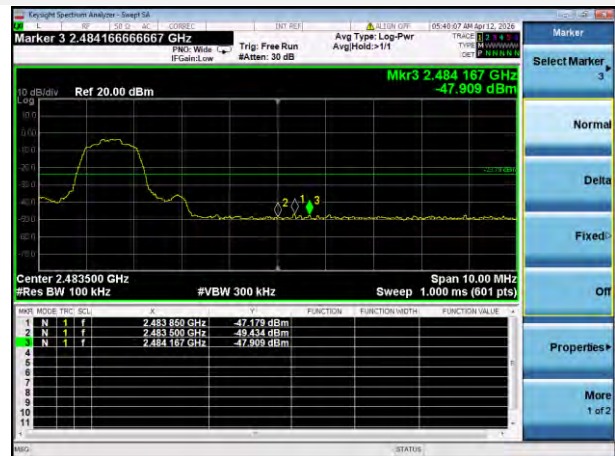


8-DPSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

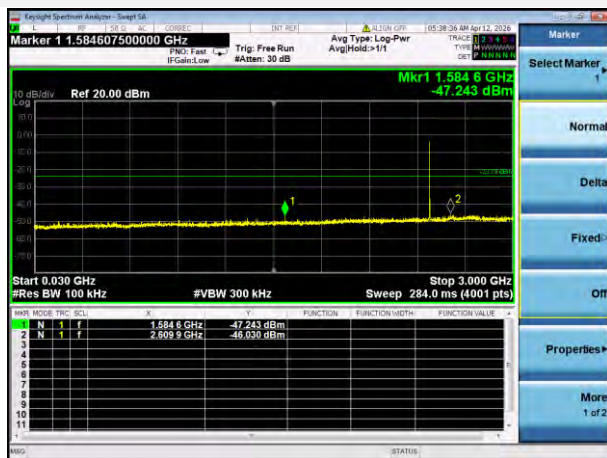


8-DPSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

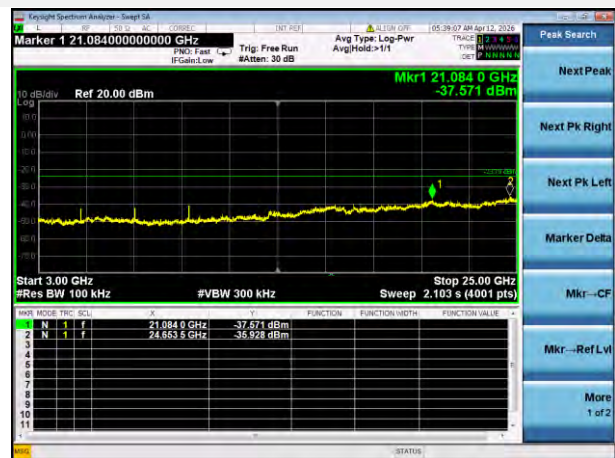




GFSK HOPPING, CARRIER LEVEL

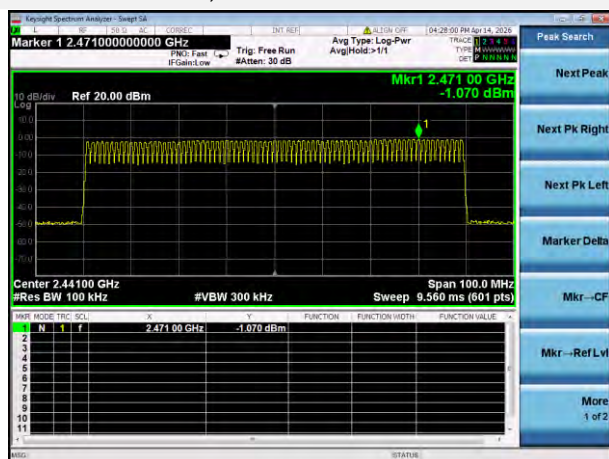


GFSK HOPPING BAND EDGE (LOW)

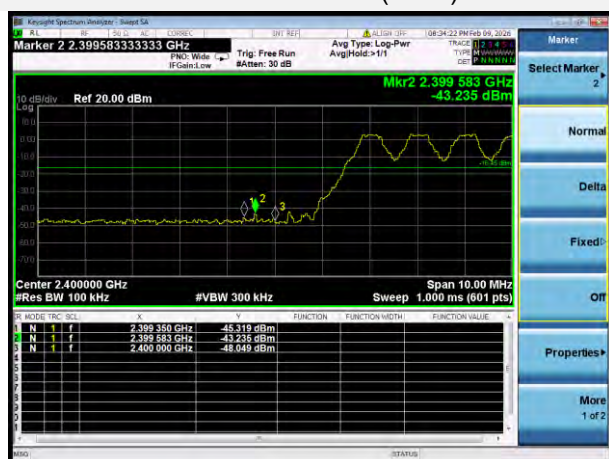

GFSK HOPPING BAND EDGE (HIGH)

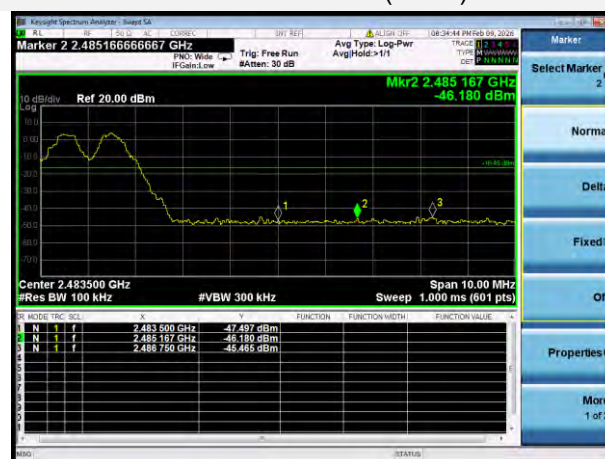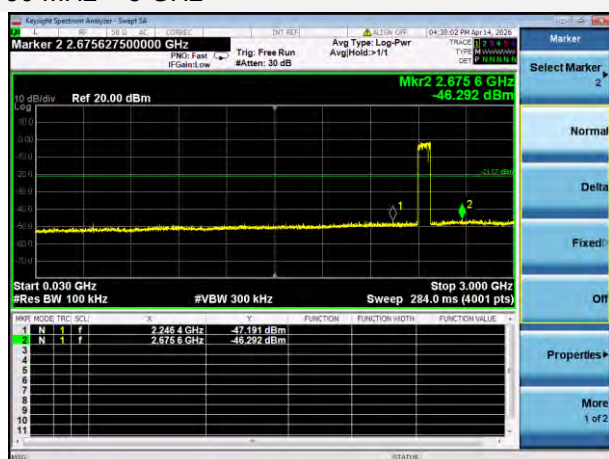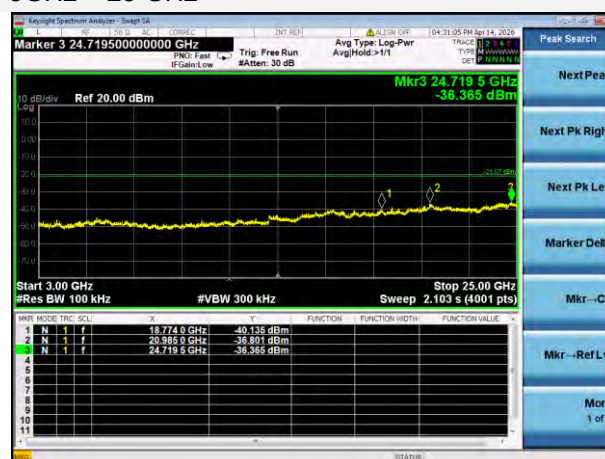GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHzGFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz



8-DPSK HOPPING, CARRIER LEVEL

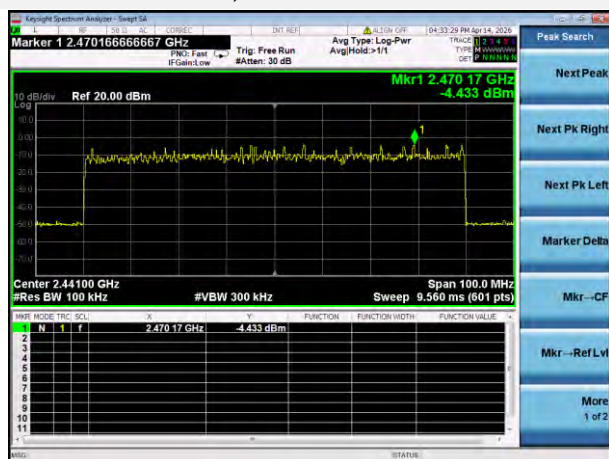

8-DPSK Hopping BAND EDGE (LOW)



8-DPSK Hopping BAND EDGE (HIGH)

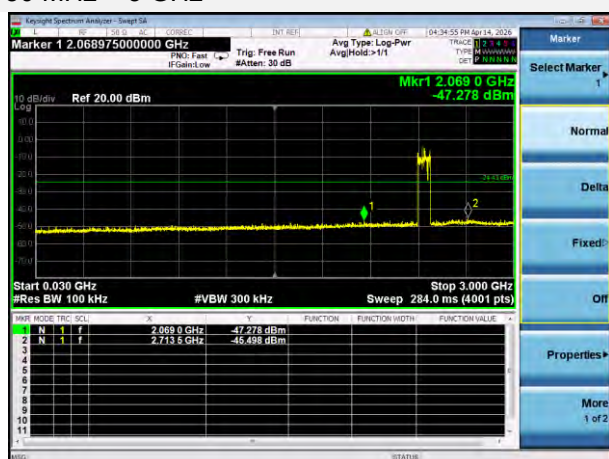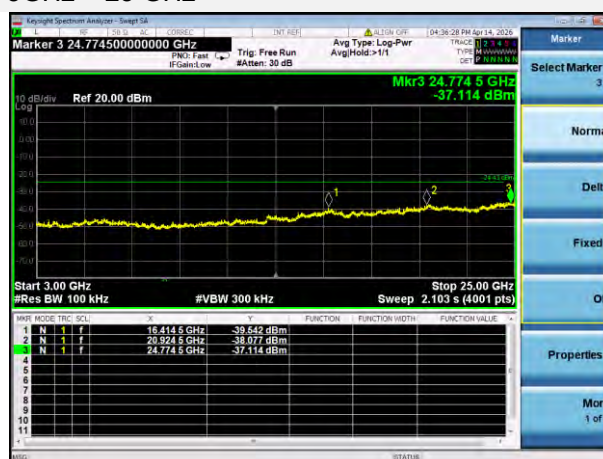8-DPSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz8-DPSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

A.7 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

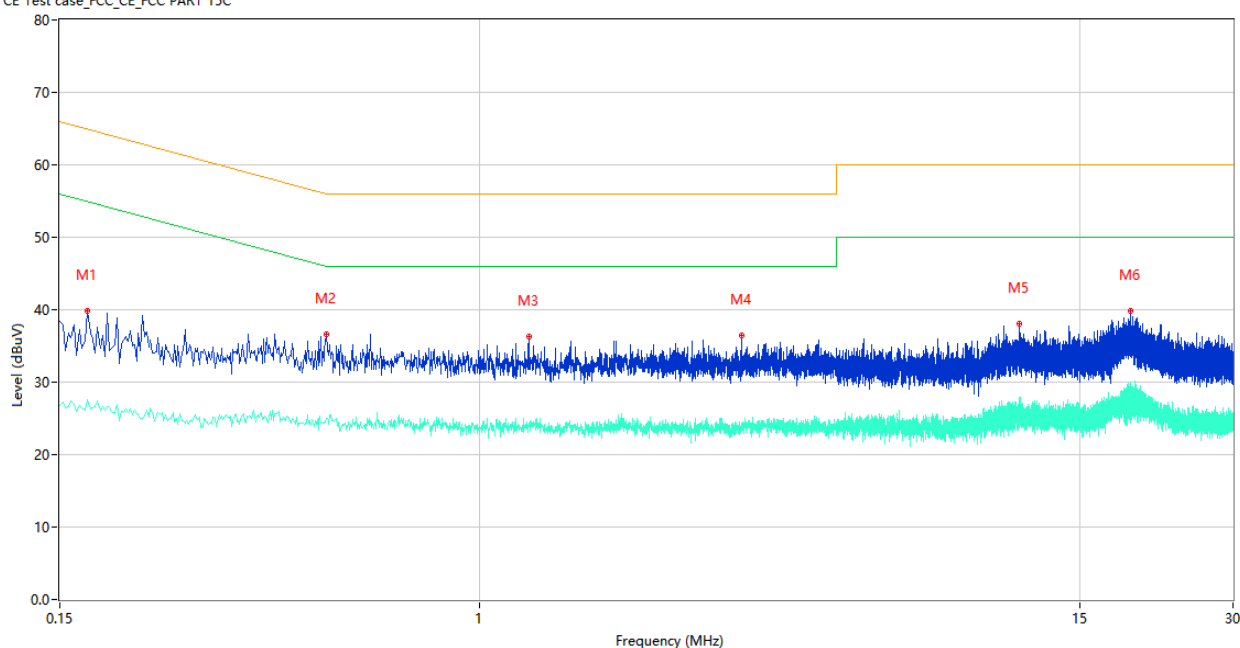

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.170	39.90	9.85	64.96	25.06	Peak	L	Pass
1**	0.170	27.56	9.85	54.96	27.40	AV	L	Pass
2	0.500	36.58	10.04	56.00	19.42	Peak	L	Pass
2**	0.500	25.00	10.04	46.00	21.00	AV	L	Pass
3	1.246	36.32	10.47	56.00	19.68	Peak	L	Pass
3**	1.246	23.79	10.47	46.00	22.21	AV	L	Pass
4	3.266	36.42	10.21	56.00	19.58	Peak	L	Pass
4**	3.266	23.69	10.21	46.00	22.31	AV	L	Pass
5	11.416	38.08	10.74	60.00	21.92	Peak	L	Pass
5**	11.416	26.52	10.74	50.00	23.48	AV	L	Pass
6	18.924	39.90	11.10	60.00	20.10	Peak	L	Pass
6**	18.924	25.76	11.10	50.00	24.24	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

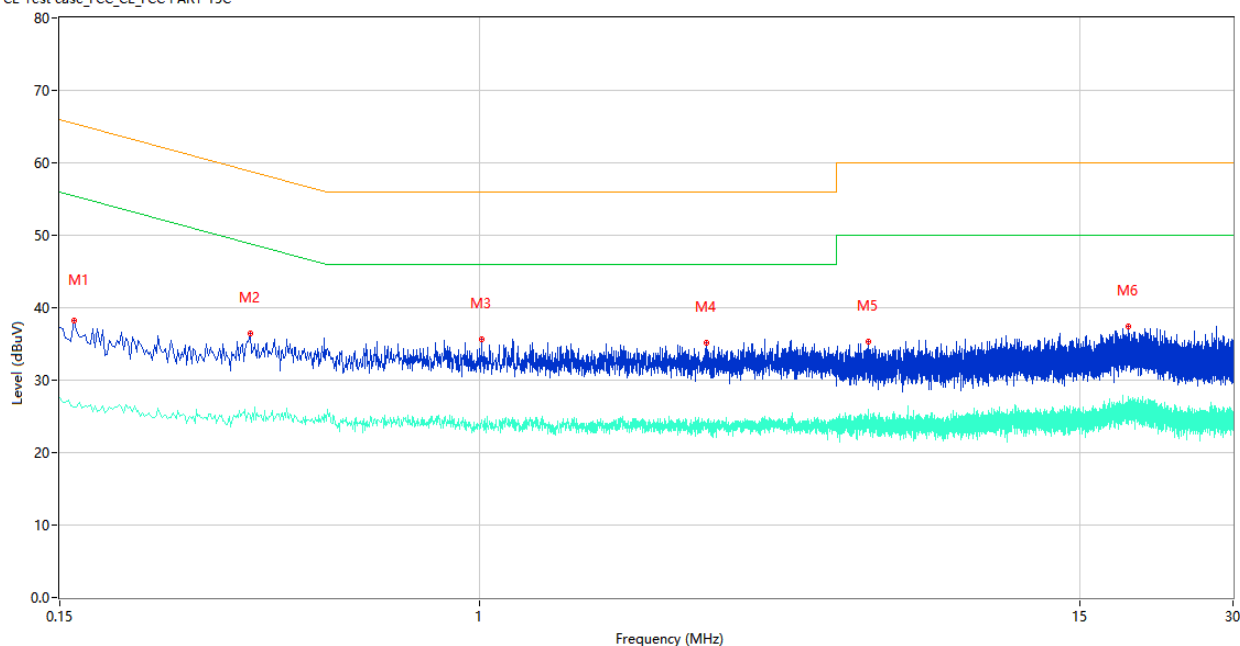

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.160	38.27	9.85	65.46	27.19	Peak	N	Pass
1**	0.160	26.22	9.85	55.46	29.24	AV	N	Pass
2	0.354	36.51	10.80	58.87	22.36	Peak	N	Pass
2**	0.354	25.17	10.80	48.87	23.70	AV	N	Pass
3	1.008	35.63	10.07	56.00	20.37	Peak	N	Pass
3**	1.008	24.51	10.07	46.00	21.49	AV	N	Pass
4	2.788	35.08	10.40	56.00	20.92	Peak	N	Pass
4**	2.788	23.74	10.40	46.00	22.26	AV	N	Pass
5	5.784	35.39	10.33	60.00	24.61	Peak	N	Pass
5**	5.784	23.31	10.33	50.00	26.69	AV	N	Pass
6	18.724	37.49	11.18	60.00	22.51	Peak	N	Pass
6**	18.724	27.16	11.18	50.00	22.84	AV	N	Pass

A.8 Radiated Spurious Emission

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and DH5-Hopping mode is the worst.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

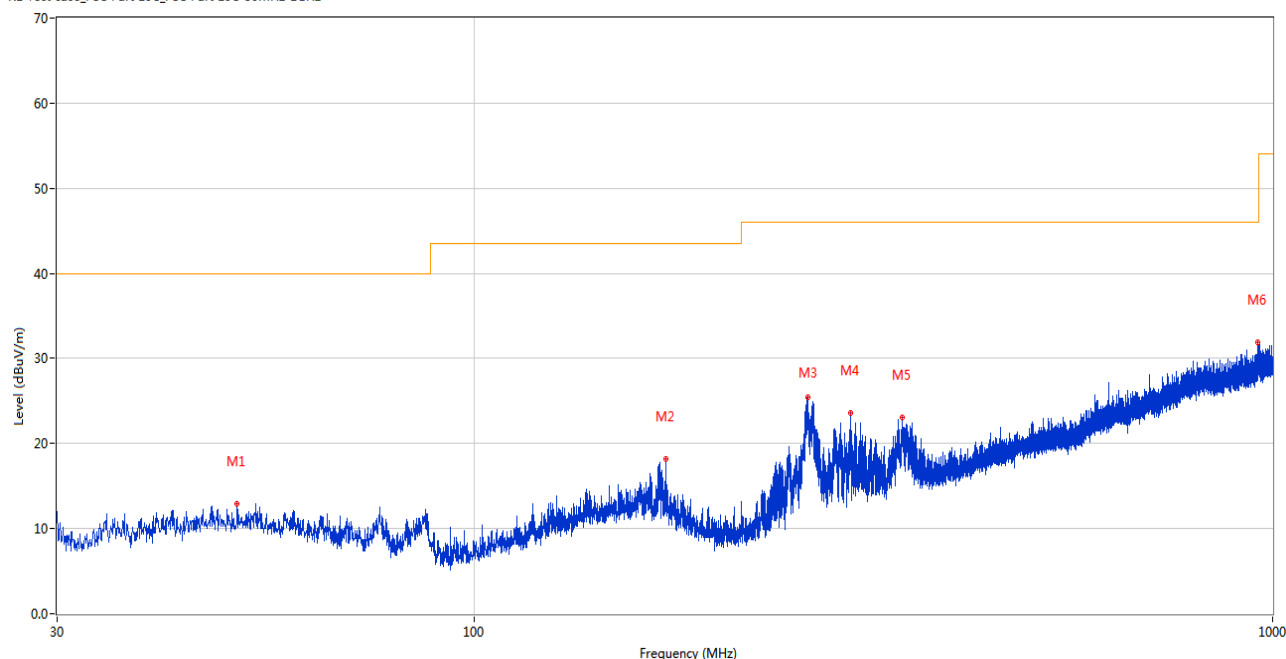

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	50.419	12.88	-25.05	40.0	27.12	Peak	65.00	100	Horizontal	Pass
2	173.803	18.14	-25.00	43.5	25.36	Peak	249.00	100	Horizontal	Pass
3	261.393	25.43	-24.47	46.0	20.57	Peak	249.00	100	Horizontal	Pass
4	295.683	23.59	-22.83	46.0	22.41	Peak	87.00	100	Horizontal	Pass
5	343.746	23.12	-21.79	46.0	22.88	Peak	0.00	100	Horizontal	Pass
6	958.338	31.91	-8.05	46.0	14.09	Peak	264.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

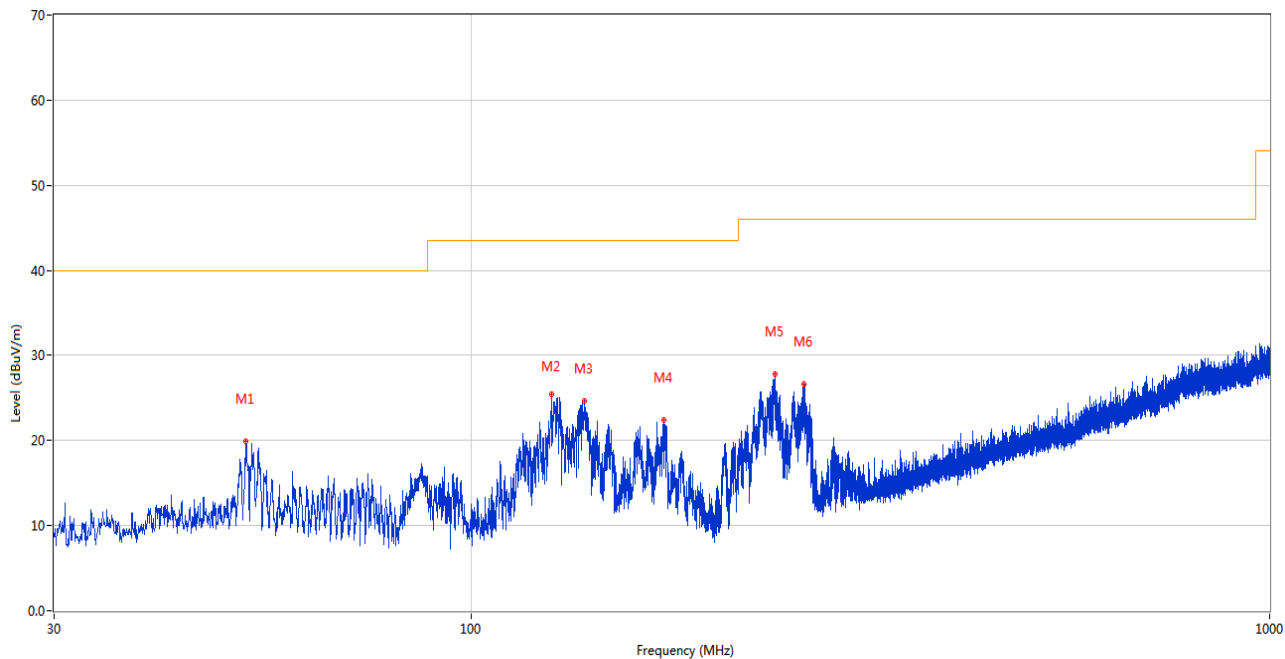


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	52.213	19.89	-25.10	40.0	20.11	Peak	28.00	100	Vertical	Pass
2	126.030	25.46	-26.60	43.5	18.04	Peak	203.00	100	Vertical	Pass
3	138.446	24.65	-25.09	43.5	18.85	Peak	203.00	100	Vertical	Pass
4	173.997	22.42	-25.01	43.5	21.08	Peak	223.00	100	Vertical	Pass
5	239.762	27.79	-25.43	46.0	18.21	Peak	183.00	100	Vertical	Pass
6	261.054	26.65	-24.49	46.0	19.35	Peak	183.00	100	Vertical	Pass

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

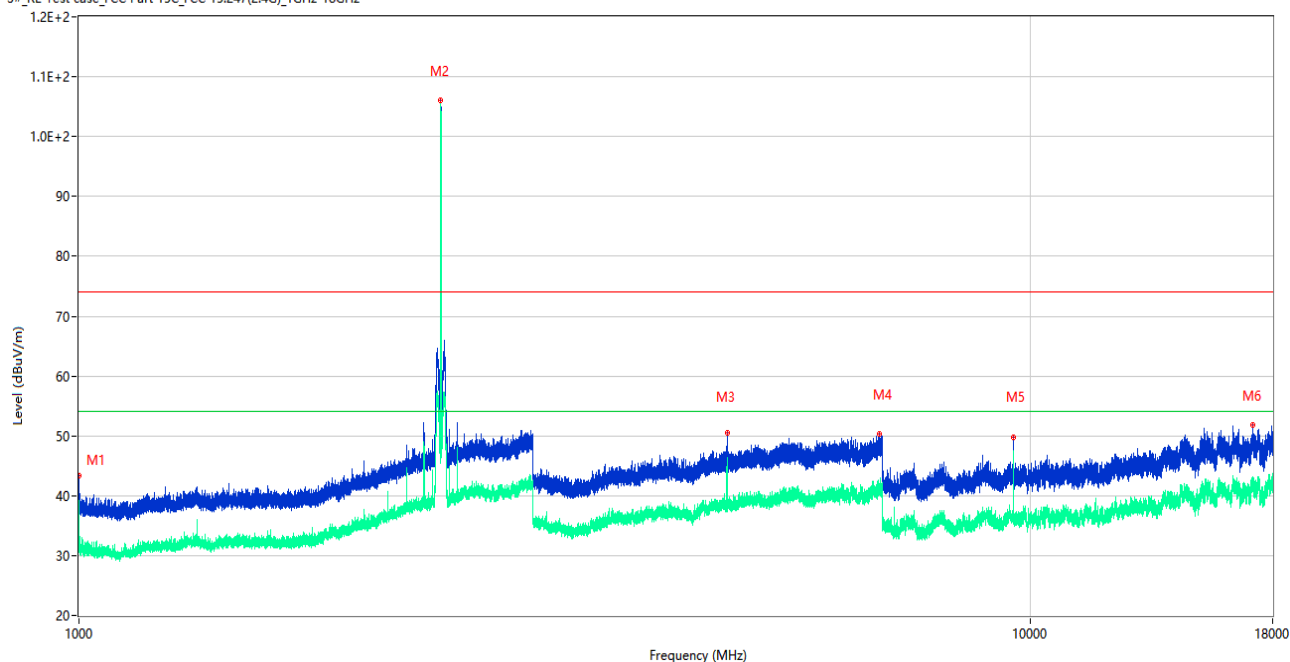

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1000.000	43.41	74.0	30.59	Peak	99.00	400	Horizontal	Pass
1**	1000.000	32.05	54.0	21.95	AV	99.00	400	Horizontal	Pass
2	2402.100	105.99	--	--	Peak	68.00	200	Horizontal	N/A
2**	2402.100	105.61	--	--	AV	68.00	200	Horizontal	N/A
3	4804.200	50.53	74.0	23.47	Peak	0.00	200	Horizontal	Pass
3**	4804.200	46.45	54.0	7.55	AV	0.00	200	Horizontal	Pass
4	6950.800	50.29	74.0	23.71	Peak	10.00	100	Horizontal	Pass
4**	6950.800	40.72	54.0	13.28	AV	10.00	100	Horizontal	Pass
5	9608.200	49.81	74.0	24.19	Peak	50.00	400	Horizontal	Pass
5**	9608.200	47.09	54.0	6.91	AV	50.00	400	Horizontal	Pass
6	17167.088	51.80	74.0	22.20	Peak	192.00	100	Horizontal	Pass
6**	17167.088	41.39	54.0	12.61	AV	192.00	100	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

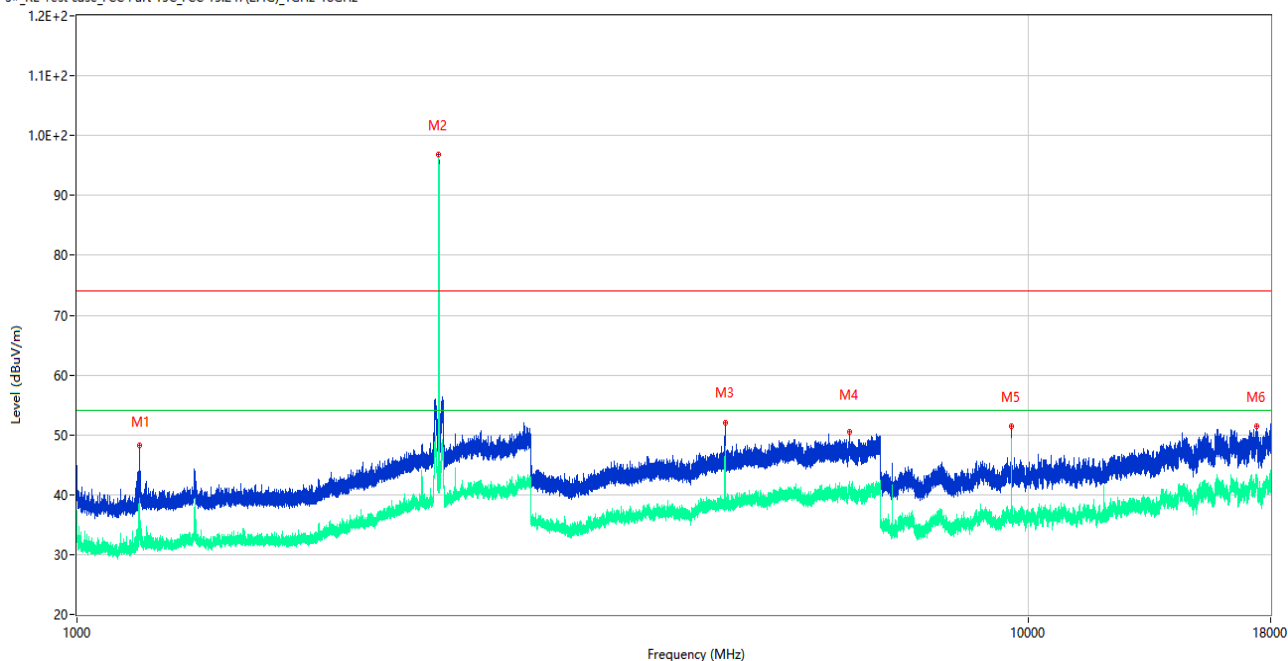

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1164.400	48.17	74.0	25.83	Peak	224.00	150	Vertical	Pass
1**	1164.400	34.74	54.0	19.26	AV	224.00	150	Vertical	Pass
2	2402.000	96.75	--	--	Peak	115.00	100	Vertical	N/A
2**	2402.000	96.10	--	--	AV	115.00	100	Vertical	N/A
3	4804.400	52.11	74.0	21.89	Peak	69.00	200	Vertical	Pass
3**	4804.400	47.25	54.0	6.75	AV	69.00	200	Vertical	Pass
4	6490.000	50.43	74.0	23.57	Peak	11.00	200	Vertical	Pass
4**	6490.000	41.06	54.0	12.94	AV	11.00	200	Vertical	Pass
5	9607.912	51.42	74.0	22.58	Peak	325.00	200	Vertical	Pass
5**	9607.912	47.57	54.0	6.43	AV	325.00	200	Vertical	Pass
6	17386.275	51.40	74.0	22.60	Peak	248.00	200	Vertical	Pass
6**	17386.275	42.13	54.0	11.87	AV	248.00	200	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

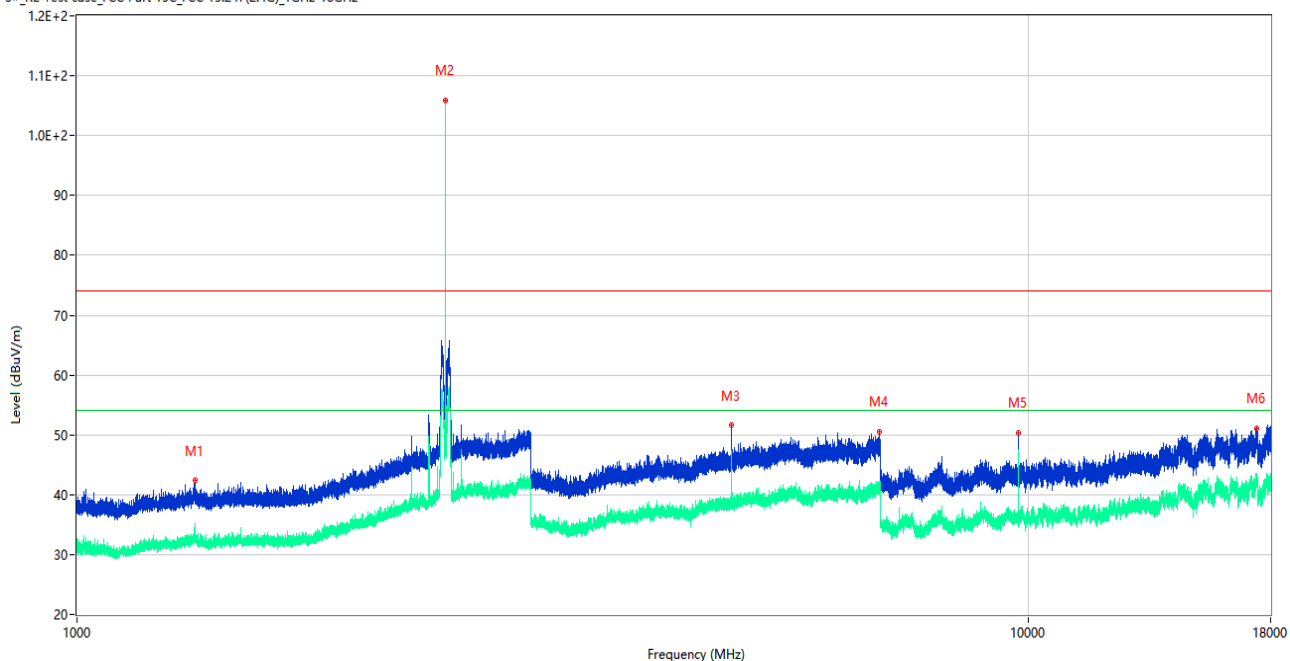

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.400	42.33	74.0	31.67	Peak	360.00	300	Horizontal	Pass
1**	1331.400	32.63	54.0	21.37	AV	360.00	300	Horizontal	Pass
2	2441.100	105.89	--	--	Peak	66.00	200	Horizontal	N/A
2**	2441.100	105.20	--	--	AV	66.00	200	Horizontal	N/A
3	4882.000	51.59	74.0	22.41	Peak	89.00	100	Horizontal	Pass
3**	4882.000	46.07	54.0	7.93	AV	89.00	100	Horizontal	Pass
4	6984.200	50.59	74.0	23.41	Peak	250.00	400	Horizontal	Pass
4**	6984.200	40.95	54.0	13.05	AV	250.00	400	Horizontal	Pass
5	9764.025	50.37	74.0	23.63	Peak	35.00	400	Horizontal	Pass
5**	9764.025	45.98	54.0	8.02	AV	35.00	400	Horizontal	Pass
6	17388.114	51.16	74.0	22.84	Peak	134.00	300	Horizontal	Pass
6**	17388.114	42.59	54.0	11.41	AV	134.00	300	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

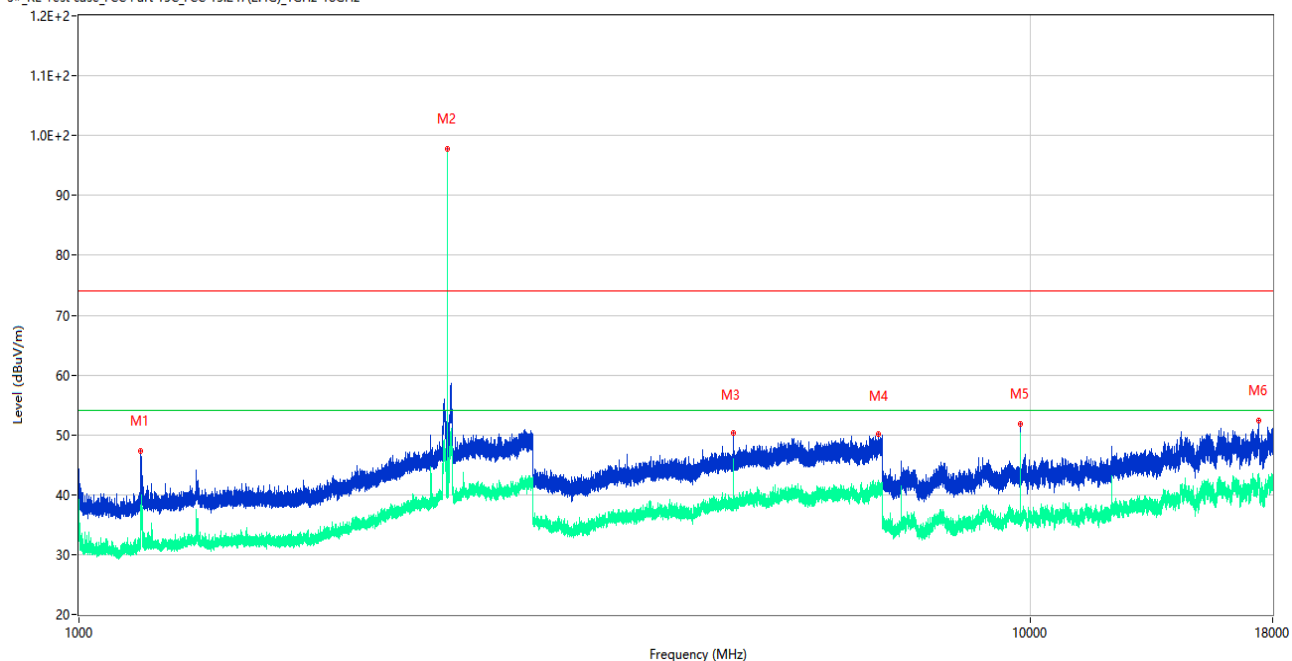

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1162.100	47.34	74.0	26.66	Peak	39.00	100	Vertical	Pass
1**	1162.100	35.34	54.0	18.66	AV	39.00	100	Vertical	Pass
2	2440.800	97.78	--	--	Peak	110.00	150	Vertical	N/A
2**	2440.800	96.47	--	--	AV	110.00	150	Vertical	N/A
3	4881.800	50.36	74.0	23.64	Peak	191.00	200	Vertical	Pass
3**	4881.800	45.10	54.0	8.90	AV	191.00	200	Vertical	Pass
4	6927.800	50.04	74.0	23.96	Peak	304.00	300	Vertical	Pass
4**	6927.800	40.99	54.0	13.01	AV	304.00	300	Vertical	Pass
5	9764.025	51.91	74.0	22.09	Peak	312.00	300	Vertical	Pass
5**	9764.025	49.36	54.0	4.64	AV	312.00	300	Vertical	Pass
6	17395.462	52.45	74.0	21.55	Peak	55.00	200	Vertical	Pass
6**	17395.462	41.97	54.0	12.03	AV	55.00	200	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

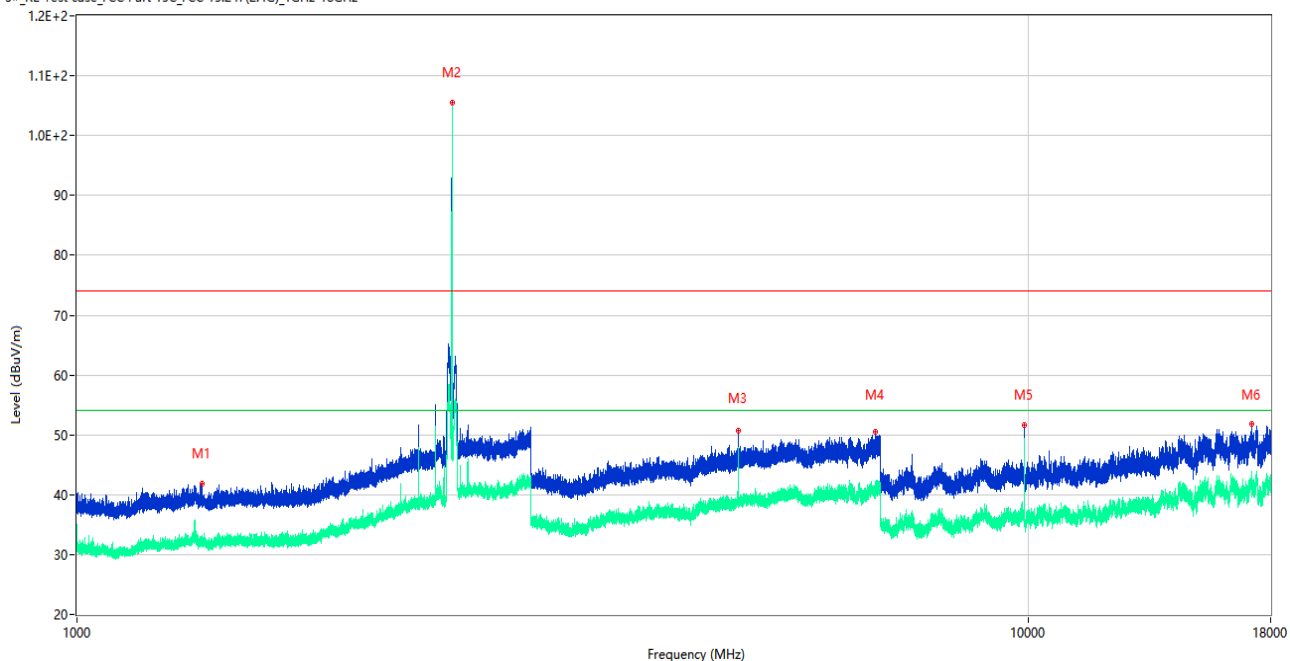

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1355.300	41.84	74.0	32.16	Peak	22.00	200	Horizontal	Pass
1**	1355.300	31.73	54.0	22.27	AV	22.00	200	Horizontal	Pass
2	2480.100	105.56	--	--	Peak	67.00	150	Horizontal	N/A
2**	2480.100	105.04	--	--	AV	67.00	150	Horizontal	N/A
3	4960.000	50.64	74.0	23.36	Peak	19.00	100	Horizontal	Pass
3**	4960.000	47.27	54.0	6.73	AV	19.00	100	Horizontal	Pass
4	6917.200	50.47	74.0	23.53	Peak	0.00	300	Horizontal	Pass
4**	6917.200	40.80	54.0	13.20	AV	0.00	300	Horizontal	Pass
5	9920.137	51.69	74.0	22.31	Peak	31.00	200	Horizontal	Pass
5**	9920.137	49.36	54.0	4.64	AV	31.00	200	Horizontal	Pass
6	17194.912	51.75	74.0	22.25	Peak	35.00	400	Horizontal	Pass
6**	17194.912	42.25	54.0	11.75	AV	35.00	400	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

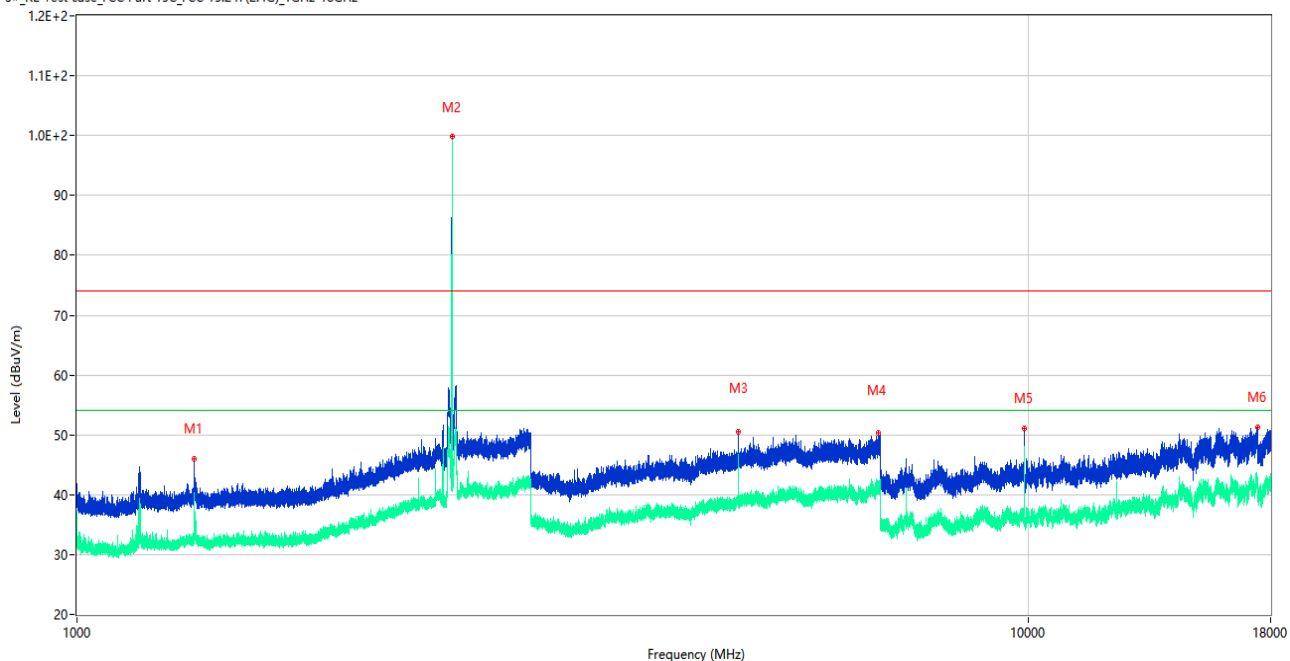

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.400	46.00	74.0	28.00	Peak	102.00	400	Vertical	Pass
1**	1327.400	33.01	54.0	20.99	AV	102.00	400	Vertical	Pass
2	2480.000	99.81	--	--	Peak	76.00	100	Vertical	N/A
2**	2480.000	99.21	--	--	AV	76.00	100	Vertical	N/A
3	4960.200	50.51	74.0	23.49	Peak	87.00	150	Vertical	Pass
3**	4960.200	46.20	54.0	7.80	AV	87.00	150	Vertical	Pass
4	6962.800	50.34	74.0	23.66	Peak	292.00	100	Vertical	Pass
4**	6962.800	40.44	54.0	13.56	AV	292.00	100	Vertical	Pass
5	9919.849	51.08	74.0	22.92	Peak	18.00	400	Vertical	Pass
5**	9919.849	45.98	54.0	8.02	AV	18.00	400	Vertical	Pass
6	17426.698	51.34	74.0	22.66	Peak	320.00	200	Vertical	Pass
6**	17426.698	41.62	54.0	12.38	AV	320.00	200	Vertical	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

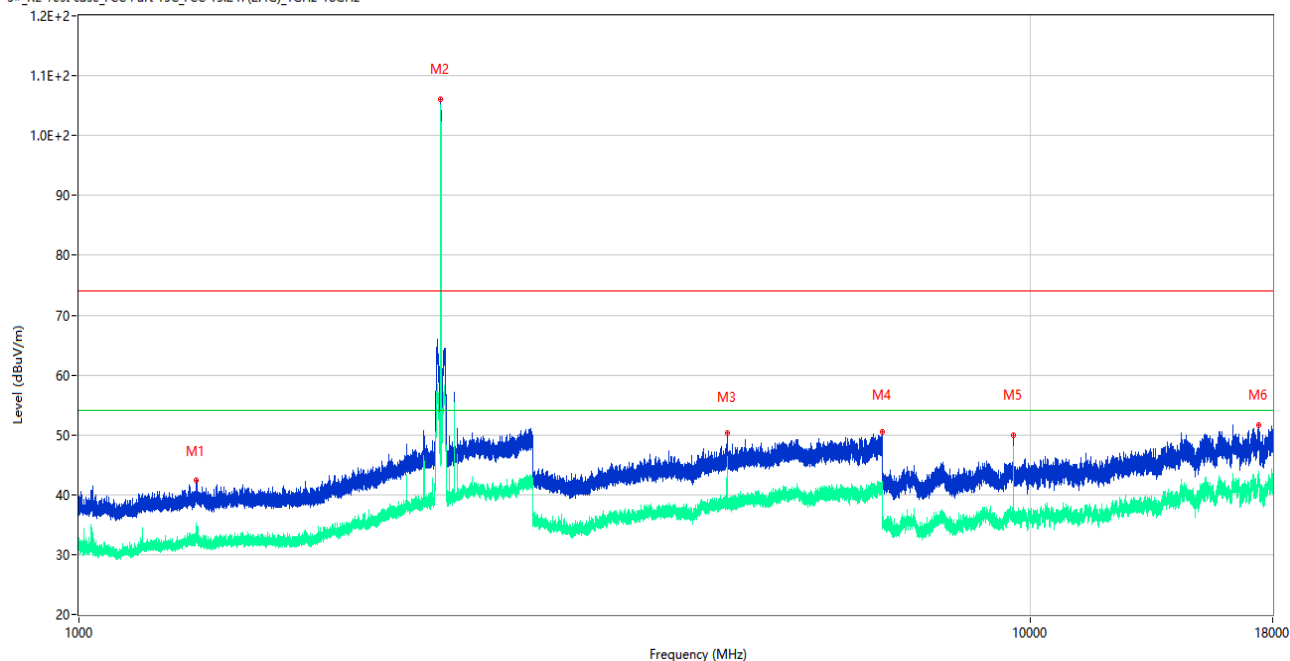

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1329.100	42.40	74.0	31.60	Peak	352.00	200	Horizontal	Pass
1**	1329.100	33.04	54.0	20.96	AV	352.00	200	Horizontal	Pass
2	2402.100	106.10	--	--	Peak	64.00	150	Horizontal	N/A
2**	2402.100	105.12	--	--	AV	64.00	150	Horizontal	N/A
3	4804.000	50.29	74.0	23.71	Peak	87.00	200	Horizontal	Pass
3**	4804.000	45.51	54.0	8.49	AV	87.00	200	Horizontal	Pass
4	6993.400	50.56	74.0	23.44	Peak	53.00	200	Horizontal	Pass
4**	6993.400	42.08	54.0	11.92	AV	53.00	200	Horizontal	Pass
5	9608.200	50.01	74.0	23.99	Peak	37.00	300	Horizontal	Pass
5**	9608.200	47.57	54.0	6.43	AV	37.00	300	Horizontal	Pass
6	17396.251	51.65	74.0	22.35	Peak	130.00	300	Horizontal	Pass
6**	17396.251	43.19	54.0	10.81	AV	130.00	300	Horizontal	Pass

8-DPSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

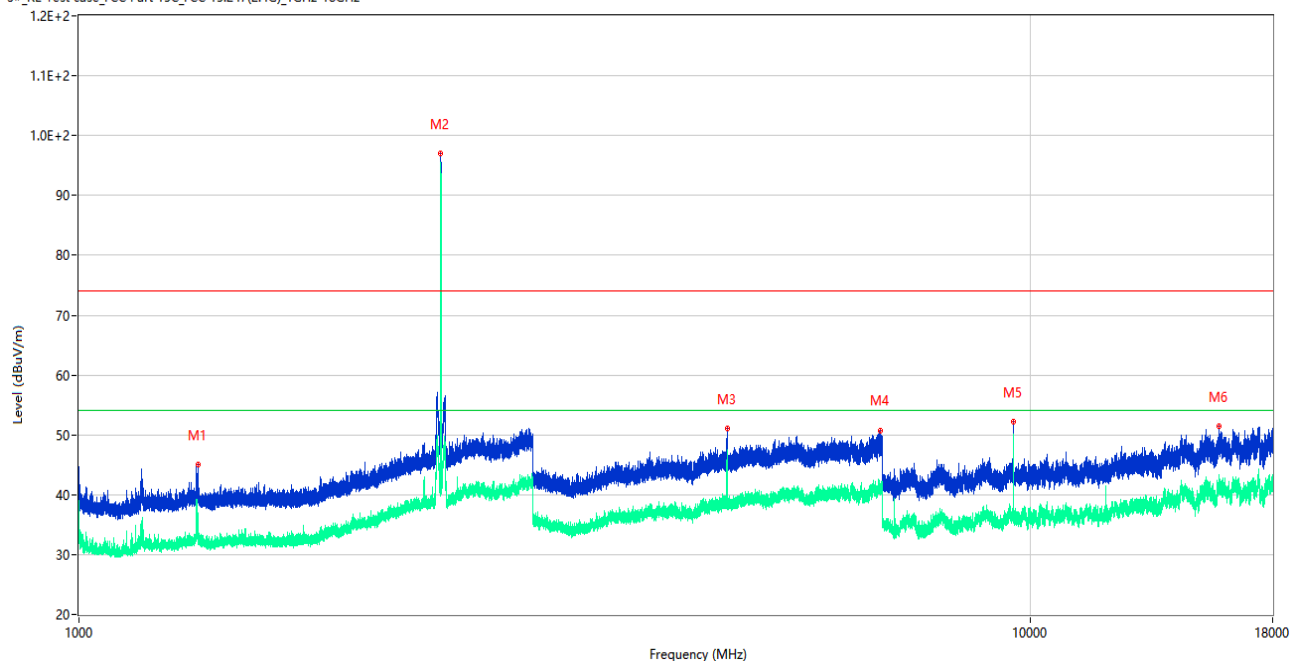

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.500	44.98	74.0	29.02	Peak	21.00	100	Vertical	Pass
1**	1333.500	33.37	54.0	20.63	AV	21.00	100	Vertical	Pass
2	2401.900	96.96	--	--	Peak	112.00	200	Vertical	N/A
2**	2401.900	95.02	--	--	AV	112.00	200	Vertical	N/A
3	4804.000	51.04	74.0	22.96	Peak	74.00	200	Vertical	Pass
3**	4804.000	47.34	54.0	6.66	AV	74.00	200	Vertical	Pass
4	6955.600	50.77	74.0	23.23	Peak	274.00	200	Vertical	Pass
4**	6955.600	41.50	54.0	12.50	AV	274.00	200	Vertical	Pass
5	9607.912	52.18	74.0	21.82	Peak	312.00	400	Vertical	Pass
5**	9607.912	48.68	54.0	5.32	AV	312.00	400	Vertical	Pass
6	15807.337	51.43	74.0	22.57	Peak	306.00	300	Vertical	Pass
6**	15807.337	41.88	54.0	12.12	AV	306.00	300	Vertical	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

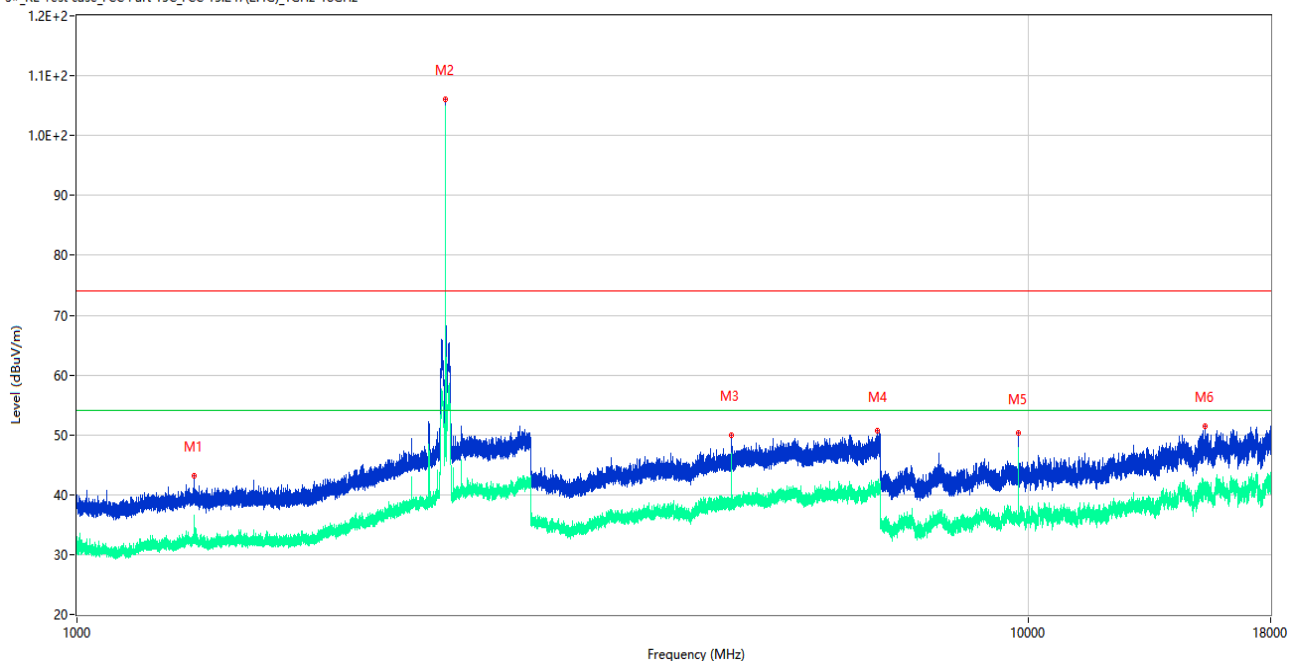

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.800	43.12	74.0	30.88	Peak	158.00	100	Horizontal	Pass
1**	1327.800	33.79	54.0	20.21	AV	158.00	100	Horizontal	Pass
2	2441.100	106.03	--	--	Peak	63.00	200	Horizontal	N/A
2**	2441.100	104.88	--	--	AV	63.00	200	Horizontal	N/A
3	4882.200	49.88	74.0	24.12	Peak	86.00	100	Horizontal	Pass
3**	4882.200	46.96	54.0	7.04	AV	86.00	100	Horizontal	Pass
4	6951.200	50.65	74.0	23.35	Peak	163.00	100	Horizontal	Pass
4**	6951.200	41.33	54.0	12.67	AV	163.00	100	Horizontal	Pass
5	9764.025	50.36	74.0	23.64	Peak	20.00	300	Horizontal	Pass
5**	9764.025	47.19	54.0	6.81	AV	20.00	300	Horizontal	Pass
6	15341.924	51.41	74.0	22.59	Peak	225.00	200	Horizontal	Pass
6**	15341.924	41.40	54.0	12.60	AV	225.00	200	Horizontal	Pass

8-DPSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

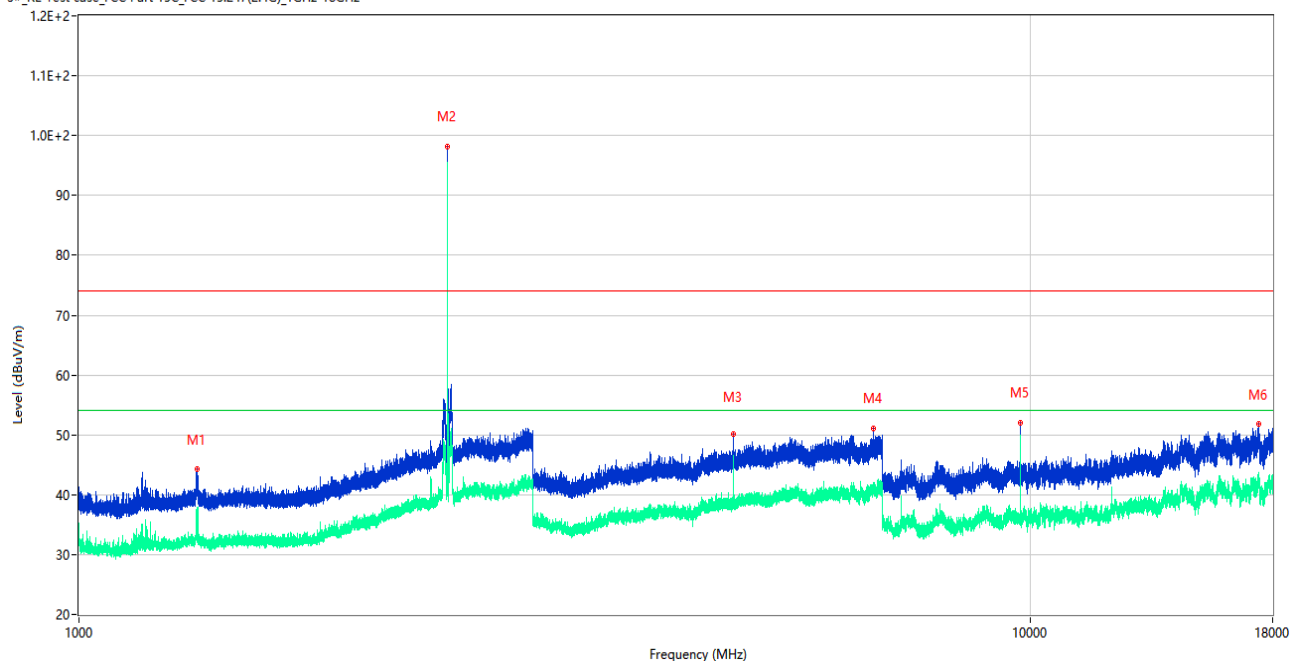

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.400	44.22	74.0	29.78	Peak	235.00	100	Vertical	Pass
1**	1331.400	33.71	54.0	20.29	AV	235.00	100	Vertical	Pass
2	2441.100	98.16	--	--	Peak	115.00	100	Vertical	N/A
2**	2441.100	95.13	--	--	AV	115.00	100	Vertical	N/A
3	4882.200	50.06	74.0	23.94	Peak	123.00	100	Vertical	Pass
3**	4882.200	46.57	54.0	7.43	AV	123.00	100	Vertical	Pass
4	6845.800	51.08	74.0	22.92	Peak	78.00	300	Vertical	Pass
4**	6845.800	41.12	54.0	12.88	AV	78.00	300	Vertical	Pass
5	9764.312	52.09	74.0	21.91	Peak	312.00	400	Vertical	Pass
5**	9764.312	50.01	54.0	3.99	AV	312.00	400	Vertical	Pass
6	17392.050	51.75	74.0	22.25	Peak	206.00	400	Vertical	Pass
6**	17392.050	42.36	54.0	11.64	AV	206.00	400	Vertical	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

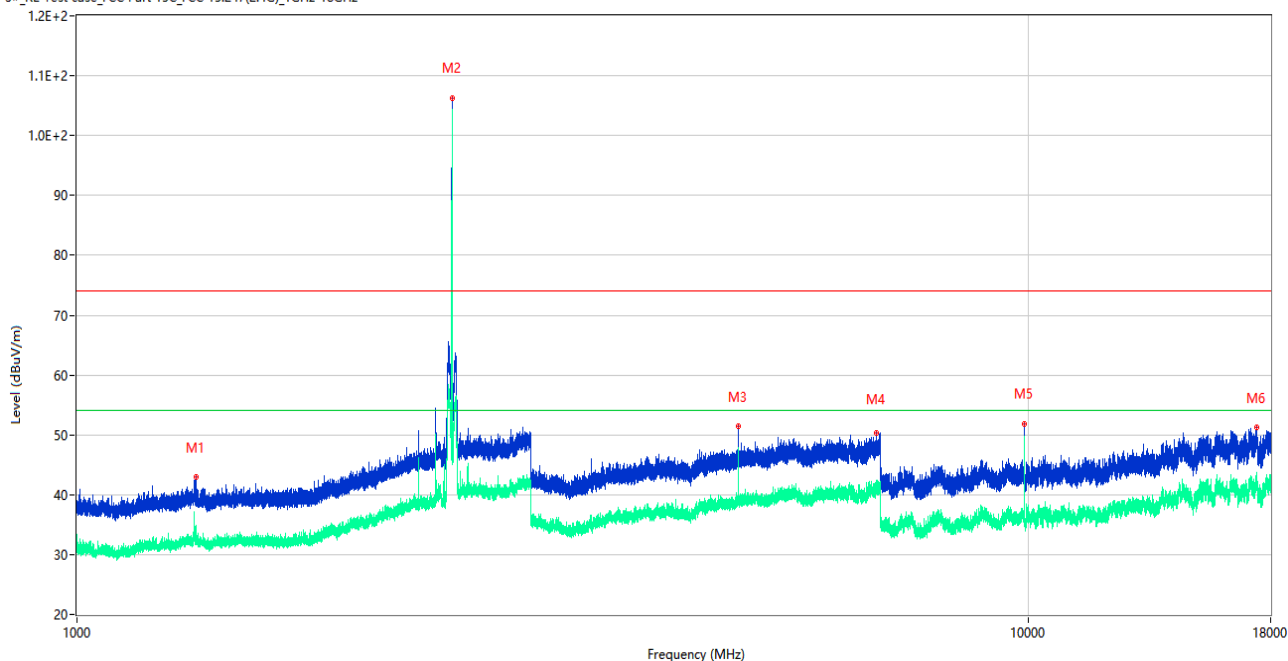

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1333.500	42.90	74.0	31.10	Peak	152.00	300	Horizontal	Pass
1**	1333.500	32.16	54.0	21.84	AV	152.00	300	Horizontal	Pass
2	2480.000	106.30	--	--	Peak	339.00	200	Horizontal	N/A
2**	2480.000	104.31	--	--	AV	339.00	200	Horizontal	N/A
3	4960.000	51.37	74.0	22.63	Peak	19.00	150	Horizontal	Pass
3**	4960.000	47.06	54.0	6.94	AV	19.00	150	Horizontal	Pass
4	6920.800	50.32	74.0	23.68	Peak	345.00	200	Horizontal	Pass
4**	6920.800	40.58	54.0	13.42	AV	345.00	200	Horizontal	Pass
5	9920.137	51.89	74.0	22.11	Peak	36.00	300	Horizontal	Pass
5**	9920.137	49.68	54.0	4.32	AV	36.00	300	Horizontal	Pass
6	17386.275	51.20	74.0	22.80	Peak	360.00	100	Horizontal	Pass
6**	17386.275	42.65	54.0	11.35	AV	360.00	100	Horizontal	Pass

8-DPSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

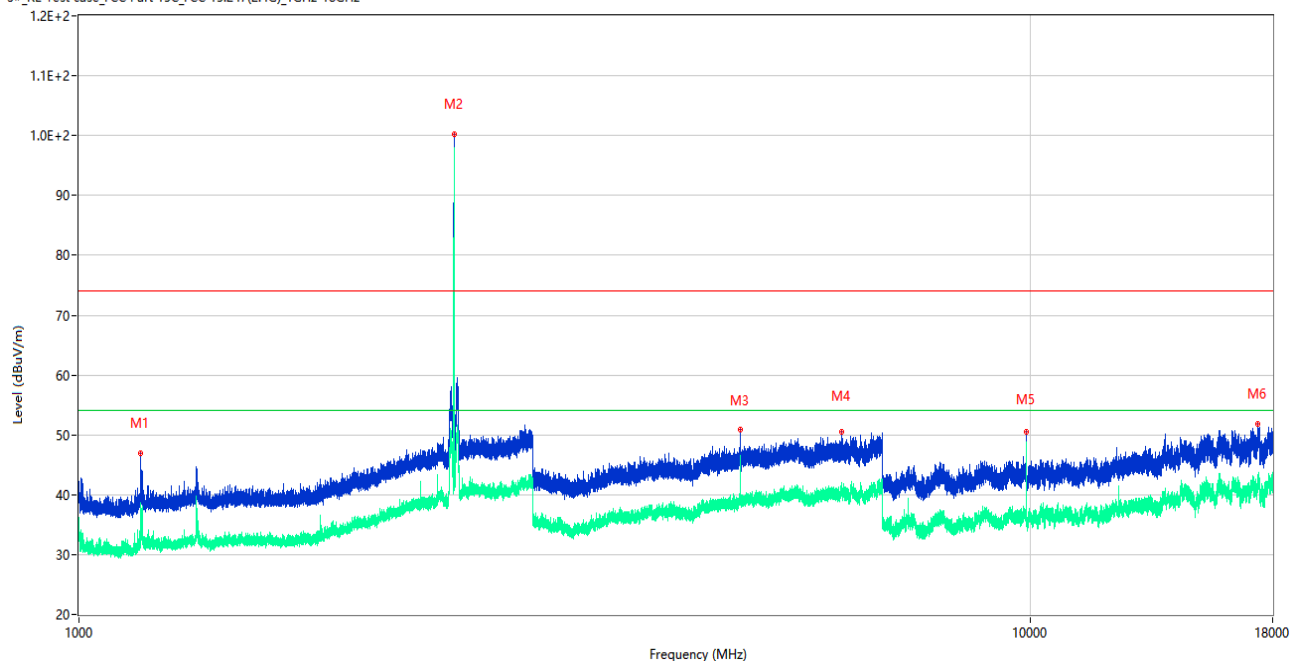

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1161.700	46.95	74.0	27.05	Peak	52.00	300	Vertical	Pass
1**	1161.700	34.17	54.0	19.83	AV	52.00	300	Vertical	Pass
2	2480.200	100.26	--	--	Peak	76.00	150	Vertical	N/A
2**	2480.200	97.12	--	--	AV	76.00	150	Vertical	N/A
3	4959.600	50.87	74.0	23.13	Peak	108.00	150	Vertical	Pass
3**	4959.600	43.45	54.0	10.55	AV	108.00	150	Vertical	Pass
4	6336.000	50.55	74.0	23.45	Peak	0.00	400	Vertical	Pass
4**	6336.000	41.98	54.0	12.02	AV	0.00	400	Vertical	Pass
5	9919.849	50.45	74.0	23.55	Peak	312.00	300	Vertical	Pass
5**	9919.849	46.58	54.0	7.42	AV	312.00	300	Vertical	Pass
6	17367.114	51.85	74.0	22.15	Peak	360.00	400	Vertical	Pass
6**	17367.114	42.31	54.0	11.69	AV	360.00	400	Vertical	Pass

A.9 Band Edge (Restricted-band band-edge)

Note¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.


Note³: According the ANSI C63.10-2020, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note⁴: The Level (dBuV/m) has been corrected by factor.

Note⁵: Both horizontal and vertical directions were pre tested, only the worst configuration has been reported in this report.

Test Data and Plots


GFSK LOW CHANNEL

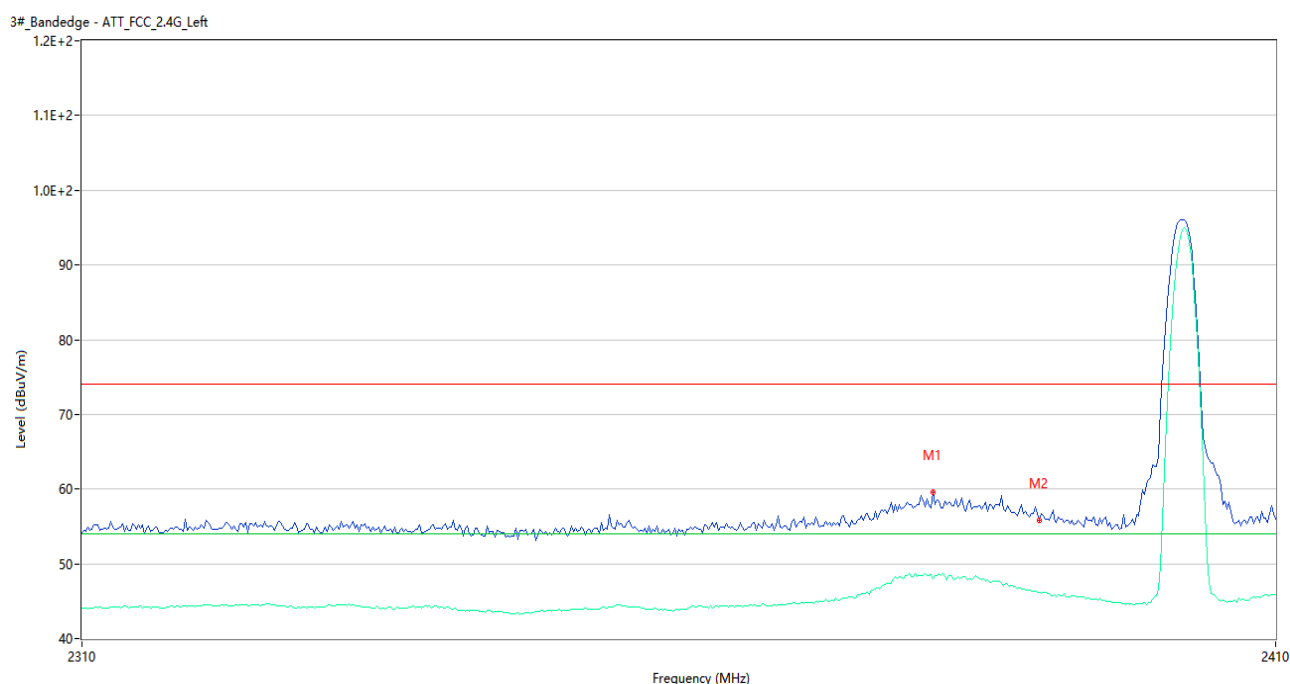

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2380.833	59.57	74.0	14.43	Peak	63.00	200	Horizontal	Pass
1**	2380.833	48.02	54.0	5.98	AV	63.00	200	Horizontal	Pass
2	2389.833	55.80	74.0	18.20	Peak	0.00	150	Horizontal	Pass
2**	2389.833	46.23	54.0	7.77	AV	0.00	150	Horizontal	Pass


GFSK HIGH CHANNEL

3#_Bandedge - ATT_FCC_2.4G_Right

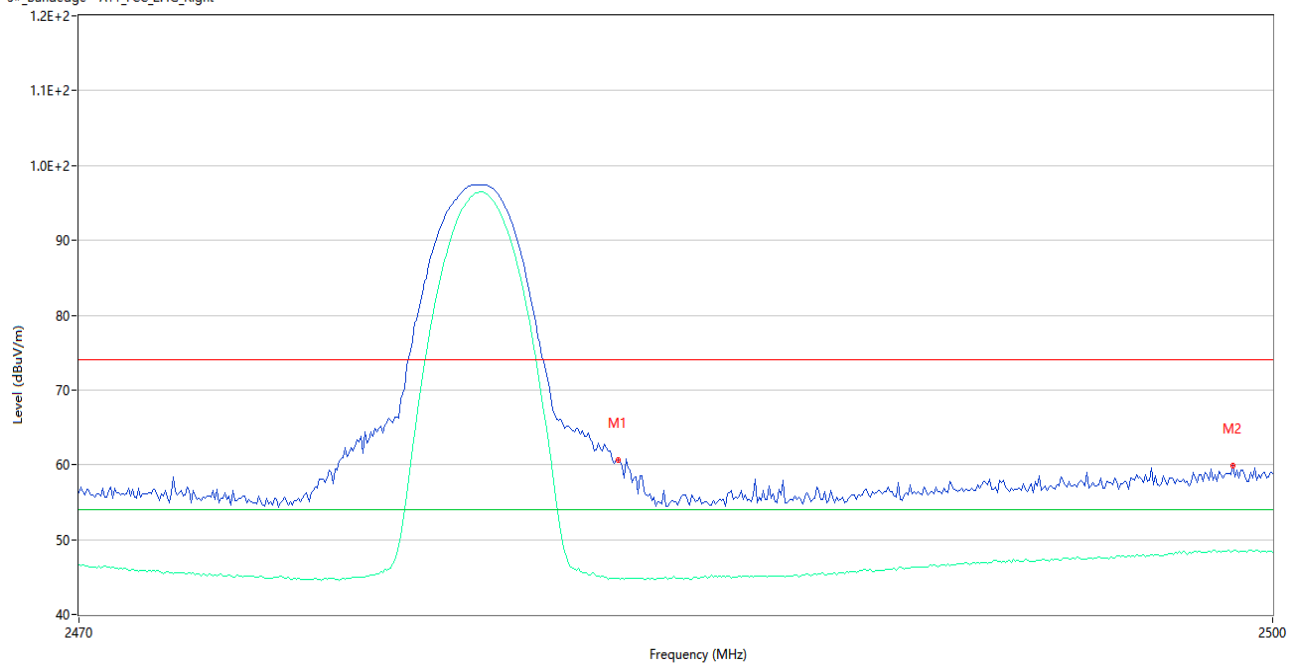

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	60.61	74.0	13.39	Peak	59.00	150	Horizontal	Pass
1**	2483.500	44.76	54.0	9.24	AV	59.00	150	Horizontal	Pass
2	2499.000	59.87	74.0	14.13	Peak	1.00	100	Horizontal	Pass
2**	2499.000	48.44	54.0	5.56	AV	1.00	100	Horizontal	Pass


8-DPSK LOW CHANNEL

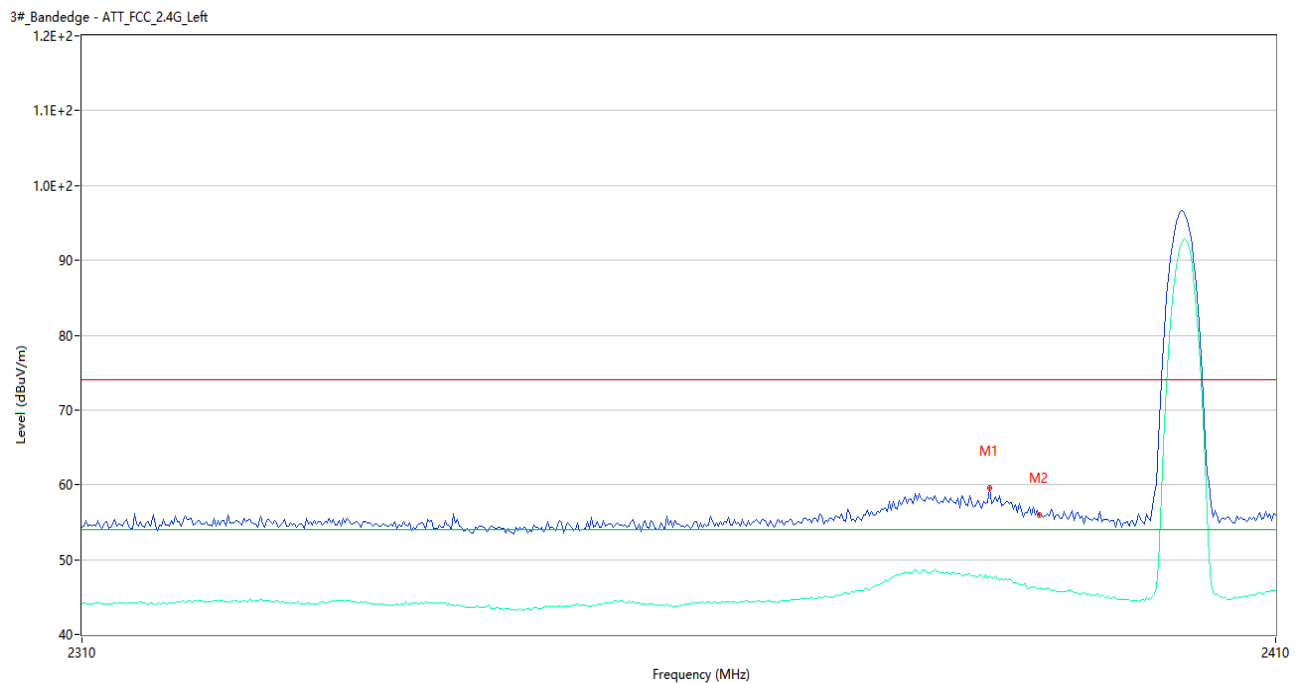

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2385.667	59.59	74.0	14.41	Peak	0.00	200	Horizontal	Pass
1**	2385.667	47.80	54.0	6.20	AV	0.00	200	Horizontal	Pass
2	2389.833	55.97	74.0	18.03	Peak	65.00	100	Horizontal	Pass
2**	2389.833	46.17	54.0	7.83	AV	65.00	100	Horizontal	Pass

8-DPSK HIGH CHANNEL

3#_Bandedge - ATT_FCC_2.4G_Right

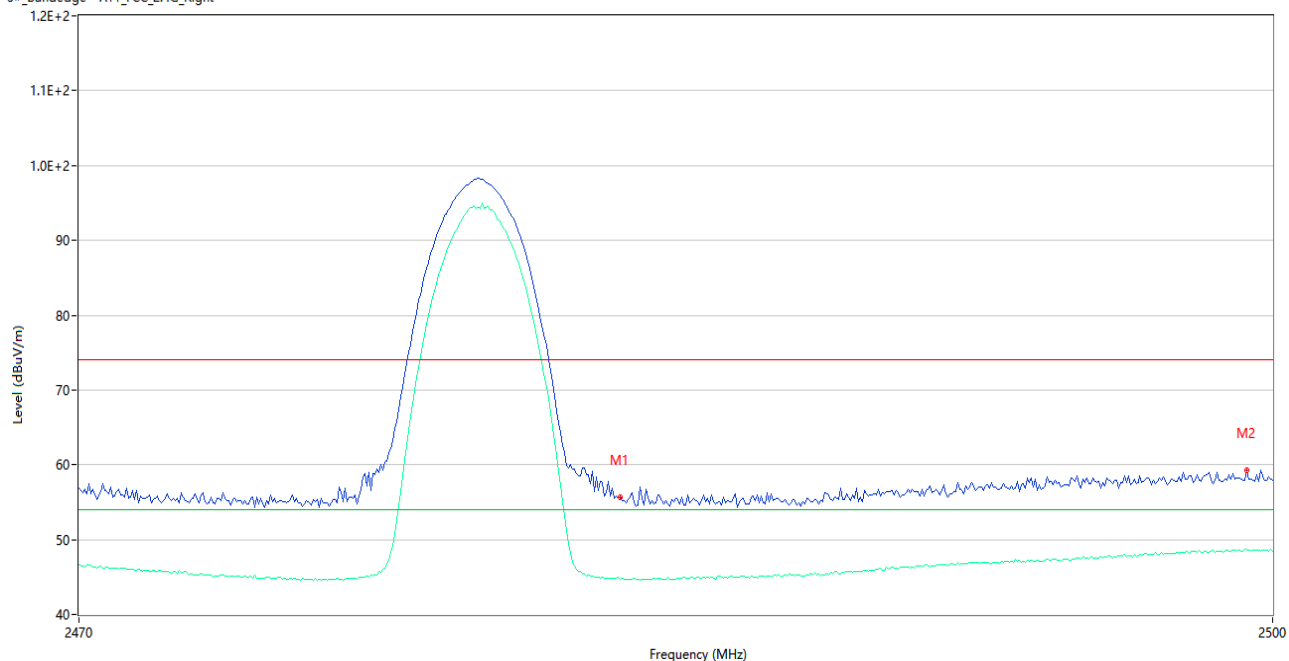

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.550	55.61	74.0	18.39	Peak	359.00	100	Horizontal	Pass
1**	2483.550	44.63	54.0	9.37	AV	359.00	100	Horizontal	Pass
2	2499.350	59.28	74.0	14.72	Peak	360.00	100	Horizontal	Pass
2**	2499.350	48.54	54.0	5.46	AV	360.00	100	Horizontal	Pass

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26010370-AR.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “Ti-EE26010370-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “Ti-EE26010370-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--