




SCR Assembly Instructions

This document contains the assembly instructions and outer dimensions of the Slim Card Reader (SCR).

The dimensions can be found on page 2.



1. Remove the protection from the foil.

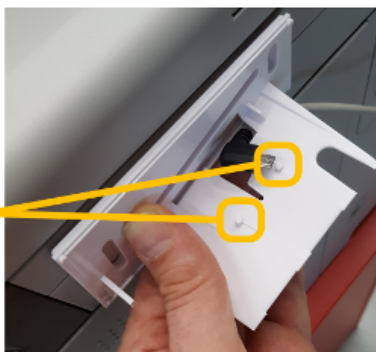

**Alignment
cylinders**

2. Stick the bracket base to the MFP. Make sure to feed the cable through the hole in the bracket.



Sticker area

3. Apply the double-sided tape to the reader. Make sure to stay within the serial sticker area!



4. Put the reader to the bracket base. Align the cylinders with the holes.



5. Click the cover on the base.

