

FCC PART 15.247

TEST REPORT

For

CROSBY LIMITED

Room 201B Floor 2, Lee Wai Commercial Building, 1-3 Hart Avenue, T.S.T., Kowloon, Hong Kong

FCC ID: 2AFBHSP82

Report Type: Original Report	Product Type: Bluetooth Speaker
Test Engineer: Gavin Xu	<i>Gavin Xu</i>
Report Number: RDG160506801-00	
Report Date: 2016-06-10	
Reviewed By: Dean Liu RF Engineer	<i>Dean Liu</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS.....	7
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT.....	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY.....	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	11
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	17
APPLICABLE STANDARD	17
MEASUREMENT UNCERTAINTY.....	17
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	19
TEST RESULTS SUMMARY	19
TEST DATA	19
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	41
APPLICABLE STANDARD	41
TEST PROCEDURE	41
TEST EQUIPMENT LIST AND DETAILS.....	41
TEST DATA	41
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST EQUIPMENT LIST AND DETAILS.....	57
TEST DATA	57
FCC §15.247(d) - BAND EDGES TESTING	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST EQUIPMENT LIST AND DETAILS.....	63
TEST DATA	64

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *CROSBY LIMITED*'s product, model number: *LI-S460BT (FCC ID: 2AFBHSP82)* (the "EUT") in this report was a *Bluetooth Speaker*, which was measured approximately: 20.0 cm (L) x 24.7 cm (W) x 32.5 cm (H), rated input voltage: AC 120 V/60 Hz, DC9V from adapter or DC 9V from battery.

All measurement and test data in this report was gathered from production sample serial number: 160506801 (Assigned by BACL, Dongguan). The EUT was received on 2016-05-10.

Objective

This report is prepared on behalf of *CROSBY LIMITED* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software 'AppoTech RF Control Kit' was used during testing, the system configured maximum output power as default setting. The software is only for changing channel and modes.

Equipment Modifications

No modification was made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
KUANTEN	AC Adapter	SG401	N/A

External Cable


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.0	Adapter	EUT

Block Diagram of Test Setup

Adapter mode:

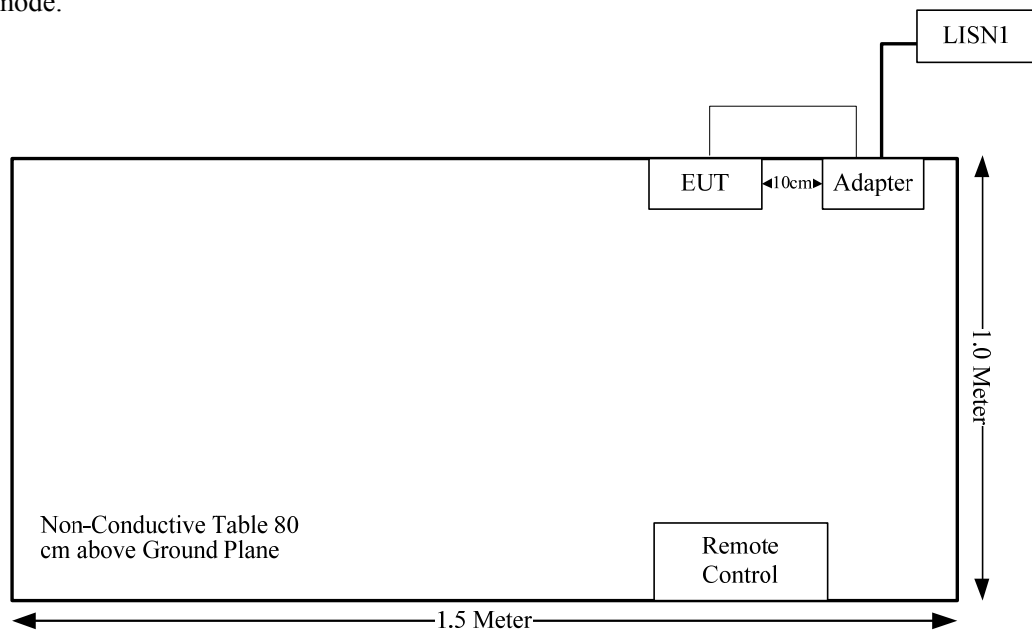

AC mode:

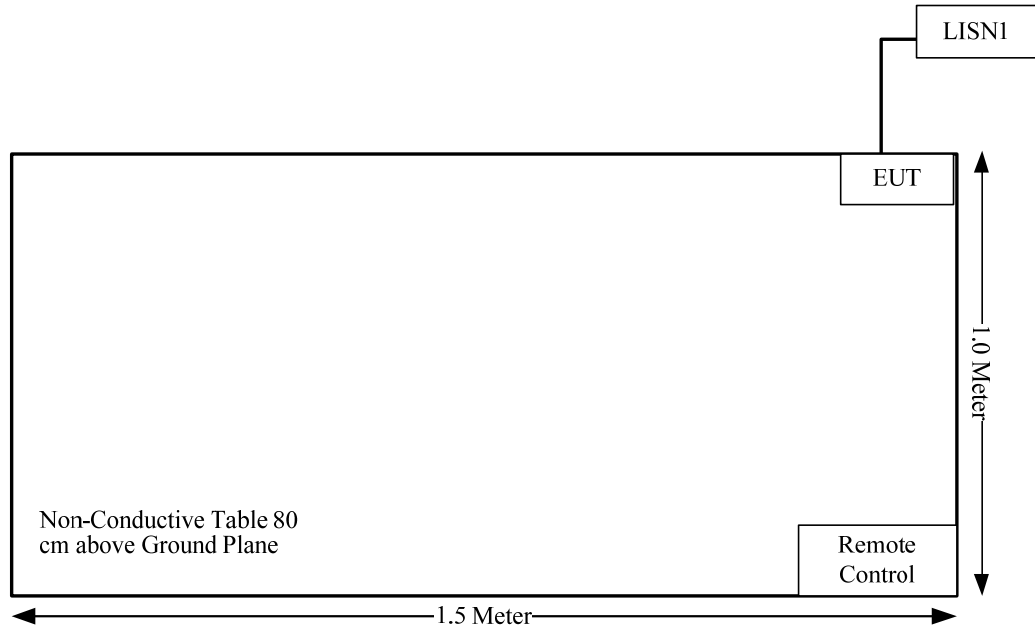

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The tune-up power is 4.0+/-1dBm, so tune-up including is 5.0 dBm (3.16 mW). That declared by manufacturer.

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 3.16/5 \cdot (\sqrt{2.480}) = 1.0 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for buletooth and the antenna gain is 1 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup



Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-10-20	2016-10-20
R&S	L.I.S.N	ESH2-Z5	892107/021	2015-06-09	2016-06-09
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2016-05-06	2017-05-06
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

5.0 dB at 0.378019 MHz in the **Line** conducted mode

Test Data**Environmental Conditions**


Temperature:	27.5°C
Relative Humidity:	54%
ATM Pressure:	100.6 kPa

The testing was performed by Gavin Xu on 2016-05-16.

Test Mode: AC mode


AC120 V, 60 Hz

Line:

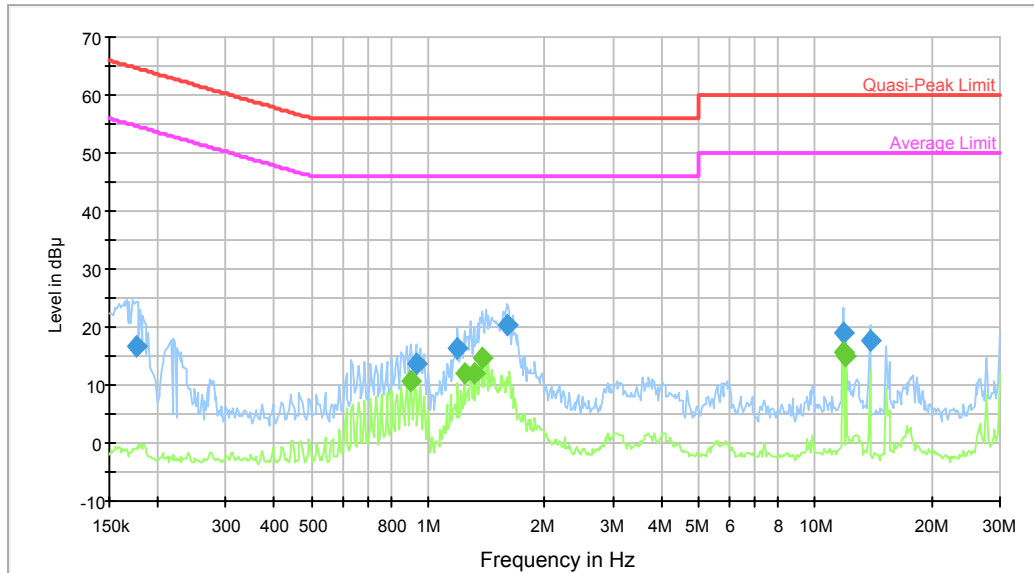

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.175915	16.8	9.000	L1	10.1	47.9	64.7	Compliance
0.930151	13.7	9.000	L1	10.4	42.3	56.0	Compliance
1.190776	16.3	9.000	L1	10.4	39.7	56.0	Compliance
1.599078	20.4	9.000	L1	10.4	35.6	56.0	Compliance
11.815800	19.1	9.000	L1	10.6	40.9	60.0	Compliance
13.857146	17.7	9.000	L1	10.6	42.3	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.900972	10.6	9.000	L1	10.4	35.4	46.0	Compliance
1.239175	12.0	9.000	L1	10.4	34.0	46.0	Compliance
1.310256	12.0	9.000	L1	10.4	34.0	46.0	Compliance
1.385415	14.5	9.000	L1	10.4	31.5	46.0	Compliance
11.815800	15.7	9.000	L1	10.6	34.3	50.0	Compliance
12.005609	15.1	9.000	L1	10.6	34.9	50.0	Compliance

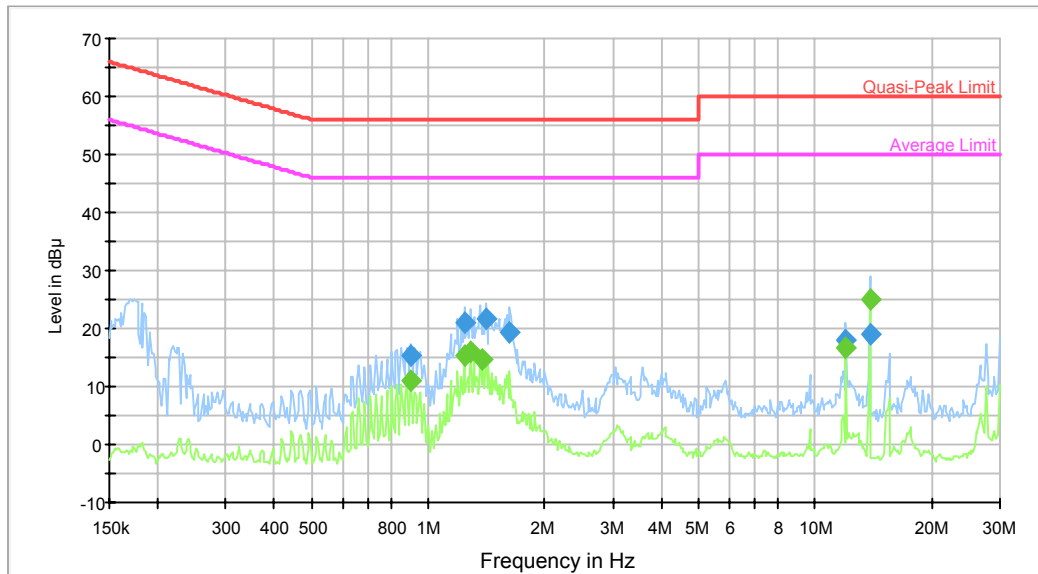Neutral:


Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.900972	15.5	9.000	N	10.4	40.5	56.0	Compliance
1.239175	20.9	9.000	N	10.4	35.1	56.0	Compliance
1.407671	21.7	9.000	N	10.4	34.3	56.0	Compliance
1.624765	19.3	9.000	N	10.4	36.7	56.0	Compliance
12.005609	18.1	9.000	N	10.6	41.9	60.0	Compliance
13.857146	18.9	9.000	N	10.6	41.1	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.900972	10.8	9.000	N	10.4	35.2	46.0	Compliance
1.239175	15.2	9.000	N	10.4	30.8	46.0	Compliance
1.289541	16.0	9.000	N	10.4	30.0	46.0	Compliance
1.385415	14.6	9.000	N	10.4	31.4	46.0	Compliance
12.005609	16.8	9.000	N	10.6	33.2	50.0	Compliance
13.857146	25.0	9.000	N	10.6	25.0	50.0	Compliance

Test Mode: Adapter mode


AC120 V, 60 Hz

Line:

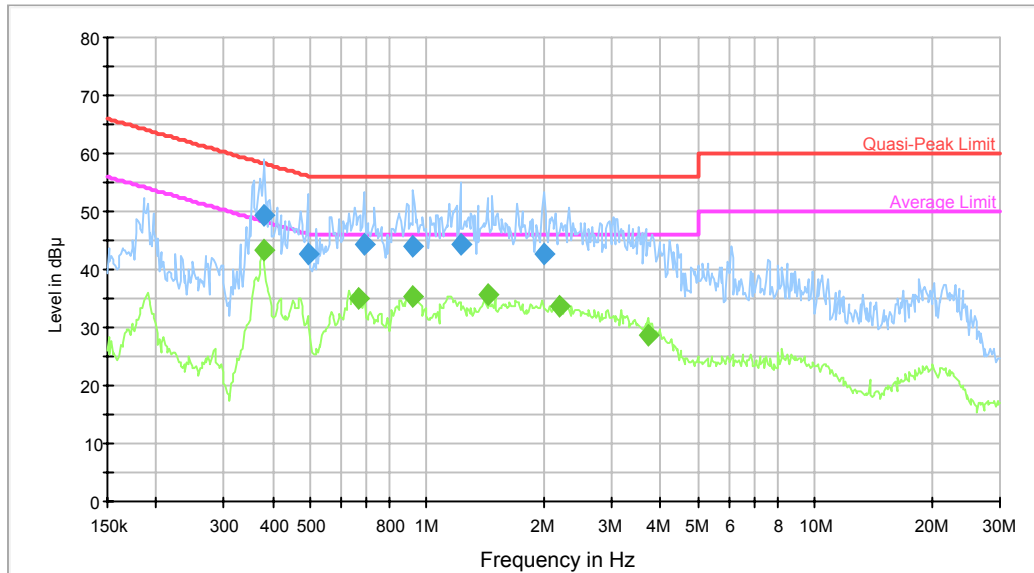

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.381043	49.4	9.000	L1	10.2	8.9	58.3	Compliance
0.491712	42.6	9.000	L1	10.1	13.5	56.1	Compliance
0.687153	44.3	9.000	L1	10.4	11.7	56.0	Compliance
0.922769	44.1	9.000	L1	10.4	11.9	56.0	Compliance
1.219583	44.4	9.000	L1	10.4	11.6	56.0	Compliance
1.998778	42.8	9.000	L1	10.4	13.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.378019	43.3	9.000	L1	10.2	5.0	48.3	Compliance
0.665597	35.2	9.000	L1	10.4	10.8	46.0	Compliance
0.922769	35.4	9.000	L1	10.4	10.6	46.0	Compliance
1.441726	35.5	9.000	L1	10.4	10.5	46.0	Compliance
2.199332	33.6	9.000	L1	10.4	12.4	46.0	Compliance
3.721226	28.7	9.000	L1	10.6	17.3	46.0	Compliance

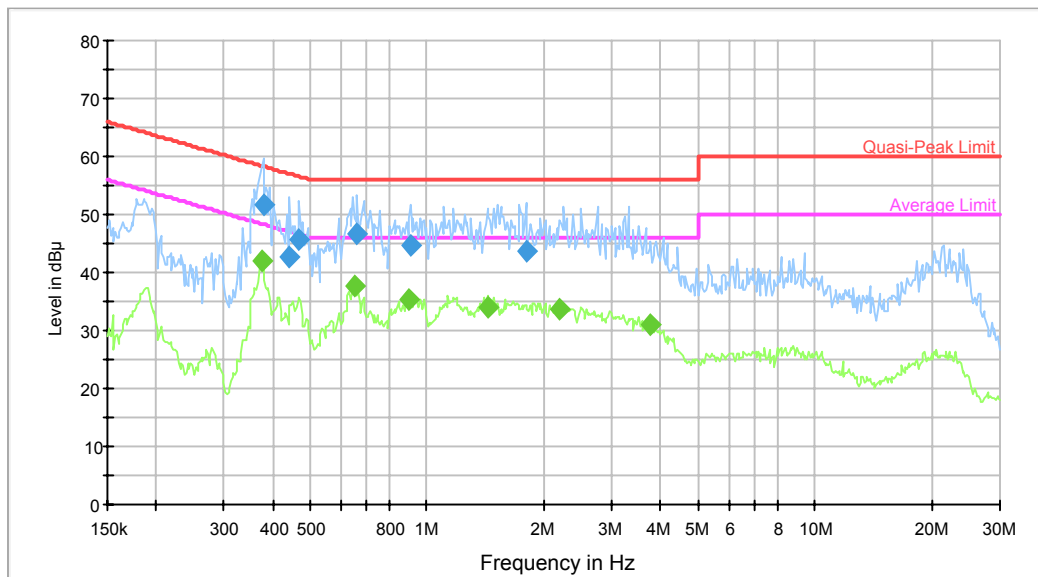Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.378019	51.8	9.000	N	10.2	6.5	58.3	Compliance
0.443327	42.8	9.000	N	10.1	14.2	57.0	Compliance
0.468757	45.8	9.000	N	10.1	10.7	56.5	Compliance
0.660314	46.5	9.000	N	10.4	9.5	56.0	Compliance
0.908180	44.8	9.000	N	10.4	11.2	56.0	Compliance
1.802095	43.5	9.000	N	10.4	12.5	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.375019	41.9	9.000	N	10.2	6.5	48.4	Compliance
0.649874	37.7	9.000	N	10.3	8.3	46.0	Compliance
0.900972	35.3	9.000	N	10.4	10.7	46.0	Compliance
1.430284	34.0	9.000	N	10.4	12.0	46.0	Compliance
2.199332	33.7	9.000	N	10.4	12.3	46.0	Compliance
3.781003	31.2	9.000	N	10.6	14.8	46.0	Compliance

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB


Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

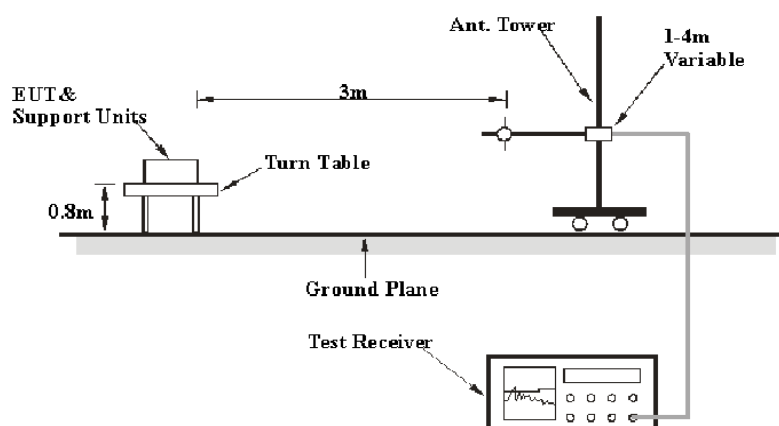

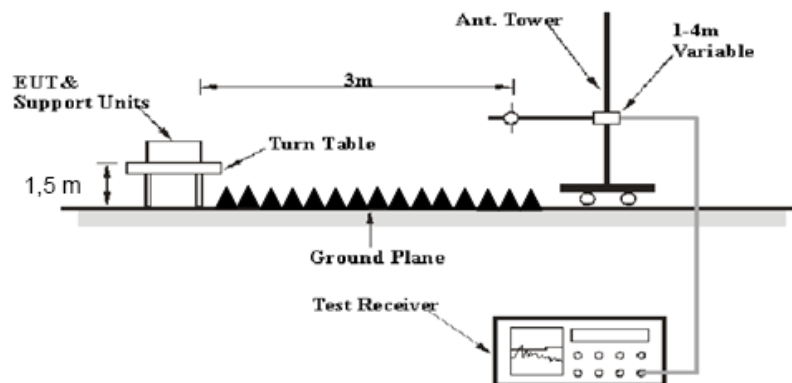Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-18
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247.


Test Data**Environmental Conditions**

Temperature:	25.4°C
Relative Humidity:	62%
ATM Pressure:	100.8kPa


* The testing was performed by Gavin Xu on 2016-05-20.

Test Mode: Transmitting

Note: AC mode was the worst, please refer to the below tables and plots:

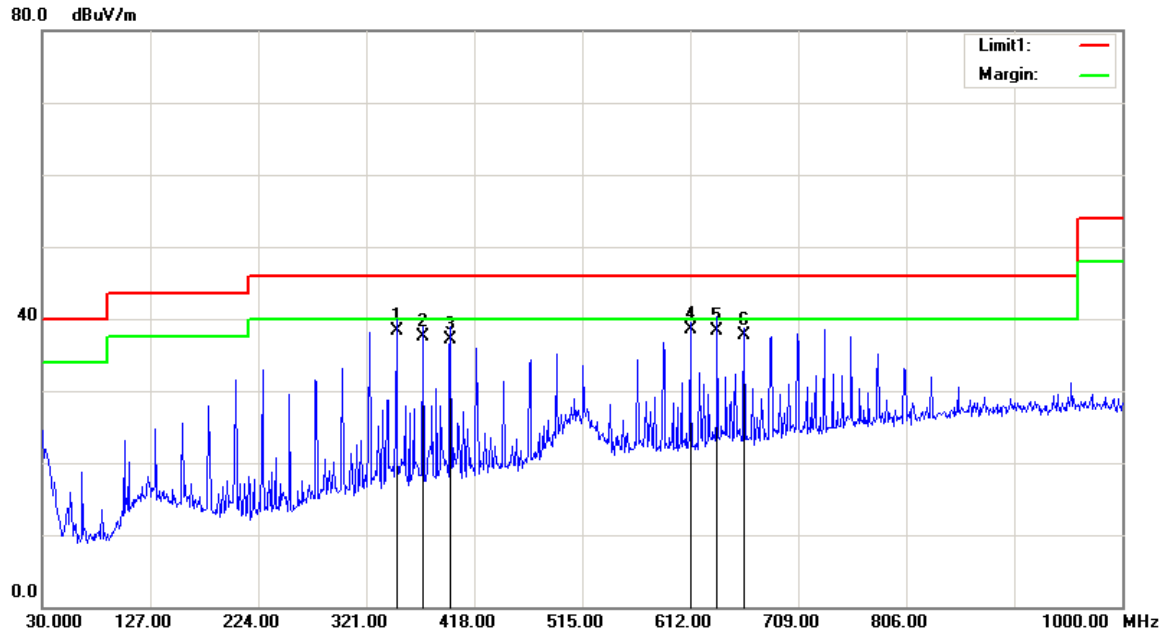1)Below 1GHz:**Horizontal:**

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
348.1600	43.15	QP	-4.75	38.40	46.00	7.60
371.4400	41.98	QP	-4.48	37.50	46.00	8.50
396.6600	40.78	QP	-3.68	37.10	46.00	8.90
612.0000	39.24	QP	-0.64	38.60	46.00	7.40
636.2500	37.90	QP	0.50	38.40	46.00	7.60
660.5000	37.48	QP	0.32	37.80	46.00	8.20

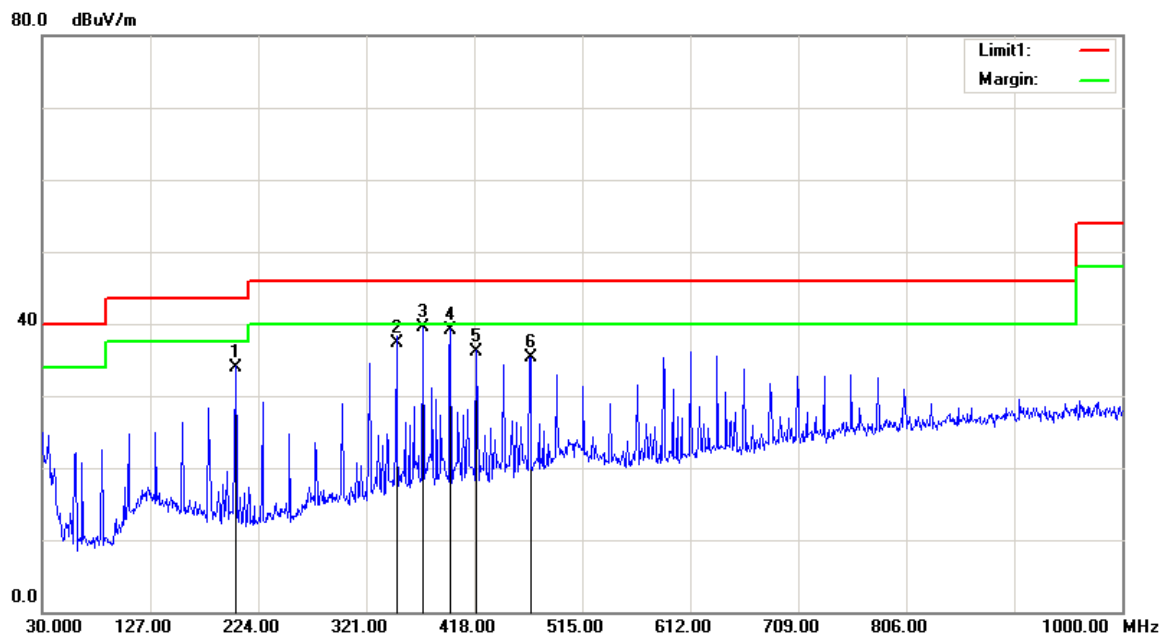Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
203.6300	41.74	QP	-7.74	34.00	43.50	9.50
348.1600	42.15	QP	-4.75	37.40	46.00	8.60
371.4400	43.98	QP	-4.48	39.50	46.00	6.50
396.6600	42.88	QP	-3.68	39.20	46.00	6.80
419.9400	39.45	QP	-3.25	36.20	46.00	9.80
468.4400	37.06	QP	-1.76	35.30	46.00	10.70

2)Above 1GHz*BDR Mode (GFSK):*

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	FCC 15.247	
	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	68.61	PK	H	25.65	3.66	0.00	97.92	N/A	N/A
2402	58.35	AV	H	25.65	3.66	0.00	87.66	N/A	N/A
2402	65.12	PK	V	25.65	3.66	0.00	94.43	N/A	N/A
2402	55.70	AV	V	25.65	3.66	0.00	85.01	N/A	N/A
2390	27.00	PK	H	25.61	3.63	0.00	56.24	74.00	17.76
2390	14.31	AV	H	25.61	3.63	0.00	43.55	54.00	10.45
4804	48.71	PK	H	30.59	5.06	27.41	56.95	74.00	17.05
4804	36.95	AV	H	30.59	5.06	27.41	45.19	54.00	8.81
7206	42.39	PK	H	34.09	6.61	25.91	57.18	74.00	16.82
7206	30.41	AV	H	34.09	6.61	25.91	45.20	54.00	8.80
9608	32.65	PK	H	36.74	8.53	27.55	50.37	74.00	23.63
9608	20.50	AV	H	36.74	8.53	27.55	38.22	54.00	15.78
2957	37.17	PK	H	27.09	6.64	27.54	43.36	74.00	30.64
2957	25.32	AV	H	27.09	6.64	27.54	31.51	54.00	22.49
Middle Channel: 2441 MHz									
2441	68.18	PK	H	25.75	3.76	0.00	97.69	N/A	N/A
2441	58.16	AV	H	25.75	3.76	0.00	87.67	N/A	N/A
2441	65.72	PK	V	25.75	3.76	0.00	95.23	N/A	N/A
2441	55.00	AV	V	25.75	3.76	0.00	84.51	N/A	N/A
4882	48.35	PK	H	30.79	5.19	27.42	56.91	74.00	17.09
4882	36.96	AV	H	30.79	5.19	27.42	45.52	54.00	8.48
7323	42.21	PK	H	34.38	6.75	25.88	57.46	74.00	16.54
7323	30.39	AV	H	34.38	6.75	25.88	45.64	54.00	8.36
9764	32.50	PK	H	36.81	8.62	27.20	50.73	74.00	23.27
9764	20.71	AV	H	36.81	8.62	27.20	38.94	54.00	15.06
2957	37.54	PK	H	27.09	6.64	27.54	43.73	74.00	30.27
2957	25.64	AV	H	27.09	6.64	27.54	31.83	54.00	22.17
2169	35.83	PK	H	25.04	3.22	27.32	36.77	74.00	37.23
2169	23.69	AV	H	25.04	3.22	27.32	24.63	54.00	29.37
High Channel: 2480 MHz									
2480	68.04	PK	H	25.85	3.68	0.00	97.57	N/A	N/A
2480	58.17	AV	H	25.85	3.68	0.00	87.70	N/A	N/A
2480	65.09	PK	V	25.85	3.68	0.00	94.62	N/A	N/A
2480	55.45	AV	V	25.85	3.68	0.00	84.98	N/A	N/A
2483.5	28.22	PK	H	25.86	3.67	0.00	57.75	74.00	16.25
2483.5	14.59	AV	H	25.86	3.67	0.00	44.12	54.00	9.88
4960	48.63	PK	H	31.00	5.34	27.43	57.54	74.00	16.46
4960	36.11	AV	H	31.00	5.34	27.43	45.02	54.00	8.98
7440	42.59	PK	H	34.66	6.89	25.97	58.17	74.00	15.83
7440	30.85	AV	H	34.66	6.89	25.97	46.43	54.00	7.57
9920	32.62	PK	H	36.87	8.71	26.66	51.54	74.00	22.46
9920	20.64	AV	H	36.87	8.71	26.66	39.56	54.00	14.44
2957	37.91	PK	H	27.09	6.64	27.54	44.10	74.00	29.90
2957	25.78	AV	H	27.09	6.64	27.54	31.97	54.00	22.03

EDR Mode ($\pi/4$ -DQPSK):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	68.88	PK	H	25.65	3.66	0.00	98.19	N/A	N/A
2402	58.57	AV	H	25.65	3.66	0.00	87.88	N/A	N/A
2402	66.63	PK	V	25.65	3.66	0.00	95.94	N/A	N/A
2402	56.49	AV	V	25.65	3.66	0.00	85.80	N/A	N/A
2390	28.03	PK	H	25.61	3.63	0.00	57.27	74.00	16.73
2390	14.17	AV	H	25.61	3.63	0.00	43.41	54.00	10.59
4804	48.43	PK	H	30.59	5.06	27.41	56.67	74.00	17.33
4804	36.75	AV	H	30.59	5.06	27.41	44.99	54.00	9.01
7206	42.03	PK	H	34.09	6.61	25.91	56.82	74.00	17.18
7206	30.14	AV	H	34.09	6.61	25.91	44.93	54.00	9.07
9608	32.26	PK	H	36.74	8.53	27.55	49.98	74.00	24.02
9608	20.55	AV	H	36.74	8.53	27.55	38.27	54.00	15.73
2957	37.67	PK	H	27.09	6.64	27.54	43.86	74.00	30.14
2957	25.82	AV	H	27.09	6.64	27.54	32.01	54.00	21.99
Middle Channel: 2441 MHz									
2441	68.12	PK	H	25.75	3.76	0.00	97.63	N/A	N/A
2441	58.47	AV	H	25.75	3.76	0.00	87.98	N/A	N/A
2441	66.95	PK	V	25.75	3.76	0.00	96.46	N/A	N/A
2441	56.91	AV	V	25.75	3.76	0.00	86.42	N/A	N/A
4882	48.69	PK	H	30.79	5.19	27.42	57.25	74.00	16.75
4882	36.33	AV	H	30.79	5.19	27.42	44.89	54.00	9.11
7323	41.57	PK	H	34.38	6.75	25.88	56.82	74.00	17.18
7323	30.01	AV	H	34.38	6.75	25.88	45.26	54.00	8.74
9764	32.64	PK	H	36.81	8.62	27.20	50.87	74.00	23.13
9764	20.72	AV	H	36.81	8.62	27.20	38.95	54.00	15.05
2957	37.00	PK	H	27.09	6.64	27.54	43.19	74.00	30.81
2957	25.27	AV	H	27.09	6.64	27.54	31.46	54.00	22.54
2169	35.94	PK	H	25.04	3.22	27.32	36.88	74.00	37.12
2169	23.81	AV	H	25.04	3.22	27.32	24.75	54.00	29.25
High Channel: 2480 MHz									
2480	68.47	PK	H	25.85	3.68	0.00	98.00	N/A	N/A
2480	58.67	AV	H	25.85	3.68	0.00	88.20	N/A	N/A
2480	66.18	PK	V	25.85	3.68	0.00	95.71	N/A	N/A
2480	56.24	AV	V	25.85	3.68	0.00	85.77	N/A	N/A
2483.5	28.19	PK	H	25.86	3.67	0.00	57.72	74.00	16.28
2483.5	14.67	AV	H	25.86	3.67	0.00	44.20	54.00	9.80
4960	47.95	PK	H	31.00	5.34	27.43	56.86	74.00	17.14
4960	36.25	AV	H	31.00	5.34	27.43	45.16	54.00	8.84
7440	42.29	PK	H	34.66	6.89	25.97	57.87	74.00	16.13
7440	30.83	AV	H	34.66	6.89	25.97	46.41	54.00	7.59
9920	32.26	PK	H	36.87	8.71	26.66	51.18	74.00	22.82
9920	20.75	AV	H	36.87	8.71	26.66	39.67	54.00	14.33
2957	37.81	PK	H	27.09	6.64	27.54	44.00	74.00	30.00
2957	25.94	AV	H	27.09	6.64	27.54	32.13	54.00	21.87

EDR Mode (8-DPSK):

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.247	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 2402 MHz									
2402	68.75	PK	H	25.65	3.66	0.00	98.06	N/A	N/A
2402	56.94	AV	H	25.65	3.66	0.00	86.25	N/A	N/A
2402	66.81	PK	V	25.65	3.66	0.00	96.12	N/A	N/A
2402	54.89	AV	V	25.65	3.66	0.00	84.20	N/A	N/A
2390	27.83	PK	H	25.61	3.63	0.00	57.07	74.00	16.93
2390	14.55	AV	H	25.61	3.63	0.00	43.79	54.00	10.21
4804	48.96	PK	H	30.59	5.06	27.41	57.20	74.00	16.80
4804	36.47	AV	H	30.59	5.06	27.41	44.71	54.00	9.29
7206	42.00	PK	H	34.09	6.61	25.91	56.79	74.00	17.21
7206	30.78	AV	H	34.09	6.61	25.91	45.57	54.00	8.43
9608	32.16	PK	H	36.74	8.53	27.55	49.88	74.00	24.12
9608	20.32	AV	H	36.74	8.53	27.55	38.04	54.00	15.96
2957	37.55	PK	H	27.09	6.64	27.54	43.74	74.00	30.26
2957	25.58	AV	H	27.09	6.64	27.54	31.77	54.00	22.23
Middle Channel: 2441 MHz									
2441	68.19	PK	H	25.75	3.76	0.00	97.70	N/A	N/A
2441	56.68	AV	H	25.75	3.76	0.00	86.19	N/A	N/A
2441	66.34	PK	V	25.75	3.76	0.00	95.85	N/A	N/A
2441	54.19	AV	V	25.75	3.76	0.00	83.70	N/A	N/A
4882	48.26	PK	H	30.79	5.19	27.42	56.82	74.00	17.18
4882	36.71	AV	H	30.79	5.19	27.42	45.27	54.00	8.73
7323	42.73	PK	H	34.38	6.75	25.88	57.98	74.00	16.02
7323	30.06	AV	H	34.38	6.75	25.88	45.31	54.00	8.69
9764	32.73	PK	H	36.81	8.62	27.20	50.96	74.00	23.04
9764	20.79	AV	H	36.81	8.62	27.20	39.02	54.00	14.98
2957	37.55	PK	H	27.09	6.64	27.54	43.74	74.00	30.26
2957	25.41	AV	H	27.09	6.64	27.54	31.60	54.00	22.40
2169	35.68	PK	H	25.04	3.22	27.32	36.62	74.00	37.38
2169	23.60	AV	H	25.04	3.22	27.32	24.54	54.00	29.46
High Channel: 2480 MHz									
2480	68.01	PK	H	25.85	3.68	0.00	97.54	N/A	N/A
2480	56.09	AV	H	25.85	3.68	0.00	85.62	N/A	N/A
2480	66.71	PK	V	25.85	3.68	0.00	96.24	N/A	N/A
2480	54.81	AV	V	25.85	3.68	0.00	84.34	N/A	N/A
2483.5	28.92	PK	H	25.86	3.67	0.00	58.45	74.00	15.55
2483.5	14.12	AV	H	25.86	3.67	0.00	43.65	54.00	10.35
4960	48.94	PK	H	31.00	5.34	27.43	57.85	74.00	16.15
4960	36.79	AV	H	31.00	5.34	27.43	45.70	54.00	8.30
7440	42.14	PK	H	34.66	6.89	25.97	57.72	74.00	16.28
7440	30.68	AV	H	34.66	6.89	25.97	46.26	54.00	7.74
9920	32.84	PK	H	36.87	8.71	26.66	51.76	74.00	22.24
9920	20.70	AV	H	36.87	8.71	26.66	39.62	54.00	14.38
2957	37.16	PK	H	27.09	6.64	27.54	43.35	74.00	30.65
2957	25.11	AV	H	27.09	6.64	27.54	31.30	54.00	22.70

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	51%
ATM Pressure:	100 kPa

* The testing was performed by Gavin Xu on 2016-06-07.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency	Channel Separation	Limit
		MHz	MHz	MHz
BDR (GFSK)	Low	2402	1.004	0.55
	Middle	2441	1.000	0.55
	High	2480	1.004	0.55
EDR ($\pi/4$ -DQPSK)	Low	2402	1.000	0.75
	Middle	2441	1.004	0.75
	High	2480	1.004	0.75
EDR Mode (8-DPSK)	Low	2402	1.004	0.77
	Middle	2441	1.000	0.77
	High	2480	1.004	0.77


Note: Limit = $(2/3) \times 20\text{dB bandwidth}$

BDR Mode (GFSK):

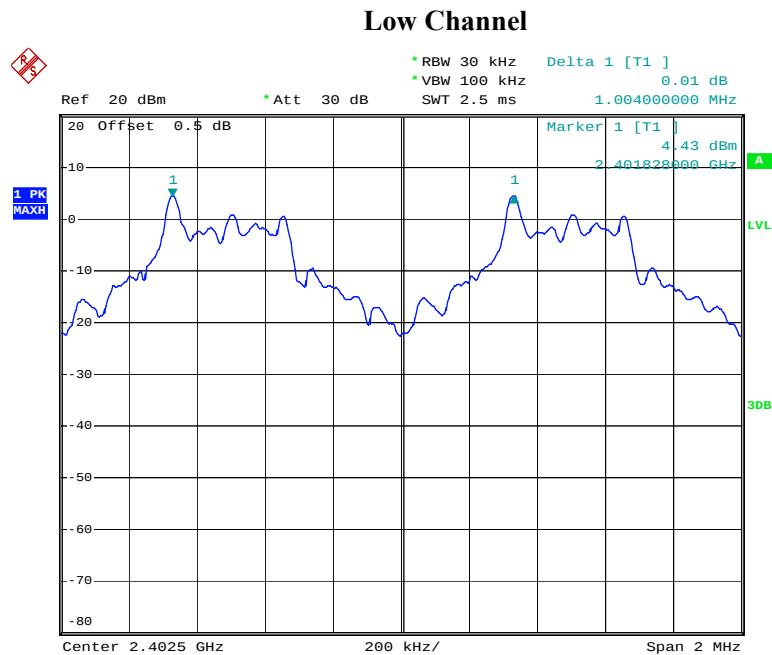


Date: 7.JUN.2016 18:54:58

Middle Channel

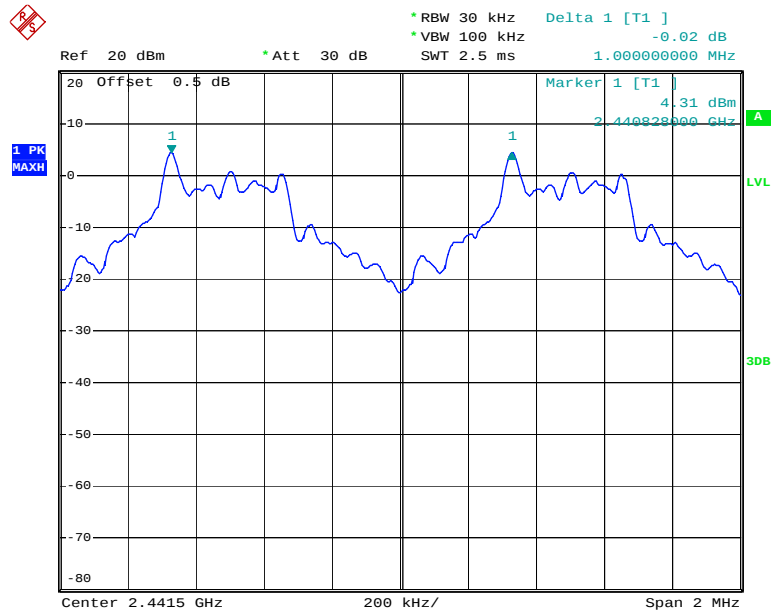

Date: 7.JUN.2016 18:56:36


High Channel

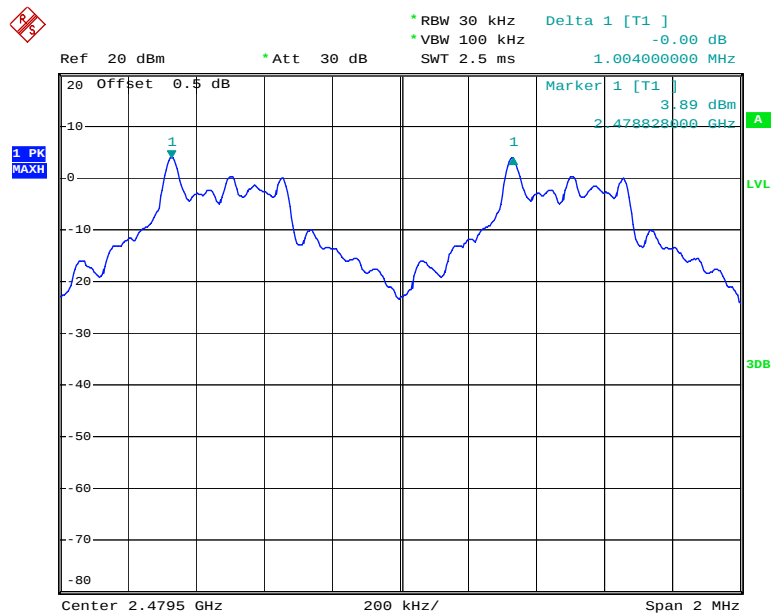

Date: 7.JUN.2016 18:58:03


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

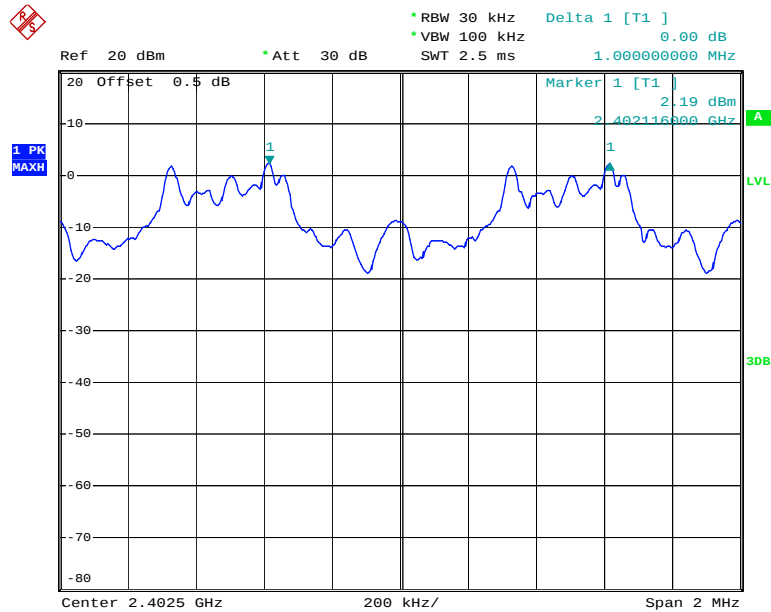


Date: 7.JUN.2016 18:53:47

Middle Channel

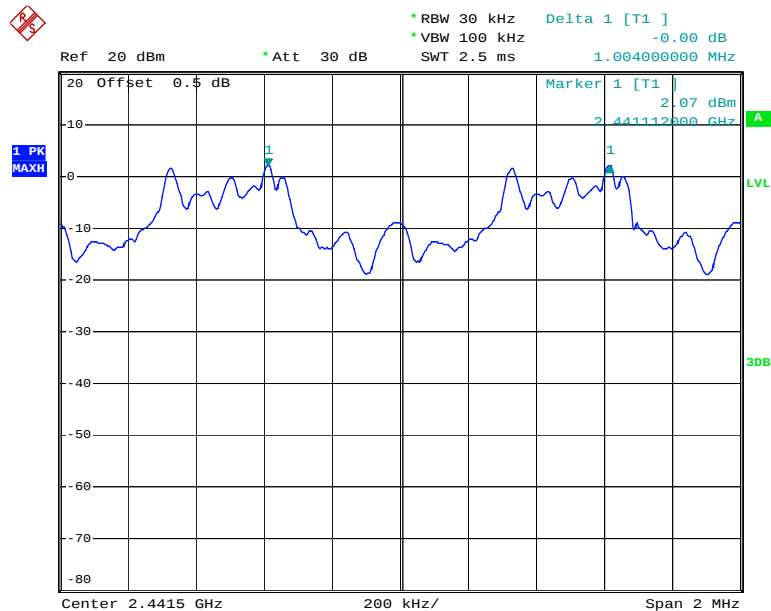

Date: 7.JUN.2016 18:52:37


High Channel

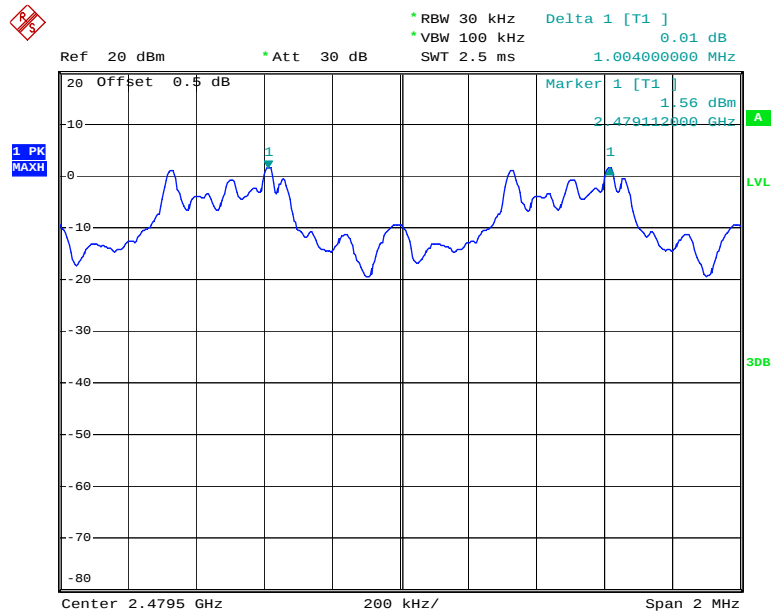

Date: 7.JUN.2016 18:51:27


EDR Mode (8-DPSK):

Low Channel

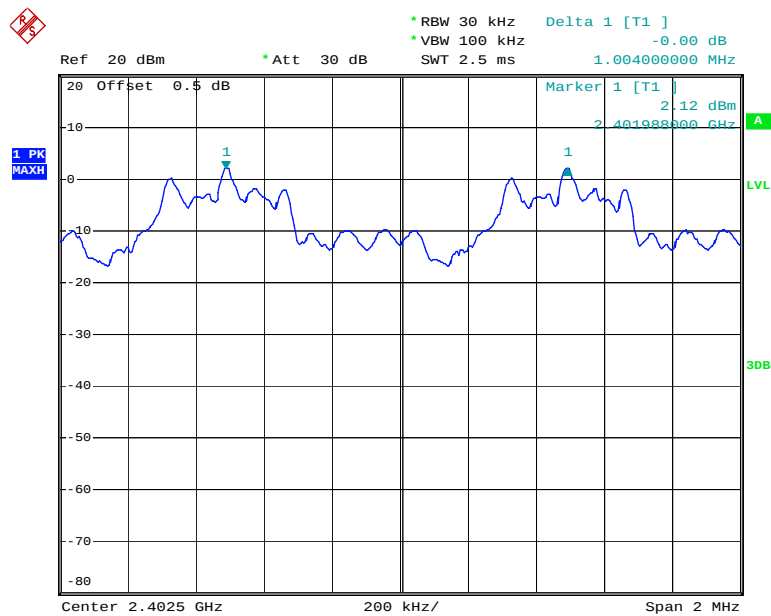


Date: 7.JUN.2016 18:47:01

Middle Channel

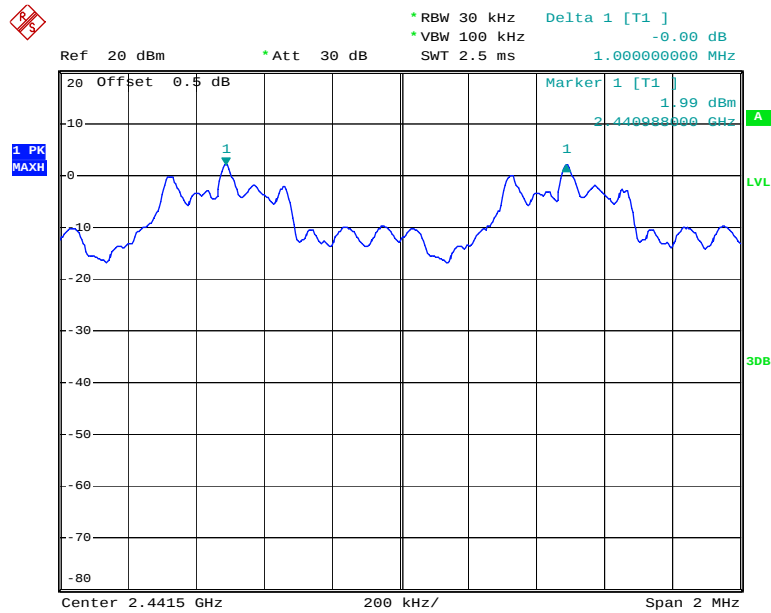

Date: 7.JUN.2016 18:48:59

High Channel

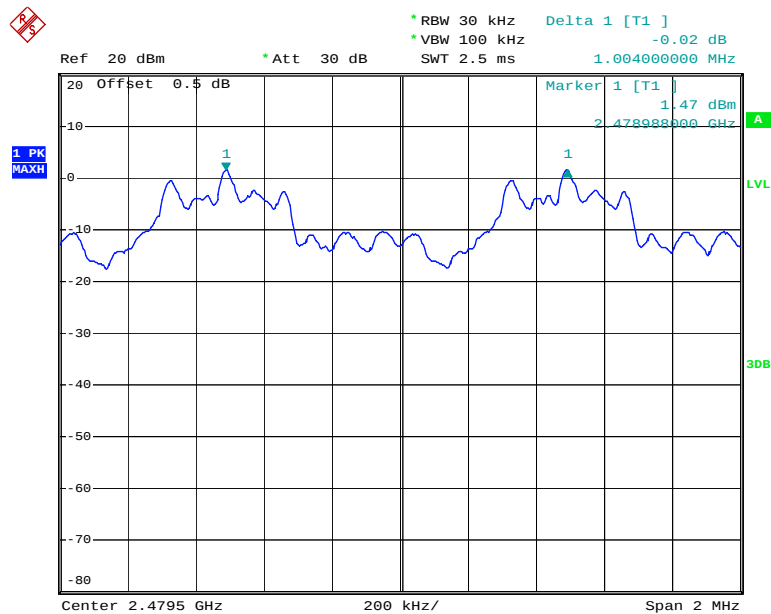

Date: 7.JUN.2016 18:50:12

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	51%
ATM Pressure:	100 kPa

* The testing was performed by Gavin Xu on 2016-06-07.


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.82
	Middle	2441	0.82
	High	2480	0.82
EDR Mode ($\pi/4$ -DQPSK):	Low	2402	1.12
	Middle	2441	1.12
	High	2480	1.12
EDR Mode (8-DPSK):	Low	2402	1.16
	Middle	2441	1.16
	High	2480	1.16

BDR Mode (GFSK):

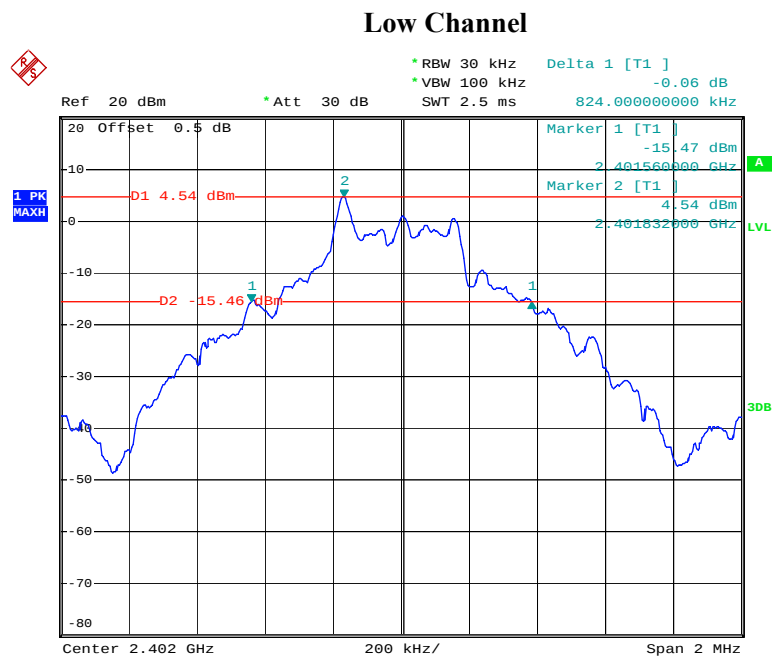


Date: 7.JUN.2016 18:34:35

Middle Channel

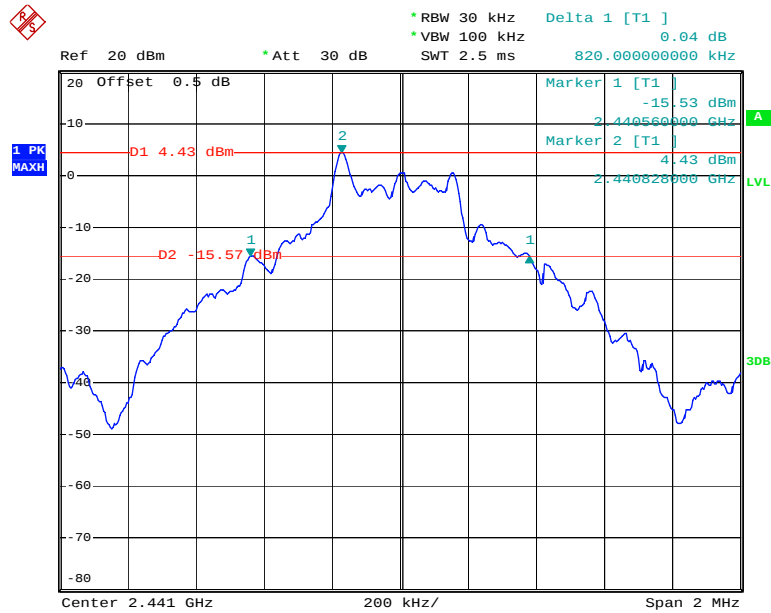

Date: 7.JUN.2016 18:33:41


High Channel

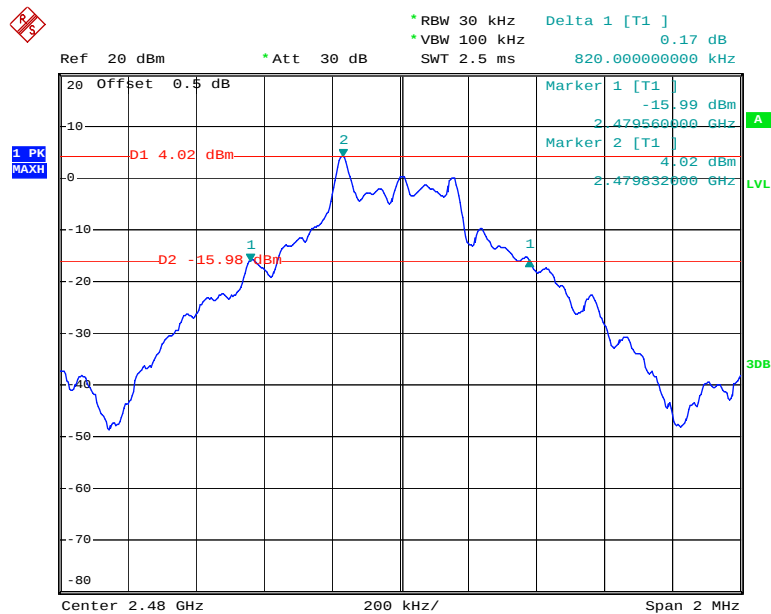

Date: 7.JUN.2016 18:32:08


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

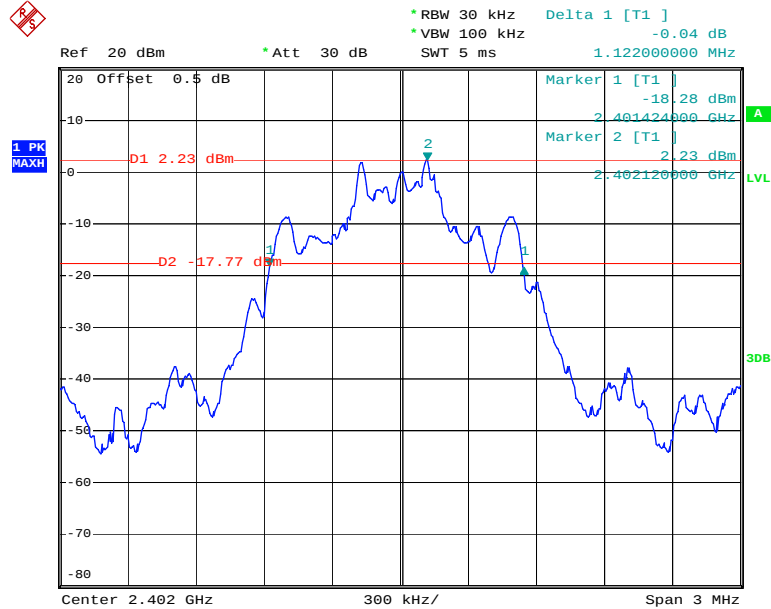


Date: 7.JUN.2016 18:36:13

Middle Channel

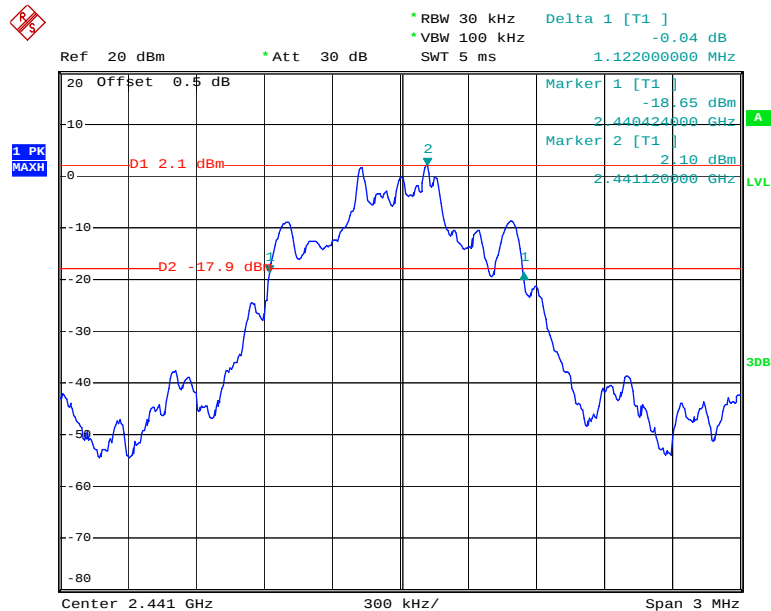

Date: 7.JUN.2016 18:37:35


High Channel

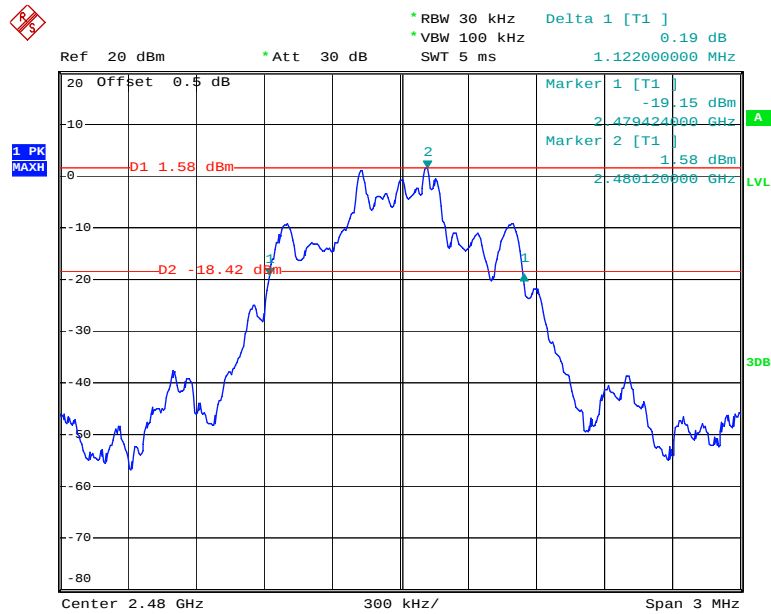

Date: 7.JUN.2016 18:39:38


EDR Mode (8-DPSK):

Low Channel

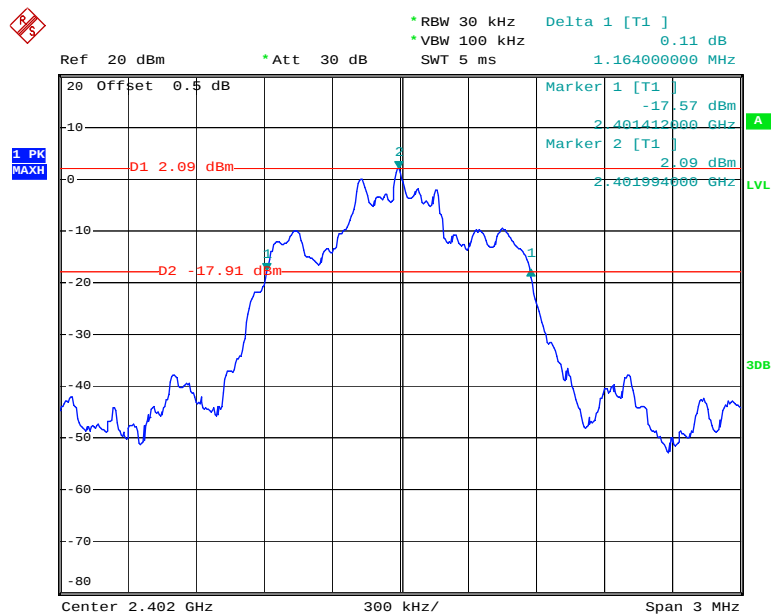


Date: 7.JUN.2016 18:45:27

Middle Channel

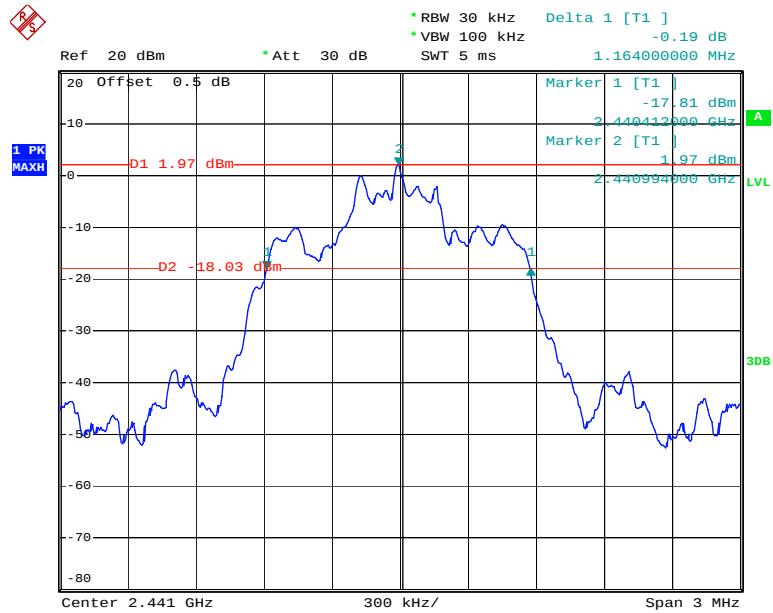

Date: 7.JUN.2016 18:44:23

High Channel

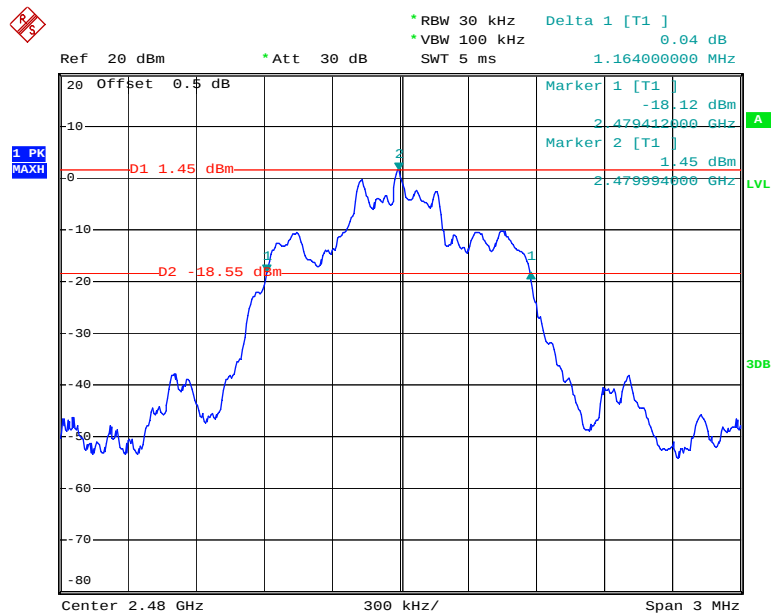

Date: 7.JUN.2016 18:42:52

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	51%
ATM Pressure:	100 kPa


* The testing was performed by Gavin Xu on 2016-06-07.

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	15



EDR Mode ($\pi/4$ -DQPSK):


Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	15

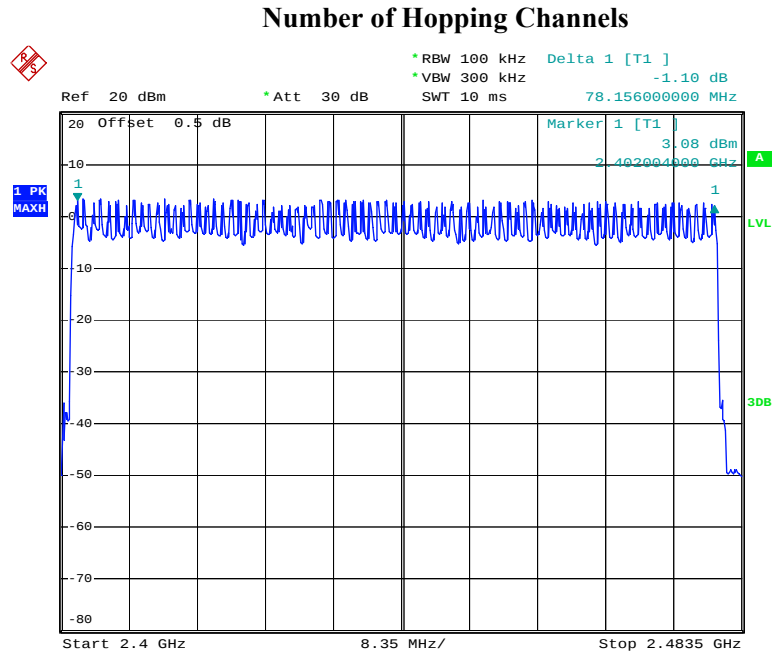

Date: 7.JUN.2016 19:55:59

EDR Mode (8-DPSK):

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	15

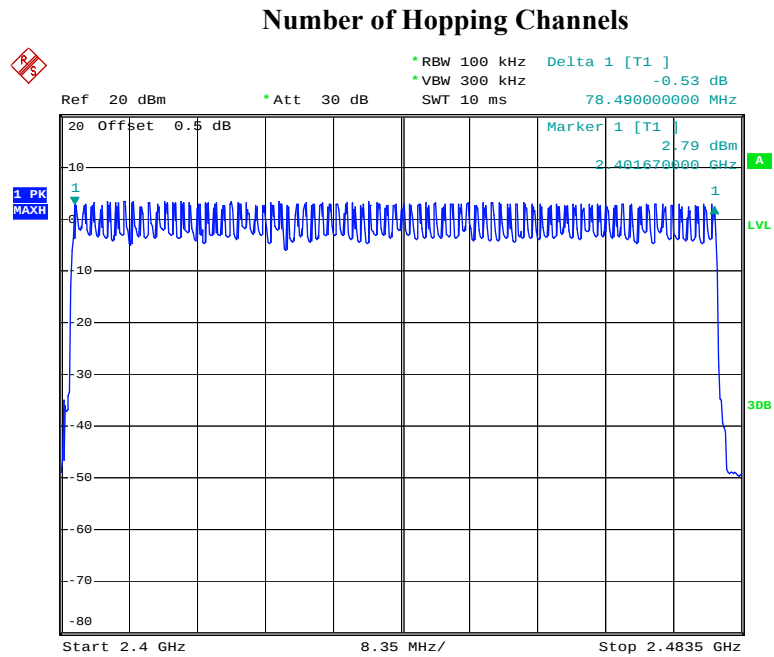

Date: 7.JUN.2016 19:52:17

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as $0.4 \times \text{channel no. (s)}$, the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s
Hop rate=1600/s

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	51 %
ATM Pressure:	100 kPa

* The testing was performed by Gavin Xu on 2016-06-07.

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

BDR Mode (GFSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH1	Low	0.380	0.122	0.4	Compliance
	Middle	0.380	0.122	0.4	Compliance
	High	0.380	0.122	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
DH3	Low	1.650	0.264	0.4	Compliance
	Middle	1.650	0.264	0.4	Compliance
	High	1.650	0.264	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
DH5	Low	2.910	0.310	0.4	Compliance
	Middle	2.900	0.309	0.4	Compliance
	High	2.910	0.310	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

DH1: Low Channel

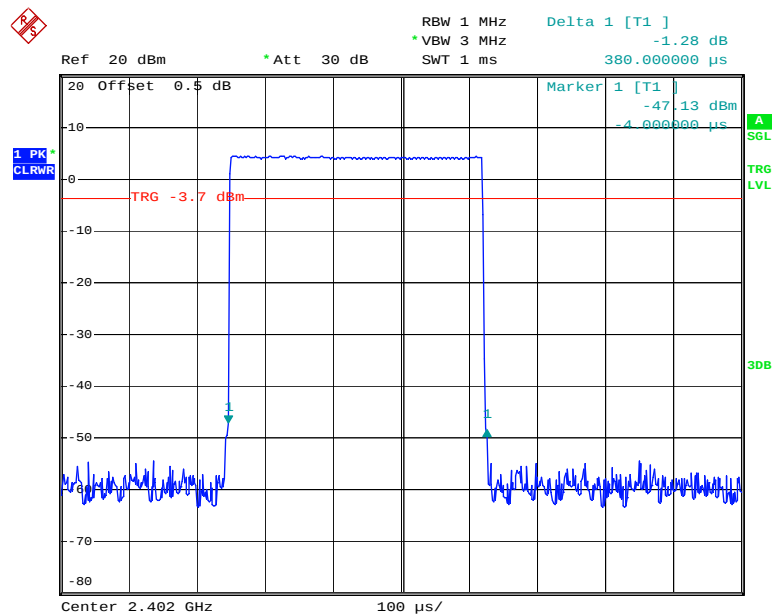


Date: 7.JUN.2016 19:21:40

DH1: Middle Channel

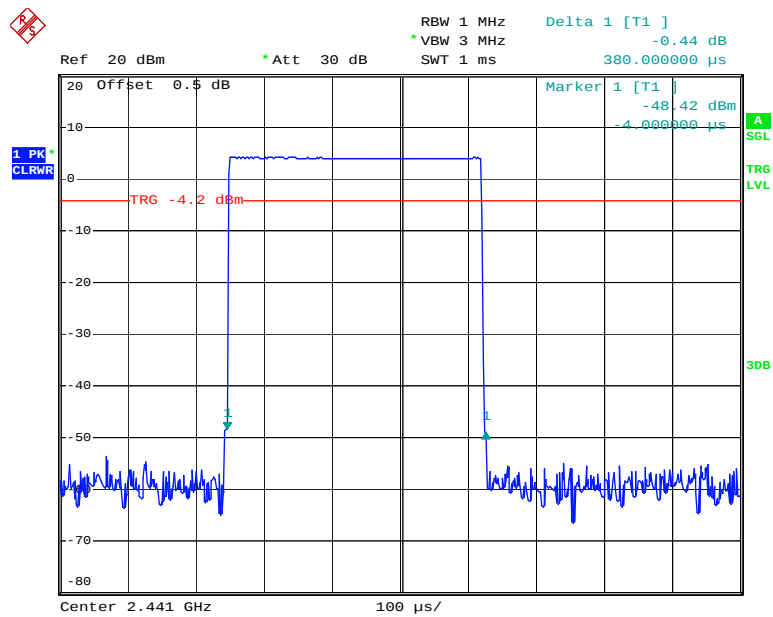


Date: 7.JUN.2016 19:21:49

DH1: High Channel

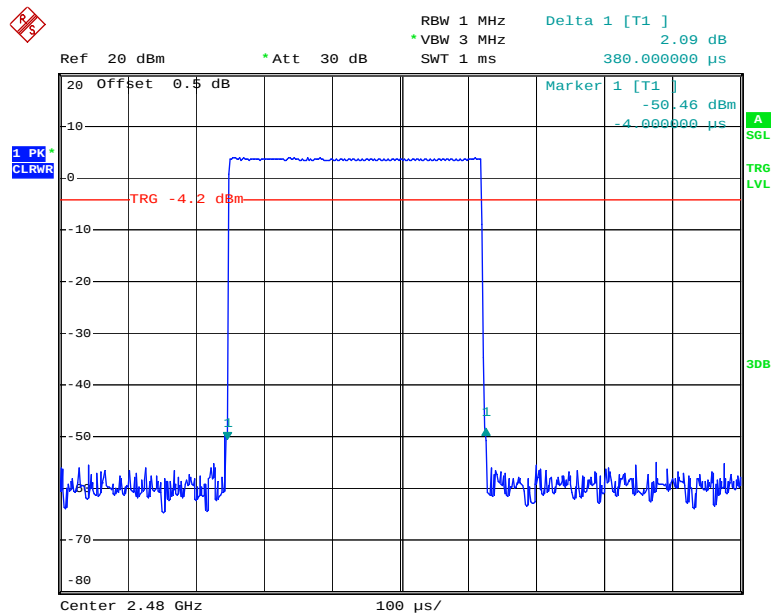


Date: 7.JUN.2016 19:21:59

DH3: Low Channel

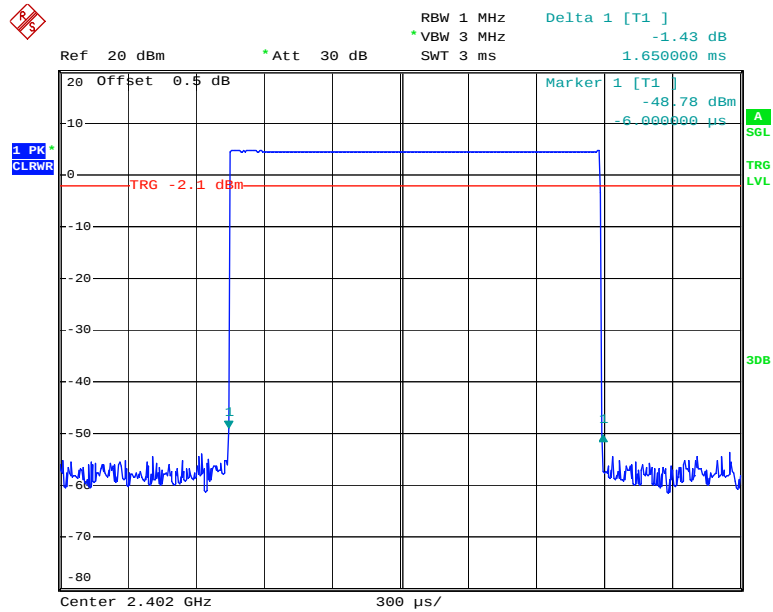


Date: 7.JUN.2016 19:22:38

DH3: Middle Channel

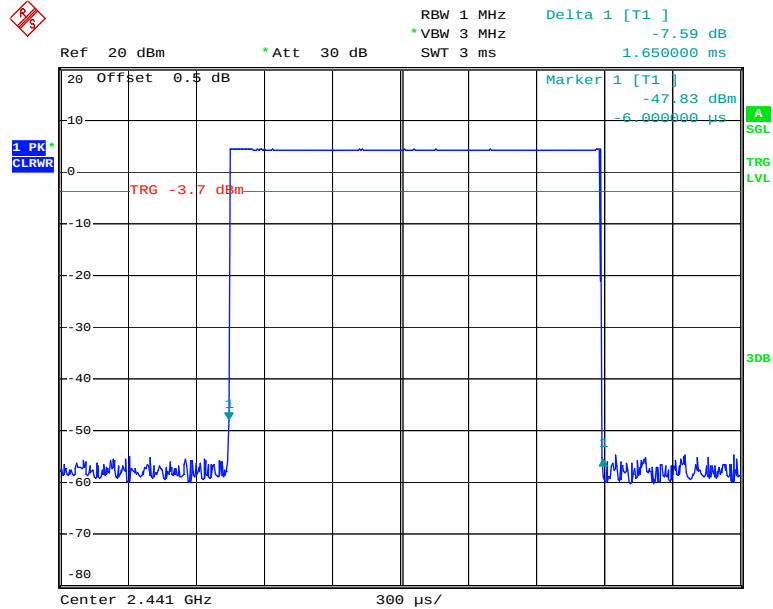


Date: 7.JUN.2016 19:22:47

DH3: High Channel

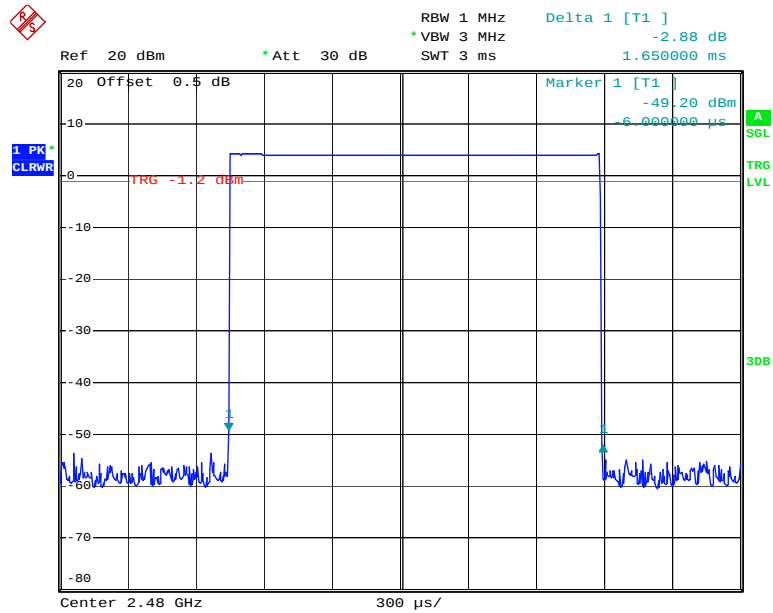


Date: 7.JUN.2016 19:22:56

DH5: Low Channel

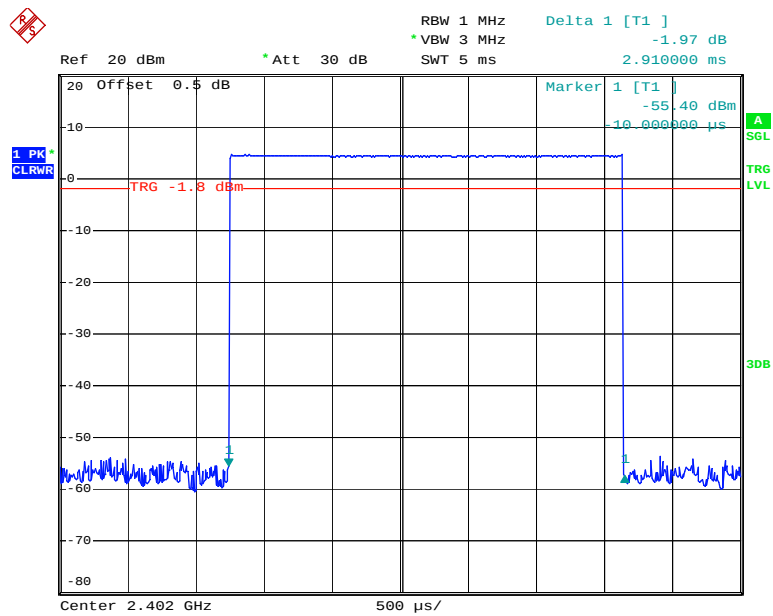


Date: 7.JUN.2016 19:32:33

DH5: Middle Channel

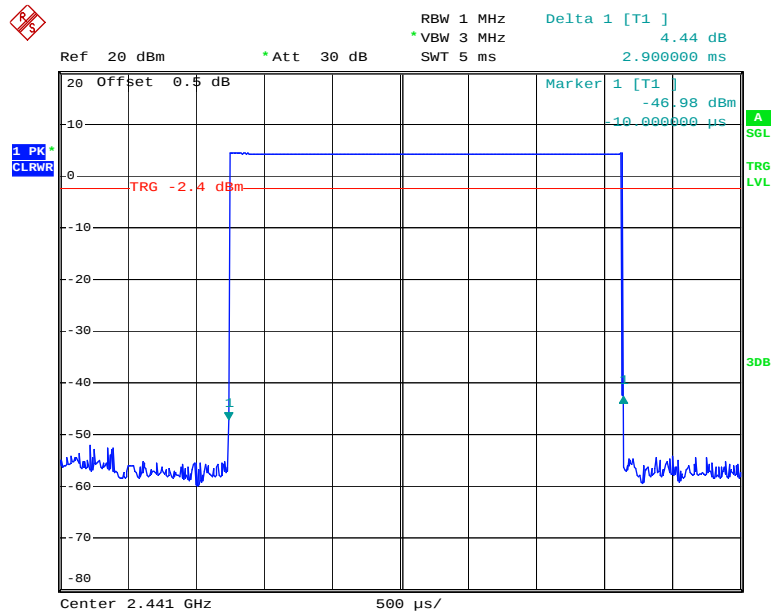

Date: 7.JUN.2016 19:32:42

DH5: High Channel

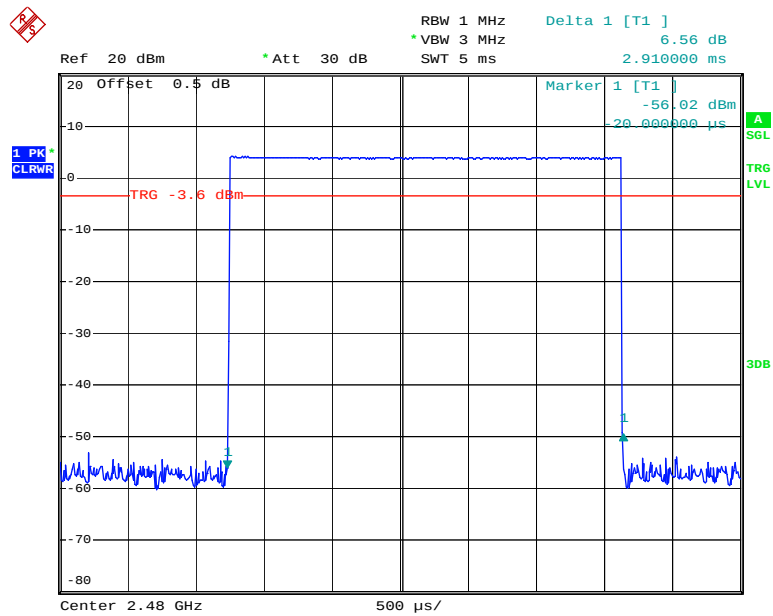


Date: 7.JUN.2016 19:32:54

EDR Mode ($\pi/4$ -DQPSK):


Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
2DH1	Low	0.390	0.125	0.4	Compliance
	Middle	0.390	0.125	0.4	Compliance
	High	0.390	0.125	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/2/79) $\times$ 31.6 s				
2DH3	Low	1.656	0.265	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.656	0.265	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/4/79) $\times$ 31.6 s				
2DH5	Low	2.910	0.310	0.4	Compliance
	Middle	2.910	0.310	0.4	Compliance
	High	2.910	0.310	0.4	Compliance
	Note: Dwell time=Pulse time (ms) $\times$ (1600/6/79) $\times$ 31.6 s				

2DH1: Low Channel

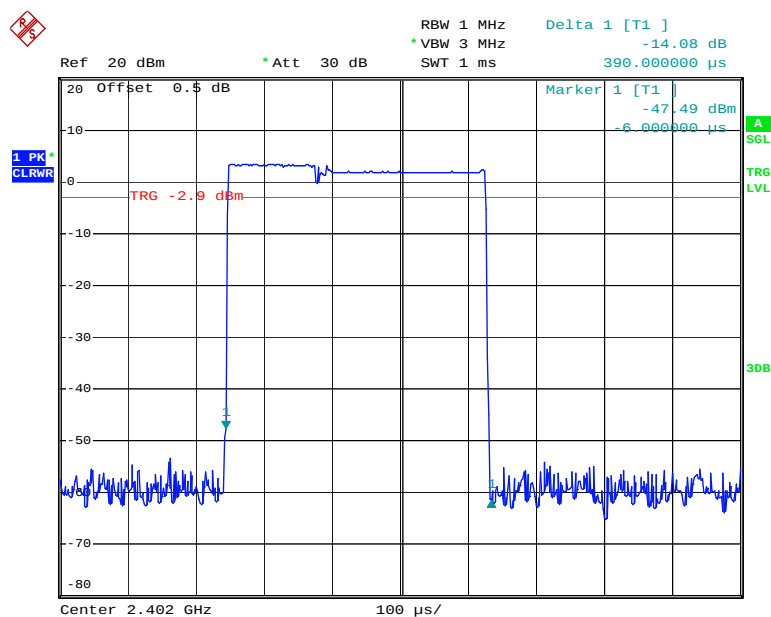


Date: 7.JUN.2016 19:38:33

2DH1: Middle Channel

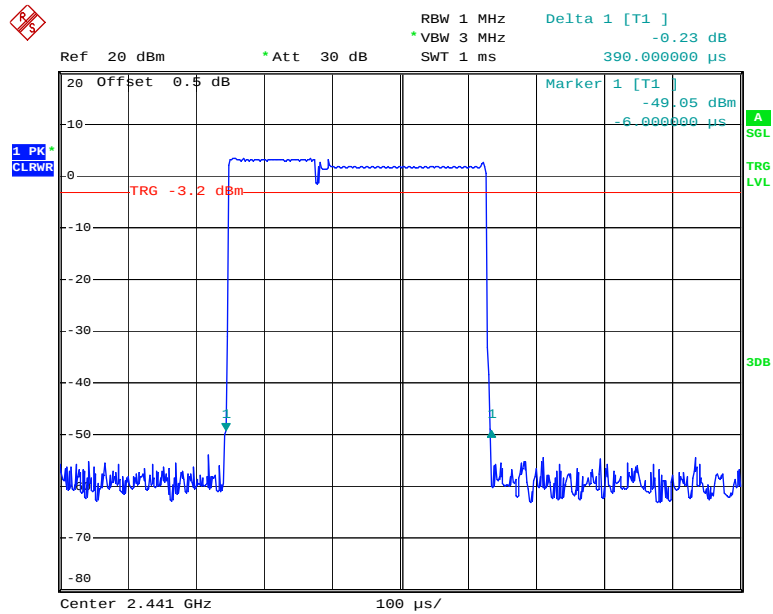


Date: 7.JUN.2016 19:38:47

2DH1: High Channel

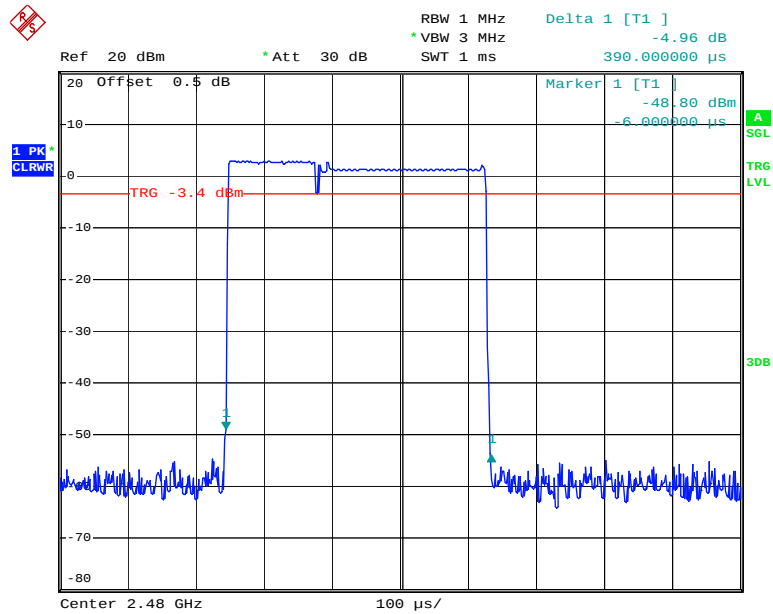


Date: 7.JUN.2016 19:38:56

2DH3: Low Channel

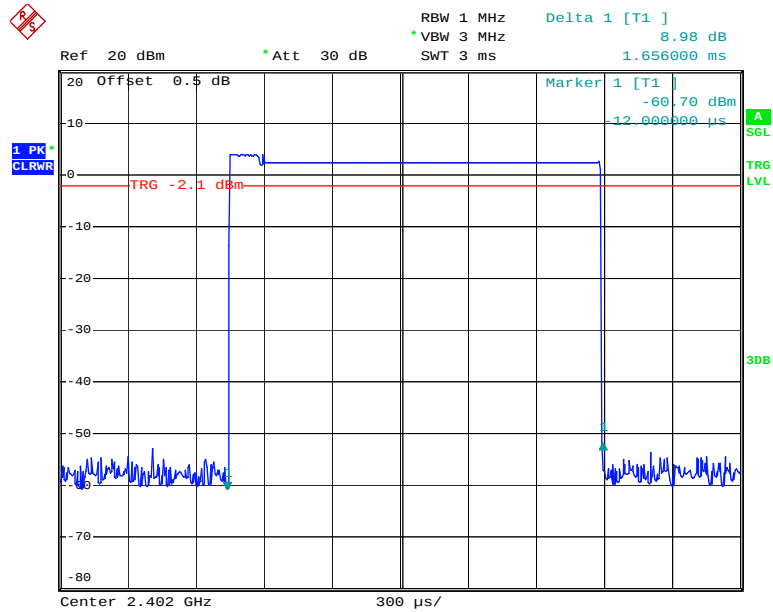


Date: 7.JUN.2016 19:35:57

2DH3: Middle Channel

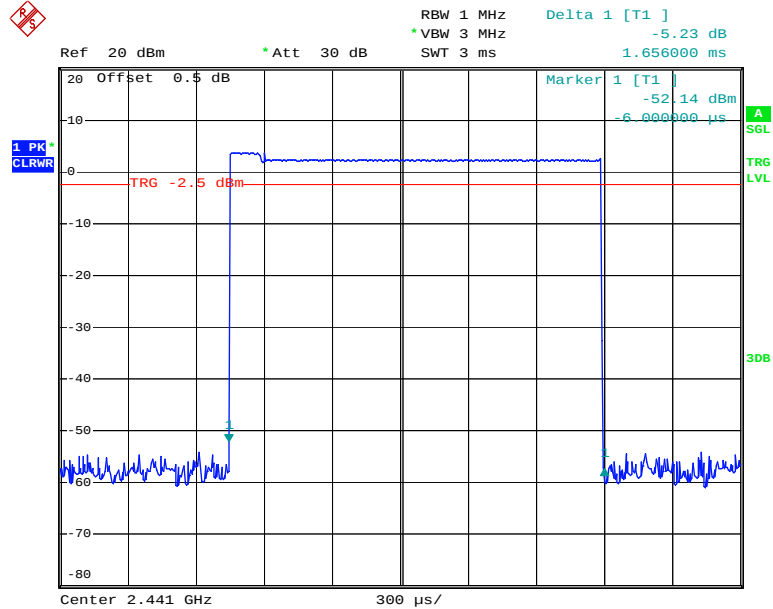


Date: 7.JUN.2016 19:36:08

2DH3: High Channel

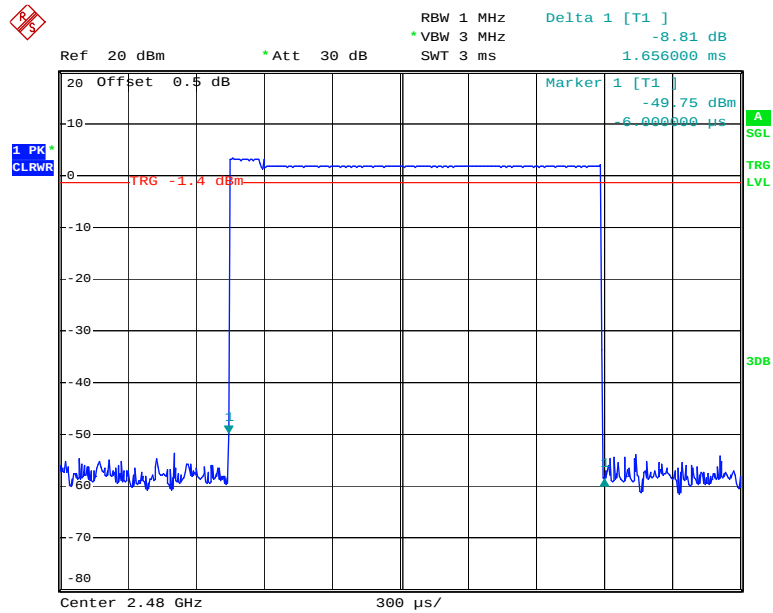


Date: 7.JUN.2016 19:36:17

2DH5: Low Channel

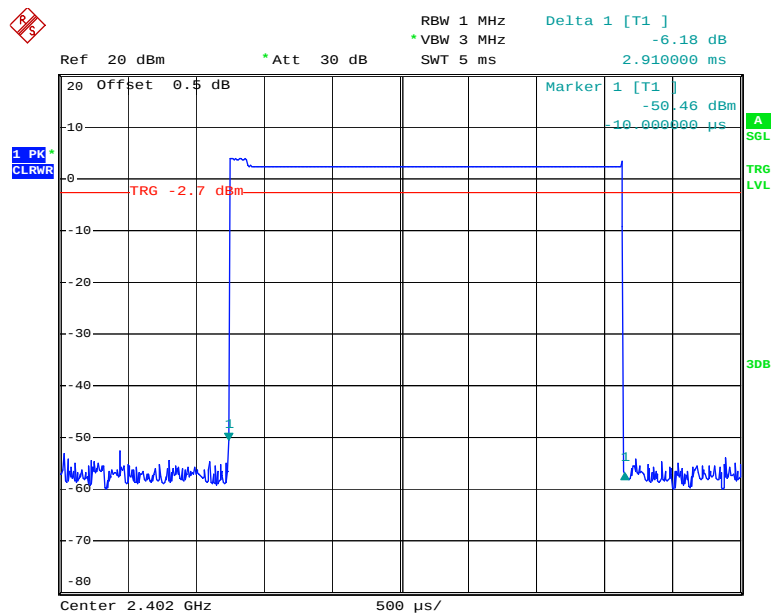


Date: 7.JUN.2016 19:35:08

2DH5: Middle Channel

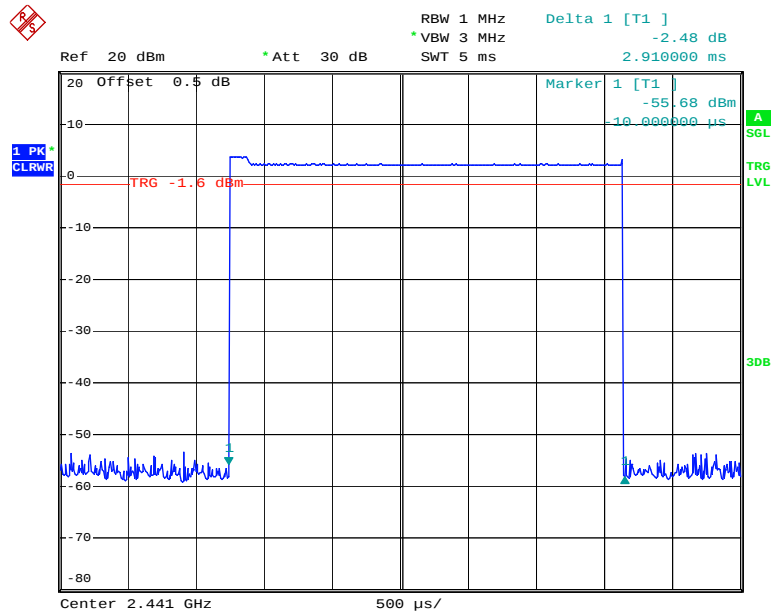

Date: 7.JUN.2016 19:35:17


2DH5: High Channel

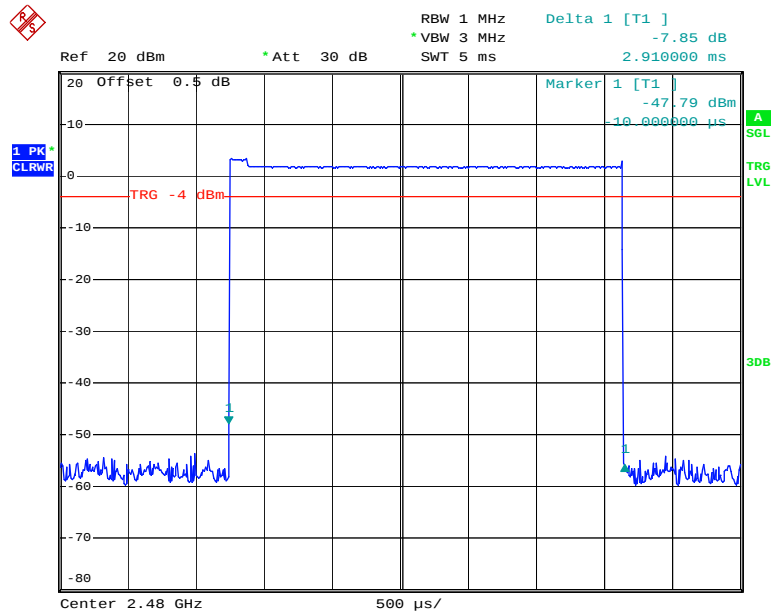

Date: 7.JUN.2016 19:35:26


EDR Mode (8-DPSK):

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
3DH1	Low	0.390	0.125	0.4	Compliance
	Middle	0.390	0.125	0.4	Compliance
	High	0.390	0.125	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/2/79) × 31.6 s				
3DH3	Low	1.650	0.264	0.4	Compliance
	Middle	1.656	0.265	0.4	Compliance
	High	1.650	0.264	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/4/79) × 31.6 s				
3DH5	Low	2.910	0.310	0.4	Compliance
	Middle	2.910	0.310	0.4	Compliance
	High	2.910	0.310	0.4	Compliance
	Note: Dwell time=Pulse time (ms) × (1600/6/79) × 31.6 s				

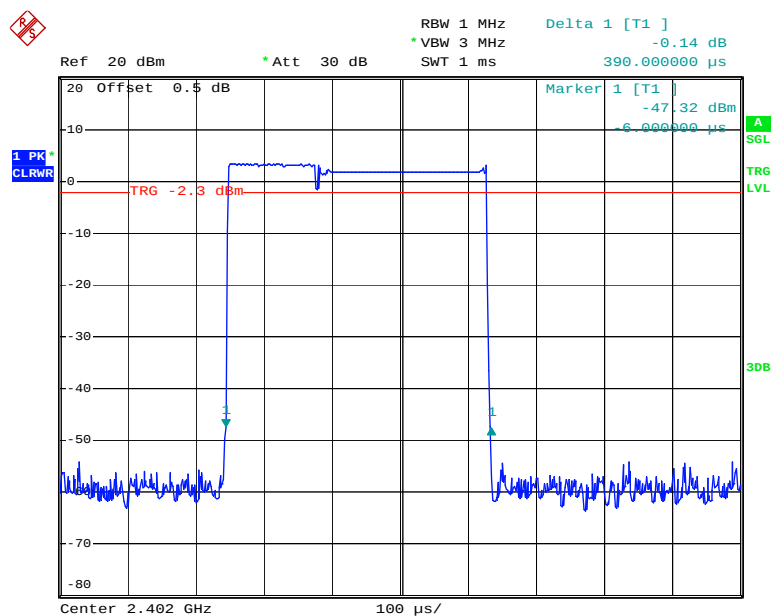3DH1: Low Channel


Date: 7.JUN.2016 19:39:30

3DH1: Middle Channel

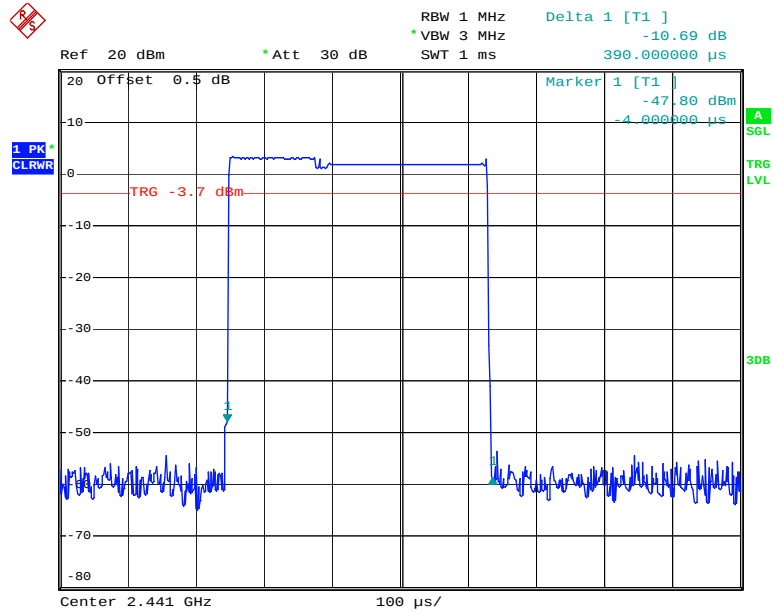


Date: 7.JUN.2016 19:39:39

3DH1: High Channel

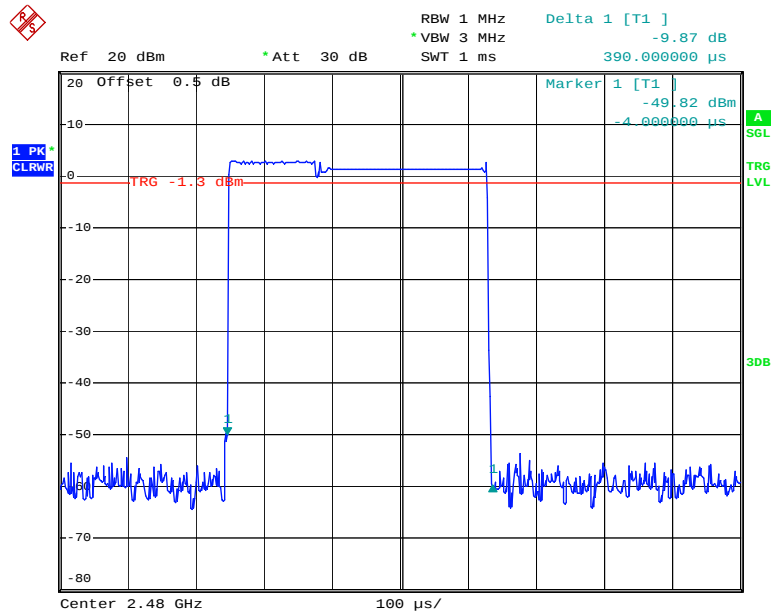


Date: 7.JUN.2016 19:39:48

3DH3: Low Channel

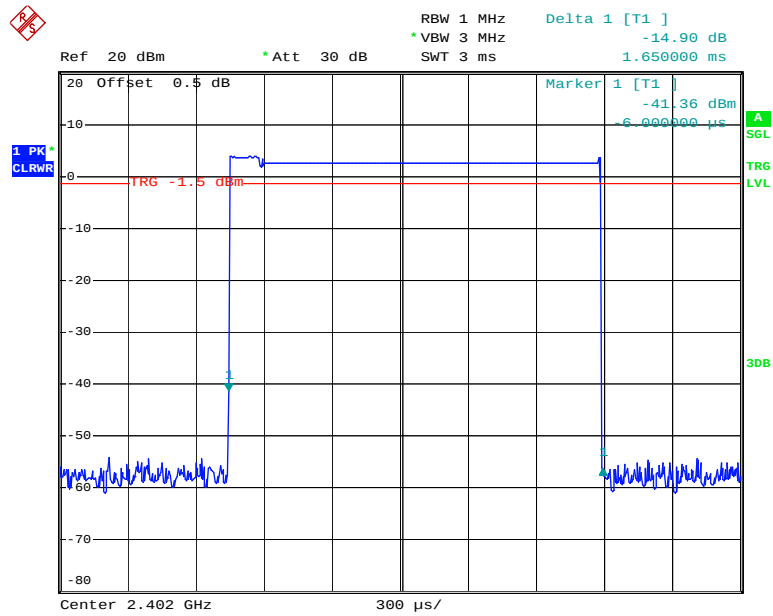


Date: 7.JUN.2016 19:40:18

3DH3: Middle Channel

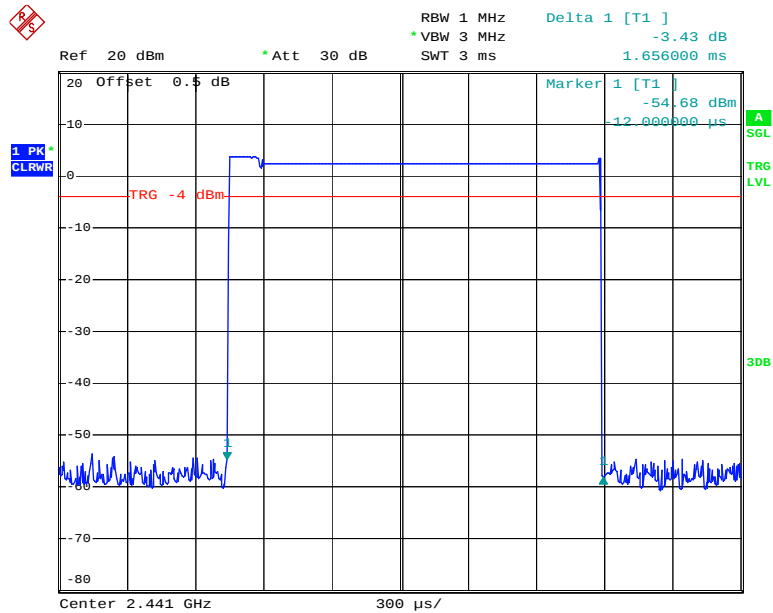


Date: 7.JUN.2016 19:40:31

3DH3: High Channel

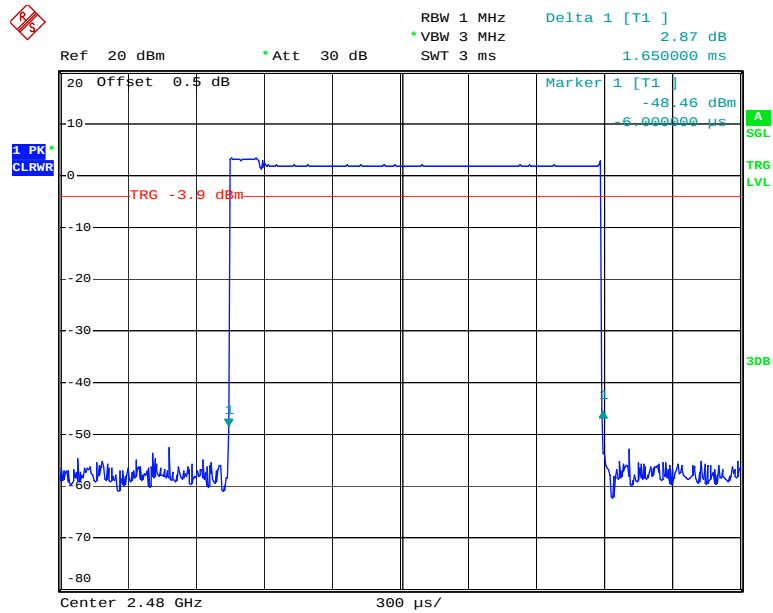


Date: 7.JUN.2016 19:40:40

3DH5: Low Channel

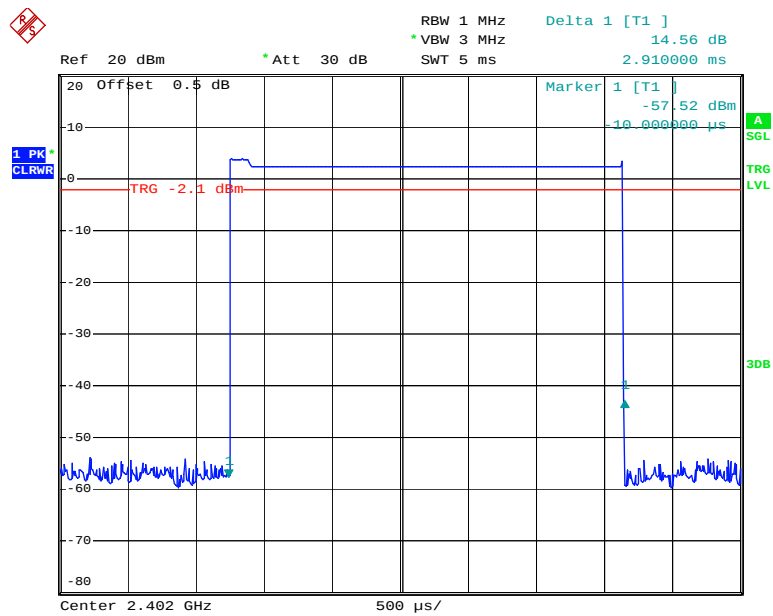


Date: 7.JUN.2016 19:42:02

3DH5: Middle Channel

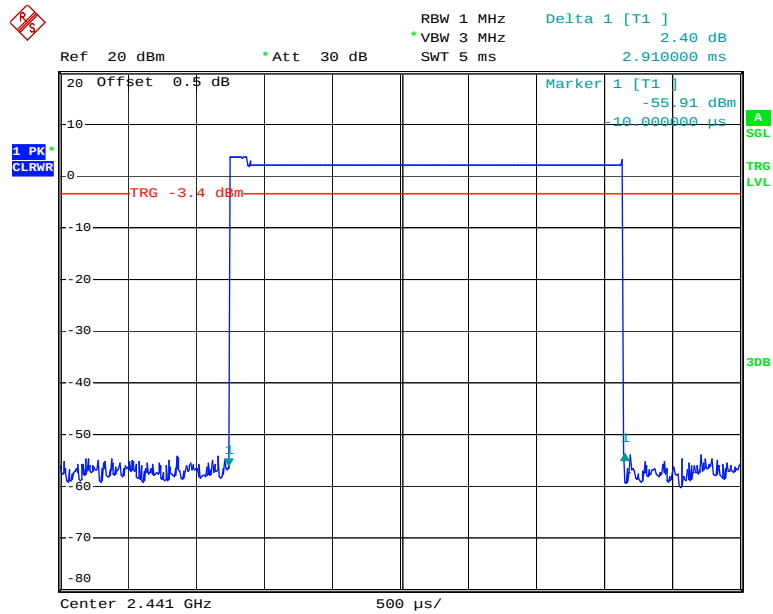

Date: 7.JUN.2016 19:42:17

3DH5: High Channel

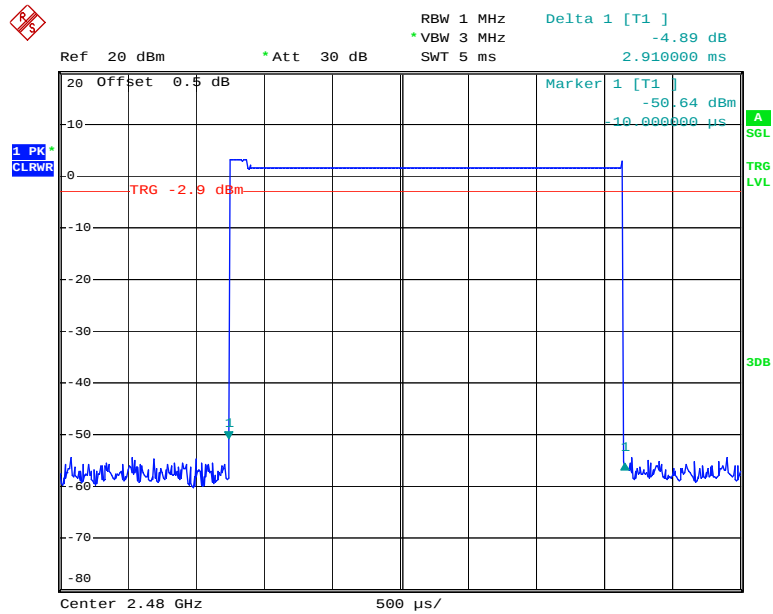

Date: 7.JUN.2016 19:42:26

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.4°C
Relative Humidity:	51 %
ATM Pressure:	100 kPa

* The testing was performed by Gavin Xu on 2016-06-07.

Test Result: Compliance.


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	Low	2402	4.74	30
	Middle	2441	4.59	30
	High	2480	4.16	30
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	4.16	30
	Middle	2441	3.95	30
	High	2480	3.52	30
EDR Mode (8-DPSK)	Low	2402	4.22	30
	Middle	2441	4.10	30
	High	2480	3.67	30

Note: The data above was tested in conducted mode.


BDR Mode (GFSK):

Output Power, Low Channel

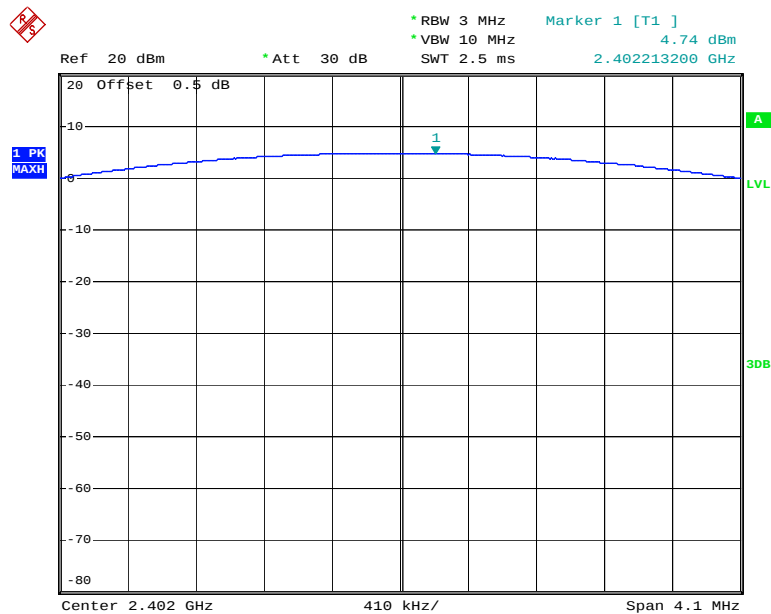


Date: 7.JUN.2016 18:35:02

Output Power, Middle Channel

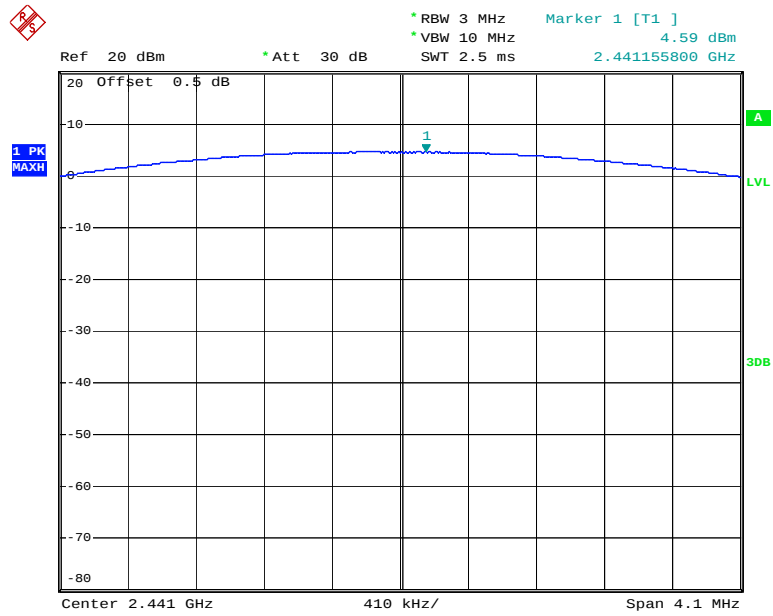

Date: 7.JUN.2016 18:34:07


Output Power, High Channel

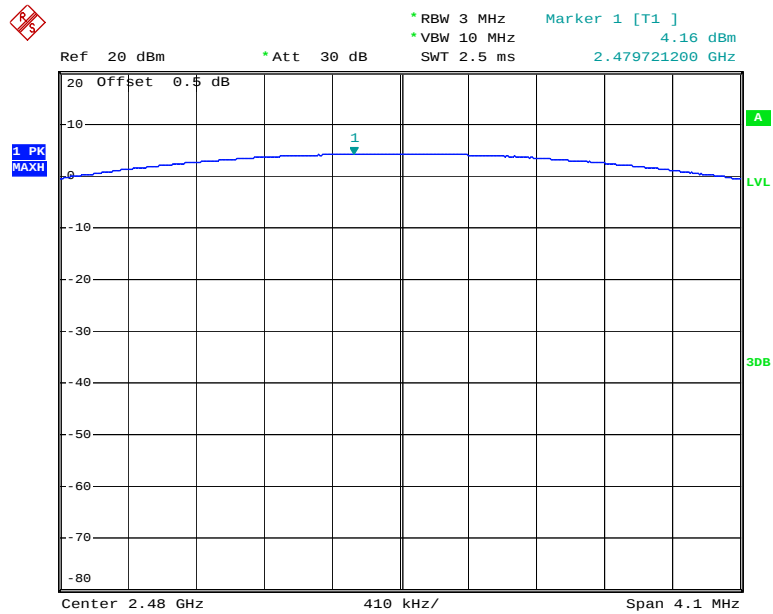

Date: 7.JUN.2016 18:32:33


EDR Mode ($\pi/4$ -DQPSK):

Output Power, Low Channel

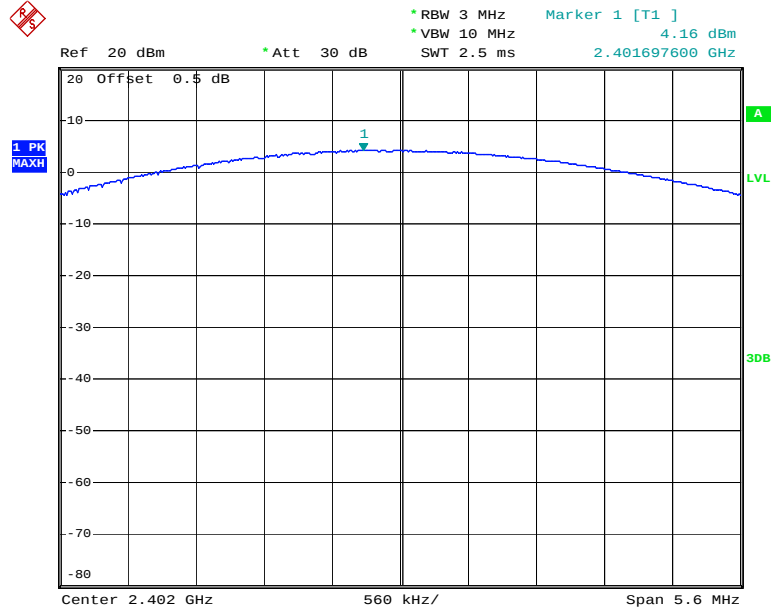


Date: 7.JUN.2016 18:36:40

Output Power, Middle Channel

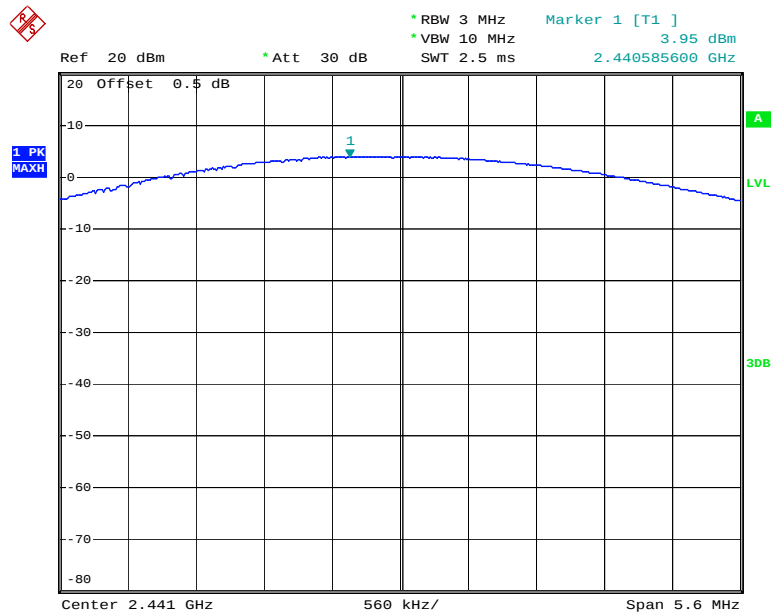

Date: 7.JUN.2016 18:38:02


Output Power, High Channel

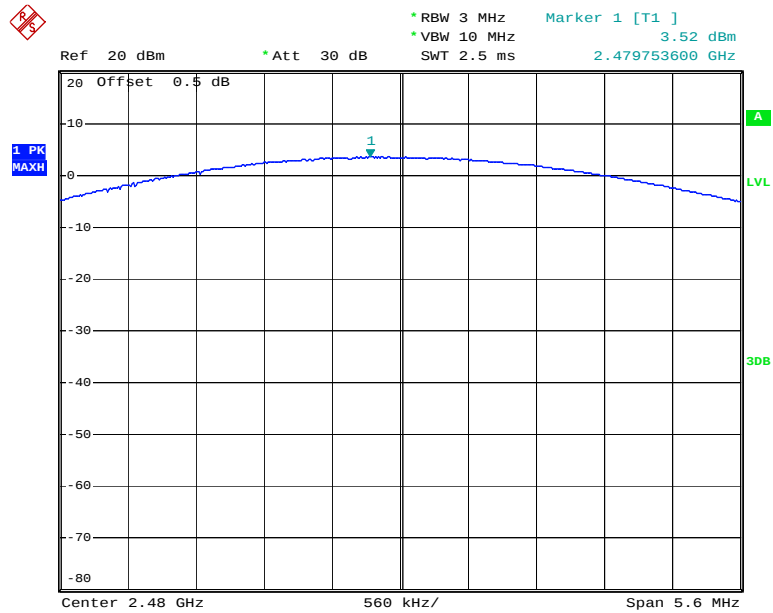

Date: 7.JUN.2016 18:40:05


EDR Mode (8-DPSK):

Output Power, Low Channel

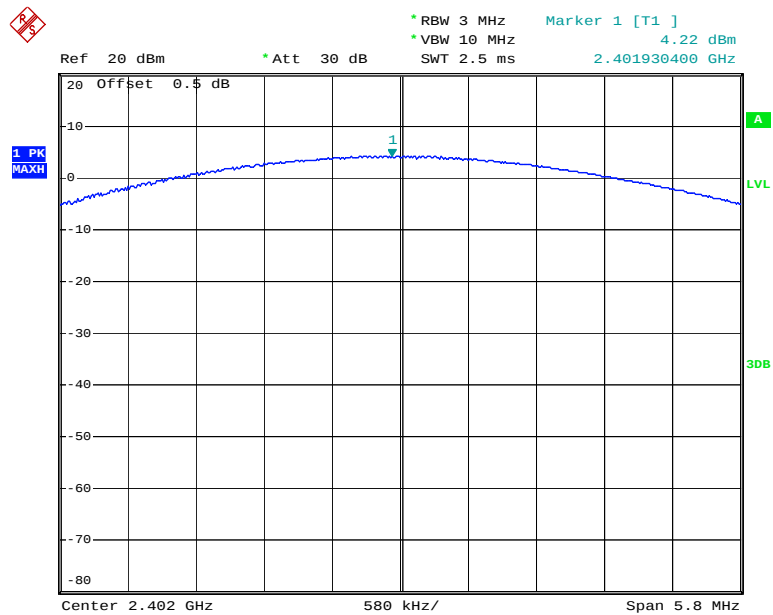


Date: 7.JUN.2016 18:45:54

Output Power, Middle Channel

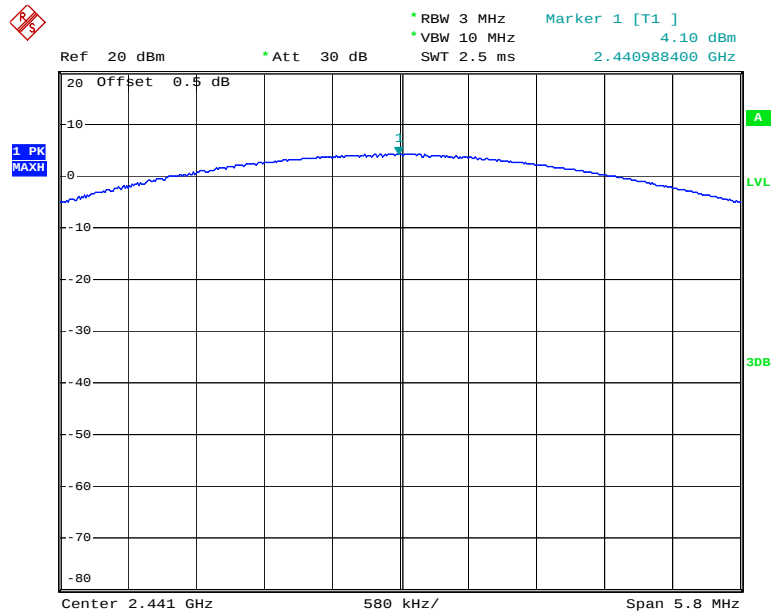

Date: 7.JUN.2016 18:44:50

Output Power, High Channel

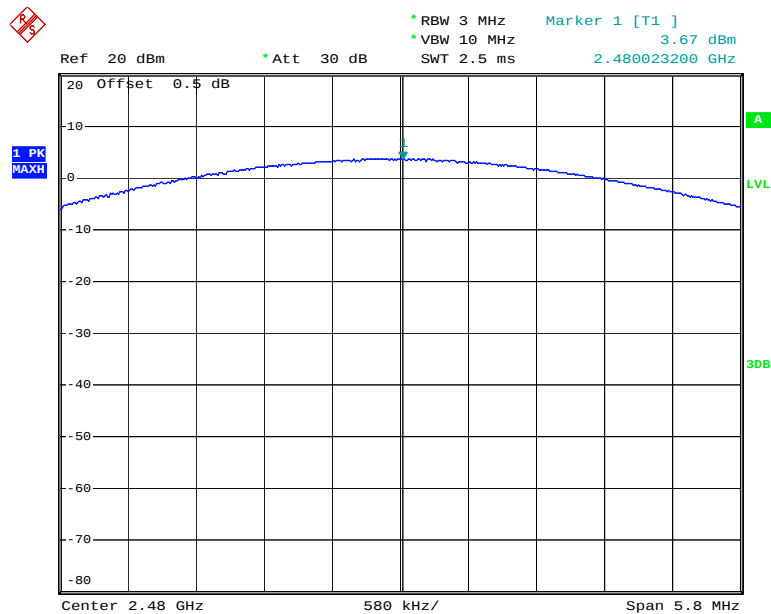

Date: 7.JUN.2016 18:43:18

FCC §15.247(d) - BAND EDGES TESTING**Applicable Standard**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2016-05-09	2017-05-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	Attenuator	EMCA03-5RN	OE01153830	2016-05-08	2017-05-08
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Temperature:	28.4 °C
Relative Humidity:	51 %
ATM Pressure:	100 kPa

* The testing was performed by Gavin Xu on 2016-06-07


Test Result: Compliance

BDR Mode (GFSK):

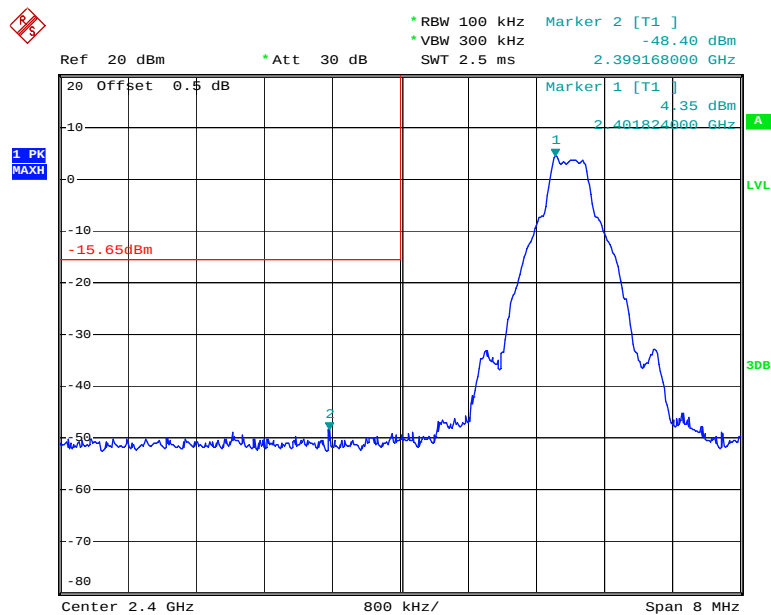Band Edge, Left Side

Date: 7.JUN.2016 18:35:27


Band Edge, Right Side

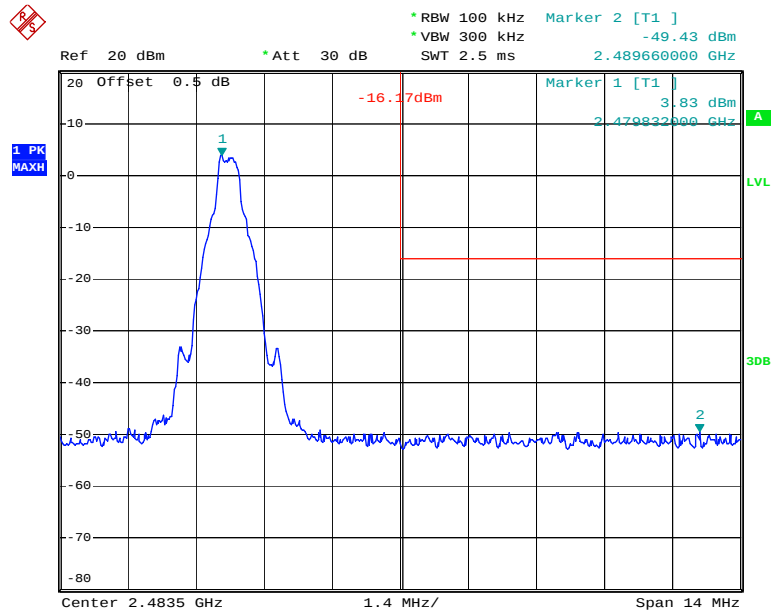

Date: 7.JUN.2016 18:32:51


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

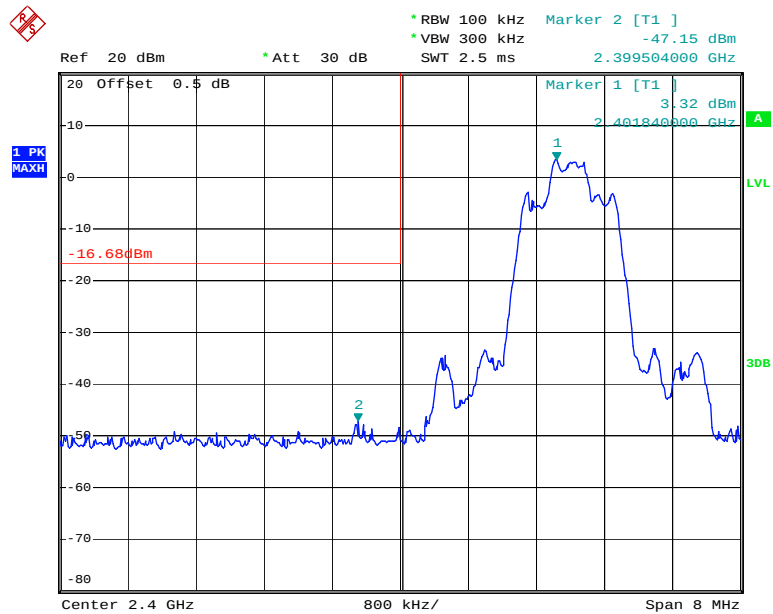

Date: 7.JUN.2016 18:37:03


Band Edge, Right Side

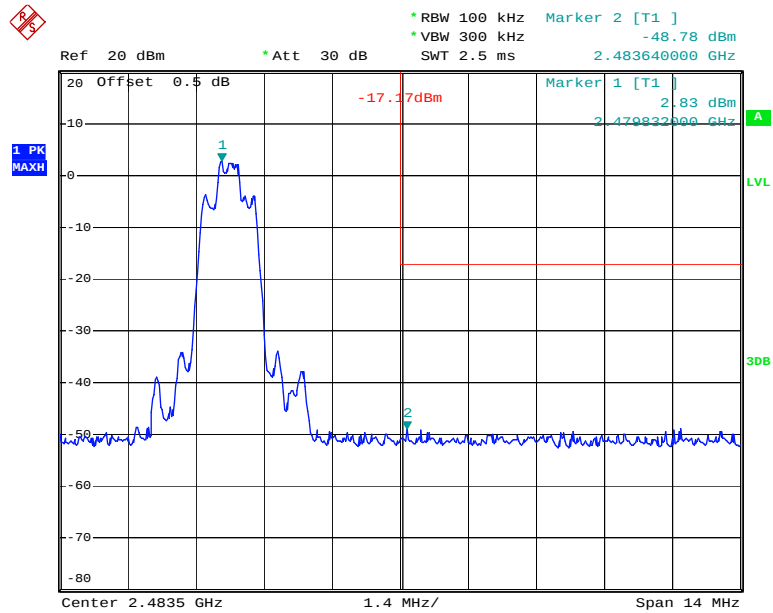


Date: 7.JUN.2016 18:40:26

EDR Mode (8-DPSK):

Band Edge, Left Side

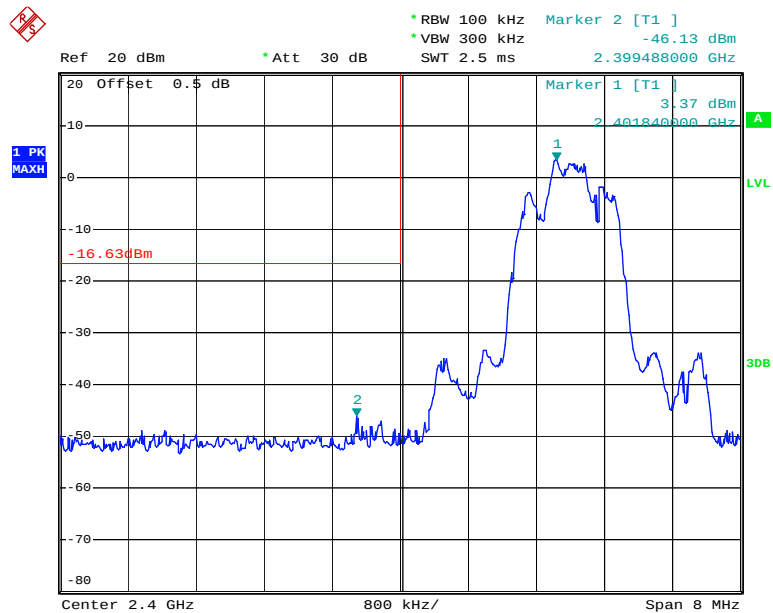

Date: 7.JUN.2016 18:46:11

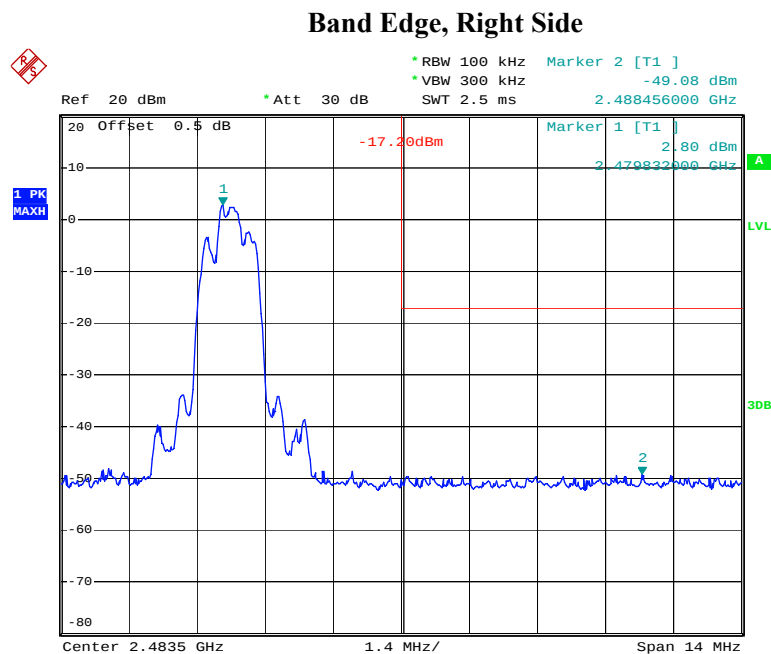

Date: 7.JUN.2016 18:43:47

*****END OF REPORT*****