

Emissions Test Report

EUT Name: Smart Power Cord

Model No.: CS-SC-01

CFR 47 Part 15.247: 2020 and RSS 247: 2017

Prepared for:

Grid Connect
1630 W Diehl Rd
Naperville, IL, 60563

Prepared by:

TUV Rheinland of North America, Inc.
5015 Brandin Ct.
Fremont, CA 94538
Tel: (925) 249-9123
Fax: (925) 249-9124
<http://www.tuv.com/>

Report/Issue Date: December 10, 2020
Job # 234111406
Report Number: 31964648.001

Revisions

Revision No.	Date MM/DD/YYYY	Reason for Change	Author
0	10/23/19	Original Document	OC
1	12/10/20	Updated to current date for IC filings	OC

Note: Latest revision report will replace all previous reports.

Statement of Compliance

Manufacturer: Grid Connect
1630 W Diehl Rd
Naperville, IL, 60563
Requester / Applicant: Grid Connect
Name of Equipment: Smart Power Cord
Model No. CS-SC-01
Type of Equipment: Intentional Radiator
Application of Regulations: CFR 47 Part 15.247: 2020 and RSS 247: 2017
Test Dates: October 7th, 2019 to October 10th, 2019

Guidance Documents:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

Test Methods:

Emissions: ANSI C63.10-2013, KDB 558074 D01 DTS Measurement Guidance v05r02, KDB 662911 D01 Multiple Transmitter Output v02r01

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that the equipment described above has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by A2LA or any agency of the U.S. Government. This report shall not be reproduced except in full, without the written authorization of TUV Rheinland of North America.

Osvaldo Casorla

Test Engineer

Date December 10, 2020

Rachana Khanduri

A2LA Signatory

Date December 10, 2020



Testing Cert #3331.02



US1131



Industry
Canada Industrie
Canada

2932D

Table of Contents

1	Executive Summary	7
1.1	Scope	7
1.2	Purpose	7
1.3	Summary of Test Results	8
1.4	Special Accessories	8
1.5	Equipment Modifications	8
2	Laboratory Information	9
2.1	Accreditations & Endorsements	9
2.1.1	US Federal Communications Commission	9
2.1.2	NIST / A2LA	9
2.1.3	Canada – Industry Canada	9
2.1.4	Japan – VCCI	9
2.1.5	Acceptance by Mutual Recognition Arrangement	10
2.2	Test Facilities	10
2.2.1	Emission Test Facility	10
2.3	Measurement Uncertainty	10
2.3.1	Sample Calculation – radiated & conducted emissions	11
2.3.2	Measurement Uncertainty	11
2.4	Calibration Traceability	11
3	Product Information	12
3.1	Product Description	12
3.2	Equipment Configuration	12
3.3	Operating Mode	12
3.4	Unique Antenna Connector	13
3.4.1	Results	13
3.5	Duty Cycle	13
4	Emissions	15
4.1	Output Power Requirements	15
4.1.1	Test Method	15
4.1.2	Results	16
4.2	DTS Bandwidth (6dB) and Occupied Bandwidth	20
4.2.1	Test Method	20
4.3	Peak Power Spectral Density	28
4.3.1	Test Method	28
4.3.2	Results	29
4.4	Out of Band Emissions: Non-Restricted Bands	33
4.4.1	Test Method	33
4.4.2	Results	34

Table of Contents

4.5	Out of Band Emissions: Restricted Band Edge	41
4.5.1	Test Method	41
4.5.2	Test Results	42
4.6	Transmitter Spurious Emissions	45
4.6.1	Test Methodology	45
4.6.2	Test Setup:	46
4.6.3	Transmitter Spurious Emission Limit	47
4.6.4	Test Results	47
4.7	AC Conducted Emissions	57
4.7.1	Test Methodology	57
4.7.2	Test Results	57
5	Test Equipment List	62
5.1	Equipment List	62
6	EMC Test Plan	63
6.1	Introduction	63
6.2	Customer	63
6.3	Equipment Under Test (EUT)	63
6.4	Product Specifications	64
Table 14: Accessory Equipment		65
6.5	Test Specifications	66

Index of Tables

Table 1: Summary of Test Results	8
Table 2: RF Output Power at the Antenna Port – Test Results	16
Table 3: Occupied Bandwidth – Test Results	21
Table 4: Peak Power Spectral Density – Test Results	29
Table 5: Emissions at the Band-Edge – Test Results	34
Table 6: Emissions at the Band-Edge – Test Results	42
Table 7: AC Conducted Emissions – Test Results	57
Table 8: Customer Information	63
Table 9: Technical Contact Information	63
Table 10: EUT Designation.....	63
Table 11: EUT Specifications	64
Table 12: Antenna Information	65
Table 13: Interface Specifications	65
Table 14: Accessory Equipment.....	65
Table 15: Ancillary Equipment (used for test purposes only).....	65
Table 16: Description of Sample used for Testing	66
Table 17: Description of Test Configuration used for Radiated Measurement.....	66
Table 18: Test Specifications	66

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the CFR 47 Part 15.247: 2020 and RSS 247: 2017 based on the results of testing performed on October 7th, 2019 to October 10th, 2019 on the Smart Power Cord Model CS-SC-01 manufactured by Grid Connect. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report. The 2404 MHz to 2480 MHz frequency band for Bluetooth, Low Energy is covered in this document.

1.3 Summary of Test Results

Table 1: Summary of Test Results

Test	Test Method ANSI C 63.10 & C63.4	Worse Case (Measured)	Result
Maximum Output Power	CFR47 15.247 (b), RSS 247 Sect. 5.4 (d)	4.94dBm @ 2404MHz Channel, 1Mbps	Complied
DTS Bandwidth (6dB)	CFR47 15.247 (a)(2), RSS 247 Sect. 5.2 (a)	0.65MHz @ 2404MHz Channel, 1Mbps	Complied
Peak Power Spectral Density	CFR47 15.247 (e), RSS 247 Sect. 5.2 (b)	-11.14 dBm @ 2404MHz channel, 1Mbps	Complied
Out of Band Emissions: Non-Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-46.17 dBc @ 2396.20 MHz, Lower Band Edge	Complied
Out of Band Emissions: Restricted	CFR47 15.247 (d), RSS 247 Sect.5.5	-16.36dB margin @ 2486.134 MHz, Average	Complied
Transmitter Spurious Emissions	CFR47 15.247 (d), RSS 247 Sect.5.5	-5.29dB Margin @ 3303.50 MHz, Average	Complied
AC Power Conducted Emission	CFR47 15.207, RSS-GEN Sect.8.8	Class B	Complied

Note 1: This test report covers 2400 MHz to 2480 MHz band. * = summed power.

Note 2: Class B limits were applied where applicable.

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

None

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission



TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, are recognized by the Commission for performing testing services for the general public on a fee basis. These laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No. US1131). The laboratory Scopes of Accreditation include Title 47 CFR Parts 15, 18 and 90. The accreditations are updated every three years.

2.1.2 NIST / A2LA



TUV Rheinland of North America is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 17025:2017. The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada



Industry
Canada Industrie
Canada

The Pleasanton 5-meter Semi-Anechoic Chamber, Registration No. 2932M-1, has been accepted by Industry Canada to perform testing to 3 and 5 meters based on the test procedures described in ANSI C63.4-2014. The Fremont 10-meter Semi-Anechoic Chamber, Registration No. 2932D-1, has been accepted by Industry Canada to perform testing to 3 and 10 meters based on the test procedures described in ANSI C63.4-2014.

2.1.4 Japan – VCCI



The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland of North America EMC test facilities located at 1279 Quarry Lane, Ste. A, Pleasanton, CA, 94566, and 5015 Brandin Ct, Fremont, CA 94538, have been assessed and approved in accordance with the Regulations for Voluntary Control Measures.

VCCI Registration No. for Pleasanton: A-0326

VCCI Registration No. for Fremont: A-0327

2.1.5 Acceptance by Mutual Recognition Arrangement



The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at 1279 Quarry Ln, Pleasanton, CA 94566 test results and test reports within the scope of the laboratory NIST / A2LA accreditation will be accepted by each member

country.

2.2 Test Facilities

Test facilities are located at 5015 Brandin Ct, Fremont, California, 94538, USA and 1279 Quarry Lane, Pleasanton, California 94566, USA (Fremont is the Pleasanton Annex).

2.2.1 Emission Test Facility

The Semi-Anechoic Chambers and AC Line Conducted measurement facilities used to collect radiated and conducted emissions data have been constructed in accordance with ANSI C63.7:1992. The Fremont 10 meter semi-anechoic chamber has been measured in accordance with and verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2014 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04), at test distances of 3 and 10 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02). The Pleasanton 5 meter semi-anechoic chamber has been verified to comply with the theoretical volumetric normalized site attenuation of ANSI C63.4:2009 and SVSWR requirements of CISPR 16-1-4 Consol. Ed. 3.0 (2010-04) at a test distance of 3 meters. This site has been described in reports dated November 1st, 2006, submitted to the FCC, and accepted by letter dated November 28, 2006. The site is listed with the FCC and accredited by A2LA (Testing Certificate #3331.02).

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities; it is equal to the positive square root of the sum of the variances or co-variances of these other quantities, weighted according to how the measurement result varies with changes in these quantities. The term *standard uncertainty* is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurement and the fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V} / \text{m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty

Per CISPR 16-4-2	U _{lab}	U _{cispr}
Radiated Disturbance @ 10 meters		
30 – 1,000 MHz	2.25 dB	4.51 dB
Radiated Disturbance @ 3 meters		
30 – 1,000 MHz	2.26 dB	4.52 dB
1 – 6 GHz	2.12 dB	4.25 dB
6 – 18 GHz	2.47 dB	4.93 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.09 dB	2.18 dB
Disturbance Power		
30 MHz – 300 MHz	3.92 dB	4.3 dB

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2017. Equipment calibration records are kept on file at the test facility.

3 Product Information

3.1 Product Description

The Model CS-SC-01 is a Smart Power Cord utilizing Bluetooth. The EUT will be in compliance with regulatory standards of regions it will be operating in.

3.2 Equipment Configuration

A description of the equipment configuration is given in the Test Plan Section. The EUT was tested as called for in the test standard and was configured and operated in a manner consistent with its intended use. The EUT was connected to rated power and allowed to reach intended operating conditions. The placement of the EUT system components was guided by the test standard and selected to represent typical installation conditions.

In the case of an EUT that can operate in more than one configuration, preliminary testing was performed to determine the configuration that produced maximum radiation.

The final configuration was selected to produce the worst case radiation for emissions testing and to place the EUT in the most susceptible state for immunity testing.

3.3 Operating Mode

A description of the operation mode is given in the Test Plan Section. In the case of an EUT that can operate in more than one state, preliminary testing was performed to determine the operating mode that produced maximum radiation.

The final operating mode was selected to produce the worst case radiation for emissions testing.

3.4 Unique Antenna Connector

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of CFR47 Parts 15.211, 15.213, 15.217, 15.219, or 15.221.

3.4.1 Results


The Smart Power Cord has 1 PCB trace antenna dedicated Bluetooth antenna that has maximum gain of – 9.67 dBi. It is connected via RF connector that is not easily accessible to the end user.

Refer to Table 30 for additional antenna information.

3.5 Duty Cycle

Duty cycles were measured by the spectrum analyzer used for measurements in section 4.1 of this report.

Mode	Measured Duty Cycle	Duty Cycle Correction Factor (dB)
BLE	83%	0.81

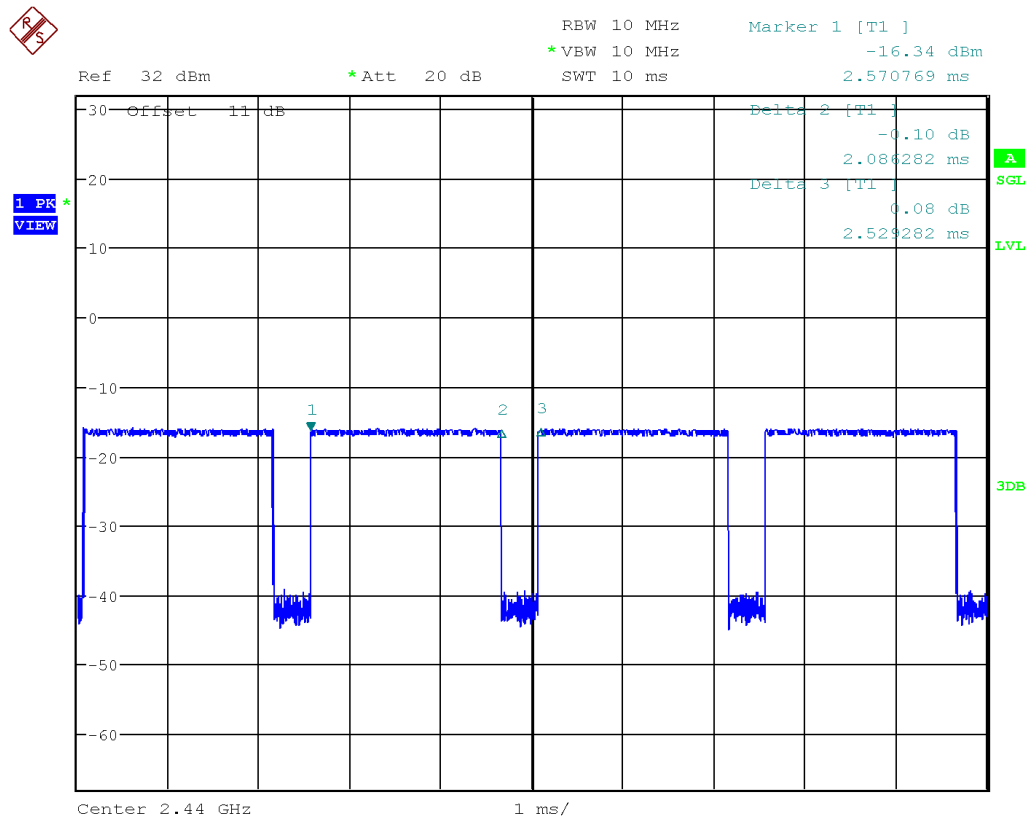

Date: 10.OCT.2019 19:03:18

Figure 1: Duty Cycle for BLE

4 Emissions

Testing was performed in accordance with CFR 47 Part 15.247: 2020 and RSS 247: 2017. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices. Procedures described in section 8 of the standard were used.

4.1 Output Power Requirements

The maximum output power requirement is the maximum equivalent isotropic radiated power delivering at the transmitting antenna under specified conditions of measurements in the presence of modulation.


The maximum output power and harmonics shall not exceed CFR47 Part 15.247 (b) and RSS 247 5.4 (d).

The maximum transmitted power in the band 2400-2483.5 MHz: 1 W

4.1.1 Test Method

Conducted method was used to measure the channel power output. The worst findings were conducted on 3 channels in each operating range per CFR47 Part 15.247(b) and RSS 247 Sect. 5.4(d); 2400 MHz to 2483.5 MHz. The worst mode results indicated below.

Test Setup:

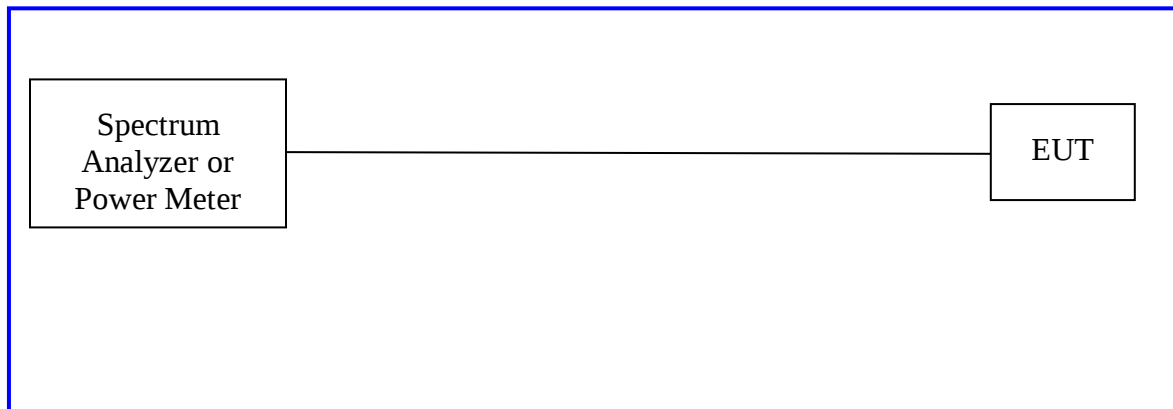


4.1.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s). Worse case data for each mode reported below. Plots of highest power included for low, medium, and high channels.


Table 2: RF Output Power at the Antenna Port – Test Results

Test Conditions: Conducted Measurement, Normal Temperature			
Antenna Type: PCB trace antenna			
Max. Antenna Gain: -9.67 dBi			
Operating Channel (MHz)	Limit [dBm]	Total Power [dBm]	Margin [dB]
2404.00	30.00	4.94	-25.06
2440.00	30.00	4.47	-25.53
2480.00	30.00	3.98	-26.02

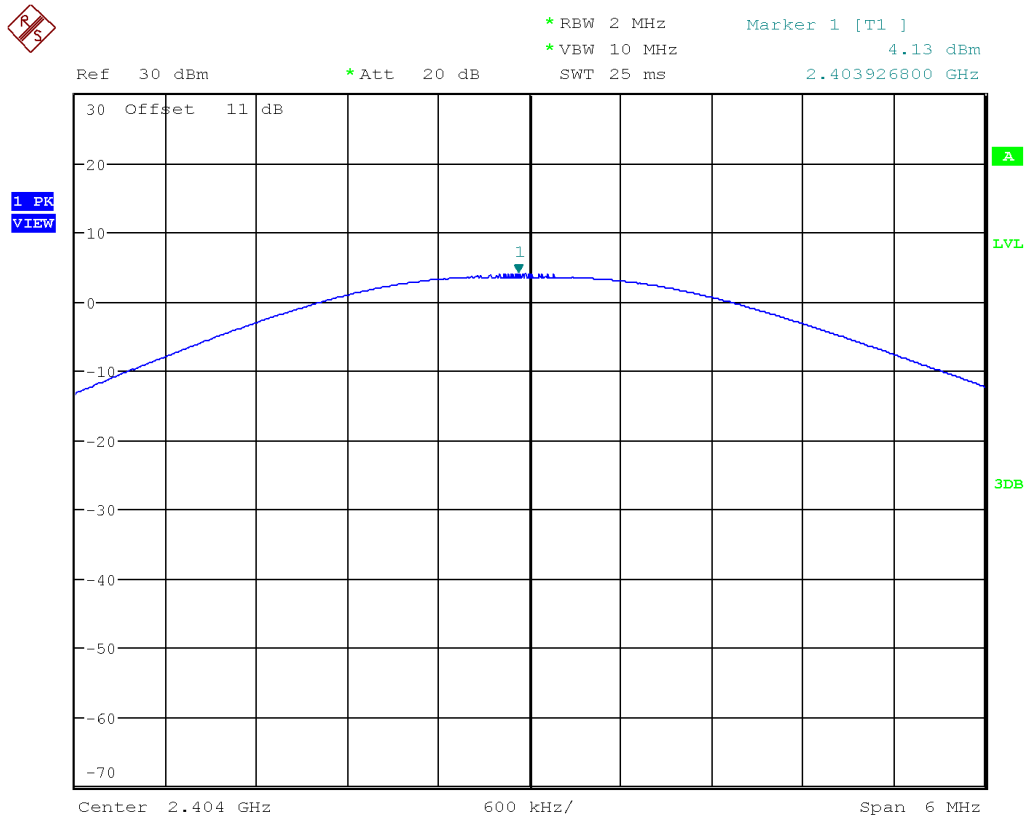


Date: 10.OCT.2019 11:56:34

Plot 1. Maximum Conducted Power, 2404MHz

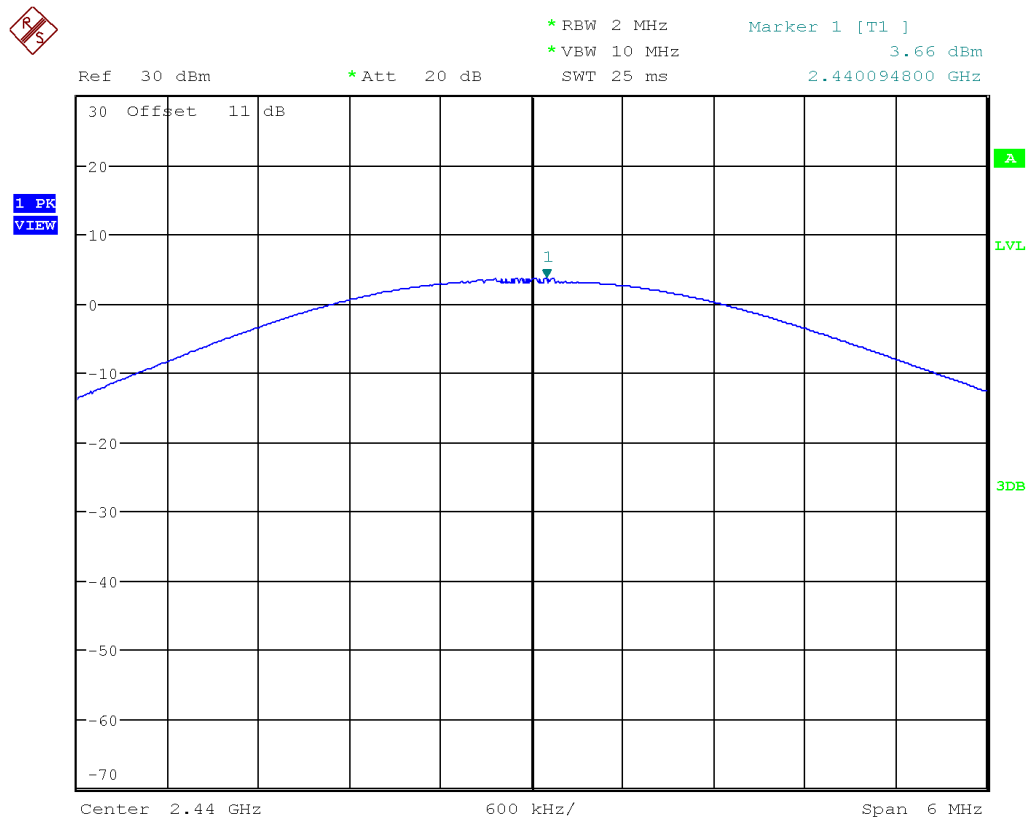

Date: 10.OCT.2019 11:55:42

Plot 2. Maximum Conducted Power, 2440MHz

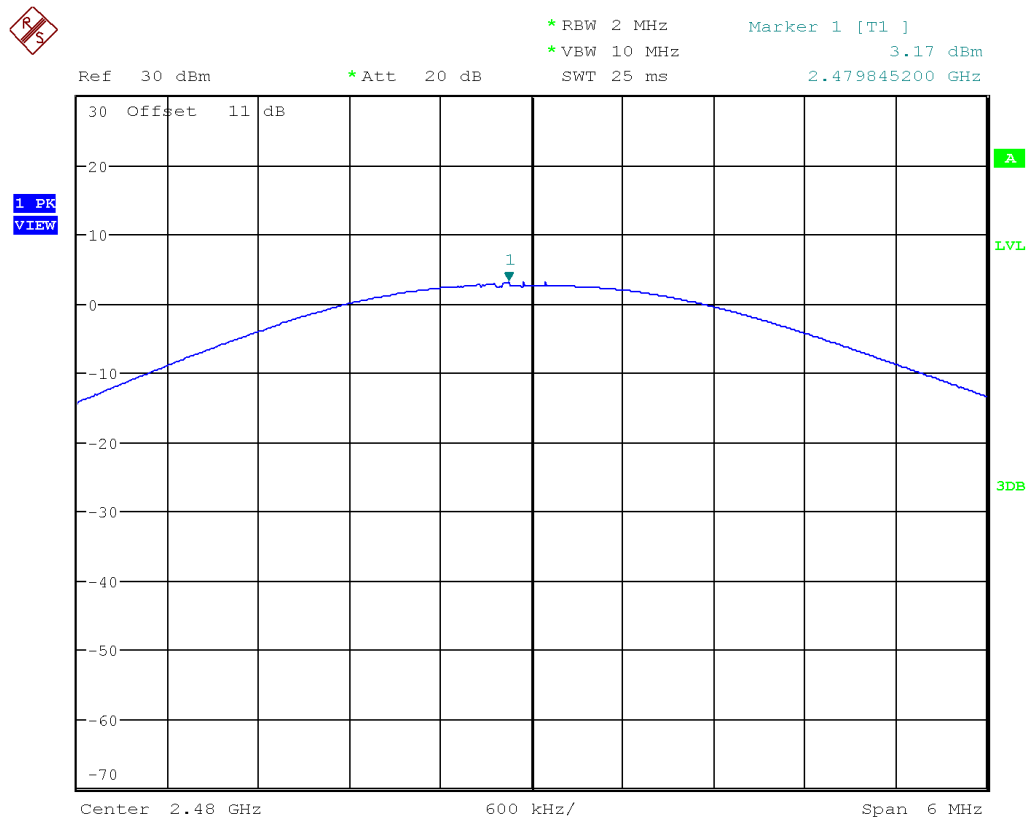

Date: 10.OCT.2019 11:54:07

Plot 3. Maximum Conducted Power, 2480MHz

4.2 DTS Bandwidth (6dB) and Occupied Bandwidth

The occupied bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency.


The 99% bandwidth is the bandwidth in which 99% of the transmitted power occupied.

The minimum 6 dB bandwidth shall be at least 500 kHz.

4.2.1 Test Method

The conducted method was used to measure the occupied bandwidth according to ANSI C63.10:2013 Section 11.8. The measurement was performed with modulation per CFR47 15.247 (a) (2) and RSS Gen Sect. 6.6. Measurements were performed on the low, middle and high channels of the operating frequency range; 2400 MHz to 2483.5 MHz.

Test Setup:

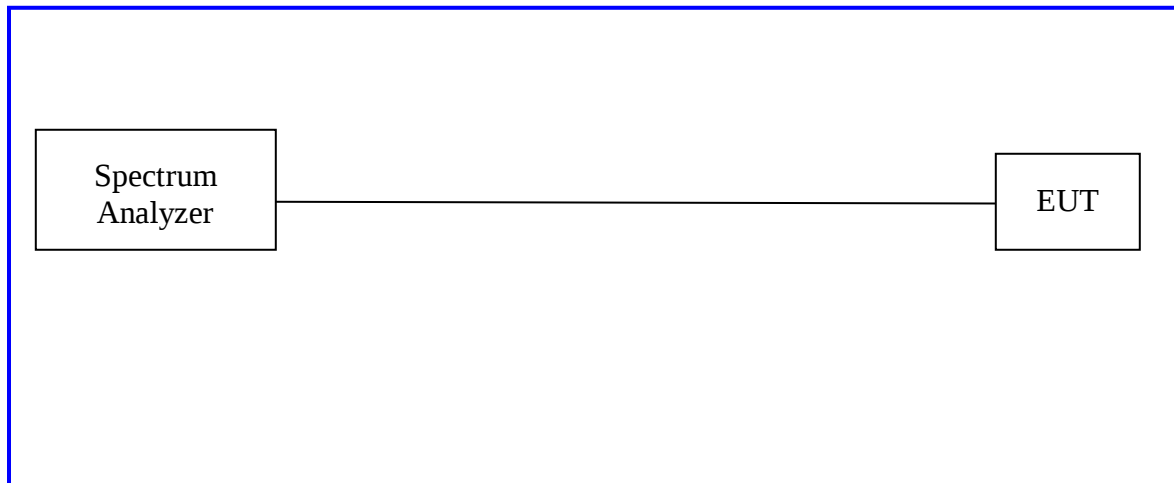


Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 3: Occupied Bandwidth – Test Results


Test Conditions: Conducted Measurement, Normal Temperature

Bandwidth (MHz)		
Freq. (MHz)	99% Bandwidth (MHz)	6dB (DTS) Bandwidth (MHz)
2404	1.03	0.65
2440	1.03	0.65
2480	1.03	0.65
Note: None		

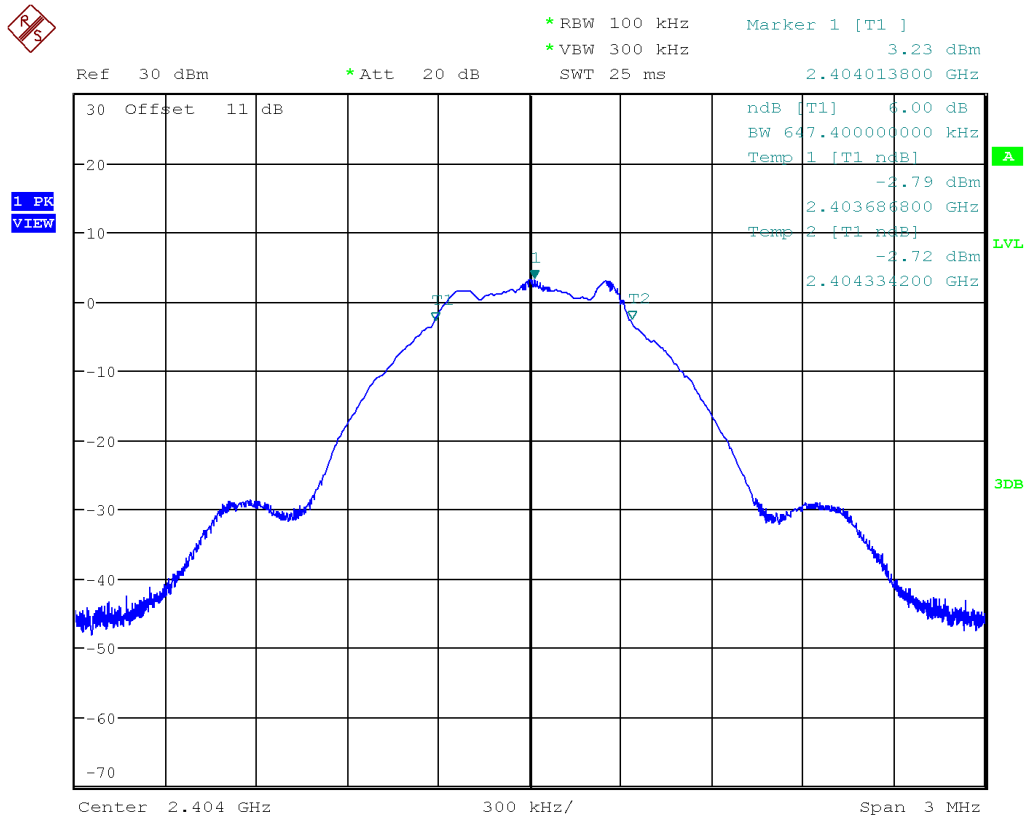


Date: 10.OCT.2019 11:35:53

Plot 4. 2404MHz, 6dB Bandwidth

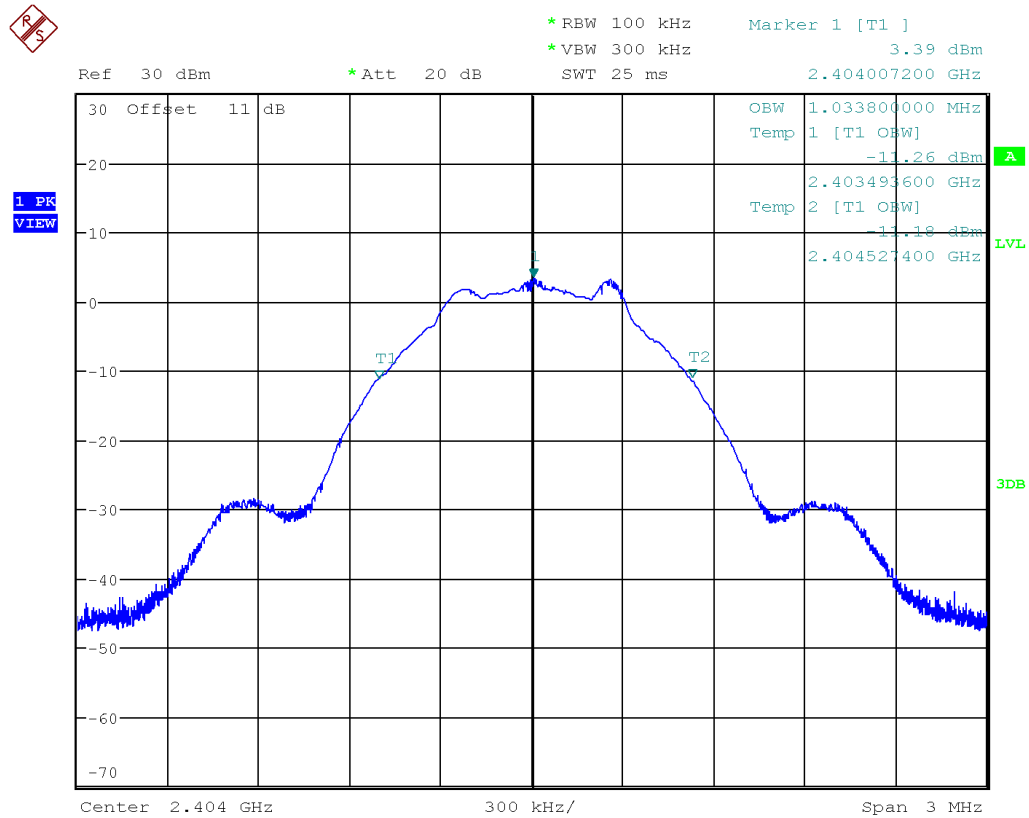


Date: 10.OCT.2019 11:34:43

Plot 5. 2404MHz, 99% Bandwidth




Plot 6. 2440MHz, 6dB Bandwidth

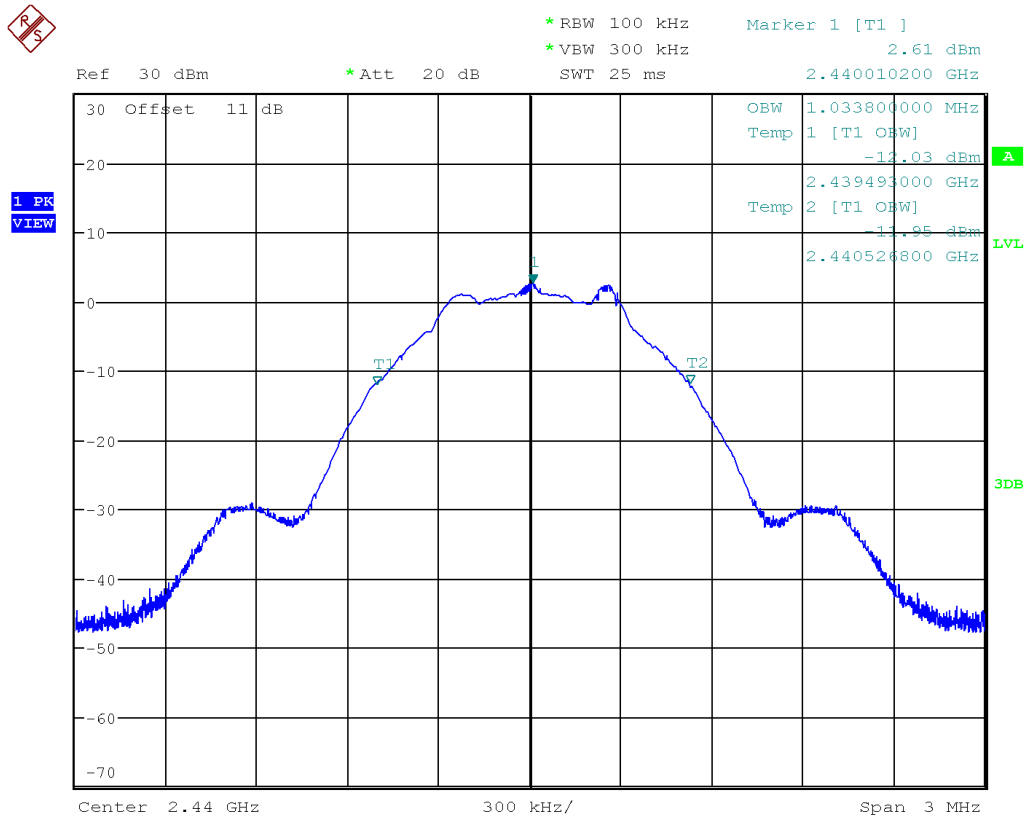


Date: 10.OCT.2019 11:38:33

Plot 7. 2440MHz, 99% Bandwidth

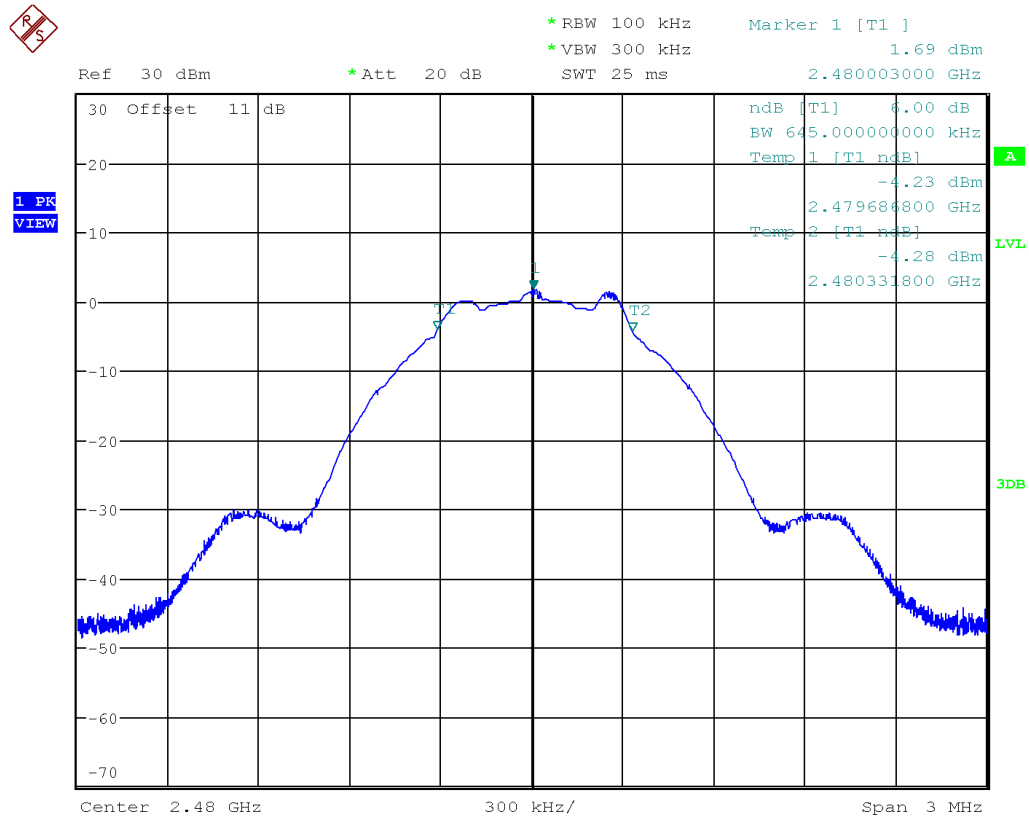

Date: 10.OCT.2019 11:45:04

Plot 8. 2480MHz, 6dB Bandwidth

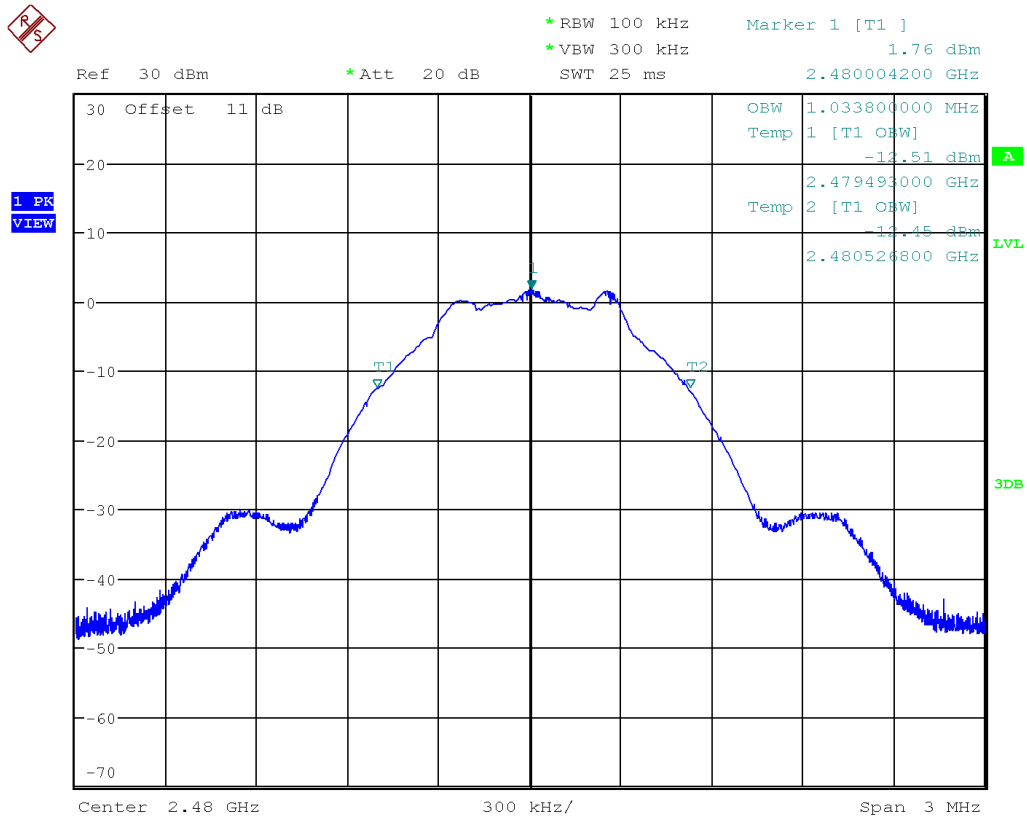

Date: 10.OCT.2019 11:41:29

Plot 9. 2480MHz, 99% Bandwidth


4.3 Peak Power Spectral Density

According to the CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b), the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.1 Test Method

The conducted method was used to measure the channel power output per ANSI C63.10-2013 Section 11.10.2. The measurement was performed with modulation per CFR47 Part 15.247 (e) and RSS 247 Sect.5.2 (b). The worst findings were conducted on 3 channels in each operating frequency range of 2400 MHz to 2483.5 MHz.

Test Setup:

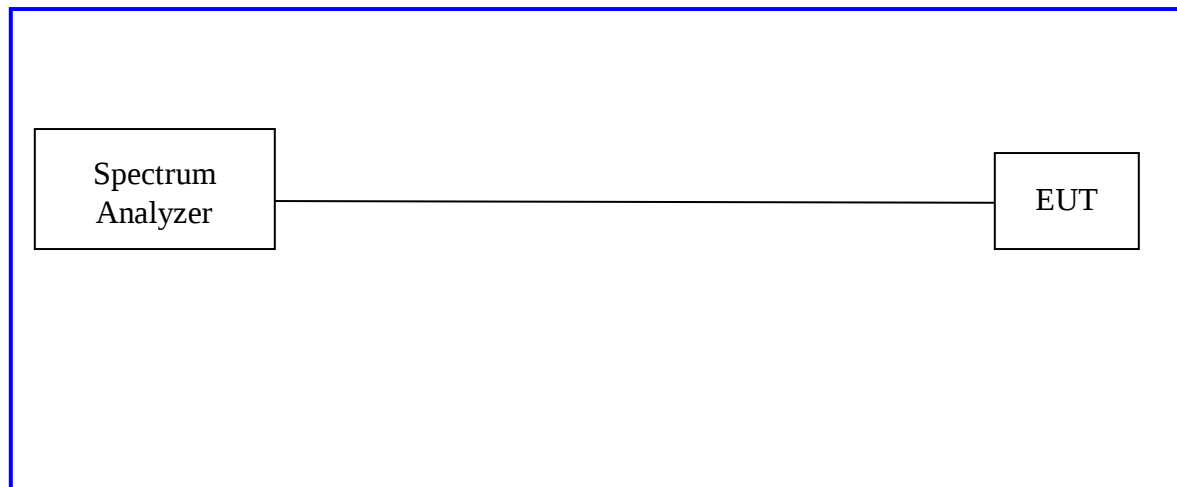

Method PKPSD of “KDB 558074 – DTS Measurement Guidance v04” was used.


4.3.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 4: Peak Power Spectral Density – Test Results


Test Conditions: Conducted Measurement, Normal Temperature

Peak Power Spectral Density			
Freq. (MHz)	Total PSD [dBm]	Limit [dBm]	Margin [dB]
2404	-11.14	8.0/3 kHz	-19.14
2440	-11.50	8.0/3 kHz	-19.50
2480	-12.52	8.0/3 kHz	-20.52
Note: None			

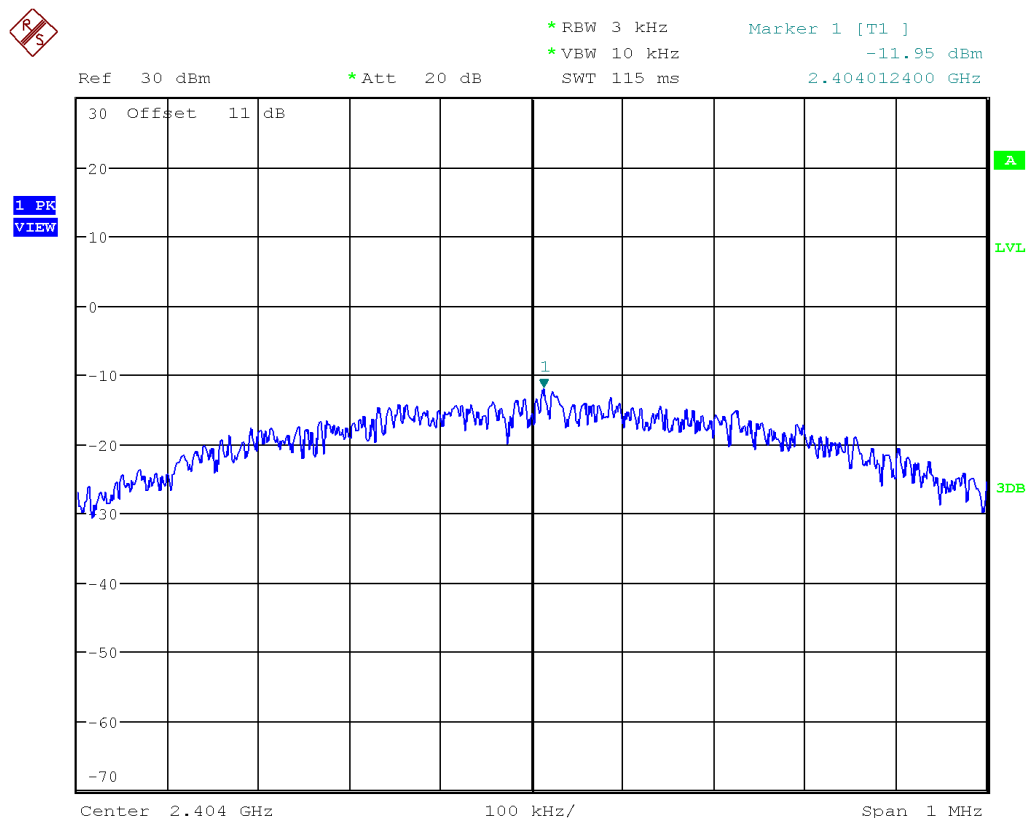


Date: 10.OCT.2019 11:57:56

Plot 10. 2404MHz PSD

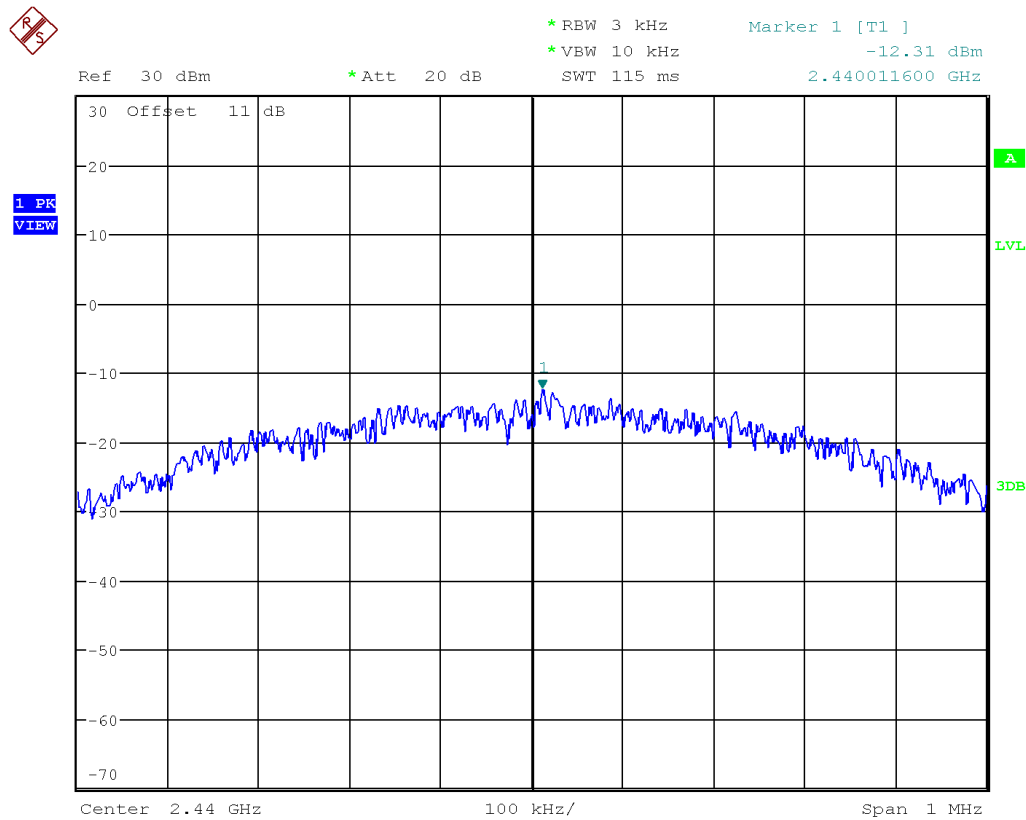

Date: 10.OCT.2019 12:00:21

Plot 11. 2440MHz PSD

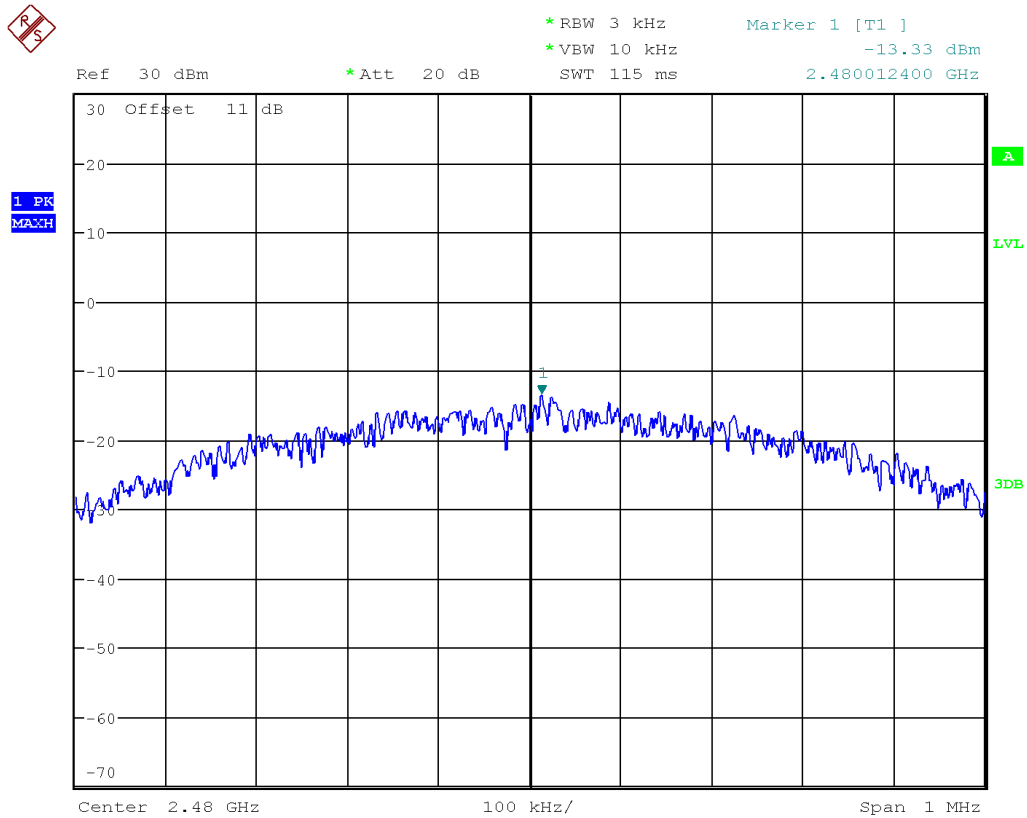

Date: 10.OCT.2019 12:01:55

Plot 12. 2480MHz PSD


4.4 Out of Band Emissions: Non-Restricted Bands

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.4.1 Test Method

Conducted measurements per ANSI C63.10-2013 Sections 6.10, 11.11, 14.3.3 were used to measure the undesirable emission requirement in non-restricted bands. The measurement was performed with modulation. The measurement was conducted from 30MHz to 26.5GHz on 3 channels in each mode on the EUT. Reference level was established on the channel with highest measured PSD (2440MHz) as stated in ANSI C63.10-2013 Section 11.11.2. Band edge tests were conducted on the low and high channel of each mode. The worst case measurement of each mode is recorded in this report.

Test Setup:

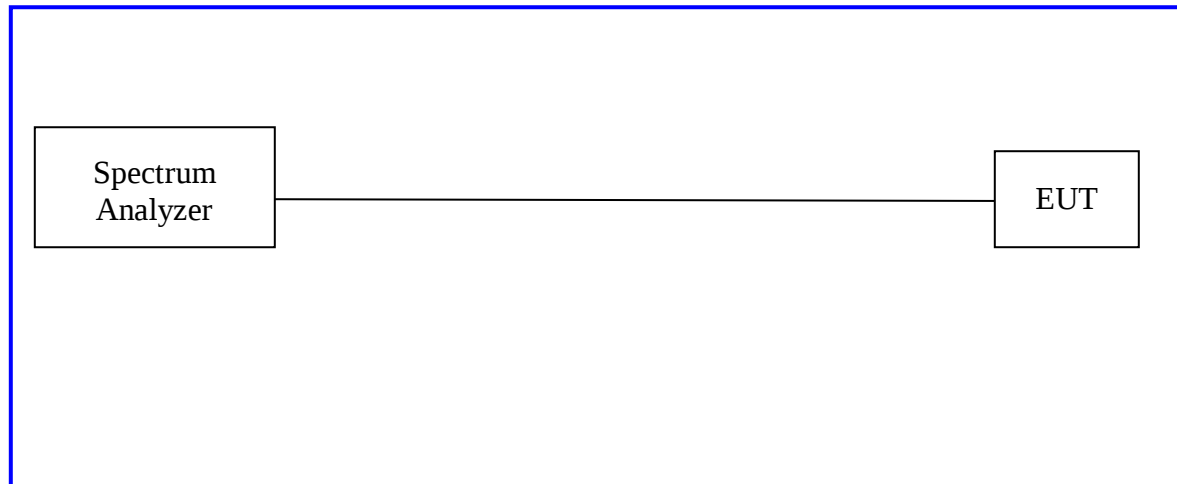


4.4.2 Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).


Table 5: Emissions at the Band-Edge – Test Results

Test Conditions: Conducted Measurement, Normal Temperature and Voltage only					
Non-Restricted Frequency Band Edge Emissions – Worse Case					
Band Edge	Center Freq (MHz)	Measured (dBc)	Limit (dBc)	Freq (MHz)	Results
Low	2404	-46.17	20	2396.20	Pass
High	2480	-46.54	20	2488.86	Pass
Note:					

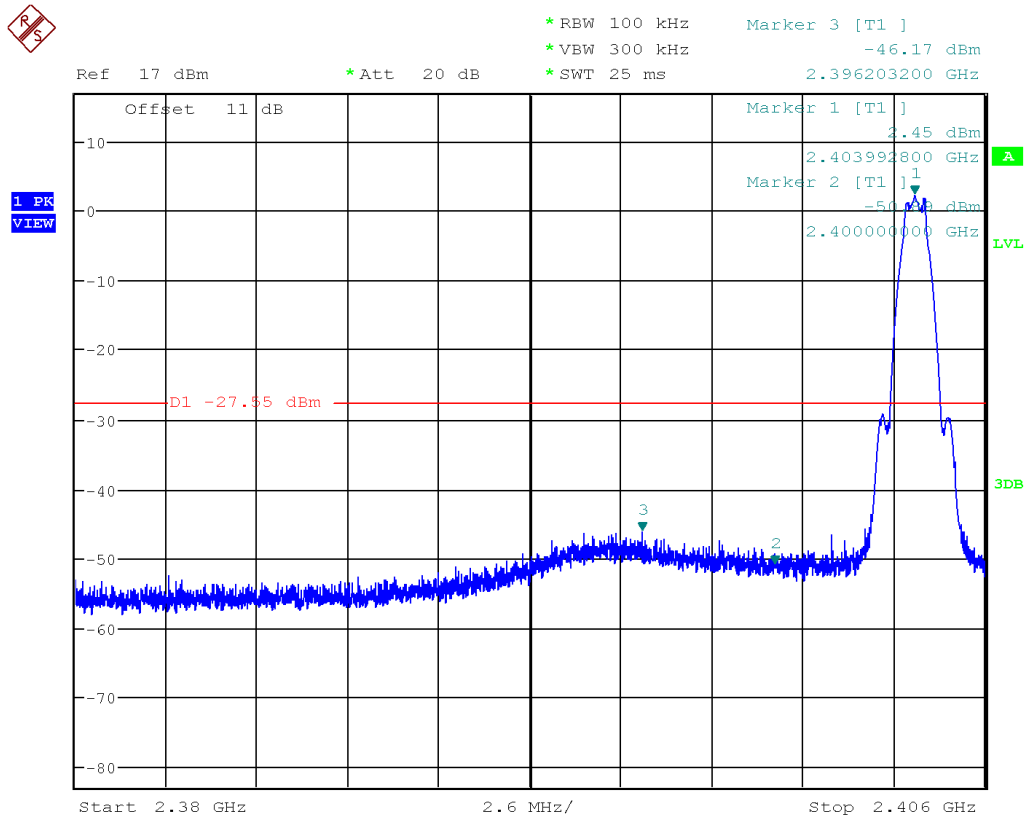


Date: 10.OCT.2019 12:40:00

Plot 13. 2404MHz Lower Band Edge

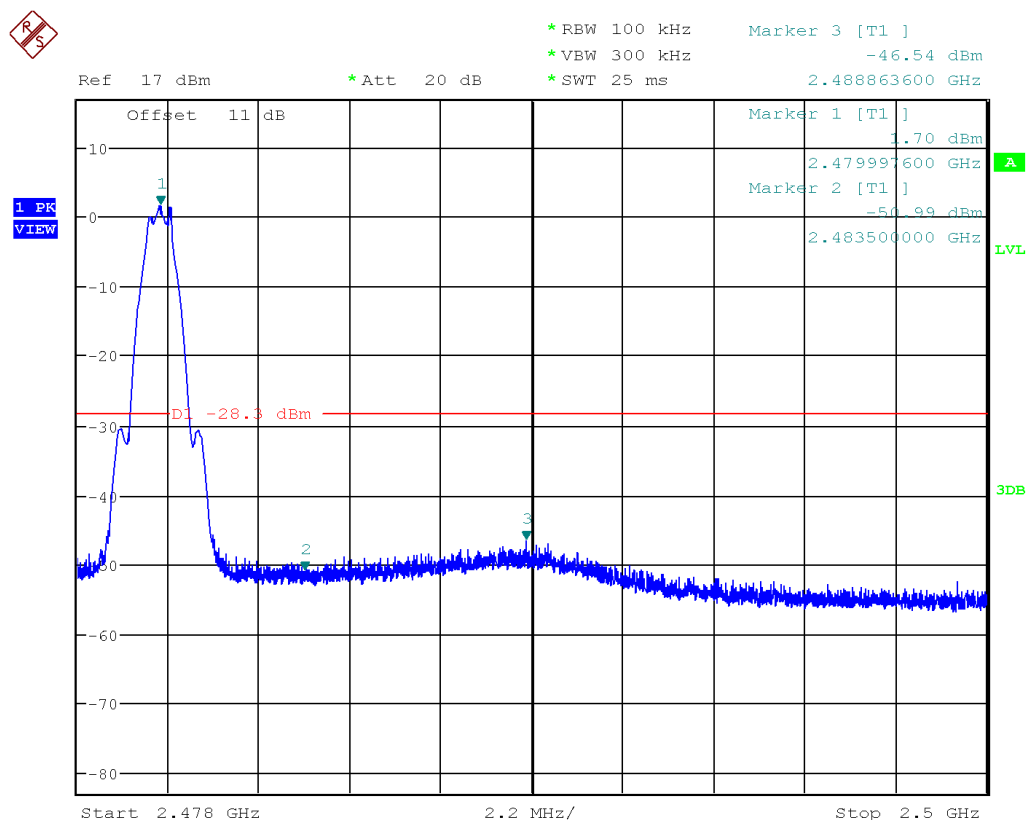


Date: 10.OCT.2019 12:37:45

Plot 14. 2480MHz Upper Band Edge

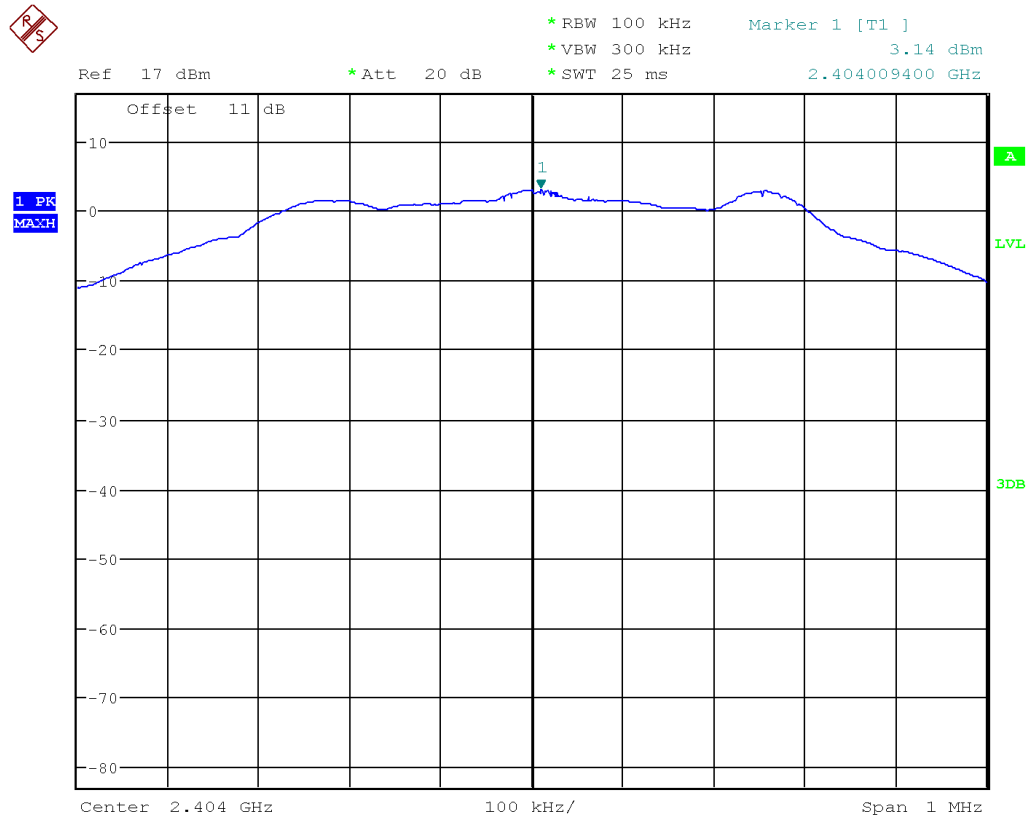


Date: 10.OCT.2019 12:43:23

Plot 15. Non-Restricted Reference Measurement, 2404Hz

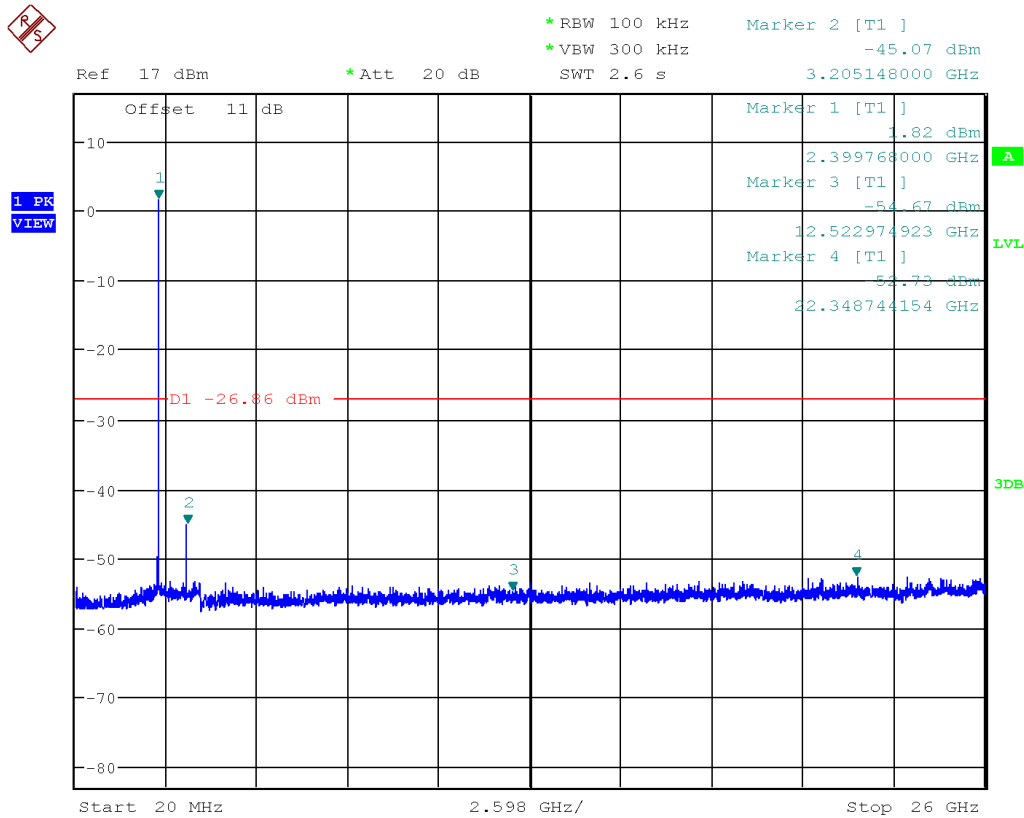


Date: 10.OCT.2019 12:50:25

Plot 16. 2404MHz 30MHz-26GHz Spurious

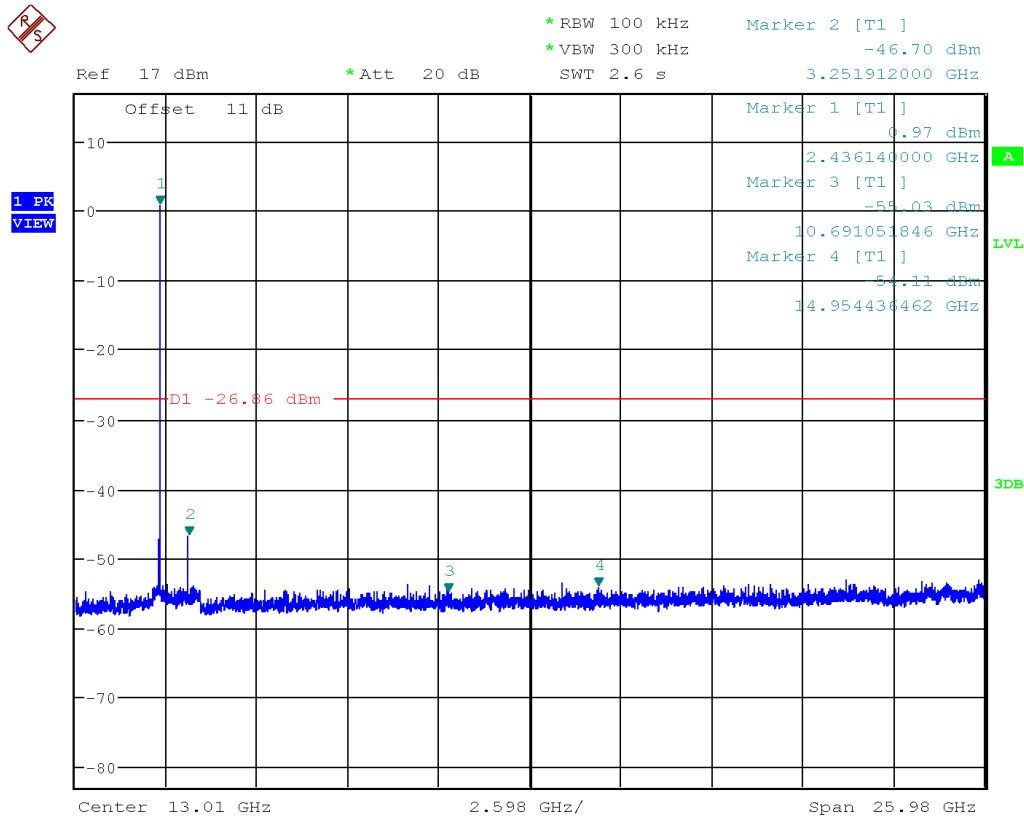

Date: 10.OCT.2019 12:53:09

Plot 17. 2440MHz 30MHz-26GHz Spurious

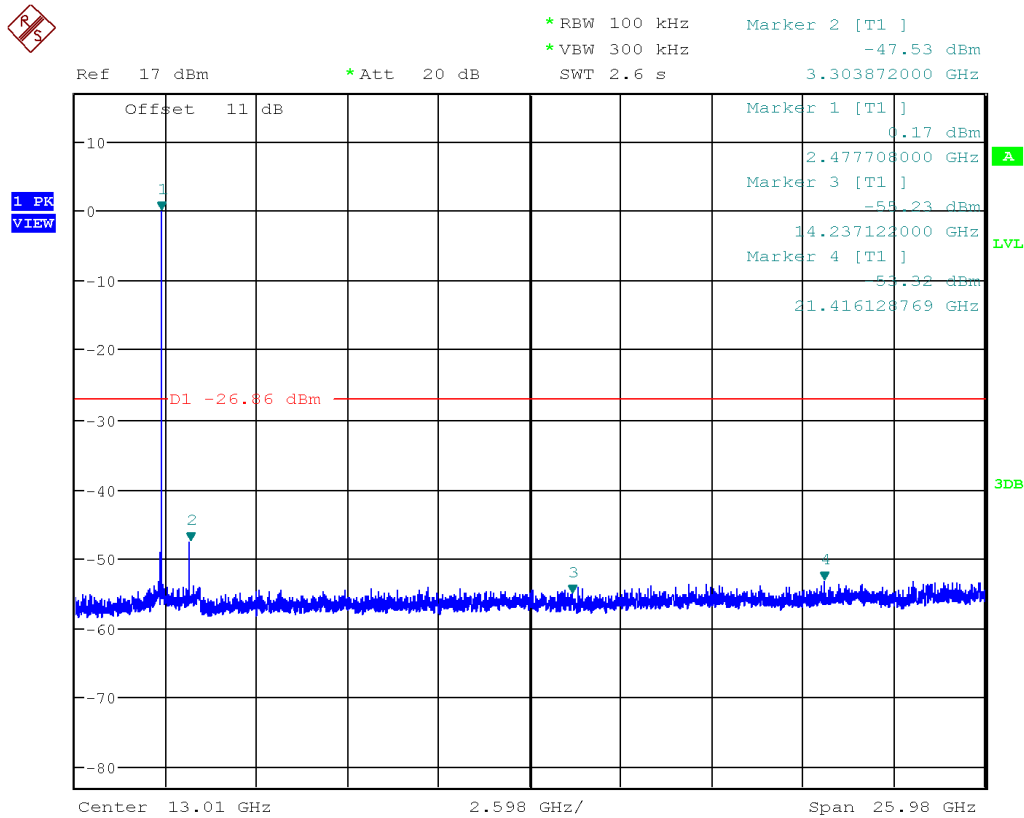

Date: 10.OCT.2019 12:55:06

Plot 18. 2480MHz 30MHz-26GHz Spurious


4.5 Out of Band Emissions: Restricted Band Edge

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmitting mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS-247 Sect. 5.5, RSS-GEN Sect. 8.9 and 8.10.

4.5.1 Test Method

Radiated measurements per ANSI C63.10-2013 Section 6.10.5 were used to measure the undesirable emission requirement in restricted bands. Peak points were found and RMS Average was taken for each point found. The measurement was performed with modulation. This test was conducted on 3 channels in each mode on the EUT. The worst case measurement of each channel is recorded in this report. All channels were tested at highest power settings.

Test Setup

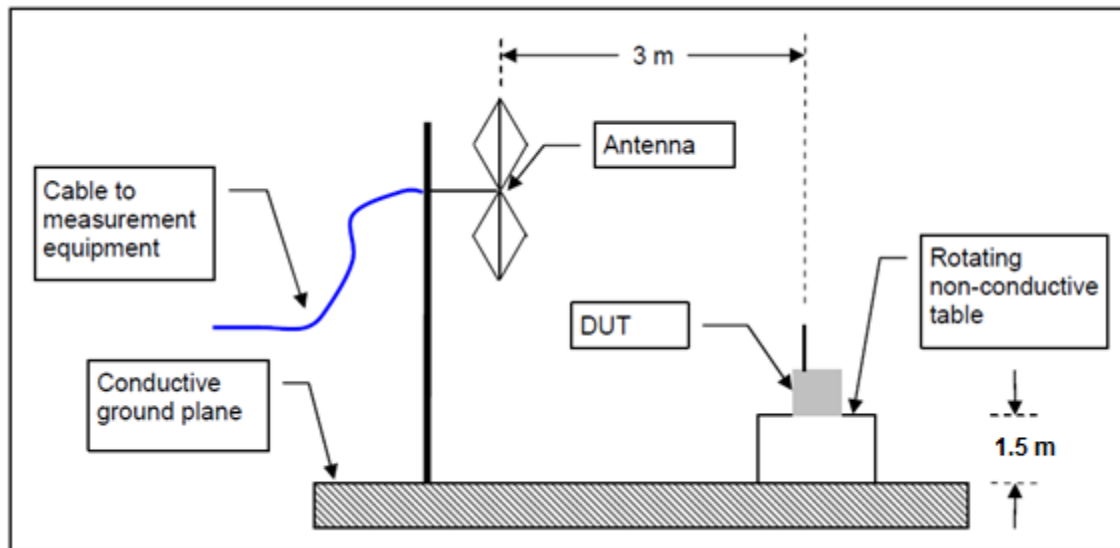


The DUT was stimulated by manufacturer provided test software that is not available to the end user.


4.5.2 Test Results

Table 6: Emissions at the Band-Edge – Test Results

Test Conditions: Radiated Measurement, Normal Temperature and Voltage							
Lower Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/ Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2389.867	BLE GFSK 1Mbps	2404	Average	33.73	54	-20.27	Pass
2389.867	BLE GFSK 1Mbps	2404	Peak	47.43	74	-26.57	Pass
Upper Restricted Band Edge							
Freq. (MHz)	Mode	Center Freq (MHz)	Detector (Average/ Peak)	Measured (dBuV/m)	Limit (dBuV/m)	Margin	Results
2486.134	BLE GFSK 1Mbps	2480	Average	37.64	54	-16.36	Pass
2486.134	BLE GFSK 1Mbps	2480	Peak	51.21	74	-22.79	Pass
Note: 1. The DCCF (Average Detector) is included in this table, the following plots are of peak values							

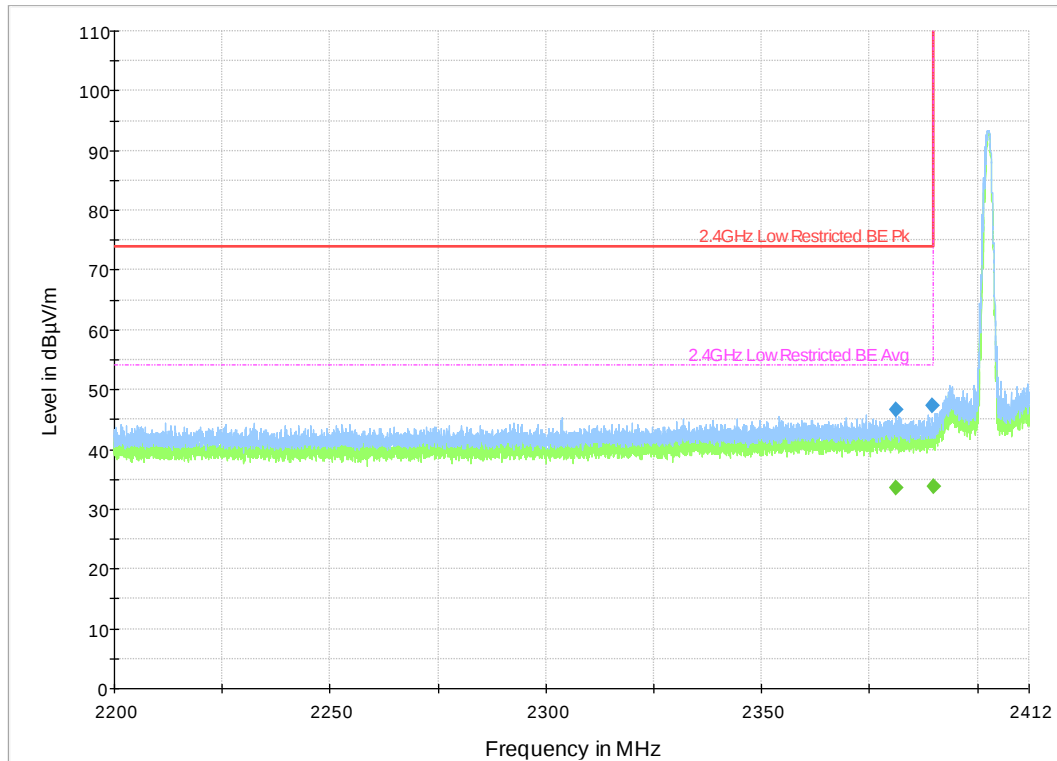

Plot 19. 2404MHz, Lower Band Edge, Restricted

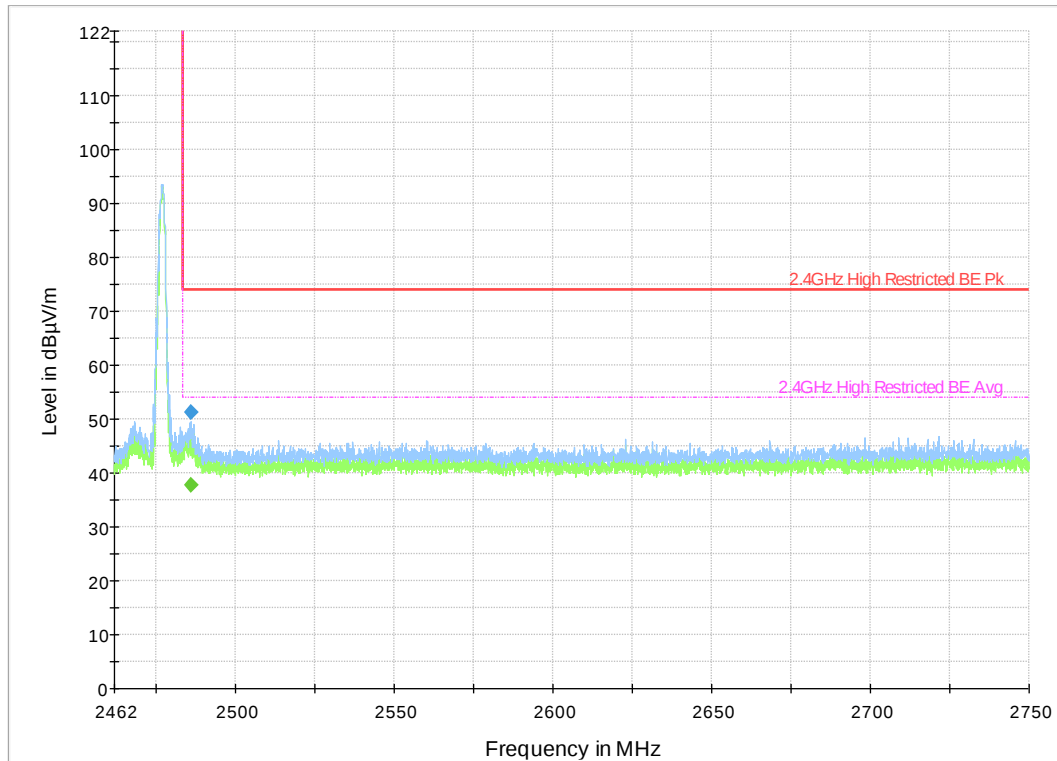

Plot 20. 2480MHz, Upper Band Edge, Restricted

4.6 Transmitter Spurious Emissions

Transmitter spurious emissions are emissions outside the frequency range of the equipment when the equipment is in transmit mode; per requirement of CFR47 15.205, 15.209, 15.247(d), RSS 247 Sect.5.5, RSS-GEN Sect. 8.9 and 8.10.

4.6.1 Test Methodology

4.6.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 120 kHz and provide a reading at each frequency for no more than 12° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

Pre-scans were performed to determine the worst data rate / chains.

4.6.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation. The six highest emissions relative to the limit were measured unless such emissions were more than 20 dB below the limit. If less than six emissions are within 20 dB of the limit, then the noise level of the receiver is measured at frequencies where emissions are expected. Multiples of all oscillator and microprocessor frequencies were also checked.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm (<1 GHz) and 150cm (>1 GHz) above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.


4.6.1.3 Deviations

None.


4.6.2 Test Setup:

All tests were conducted at full power on low, middle, and high channels. The DUT was stimulated by manufacturer provided test software that is not available to the end user.

30MHz-1GHz

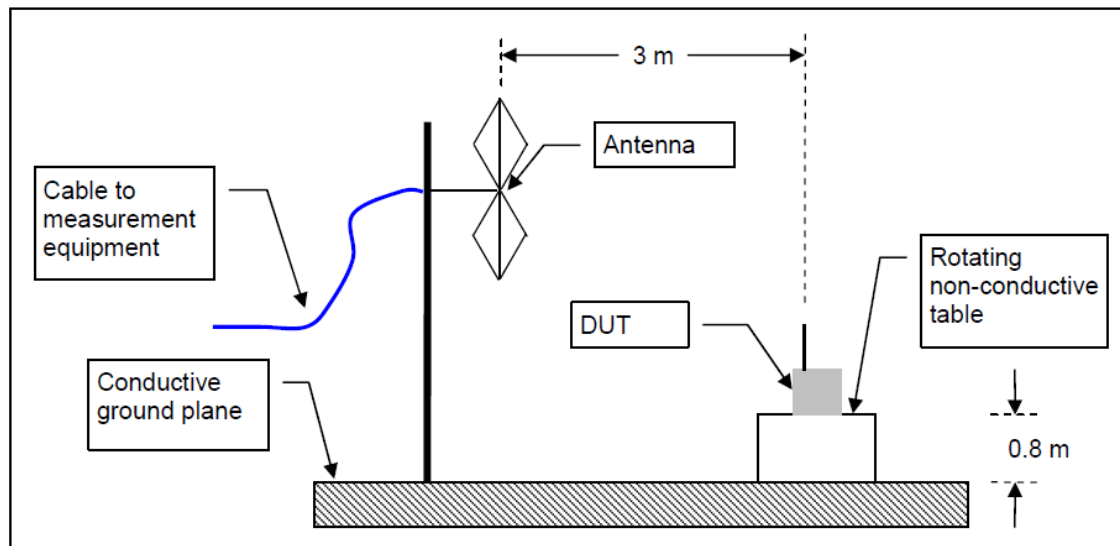

1-26GHz

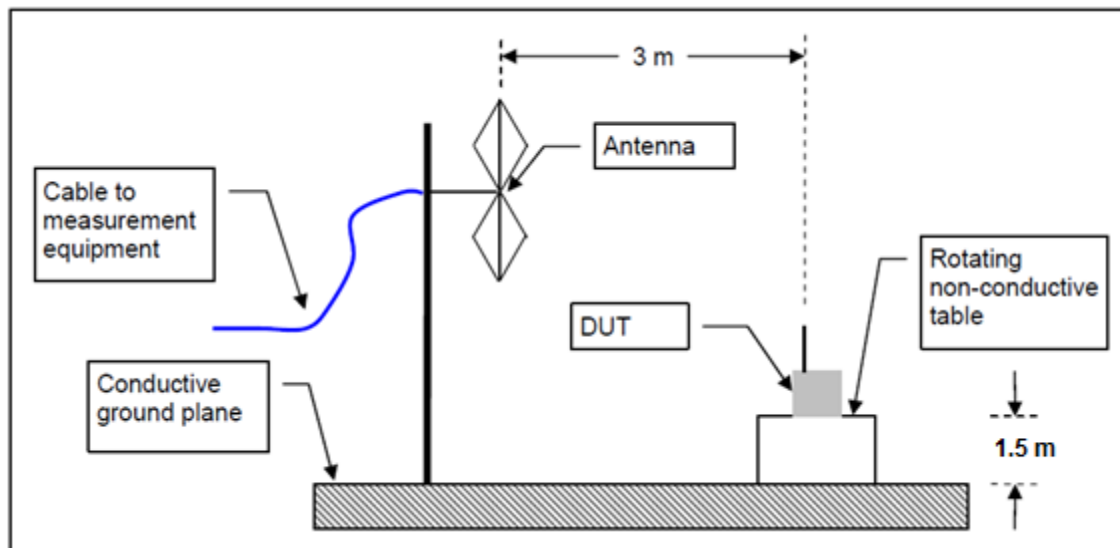

4.6.3 Transmitter Spurious Emission Limit

The spurious emissions of the transmitter shall not exceed the values in CFR47 Part 15.205, 15.209: 2015 and RSS Gen Sect. 8.9 and 8.10: 2014.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490.....	2400/F (kHz)	300
0.490-1.705.....	24000/F (kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

4.6.4 Test Results

The final measurement data was taken under the worst case operating modes, configurations, and/or cable positions. It also reflects the results including any modifications and/or special accessories listed in Sections 1.4 and test plan.


As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Note: Below 30 MHz was investigated and no emissions was found above noise floor.

Note: The 2.4 GHz notch filter was used to protect the front end of the pre-amp.


4.6.4.1 Plots

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.69	---	33.85	---	---	1000.00	120.00	309.00	V	61.00	-5.80	
30.69	29.06	---	40.00	10.94	1000.00	120.00	309.00	V	61.00	-5.80	
37.50	---	25.38	---	---	1000.00	120.00	300.00	V	75.00	-11.10	
37.50	19.83	---	40.00	20.17	1000.00	120.00	300.00	V	75.00	-11.10	
80.00	17.81	---	40.00	22.19	1000.00	120.00	300.00	V	-49.00	-18.80	
80.00	---	21.02	---	---	1000.00	120.00	300.00	V	-49.00	-18.80	
100.29	21.74	---	43.52	21.78	1000.00	120.00	101.00	V	-67.00	-16.00	
100.29	---	24.16	---	---	1000.00	120.00	101.00	V	-67.00	-16.00	
197.75	19.55	---	43.50	23.95	1000.00	120.00	101.00	V	32.00	-12.70	
197.75	---	23.16	---	---	1000.00	120.00	101.00	V	32.00	-12.70	
320.01	20.14	---	46.00	25.86	1000.00	120.00	100.00	H	-63.00	-10.60	
320.01	---	23.11	---	---	1000.00	120.00	100.00	H	-63.00	-10.60	

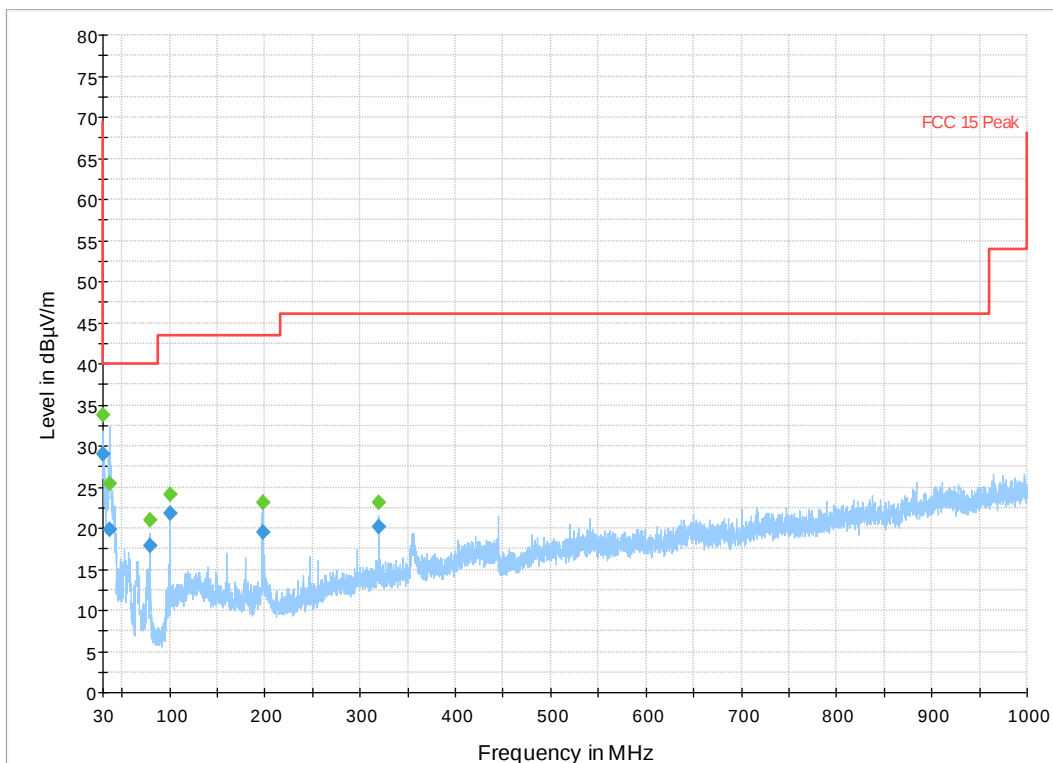


Plot 21. 30MHz-1GHz, 2404MHz

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.62	---	35.81	---	---	1000.00	120.00	306.00	V	171.00	-5.70	
30.62	31.79	---	40.00	8.21	1000.00	120.00	306.00	V	171.00	-5.70	
37.88	---	23.75	---	---	1000.00	120.00	300.00	V	-181.00	-11.40	
37.88	18.39	---	40.00	21.61	1000.00	120.00	300.00	V	-181.00	-11.40	
80.01	17.96	---	40.00	22.04	1000.00	120.00	300.00	V	79.00	-18.80	
80.01	---	21.06	---	---	1000.00	120.00	300.00	V	79.00	-18.80	
100.28	---	24.19	---	---	1000.00	120.00	100.00	V	-52.00	-16.00	
100.28	21.98	---	43.52	21.54	1000.00	120.00	100.00	V	-52.00	-16.00	
197.75	---	26.27	---	---	1000.00	120.00	100.00	V	175.00	-12.70	
197.75	23.33	---	43.50	20.17	1000.00	120.00	100.00	V	175.00	-12.70	
320.01	18.50	---	46.00	27.50	1000.00	120.00	207.00	V	106.00	-10.60	
320.01	---	21.99	---	---	1000.00	120.00	207.00	V	106.00	-10.60	

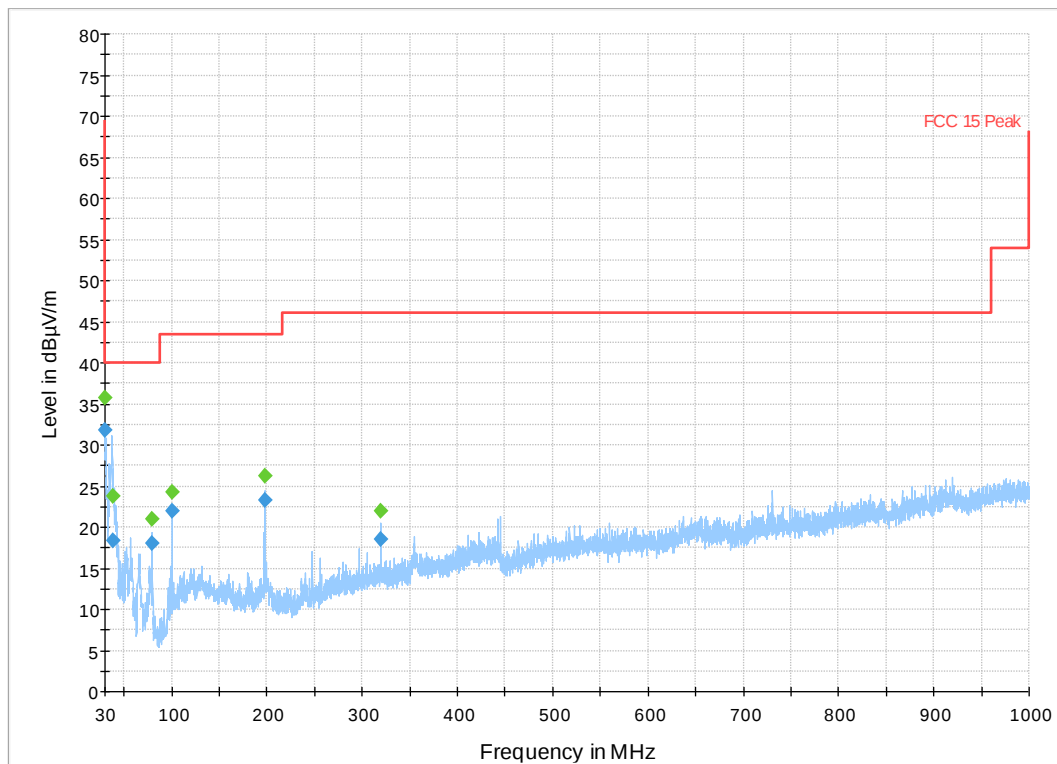


Plot 22. 30MHz-1GHz, 2440MHz

Frequency (MHz)	QuasiPeak (dBμV/m)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
30.60	31.15	---	40.00	8.85	1000.00	120.00	307.00	V	-136.00	-5.70	
30.60	---	35.47	---	---	1000.00	120.00	307.00	V	-136.00	-5.70	
37.55	---	25.81	---	---	1000.00	120.00	300.00	V	-50.00	-11.10	
37.55	20.29	---	40.00	19.71	1000.00	120.00	300.00	V	-50.00	-11.10	
80.01	18.30	---	40.00	21.70	1000.00	120.00	300.00	V	-68.00	-18.80	
80.01	---	21.22	---	---	1000.00	120.00	300.00	V	-68.00	-18.80	
100.27	21.03	---	43.52	22.49	1000.00	120.00	100.00	V	-83.00	-16.00	
100.27	---	23.46	---	---	1000.00	120.00	100.00	V	-83.00	-16.00	
197.84	---	25.23	---	---	1000.00	120.00	100.00	V	137.00	-12.70	
197.84	21.93	---	43.50	21.58	1000.00	120.00	100.00	V	137.00	-12.70	
255.98	8.50	---	46.00	37.50	1000.00	120.00	206.00	V	110.00	-13.10	
255.98	---	15.79	---	---	1000.00	120.00	206.00	V	110.00	-13.10	

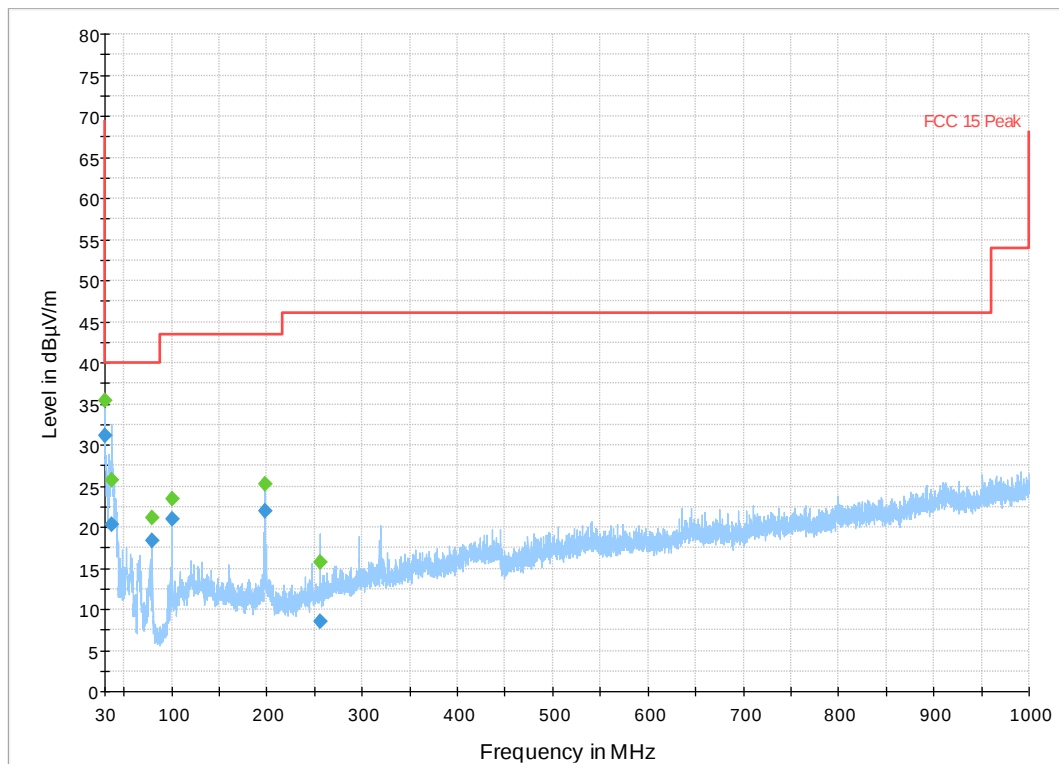


Plot 23. 30MHz-1GHz, 2480MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3205.36	51.46	---	74.00	22.54	1000.00	1000.00	217.00	V	162.00	-27.20	
3205.36	---	48.05	54.00	5.95	1000.00	1000.00	217.00	V	162.00	-27.20	
9307.47	46.27	---	74.00	27.73	1000.00	1000.00	228.00	V	-67.00	-16.50	
9307.47	---	33.15	54.00	20.85	1000.00	1000.00	228.00	V	-67.00	-16.50	
17965.18	---	40.34	54.00	13.66	1000.00	1000.00	280.00	H	-68.00	-6.80	
17965.18	54.24	---	74.00	19.76	1000.00	1000.00	280.00	H	-68.00	-6.80	

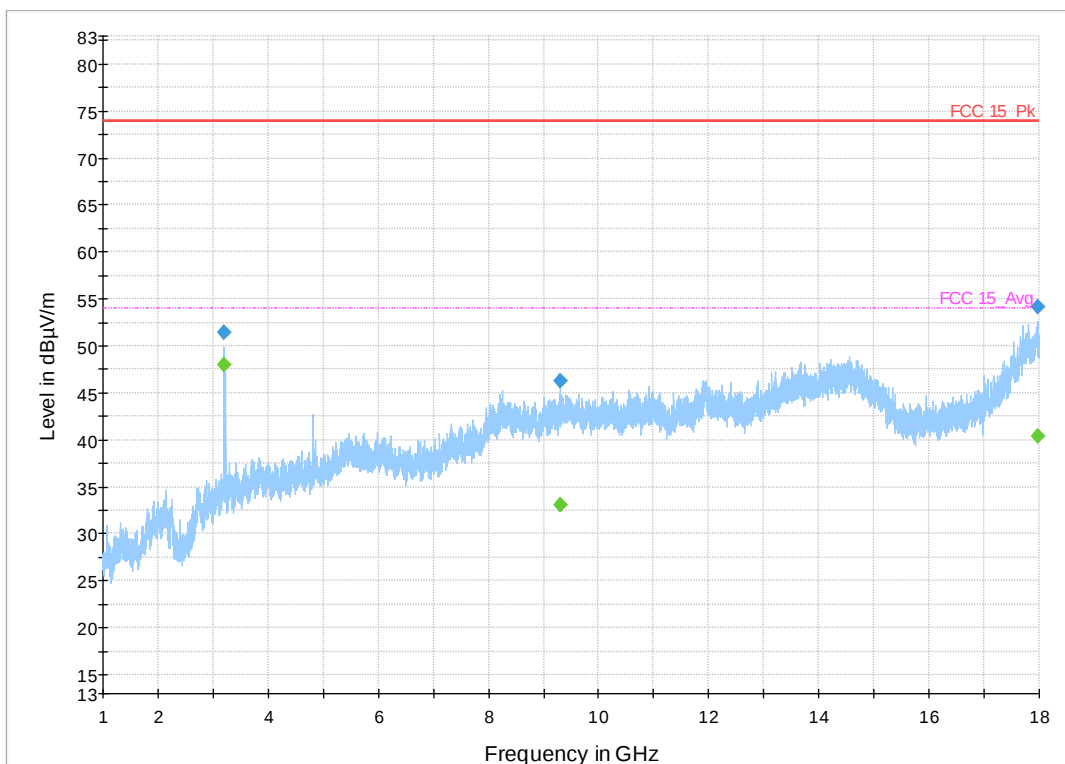


Plot 24. 1-18GHz, 2404MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
3253.35	49.10	---	74.00	24.90	1000.00	1000.00	204.00	V	139.00	-27.20	
3253.35	---	45.39	54.00	8.61	1000.00	1000.00	204.00	V	139.00	-27.20	
14630.07	49.43	---	74.00	24.57	1000.00	1000.00	204.00	V	-92.00	-12.00	
14630.07	---	36.53	54.00	17.47	1000.00	1000.00	204.00	V	-92.00	-12.00	
17927.85	---	40.98	54.00	13.02	1000.00	1000.00	228.00	V	-155.00	-7.00	
17927.85	53.66	---	74.00	20.34	1000.00	1000.00	228.00	V	-155.00	-7.00	

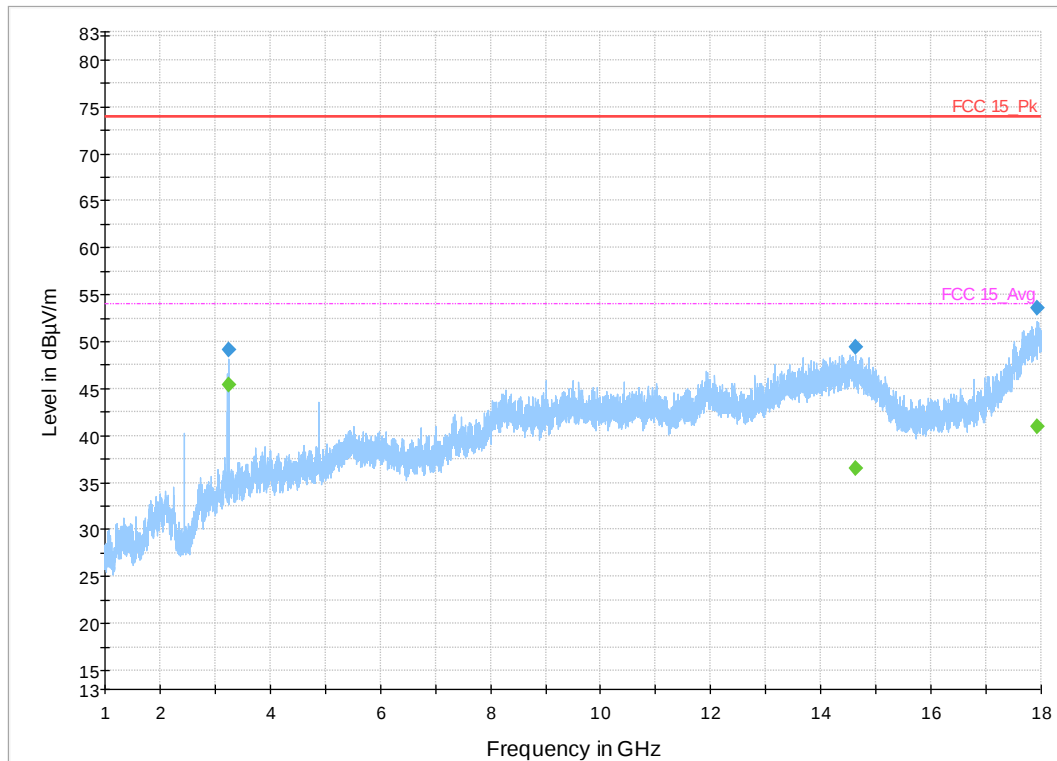


Plot 25. 1-18GHz, 2440MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
1887.87	32.96	---	74.00	41.04	1000.00	1000.00	217.00	V	-56.00	-32.10	
1887.87	---	20.58	54.00	33.42	1000.00	1000.00	217.00	V	-56.00	-32.10	
3303.50	52.53	---	74.00	21.47	1000.00	1000.00	204.00	V	159.00	-27.10	
3303.50	---	48.71	54.00	5.29	1000.00	1000.00	204.00	V	159.00	-27.10	
14250.60	---	36.49	54.00	17.51	1000.00	1000.00	300.00	H	32.00	-11.40	
14250.60	49.24	---	74.00	24.76	1000.00	1000.00	300.00	H	32.00	-11.40	
17941.25	---	40.49	54.00	13.51	1000.00	1000.00	200.00	V	170.00	-6.90	
17941.25	54.06	---	74.00	19.94	1000.00	1000.00	200.00	V	170.00	-6.90	

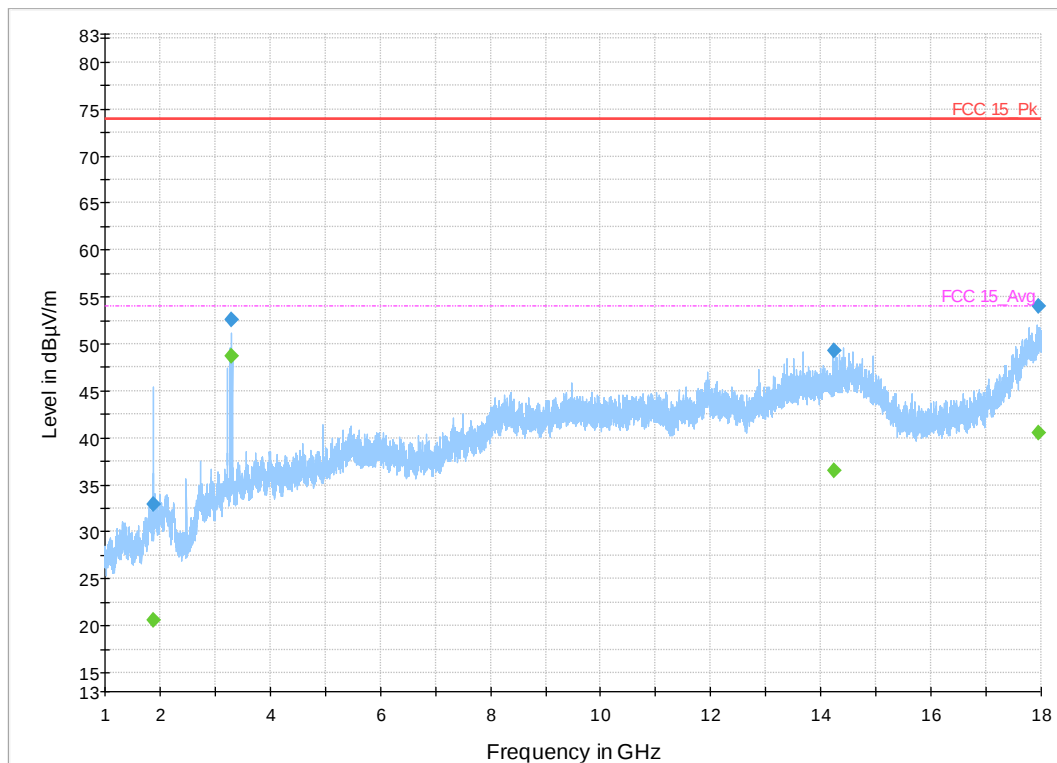


Plot 26. 1-18GHz, 2480MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
22062.69	---	34.90	54.00	19.10	1000.00	1000.00	195.00	V	-143.00	12.20	
22062.69	47.74	---	74.00	26.26	1000.00	1000.00	195.00	V	-143.00	12.20	

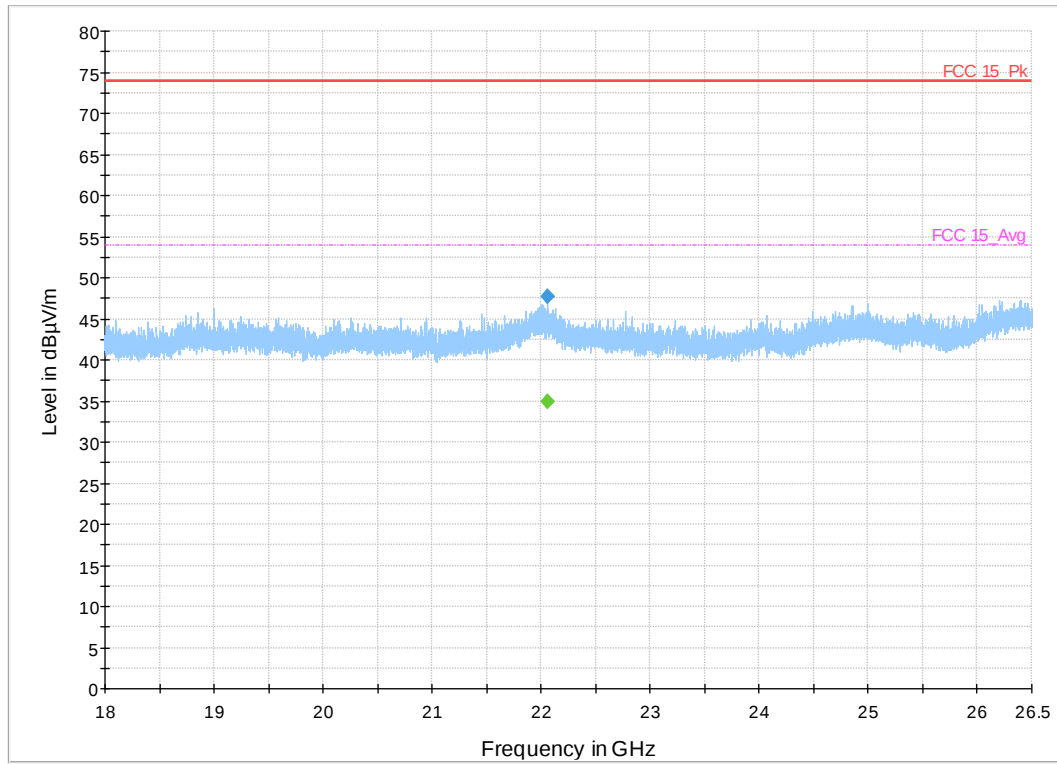


Plot 24. 18-26.5GHz, 2404MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26401.25	---	35.51	54.00	18.49	1000.00	1000.00	245.00	H	152.00	13.90	
26401.25	48.00	---	74.00	26.00	1000.00	1000.00	245.00	H	152.00	13.90	

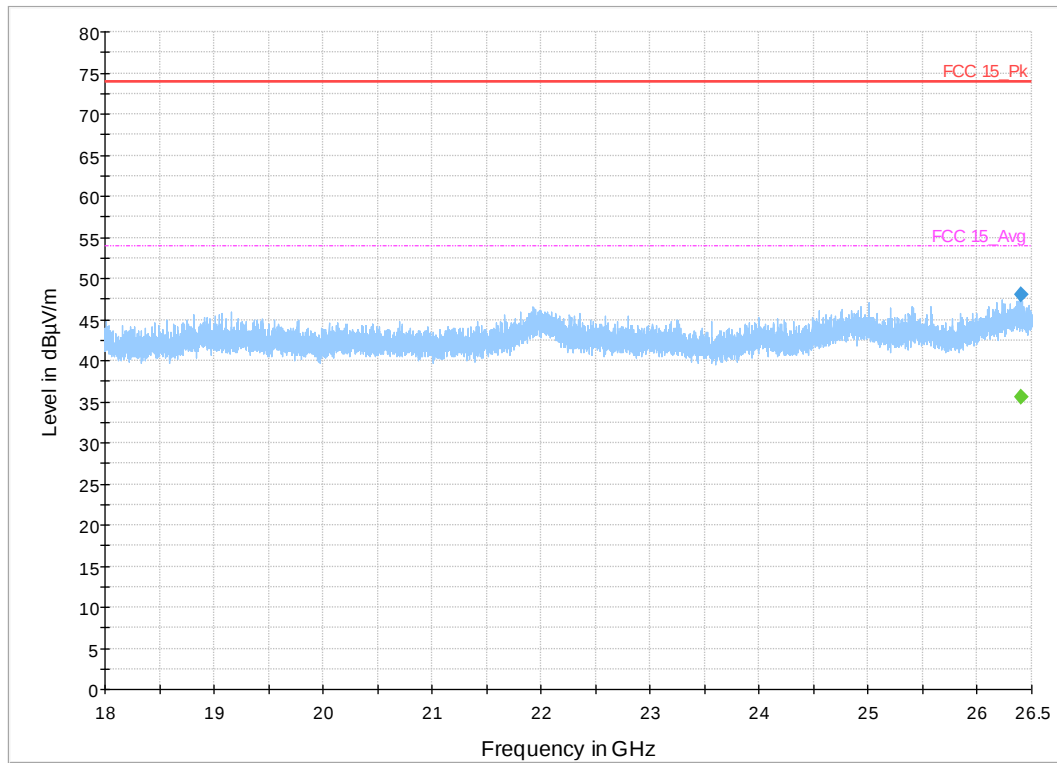

Plot 25. 18-26.5GHz, 2440MHz

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
26206.58	---	34.85	54.00	19.15	1000.00	1000.00	245.00	H	53.00	13.50	
26206.58	47.79	---	74.00	26.21	1000.00	1000.00	245.00	H	53.00	13.50	

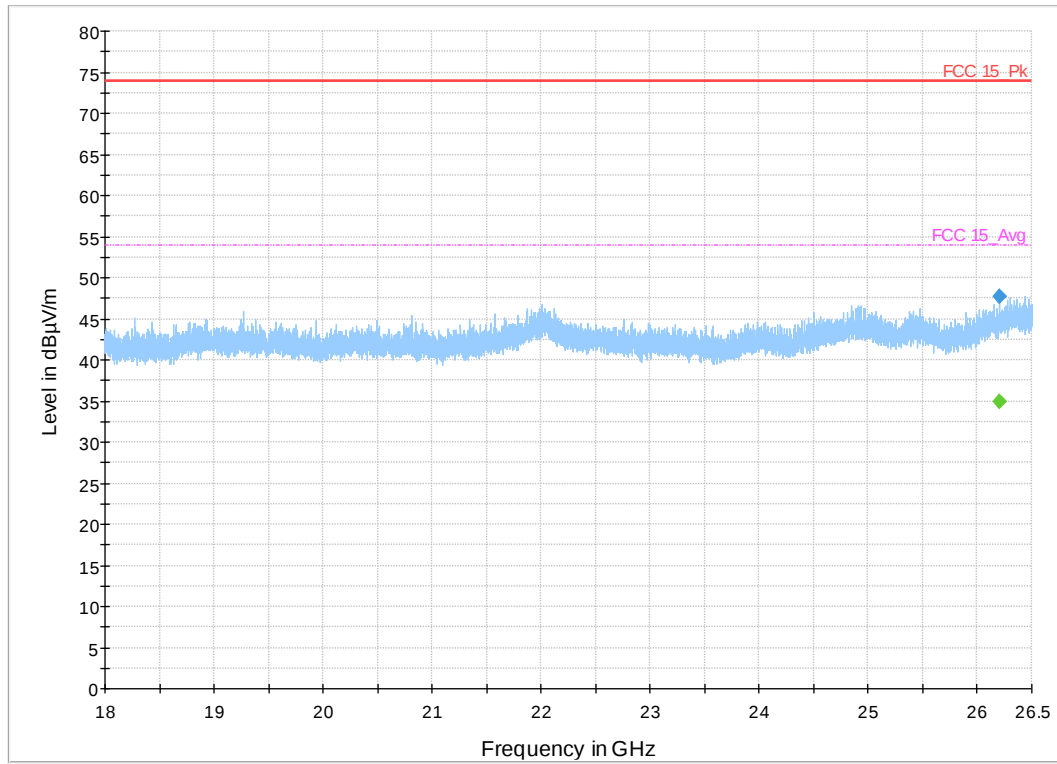

Plot 26. 18-26.5GHz, 2480MHz

4.7 AC Conducted Emissions

Testing was performed in accordance with ANSI C63.4: 2014. These test methods are listed under the laboratory's A2LA Scope of Accreditation.

This test measures the levels emanating from the EUT's AC input port, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

The AC conducted emissions of equipment under test shall not exceed the values in CFR47 Part 15.207 and RSS-GEN. Sect. 8.8.

4.7.1 Test Methodology

A test program that controls instrumentation and data logging was used to automate the AC Power Line Conducted emission test procedure. The frequency range of interest was divided into sub-ranges such as to yield a frequency resolution of 9 kHz. Each phase and neutral of the AC power line were measured with respect to ground. Measurements were performed using a set of 50µH / 50Ω LISNs.

Testing is performed in Lab1. The setup photographs clearly identify which site was used. The vertical ground plane used in the semi-anechoic chamber is a 2m x 2m solid aluminum frame and panel, and it is bonded to the horizontal ground plane.

In the case of tabletop equipment, the EUT is placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane and 40cm from a vertical ground reference plane. The rear of the EUT was positioned flush with the backside of the table and directly over the LISNs. The power and I/O cables were routed over the edge of the table and bundled approximately 40cm from the ground plane. Support equipment was powered from a separate LISN.

4.7.1.1 Deviations

There were no deviations from this test methodology.


4.7.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

Table 7: AC Conducted Emissions – Test Results


Test Conditions: Conducted Measurement at Normal Conditions only		
Antenna Type: PCB trace antenna		Power Level: See Section 4.1.4.1
AC Power: 120 Vac/60 Hz		Configuration: Tabletop
Configuration	Frequency Range	Test Result
Line 1 (Live)	0.15 to 30 MHz	Pass
Line 2 (Neutral)	0.15 to 30 MHz	Pass

4.7.2.1 Live Line

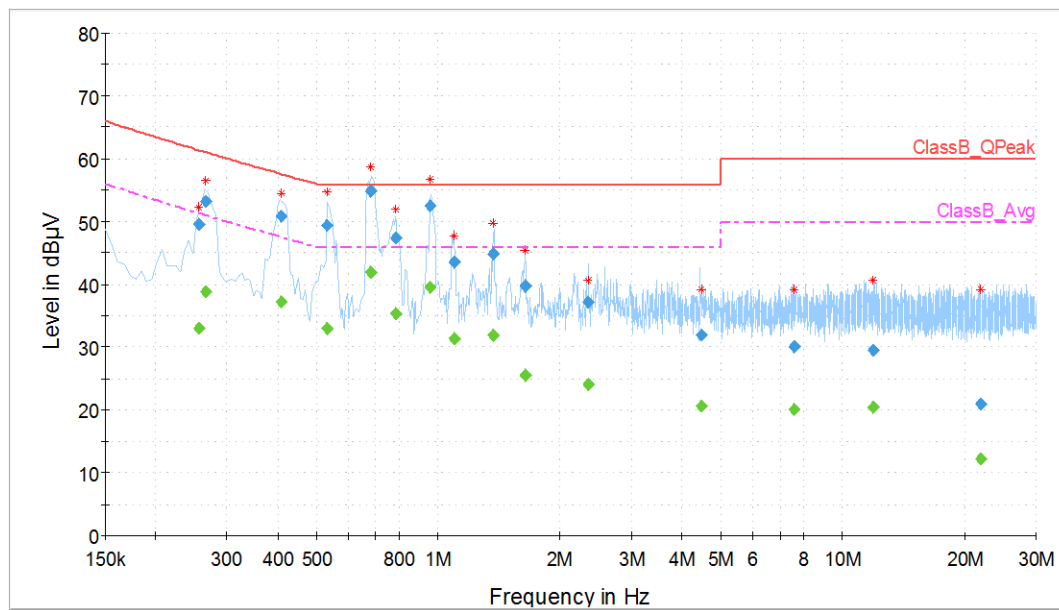

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.26	---	32.96	51.32	18.36	1000.00	10.00	L1	GND	9.80	
0.26	49.56	---	61.36	11.80	1000.00	10.00	L1	GND	9.80	
0.27	---	38.79	50.98	12.18	1000.00	10.00	L1	GND	9.80	
0.27	53.22	---	61.02	7.79	1000.00	10.00	L1	GND	9.80	
0.41	---	37.24	47.55	10.31	1000.00	10.00	L1	GND	9.70	
0.41	50.88	---	57.57	6.69	1000.00	10.00	L1	GND	9.70	
0.53	---	32.91	46.00	13.09	1000.00	10.00	L1	GND	9.70	
0.53	49.41	---	56.00	6.59	1000.00	10.00	L1	GND	9.70	
0.68	---	41.94	46.00	4.06	1000.00	10.00	L1	GND	9.70	
0.68	54.85	---	56.00	1.15	1000.00	10.00	L1	GND	9.70	
0.78	---	35.37	46.00	10.63	1000.00	10.00	L1	GND	9.70	
0.78	47.41	---	56.00	8.59	1000.00	10.00	L1	GND	9.70	
0.96	---	39.55	46.00	6.45	1000.00	10.00	L1	GND	9.70	
0.96	52.51	---	56.00	3.49	1000.00	10.00	L1	GND	9.70	
1.09	---	31.32	46.00	14.68	1000.00	10.00	L1	GND	9.70	
1.09	43.51	---	56.00	12.49	1000.00	10.00	L1	GND	9.70	
1.37	---	31.95	46.00	14.05	1000.00	10.00	L1	GND	9.70	
1.37	44.89	---	56.00	11.11	1000.00	10.00	L1	GND	9.70	
1.64	---	25.45	46.00	20.55	1000.00	10.00	L1	GND	9.70	
1.64	39.64	---	56.00	16.36	1000.00	10.00	L1	GND	9.70	
2.34	---	24.04	46.00	21.96	1000.00	10.00	L1	GND	9.80	
2.34	37.21	---	56.00	18.79	1000.00	10.00	L1	GND	9.80	
4.46	---	20.53	46.00	25.47	1000.00	10.00	L1	GND	9.80	
4.46	31.97	---	56.00	24.03	1000.00	10.00	L1	GND	9.80	
7.59	---	20.01	50.00	29.99	1000.00	10.00	L1	GND	9.80	
7.59	30.14	---	60.00	29.86	1000.00	10.00	L1	GND	9.80	
11.92	---	20.40	50.00	29.60	1000.00	10.00	L1	GND	9.80	
11.92	29.49	---	60.00	30.51	1000.00	10.00	L1	GND	9.80	
21.92	---	12.14	50.00	37.86	1000.00	10.00	L1	GND	9.80	
21.92	21.04	---	60.00	38.96	1000.00	10.00	L1	GND	9.80	

4.7.2.2 Neutral Line

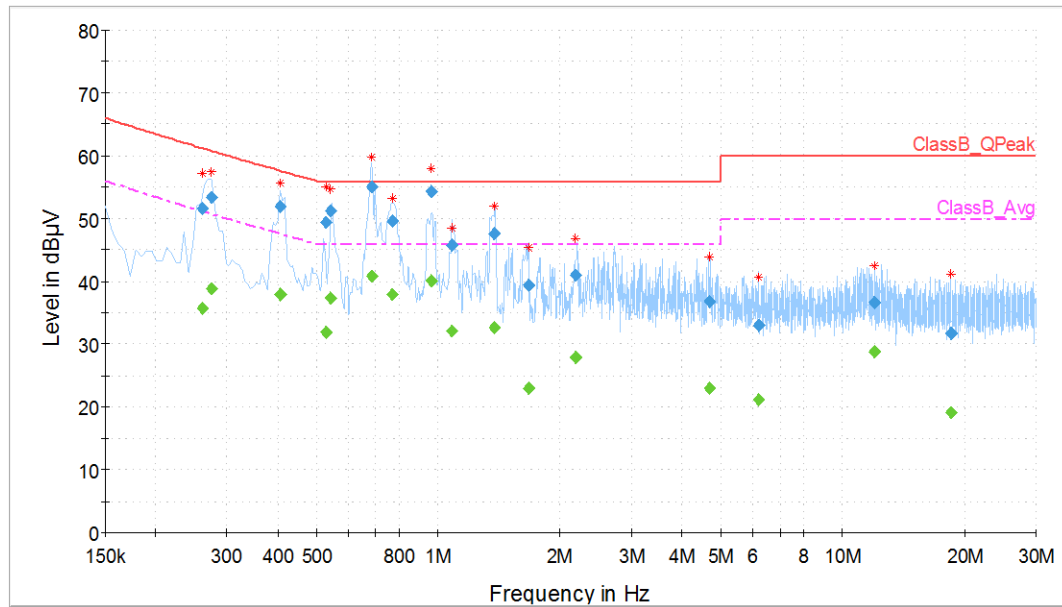

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE	Corr. (dB)	Comment
0.26	51.66	---	61.22	9.57	1000.00	10.00	L1	GND	9.80	
0.26	---	35.80	51.18	15.38	1000.00	10.00	L1	GND	9.80	
0.28	53.46	---	60.74	7.28	1000.00	10.00	L1	GND	9.80	
0.28	---	38.87	50.70	11.83	1000.00	10.00	L1	GND	9.80	
0.41	51.91	---	57.58	5.68	1000.00	10.00	L1	GND	9.70	
0.41	---	37.95	47.56	9.61	1000.00	10.00	L1	GND	9.70	
0.53	49.38	---	56.00	6.62	1000.00	10.00	L1	GND	9.70	
0.53	---	31.85	46.00	14.15	1000.00	10.00	L1	GND	9.70	
0.54	51.21	---	56.00	4.79	1000.00	10.00	L1	GND	9.70	
0.54	---	37.27	46.00	8.73	1000.00	10.00	L1	GND	9.70	
0.69	---	40.91	46.00	5.09	1000.00	10.00	L1	GND	9.70	
0.69	55.11	---	56.00	0.89	1000.00	10.00	L1	GND	9.70	
0.77	49.52	---	56.00	6.48	1000.00	10.00	L1	GND	9.70	
0.77	---	37.85	46.00	8.15	1000.00	10.00	L1	GND	9.70	
0.96	---	40.04	46.00	5.96	1000.00	10.00	L1	GND	9.70	
0.96	54.26	---	56.00	1.74	1000.00	10.00	L1	GND	9.70	
1.08	45.66	---	56.00	10.34	1000.00	10.00	L1	GND	9.70	
1.08	---	32.08	46.00	13.92	1000.00	10.00	L1	GND	9.70	
1.38	---	32.61	46.00	13.39	1000.00	10.00	L1	GND	9.70	
1.38	47.62	---	56.00	8.38	1000.00	10.00	L1	GND	9.70	
1.67	39.38	---	56.00	16.62	1000.00	10.00	L1	GND	9.70	
1.67	---	22.89	46.00	23.11	1000.00	10.00	L1	GND	9.70	
2.18	---	27.84	46.00	18.16	1000.00	10.00	L1	GND	9.80	
2.18	40.94	---	56.00	15.06	1000.00	10.00	L1	GND	9.80	
4.68	---	23.05	46.00	22.95	1000.00	10.00	L1	GND	9.80	
4.68	36.81	---	56.00	19.19	1000.00	10.00	L1	GND	9.80	
6.21	---	21.17	50.00	28.83	1000.00	10.00	L1	GND	9.80	
6.21	33.02	---	60.00	26.98	1000.00	10.00	L1	GND	9.80	
11.97	36.54	---	60.00	23.46	1000.00	10.00	L1	GND	9.80	
11.97	---	28.82	50.00	21.18	1000.00	10.00	L1	GND	9.80	
18.51	---	19.19	50.00	30.81	1000.00	10.00	L1	GND	9.80	
18.51	31.64	---	60.00	28.36	1000.00	10.00	L1	GND	9.80	

5 Test Equipment List

5.1 Equipment List

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal mm/dd/yyyy	Next Cal mm/dd/yyyy
Spectrum Analyzer	Rohde & Schwarz	FSU26.5	1166.1660.26	02/23/2020	02/23/2021
EMI Receiver	Rohde & Schwarz	ESW44	101663-dv	07/18/2019	07/18/2021
L.I.S.N.	Com-Power	LI-215	192000	01/16/2019	01/16/2021
Transient Limiter	Com-Power	LIT-930	531582	01/16/2019	01/16/2021
Preamplifier, 9 kHz – 1 GHz	Sonoma	310N	213221	01/16/2019	01/16/2021
Bilog Antenna	Sunol Sciences	JB3	A060502	12/19/2018	12/19/2020
Amplifier	Miteq	TTA1800-30-HG	1842452	01/15/2019	01/15/2021
Horn Antenna	Sunol Sciences	DRH-118	A040806	03/05/2019	03/05/2021
Amplifier	HP	8449B	3008A01013	01/15/2019	01/15/2021
Horn Antenna	EMCO	RA42-K-F-B-C	020131-004	03/04/2019	03/04/2021
Amplifier	Rohde & Schwarz	TS-PR26	3545.7014.03	03/04/2019	03/04/2021
Amplifier	Sonoma	310N	185516	N/A (See Note)	
1.6 GHz Low Pass Filter	K&L Microwave	8L120-X1600-0/09135-0249	UA691-35	N/A (See Note)	
3.5 GHz High Pass Filter	Hewlett Packard	84300-80038	820004	N/A (See Note)	
2.4GHZ Band Pass Filter	Microtronics	BRM50702	009	N/A (See Note)	

Note: Equipment is characterized before use.

6 EMC Test Plan

6.1 Introduction

This section provides a description of the Equipment Under Test (EUT), configurations, operating conditions, and performance acceptance criteria. It is an overview of information provided by the manufacturer so that the test laboratory may perform the requested testing.

6.2 Customer

Table 8: Customer Information

Company Name	Grid Connect
Address	1630 W Diehl Rd
City, State, Zip	Naperville, IL, 60563
Country	USA

Table 9: Technical Contact Information

Name	Cristian Codreanu
E-mail	cristianc@gridconnect.com

6.3 Equipment Under Test (EUT)

The information provided in the following table should be listed as it should appear in the final report. For those products that have only a model name, list the model number as *non-applicable* and vice-versa.

Table 10: EUT Designation

Product Name	Smart Power Cord
Model Number	CS-SC-01
System Name	Smart Power Cord
Product Description	Smart cord with power control and monitoring, WiFi connectivity

6.4 Product Specifications

Table 11: EUT Specifications

EUT Specifications	
AC Input	100-240V AC, 50/ 60 Hz
Environment	Indoor
Operating Temperature Range:	0-40°C
Multiple Feeds:	☐ Yes and how many ☒ No
Product Marketing Name (PMN)	Smart Power Cord
Hardware Version Identification Number (HVIN)	GC-SCBL-PCBA rev 0.3
Firmware Version Identification Number (FVIN)	N/A
RF Test Software Version	espRFTTool v1.1.0
Operating Modes	BT Low Energy, 1Mbps
Transmitter Frequency Band	2.4 GHz – 2.480 GHz
Power Setting @ Operating Channel	See section 4.1.2.
Modulation	GFSK
TX/RX Chain (s)	SISO
Type of Equipment	☒ Table Top ☐ Wall-mount ☐ Floor standing cabinet ☐ Other:
Note: EUT will be on / transmitted at all times with the highest power levels and antenna gains per channel.	

Table 12: Antenna Information

Number	Antenna Type	Description	Max Gain (dBi)
Antenna 0	PCB trace antenna	Bluetooth Low Energy	-9.67

Table 13: Interface Specifications

Interface Type	Cabled with what type of cable?	Is the cable shielded?	Maximum potential length of the cable?	Metallic (M), Coax (C), Fiber (F), or Not Applicable?
N/A	N/A	☐ N/A	☐ Metric: N/A	☐ N/A

Table 14: Accessory Equipment

Equipment	Manufacturer	Model	Serial	Comment
N/A	N/A	N/A	N/A	N/A

Table 15: Ancillary Equipment (used for test purposes only)

Equipment	Manufacturer	Model	Serial	Used for
Laptop	Lenovo	Thinkpad	N/A	Setup EUT operating modes/ channels via a USB connection to pins in EUT
Note: None.				

Table 16: Description of Sample used for Testing

Sample Number	Device	Serial Number	Configuration	Used For
1	CS-SC-01	Unit #1	Radiated Sample	TX Spurious Emissions, Bandedge
2	CS-SC-01	Unit #1	Radiated Sample	AC Mains Conducted Emissions
3	CS-SC-01	Unit #2	Conducted Sample	All other conducted Measurements
Note: None.				

Table 17: Description of Test Configuration used for Radiated Measurement.

Device	Antenna	Mode	Setup Photo (X-Axis)	Setup Photo (Y-Axis)	Setup Photo (Z-Axis)
CS-SC-01	PCB trace antenna	Transmit	EUT upright	N/A	N/A
Note:					

6.5 Test Specifications

Table 18: Test Specifications

Emissions and Immunity	
Standard	Requirement
CFR 47 Part 15.247: 2020	All
RSS 247 Issue 2, 2017	All

END OF REPORT