



FCC TEST REPORT

FCC ID: 2AFD2-VEGA

On Behalf of

DALI A/S

DALI VEGA

Model No.: DALI VEGA

Prepared for : DALI A/S
Address : Dali Allé 1, DK-9610 Nørager, Denmark

Prepared By : Shenzhen PSI Testing Co., Ltd.
1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West
Address : Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong,
China

Report Number : psi2511020-C01-R03
Date of Receipt : June 10, 2025
Date of Test : June 10, 2025-November 17, 2025
Date of Report : November 28, 2025
Version Number : V0

TABLE OF CONTENTS

	Description	Page
1	TEST SUMMARY	5
1.1	MEASUREMENT UNCERTAINTY	5
2	GENERAL INFORMATION	6
2.1	GENERAL DESCRIPTION OF EUT	6
2.2	TEST MODE	7
2.3	TEST FACILITY	7
2.4	DESCRIPTION OF SUPPORT UNITS	7
2.5	DEVIATION FROM STANDARDS	8
2.6	ABNORMALITIES FROM STANDARD CONDITIONS	8
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
2.8	ADDITIONAL INSTRUCTIONS	8
2.9	TEST CONDITIONS	9
3	TEST INSTRUMENTS LIST	10
4	TEST RESULTS AND MEASUREMENT DATA	11
4.1	ANTENNA REQUIREMENT:	11
4.2	CONDUCTED EMISSIONS	12
4.3	EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	15
4.4	MAXIMUM CONDUCTED OUTPUT POWER	66
4.5	POWER SPECTRAL DENSITY	112
4.6	BAND EDGE	135
4.7	RADIATED EMISSION	160
4.8	FREQUENCY STABILITY	170
5	PHOTOS OF TEST SETUP	189
6	PHOTOS OF EUT	189

TEST REPORT DECLARATION

Applicant : DALI A/S
Address : Dali Allé 1,DK-9610 Nørager, Denmark
Manufacturer : DALI A/S
Address : Dali Allé 1,DK-9610 Nørager, Denmark
EUT Description : DALI VEGA
(A) Model No. : DALI VEGA
(B) Trademark : **DALI**

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart E

ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024

Test Result: PASS

The device described above is tested by Shenzhen PSI Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart E limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen PSI Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.


After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen PSI Testing Co., Ltd.

Tested by (name + signature).....:

Felix Pang

Test Engineer



Approved by (name + signature).....:

Simple Guan

Project Manager



Date of issue.....:

November 28, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	November 28, 2025	Initial released Issue	Felix Pang



1 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203 Section 7.1.4	PASS
AC Power Line Conducted Emission	15.207 Section 7.2.4, 15.407(b)(9)	PASS
Occupied bandwidth	15.407(a), 15.407(e)	PASS
Maximum Conducted Output Power	15.407(a)(1)(iv)-(B1), 15.407(a)(2)(iv)-(B2, B3), 15.407(a)(3)(i)-(B4)	PASS
Power Spectral Density	15.407(a)(1)(iv)-(B1), 15.407(a)(2)(iv)-(B2, B3), 15.407(a)(3)(i)-(B4)	PASS
Radiated Emission	15.205, 15.209, 15.407(b)(1)-(B1), 15.407(b)(2)-(B2) 15.407(b)(3)-(B3), 15.407(b)(4)-(B4)	PASS
Band Edge	15.407(b), 15.209	PASS
Frequency Stability	15.407(g)	PASS

Remark:

1. Pass: The EUT complies with the essential requirements in the standard.
2. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.
3. Measurement-method usage KDB 789033 D02 General UNII Test Procedures New Rules v02r01
4. All tests are according to ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024.

1.1 Measurement Uncertainty

Item	Uncertainty
Power Line Conducted Emissions Test	2.13dB
Radiation Emission test in 3m chamber(Below 30MHz)	4.07dB
Radiation Emission test in 3m chamber(30MHz to 1GHz)	4.51dB
Radiation Emission test in 3m chamber(1GHz to 18GHz)	5.07dB
Radiation Emission test in 3m chamber(18GHz to 40GHz)	5.21dB
Radio Frequency	48.24KHz
Conducted RF Power	0.41dB
Power Spectral Density	0.39 dB
Occupied-Bandwidth	968Hz
Duty Cycle	1%
Conducted-Spurious Emission	1.26dB

2 General Information

2.1 General Description of EUT

EUT Name : DALI VEGA
Model : DALI VEGA
Diff : N/A
Test Voltage : AC 120V/60Hz

Radio Technology	: 5G WIFI
Operation frequency	: 802.11a/802.11ac20/802.11n(HT20): 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz 802.11ac40/802.11n(HT40): 5190-5230MHz, 5270-5310MHz, 5510-5670MHz, 5755-5795MHz 802.11ac80: 5210MHz, 5290MHz, 5530MHz, 5610MHz, 5775MHz
Channel separation	: 20MHz for 802.11a/802.11ac20/802.11n(HT20) 40MHz for 802.11ac40/ 802.11n(HT40) 80MHz for 802.11ac80
Modulation technology:	: IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Antenna Type	: Internal PCB antenna, Maximum Gain is 2.5dBi.
Software version	: 4.5
Hardware version	: PP
Note	: Antenna information is provided by applicant. Testing lab is not responsible for the accuracy of the information.

2.2 Test mode

Transmitting mode Keep the EUT in transmitting with modulation.

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

2.3 Test Facility

Shenzhen PSI Testing Co., Ltd.

1-2/F., Building 5, Yudafu Industrial Park, No.10, Xingye West Road, Shajing Subdistrict, Bao'an District, Shenzhen, Guangdong, China

September 13, 2023 File on Federal Communication Commission

Registration Number: 916281

September 21, 2023 Certificated by IC

Registration Number: 31123

CAB identifier: CN0158

2.4 Description of Support Units

Accessories : /

Manufacturer : /

Model : /

Rating : /

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

2.7 Other Information Requested by the Customer

None.

2.8 Additional instructions

Software (Used for test) from client

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
116	5580	110	5550	122	5610
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n20 IEEE 802.11ac20		IEEE 802.11n40 IEEE 802.11ac40		IEEE 802.11ac80	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

2.9 Test Conditions

Items	Required	Actual
Temperature range:	15-35℃	26℃
Humidity range:	25-75%	54%
Pressure range:	86-106kPa	101kPa

3 Test Instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Last Cal.	Cal. Interval
1.	9*6*6 anechoic chamber	SKET	9*6*6	N/A	/	2022.12.20	3 Year
2.	Test Receiver	Rohde&Schwarz	ESCI 7	101032/003	4.42 SP3	2024.12.18	1 Year
3.	L.I.S.N.#1	Rohde&Schwarz	ENV 216	102282	/	2024.12.18	1 Year
4.	L.I.S.N.#2	EMCO	3810-2	00094944	/	2024.12.18	1 Year
5.	Loop Antenna	Schwarz beck	FMZB 1519B	00128	/	2025.01.02	2 Year
6.	Bilog Antenna	Schwarz beck	VULB 9168	01448	/	2025.01.02	2 Year
7.	Spectrum Analyzer	Rohde&Schwarz	FSV40-N	101648	3.70	2024.12.18	1 Year
8.	Horn Antenna	Schwarz beck	BBHA 9120 D	02706	/	2025.01.02	2 Year
9.	Amplifier	SKET	LNPA_0118 G-50	SK20220329 01	/	2024.12.18	1 Year
10.	Horn Antenna	Schwarz beck	BBHA 9170	00946	/	2024.12.31	2 Year
11.	Amplifier	SKET	LNPA_1840 G-50	SK20190403 02	/	2024.12.18	1 Year
12.	RF Power Probe	Rohde&Schwarz	NRP-Z11	1138.3004.02 -1111533-Fz	/	2024.12.18	1 Year
13.	RF Sensor Unit	Tachoy	TR1029-2	20220428P0 08	/	2024.12.18	1 Year
14.	Spectrum Analyzer	Agilent	N9020A	MY51281067	A.14.03	2024.12.18	1 Year
15.	Temp. & Humid Chamber	Auchno	9606	/	/	2024.12.18	1 Year
16.	Regulated DC Power Supply	Xinouhua	ADC120V10 A	20221125163 8	/	2024.12.18	1 Year
17.	Cable	SKET	Cable-RE-1	#02/#03	/	2024.12.18	1 Year
18.	Cable	SKET	Cable-RE-2	#01	/	2024.12.18	1 Year
19.	Cable	SKET	Cable-RE-3	#04	/	2024.12.18	1 Year
20.	Cable	SKET	Cable-CE-1	A-E-24	/	2024.12.18	1 Year
21.	6dB Attenuator	Schwarzbeck	DGA 9552N 6dB	CK4186	/	2024.12.18	1 Year
22.	Power meter	Agilent	E4419B	GB40202121	/	2024.12.18	1 Year
23.	Comprehensive Test Instrument	Rohde&Schwarz	CMW 500	145266	/	2024.12.18	1 Year

For Test Software Information

Item	Software Name	Manufacturer	Version
RE	EZ EMC	Farad	PSI-3A1
CE	EZ EMC	Farad	PSI-3A1

4 Test results and Measurement Data

4.1 Antenna requirement:

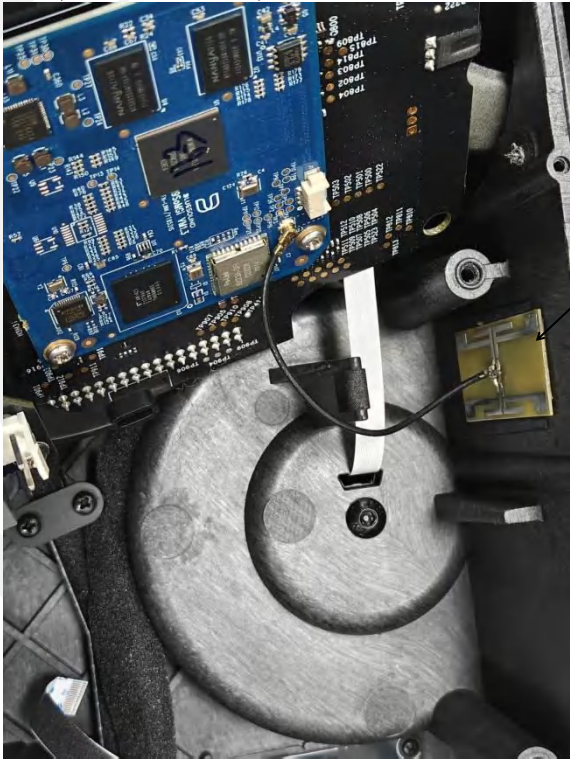Standard requirement:	FCC Part15 C Section 15.203 Section 7.1.4
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
Internal PCB antenna, for 5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz  The image shows the internal components of a device. A blue printed circuit board (PCB) is visible, populated with various electronic components including integrated circuits, capacitors, and resistors. A white ribbon cable is connected to a component on the PCB. A label 'ANT' with an arrow points to a specific component on the PCB, which is the internal antenna. The device is housed in a black plastic enclosure, and a circular metal shield is visible in the foreground.	

4.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207 Section 7.2.4, 15.407(b)(9)																
Test Method:	ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz																
Limit:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table> * Decreases with the logarithm of the frequency.			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSIC63.10-2020+Cor. 1-2023+C63.10a-2024 +Errata to C63.10a-2024 on conducted measurement.																
Test setup:	Reference Plane Test table/Insulation plane <i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m																
Test Instruments:	Refer to section 3.0 for details																
Test mode:	Refer to section 2.2 for details																
Test results:	Pass																

Measurement Data

An initial pre-scan was performed on the line and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


All modes and channels have been tested and only the A 5180MHz mode with the worst data is listed.

Line:

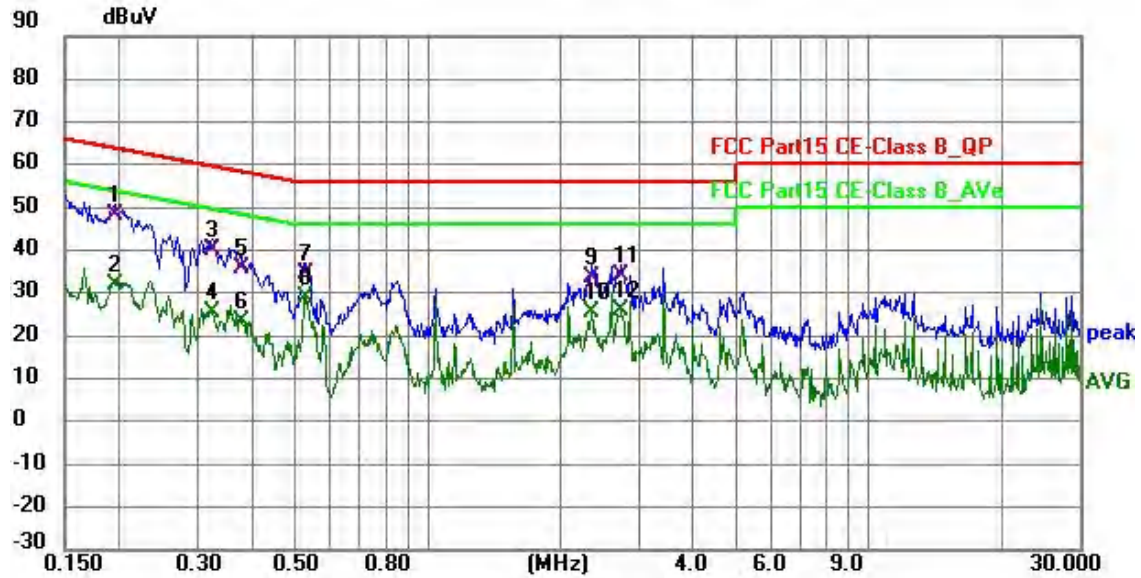

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1940	38.58	9.63	48.21	63.86	-15.65	QP	P	
2	0.1952	22.36	9.63	31.99	53.81	-21.82	AVG	P	
3	0.3251	30.52	9.63	40.15	59.58	-19.43	QP	P	
4	0.3251	16.00	9.63	25.63	49.58	-23.95	AVG	P	
5	0.3769	26.29	9.63	35.92	58.35	-22.43	QP	P	
6	0.3780	13.59	9.63	23.22	48.32	-25.10	AVG	P	
7	0.5260	24.96	9.62	34.58	56.00	-21.42	QP	P	
8	0.5260	19.43	9.62	29.05	46.00	-16.95	AVG	P	
9	2.3460	24.19	9.65	33.84	56.00	-22.16	QP	P	
10	2.3460	15.71	9.65	25.36	46.00	-20.64	AVG	P	
11	2.7380	24.48	9.65	34.13	56.00	-21.87	QP	P	
12	2.7380	16.25	9.65	25.90	46.00	-20.10	AVG	P	

Note: Level = Reading + Factor, Margin = Level - Limit

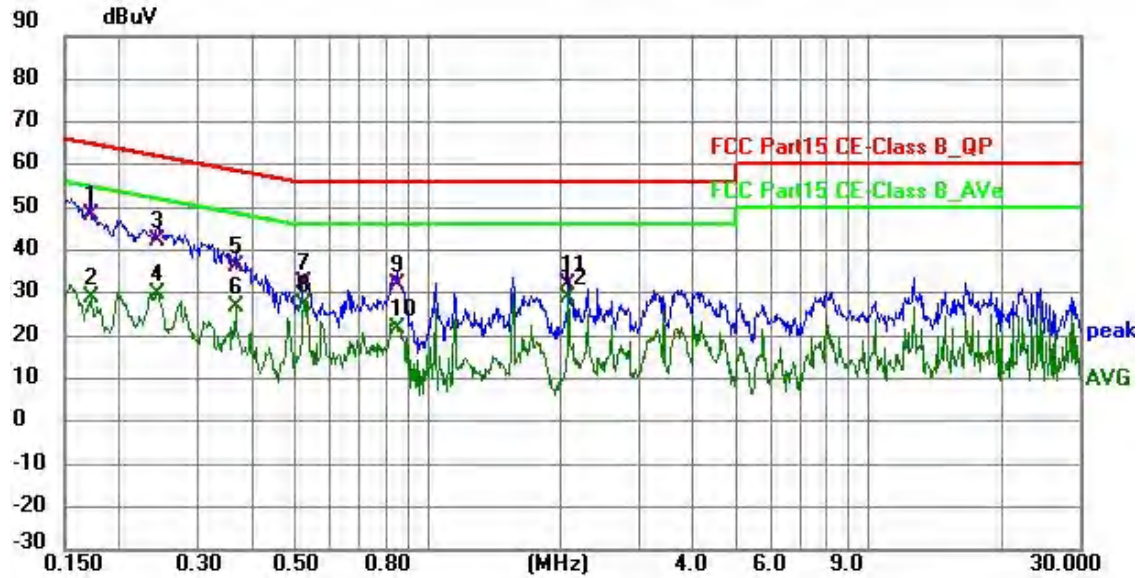Neutral:

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1 *	0.1720	38.66	9.62	48.28	64.86	-16.58	QP	P	
2	0.1720	19.28	9.62	28.90	54.86	-25.96	AVG	P	
3	0.2442	32.58	9.63	42.21	61.95	-19.74	QP	P	
4	0.2442	20.17	9.63	29.80	51.95	-22.15	AVG	P	
5	0.3653	26.50	9.62	36.12	58.61	-22.49	QP	P	
6	0.3653	17.21	9.62	26.83	48.61	-21.78	AVG	P	
7	0.5237	22.55	9.62	32.17	56.00	-23.83	QP	P	
8	0.5237	17.72	9.62	27.34	46.00	-18.66	AVG	P	
9	0.8500	22.14	9.62	31.76	56.00	-24.24	QP	P	
10	0.8500	12.14	9.62	21.76	46.00	-24.24	AVG	P	
11	2.0820	22.47	9.65	32.12	56.00	-23.88	QP	P	
12	2.0820	19.27	9.65	28.92	46.00	-17.08	AVG	P	

Note: Level = Reading + Factor, Margin = Level - Limit

4.3 Emission Bandwidth and 99% Occupied Bandwidth


Test Requirement:	FCC Part15 E Section 15.407(a), 15.407(e)
Test Method:	KDB 789033 D02 General UNII Test Procedures New Rules v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. On the left is a green rectangular device labeled 'Spectrum Analyzer' with a light blue screen and two small white circles representing ports. On the right is a yellow rectangular device labeled 'EUT' with a single white circle representing a port. A black line connects the right port of the Spectrum Analyzer to the port of the EUT.
Test procedure:	According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Measurement Data:


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.503	5171.7283	5188.2318	---	---
		5200	16.464	5191.7682	5208.2318	---	---
		5240	16.583	5231.6883	5248.2717	---	---
		5260	16.503	5251.7283	5268.2318	---	---
		5280	16.503	5271.7283	5288.2318	---	---
		5320	16.543	5311.7283	5328.2717	---	---
		5500	17.023	5491.4086	5508.4316	---	---
		5580	17.103	5571.4486	5588.5514	---	---
		5700	16.943	5691.5684	5708.5115	---	---
		5745	22.657	5734.0509	5756.7083	---	---
		5785	21.818	5773.9710	5795.7892	---	---
		5825	17.942	5816.1688	5834.1109	---	---
11N20SISO	Ant1	5180	18.462	5170.7692	5189.2308	---	---
		5200	18.422	5190.8492	5209.2707	---	---
		5240	18.422	5230.6494	5249.0709	---	---
		5260	18.182	5250.8492	5269.0310	---	---
		5280	18.142	5270.8492	5288.9910	---	---
		5320	18.182	5310.9291	5329.1109	---	---
		5500	18.102	5490.9291	5509.0310	---	---
		5580	17.822	5571.0490	5588.8711	---	---
		5700	17.982	5690.9690	5708.9510	---	---
		5745	17.902	5736.0090	5753.9111	---	---
		5785	18.102	5775.8492	5793.9510	---	---
		5825	18.102	5815.8092	5833.9111	---	---
11N40SISO	Ant1	5190	37.003	5171.4585	5208.4615	---	---
		5230	36.523	5211.9381	5248.4615	---	---
		5270	36.763	5251.5385	5288.3017	---	---
		5310	36.923	5291.5385	5328.4615	---	---
		5510	36.603	5491.4585	5528.0619	---	---
		5550	36.523	5531.7782	5568.3017	---	---
		5670	36.683	5651.6983	5688.3816	---	---
		5755	36.364	5736.7782	5773.1419	---	---
		5795	36.523	5776.6983	5813.2218	---	---
11AC20SISO	Ant1	5180	16.464	5171.6883	5188.1518	---	---
		5200	16.543	5191.6484	5208.1918	---	---
		5240	16.583	5231.6883	5248.2717	---	---
		5260	16.703	5251.6084	5268.3117	---	---

		5280	16.543	5271.6883	5288.2318	---	---
		5320	16.623	5311.6484	5328.2717	---	---
		5500	17.822	5491.0889	5508.9111	---	---
		5580	18.062	5570.8891	5588.9510	---	---
		5700	18.142	5690.8891	5709.0310	---	---
		5745	16.503	5736.6883	5753.1918	---	---
		5785	16.464	5776.7283	5793.1918	---	---
		5825	16.503	5816.6484	5833.1518	---	---
11AC40SISO	Ant1	5190	36.603	5171.5385	5208.1419	---	---
		5230	36.444	5211.6983	5248.1419	---	---
		5270	37.163	5251.3786	5288.5415	---	---
		5310	36.923	5291.6184	5328.5415	---	---
		5510	36.204	5491.7782	5527.9820	---	---
		5550	36.124	5532.0979	5568.2218	---	---
		5670	36.124	5651.9381	5688.0619	---	---
		5755	37.163	5736.4585	5773.6214	---	---
		5795	36.923	5776.4585	5813.3816	---	---
11AC80SISO	Ant1	5210	75.604	5172.1179	5247.7223	---	---
		5290	77.682	5251.3187	5329.0010	---	---
		5530	75.764	5492.4376	5568.2018	---	---
		5610	75.285	5572.1179	5647.4026	---	---
		5775	75.764	5737.1179	5812.8821	---	---


11A_Ant1_5180

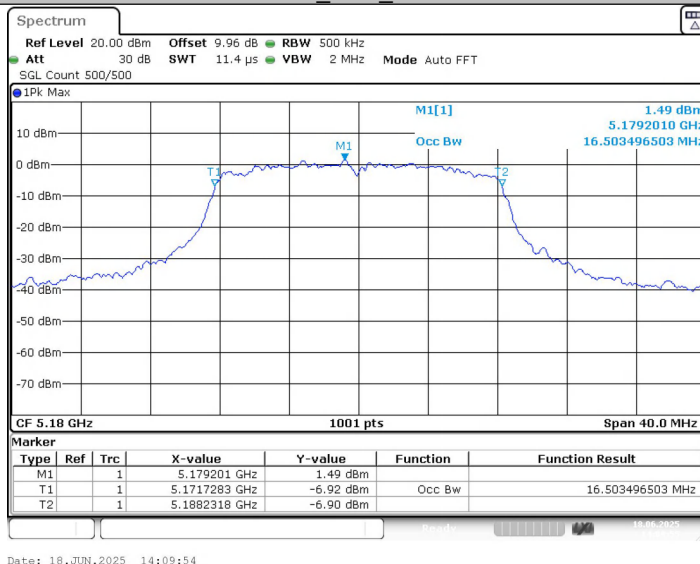


11A_Ant1_5200

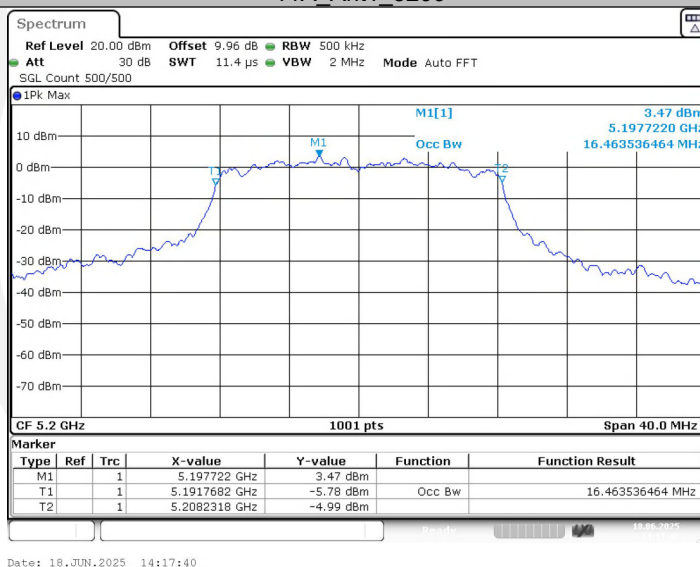


11A_Ant1_5240

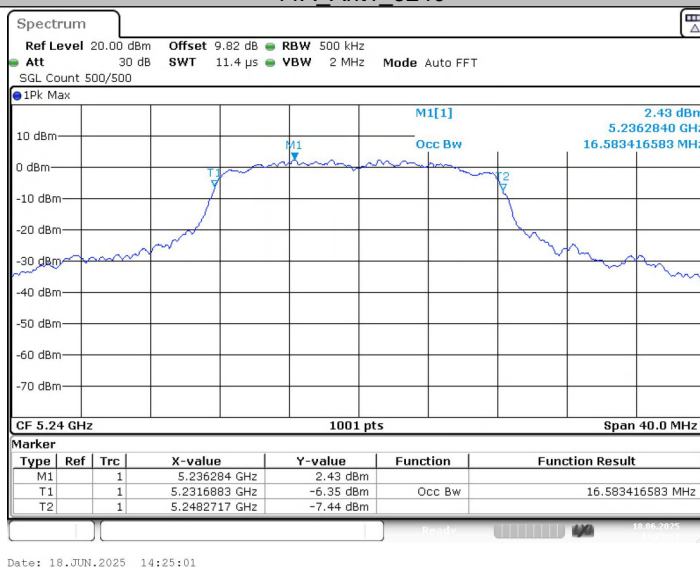


11A_Ant1_5260

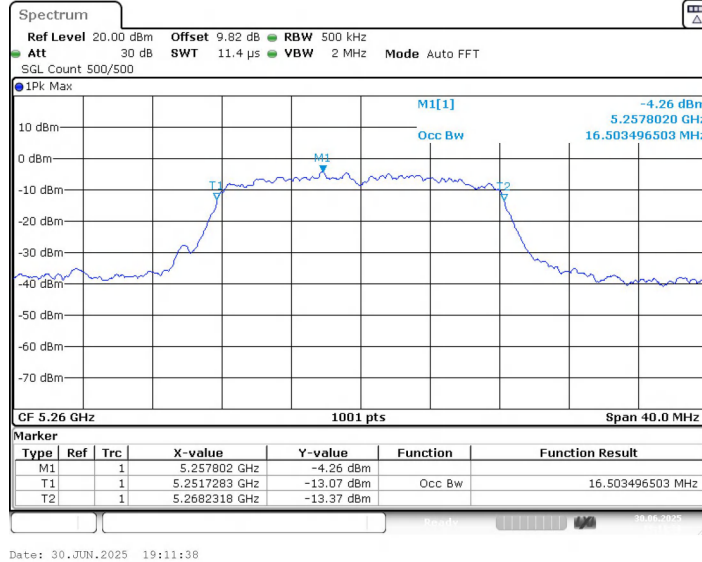


11A_Ant1_5280

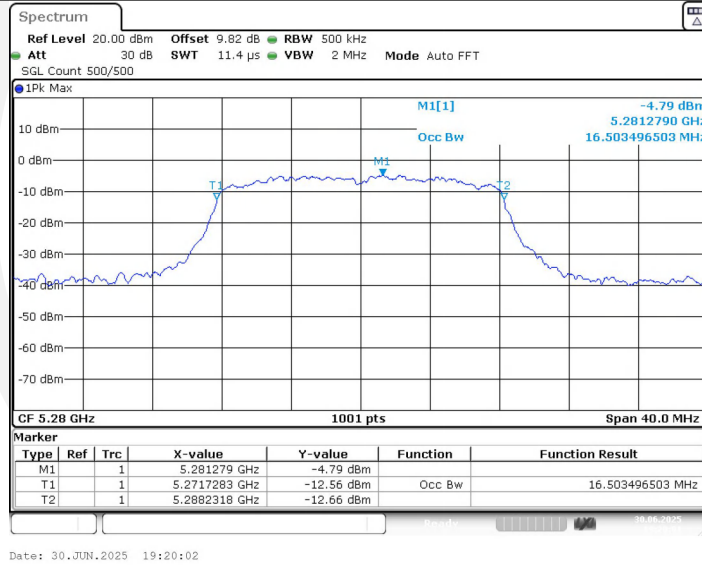


11A_Ant1_5320

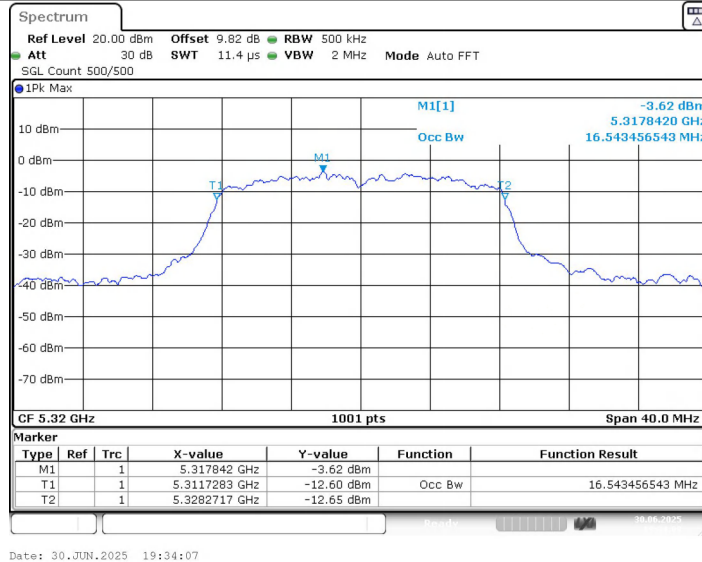


11A_Ant1_5500

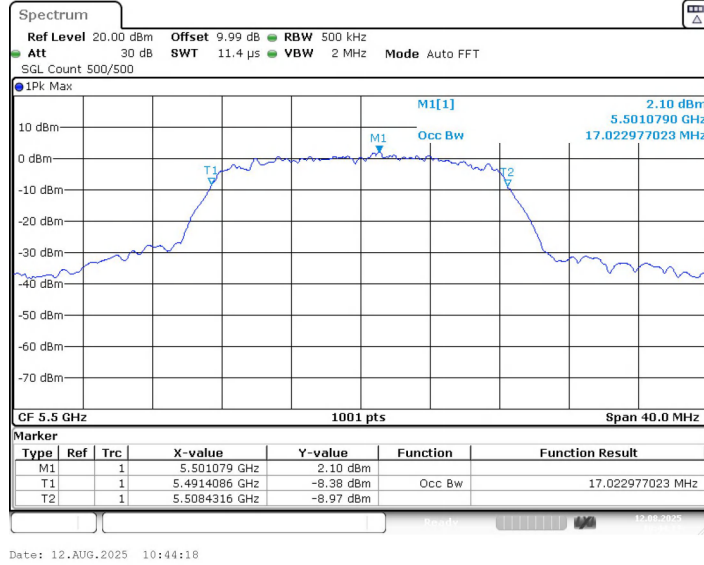


11A_Ant1_5580

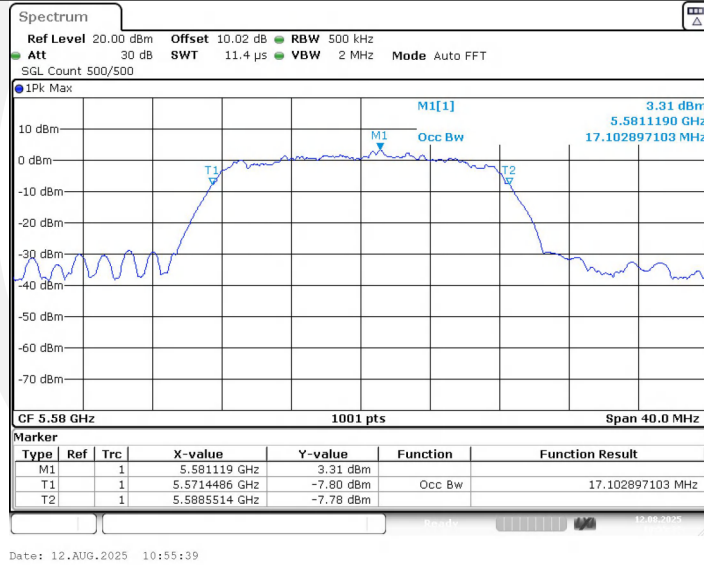


11A_Ant1_5700

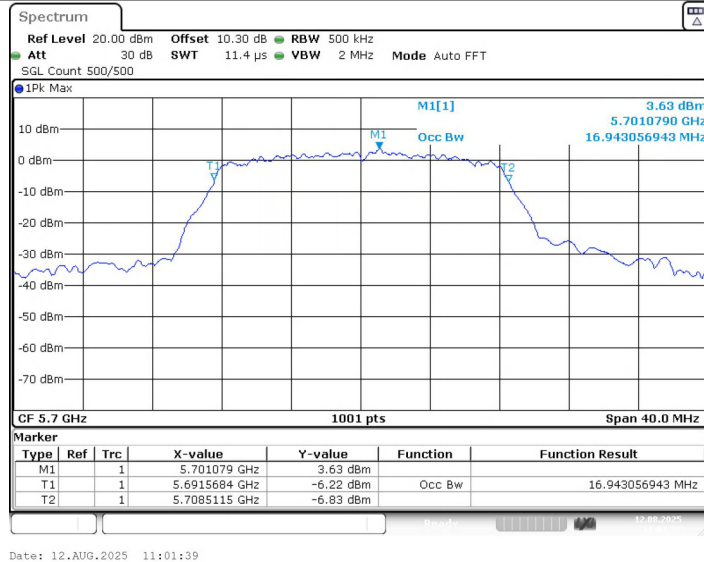


11A_Ant1_5745

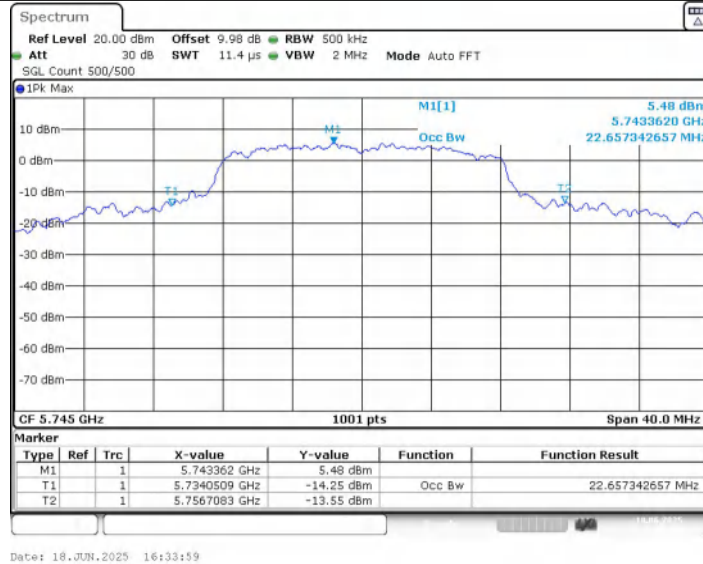


11A_Ant1_5785

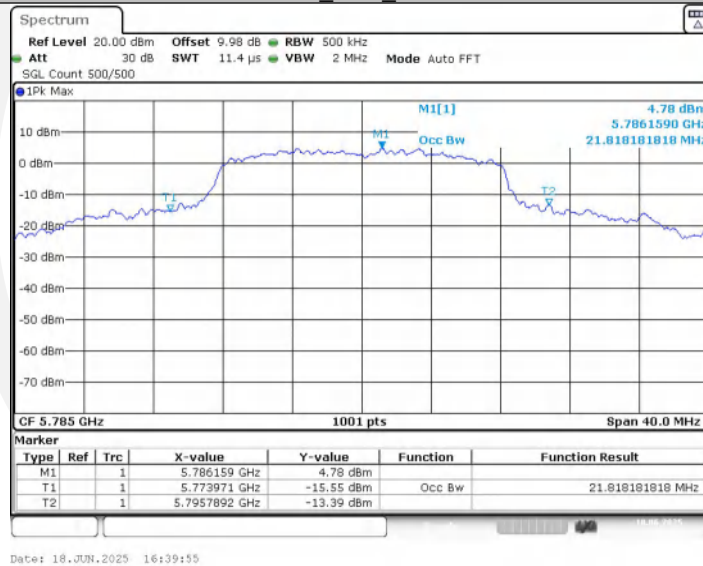


11A_Ant1_5825

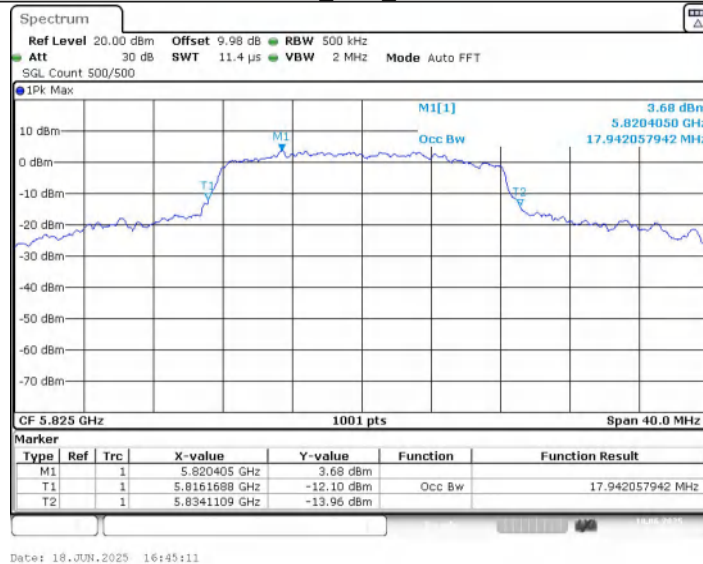


11N20SISO_Ant1_5180

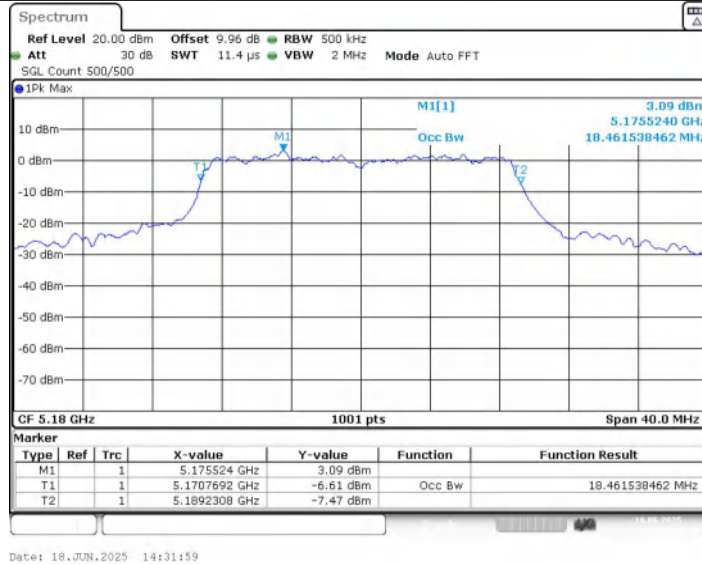


11N20SISO_Ant1_5200

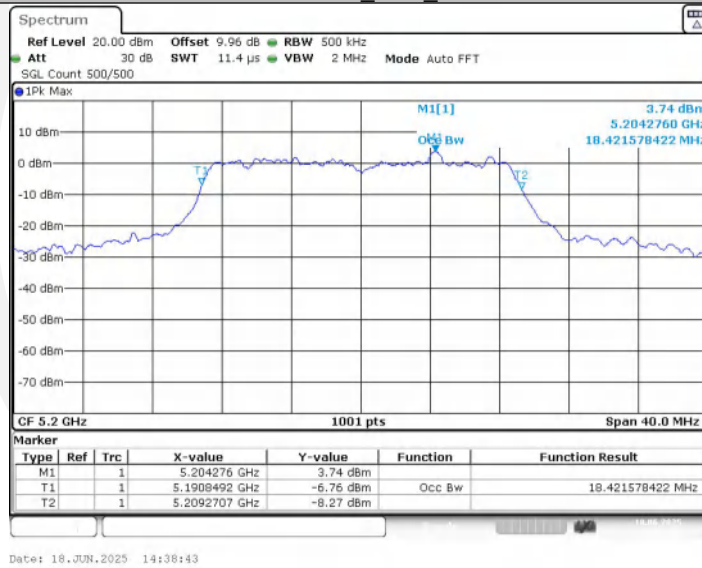


11N20SISO_Ant1_5240

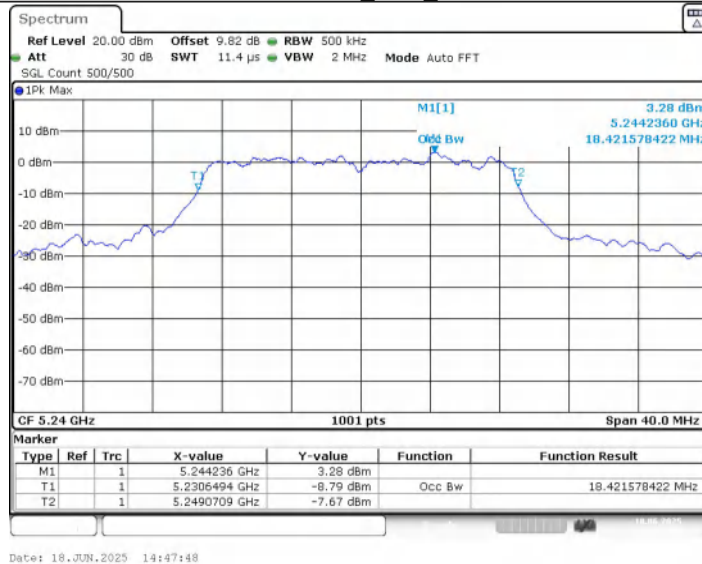


11N20SISO_Ant1_5260

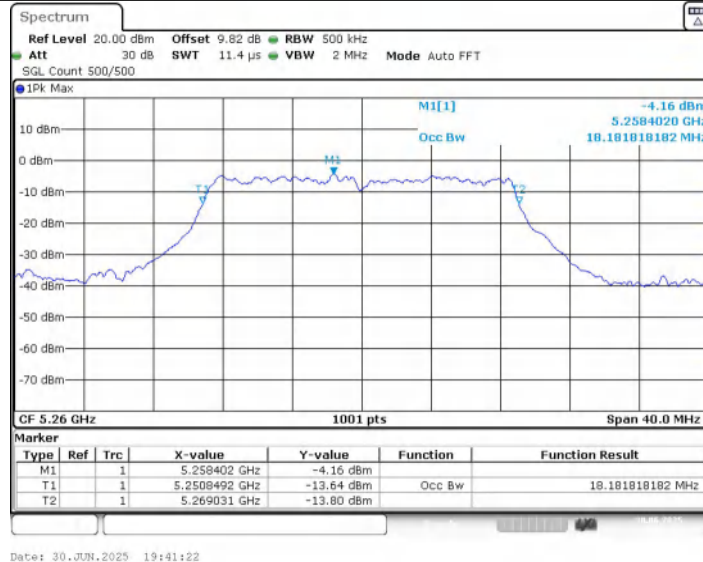


11N20SISO_Ant1_5280

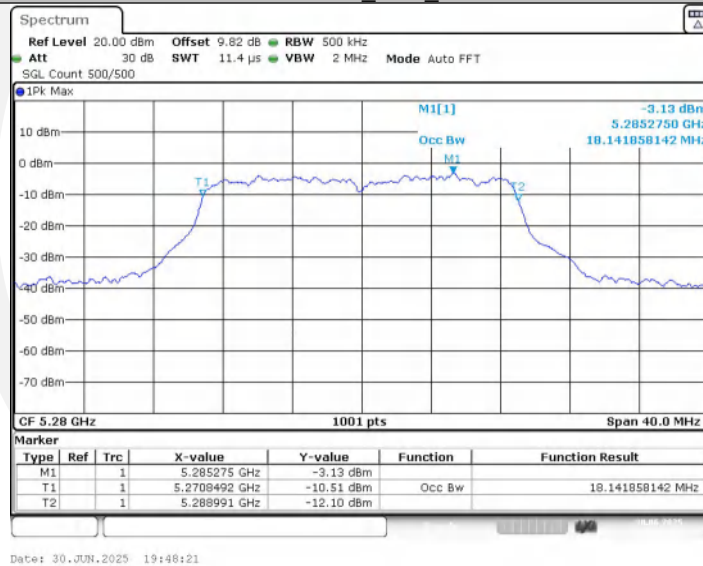


11N20SISO_Ant1_5320

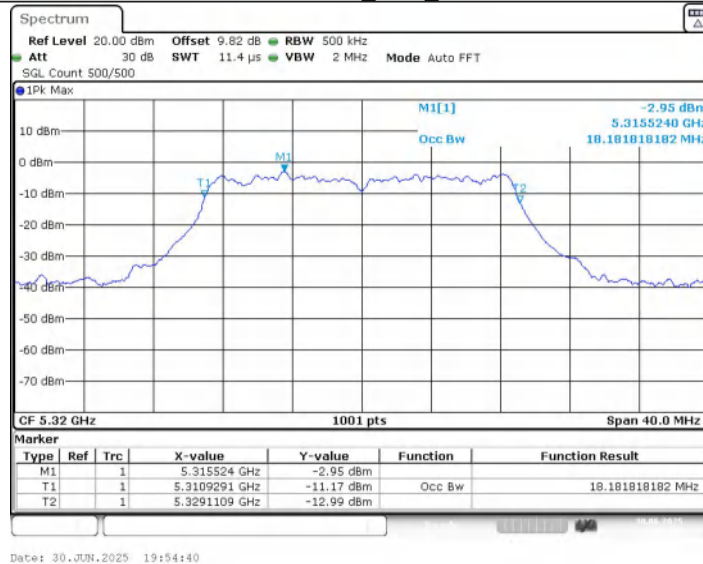


11N20SISO_Ant1_5500

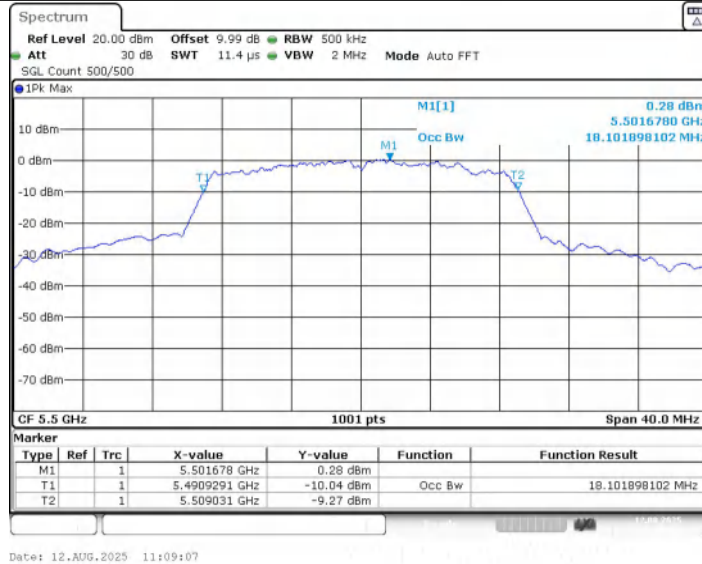


11N20SISO_Ant1_5580

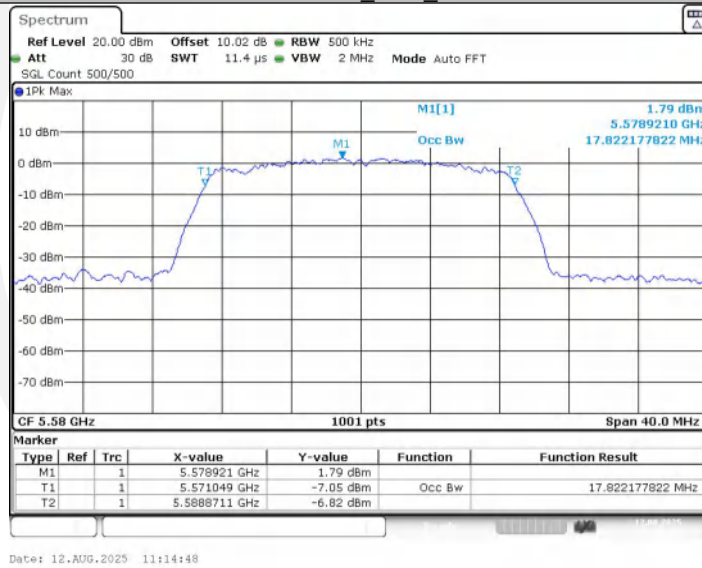


11N20SISO_Ant1_5700

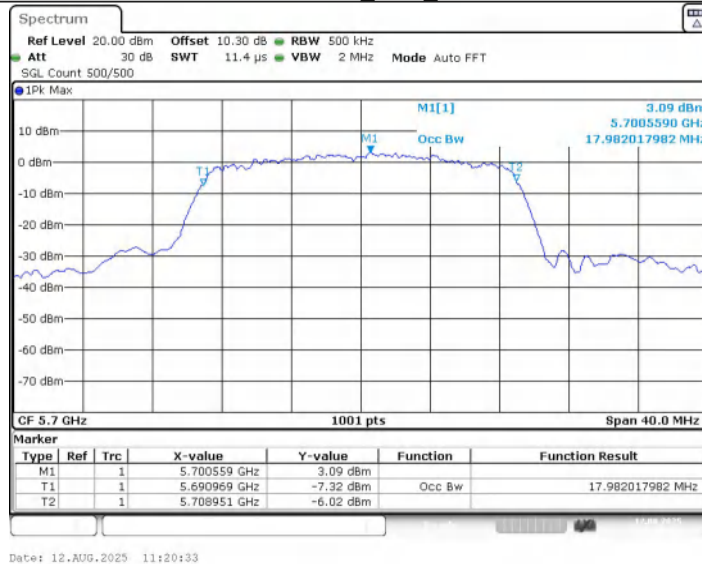


11N20SISO_Ant1_5745

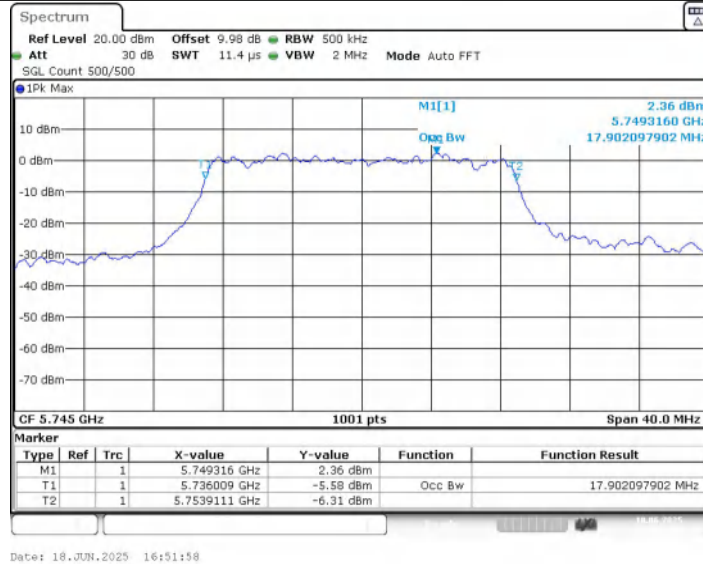


11N20SISO_Ant1_5785

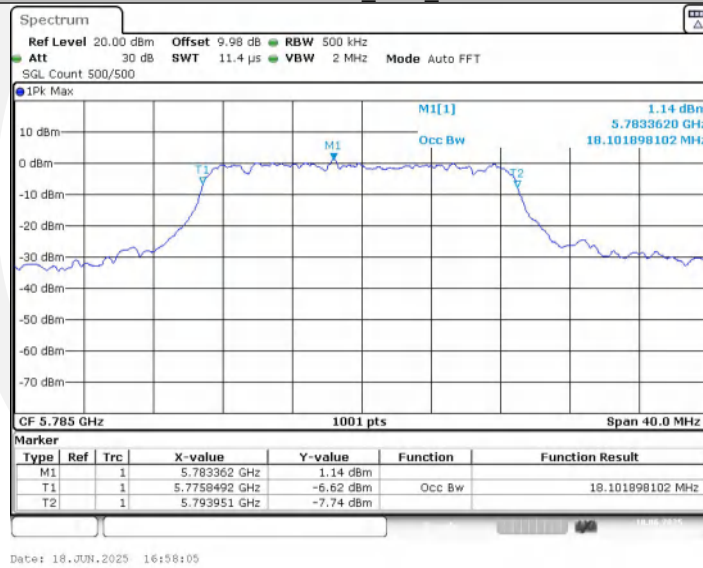


11N20SISO_Ant1_5825

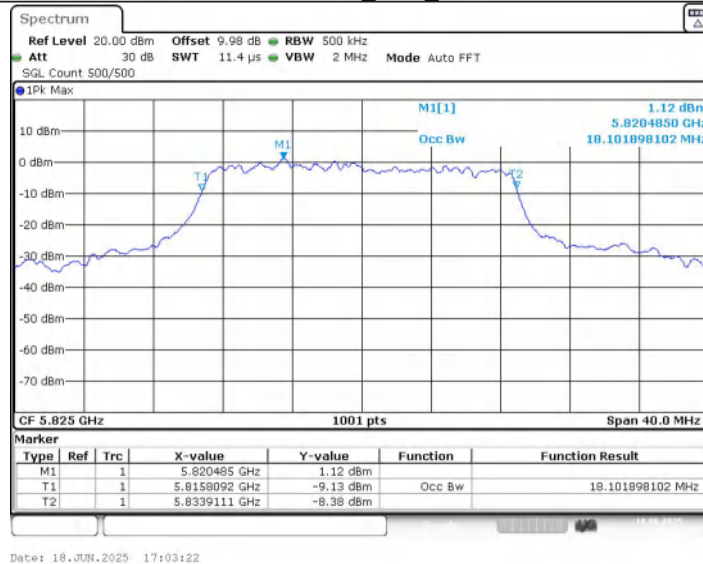


11N40SISO_Ant1_5190

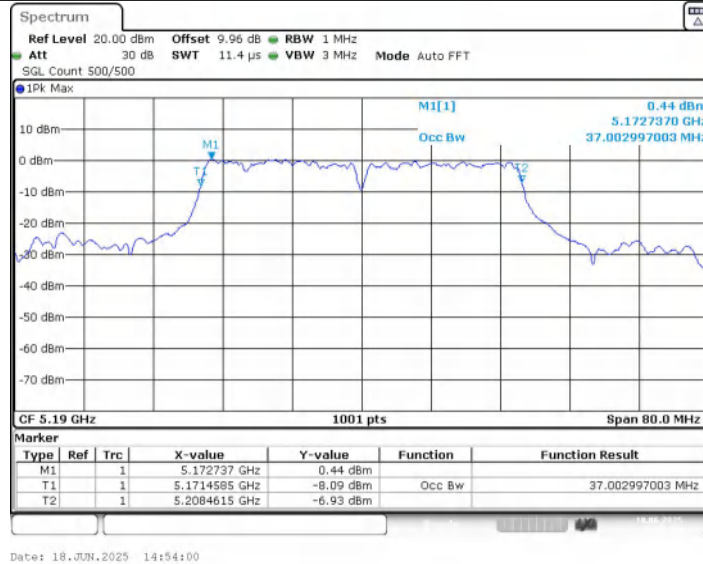


11N40SISO_Ant1_5230

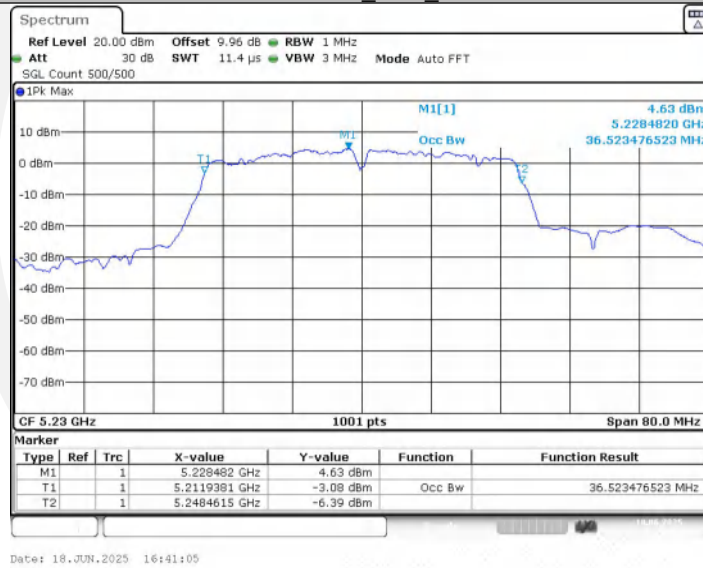


11N40SISO_Ant1_5270

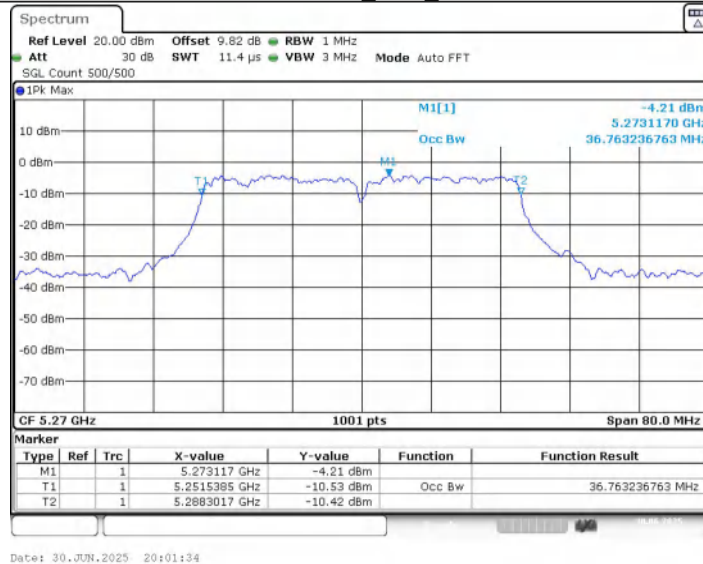


11N40SISO_Ant1_5310

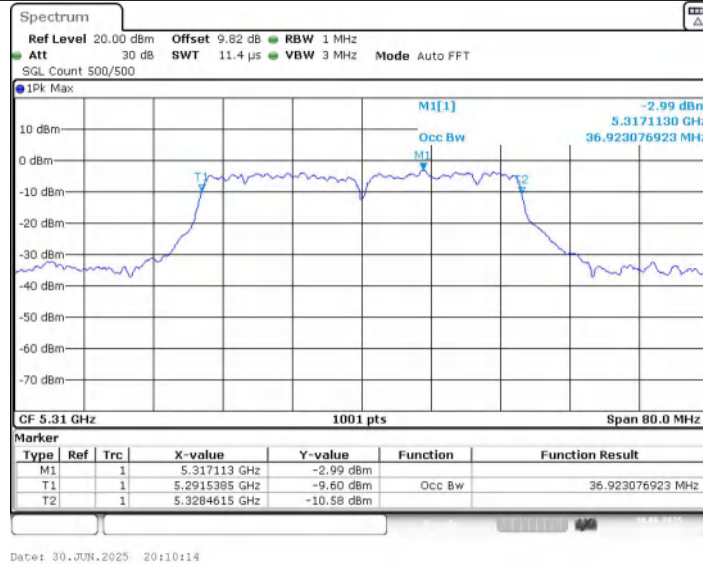


11N40SISO_Ant1_5510

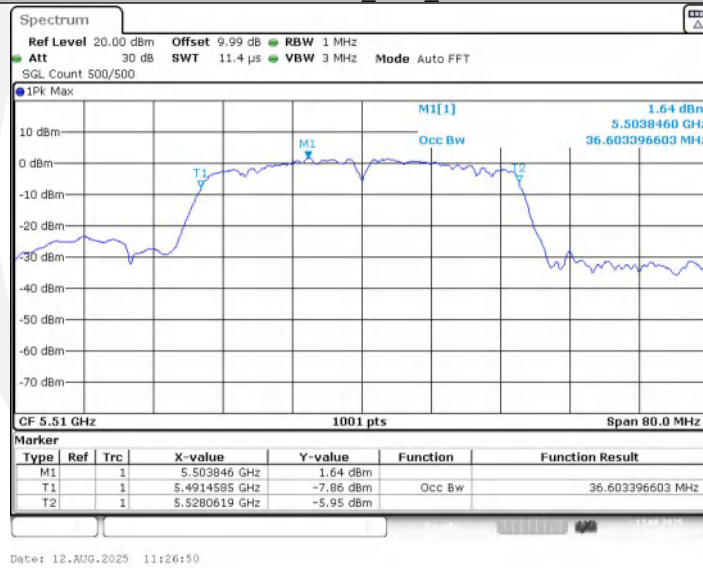


11N40SISO_Ant1_5550

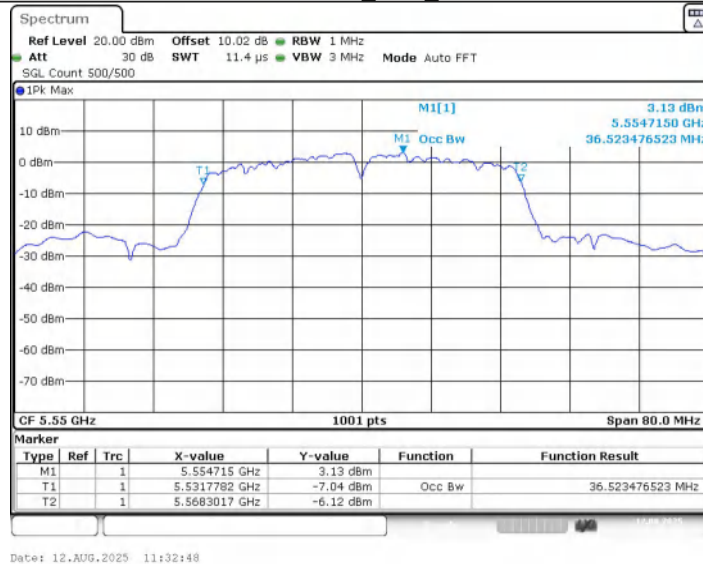


11N40SISO_Ant1_5670

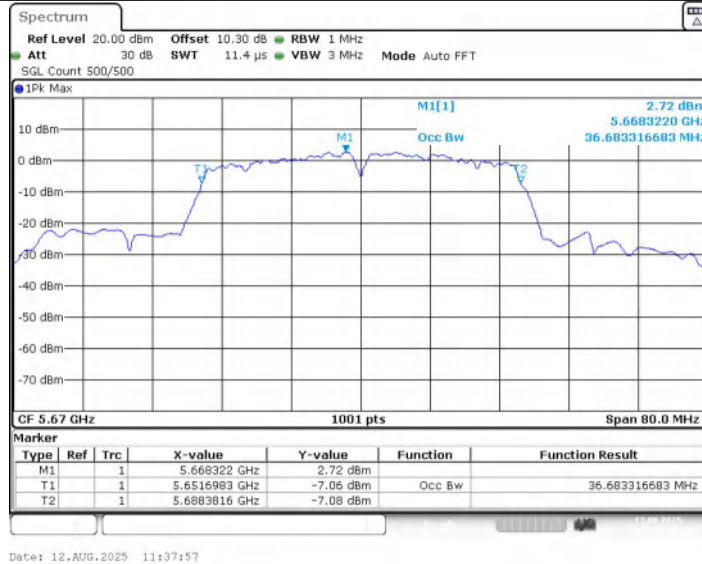


11N40SISO_Ant1_5755

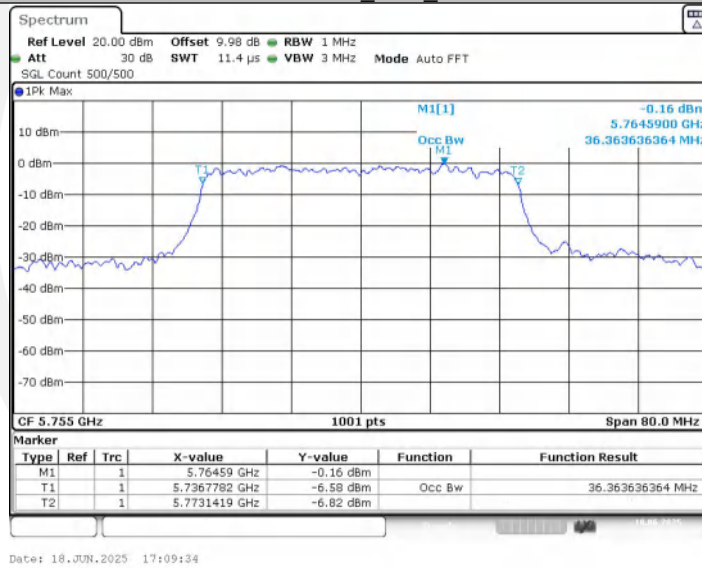

11N40SISO_Ant1_5795

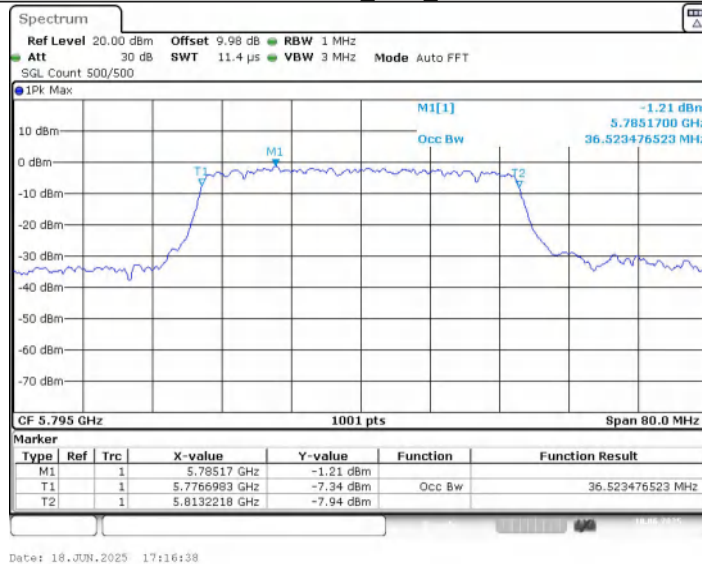


11AC20SISO_Ant1_5180

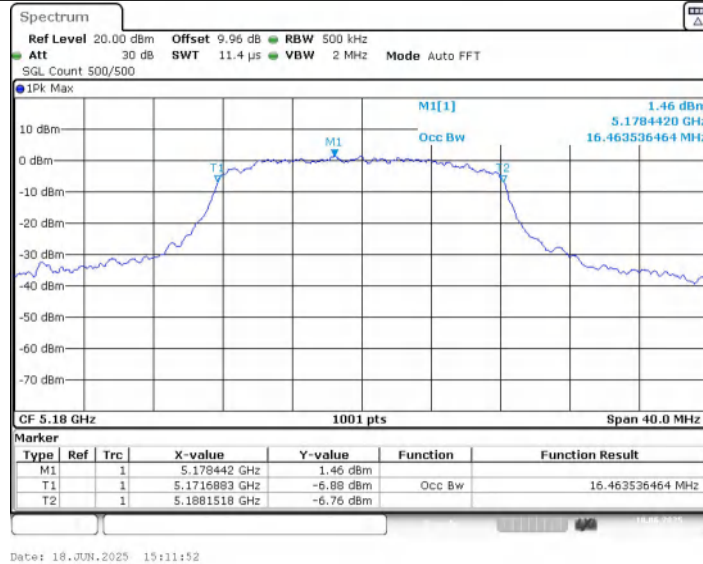


11AC20SISO_Ant1_5200




11AC20SISO_Ant1_5240

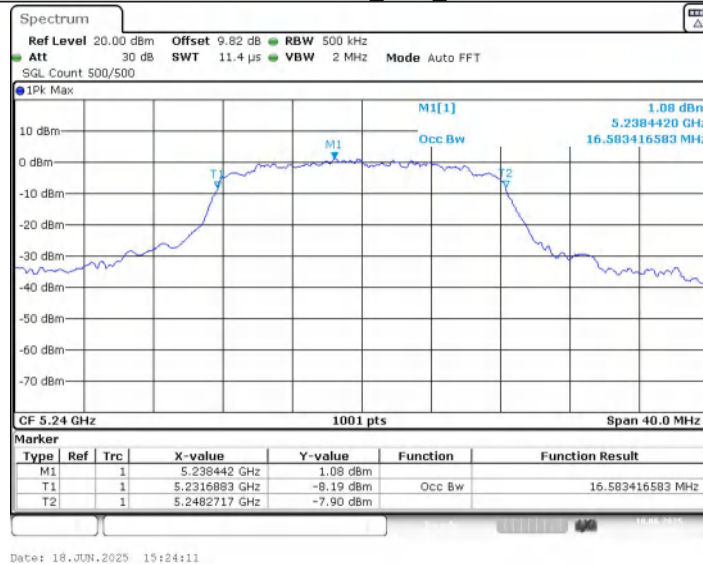


11AC20SISO_Ant1_5260

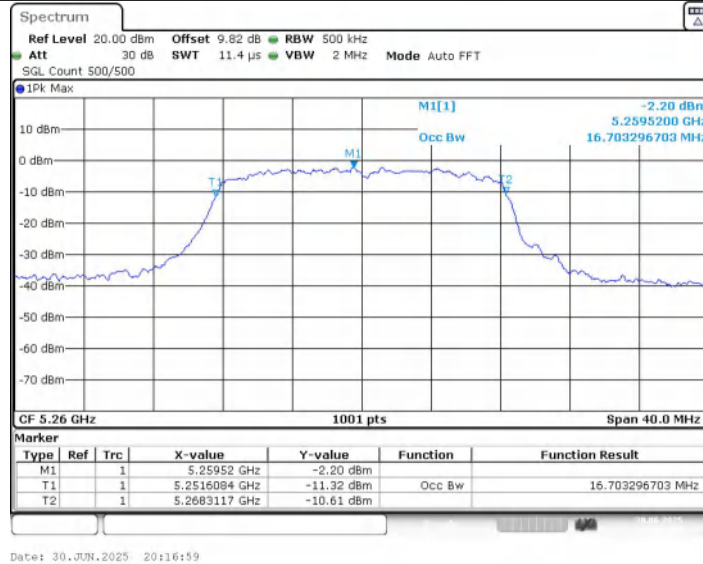


11AC20SISO_Ant1_5280

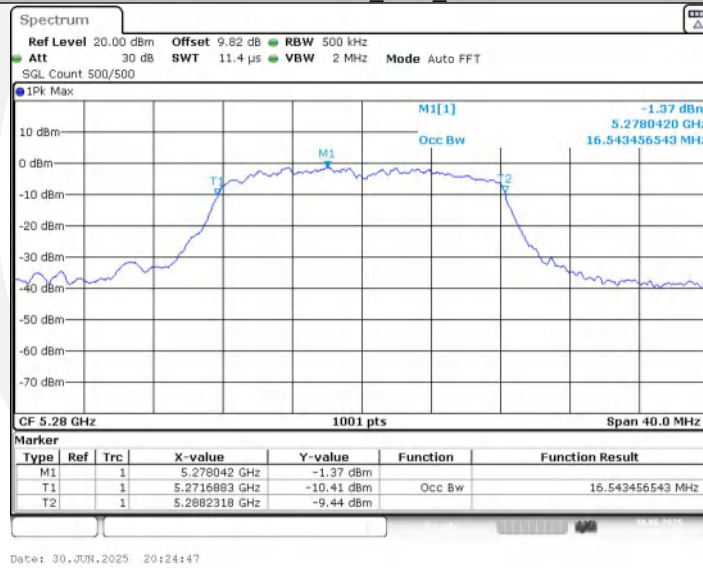


11AC20SISO_Ant1_5320

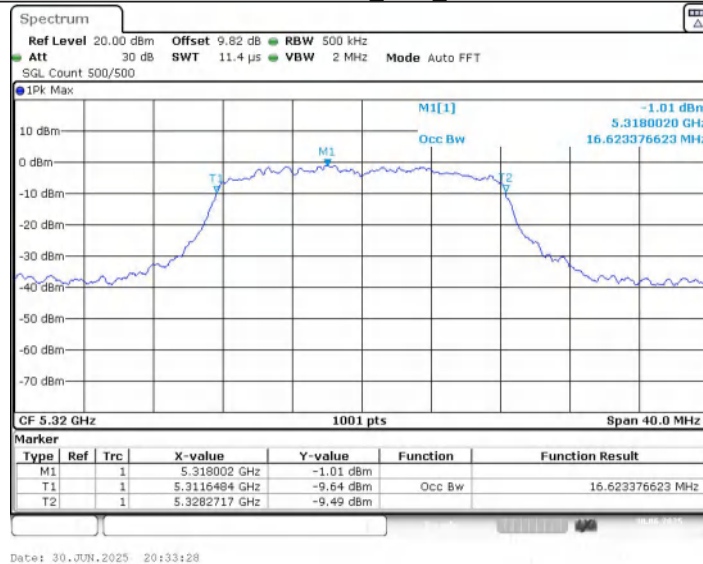


11AC20SISO_Ant1_5500

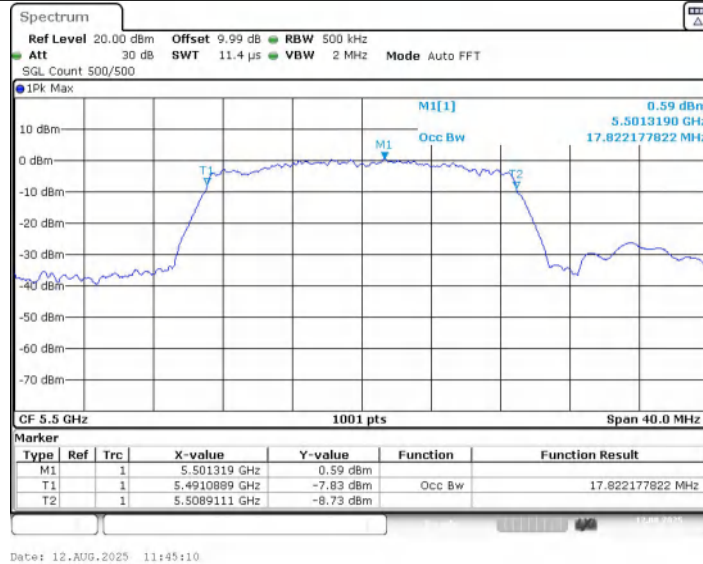


11AC20SISO_Ant1_5580

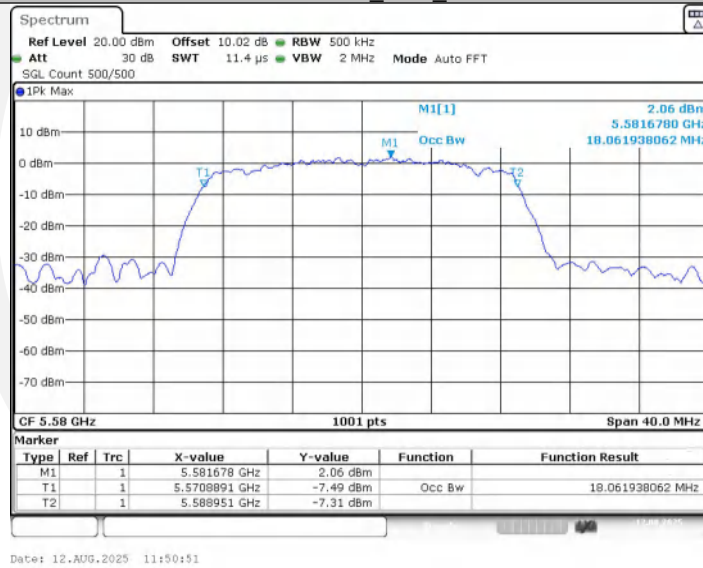


11AC20SISO_Ant1_5700

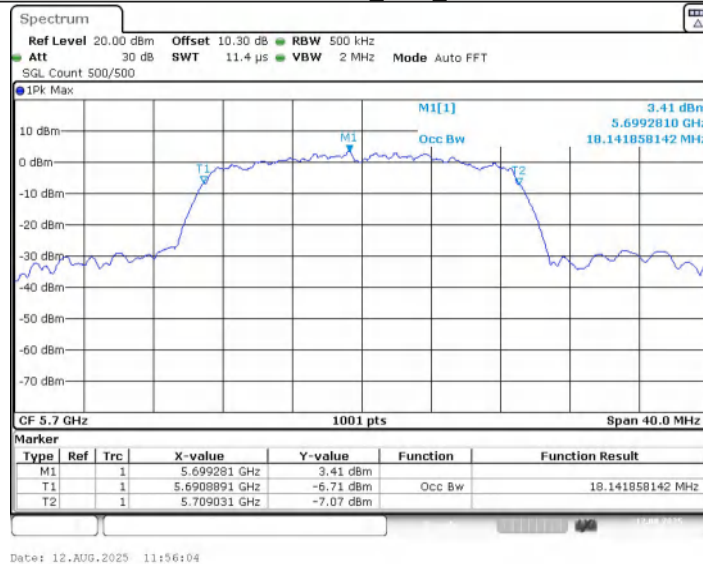


11AC20SISO_Ant1_5745

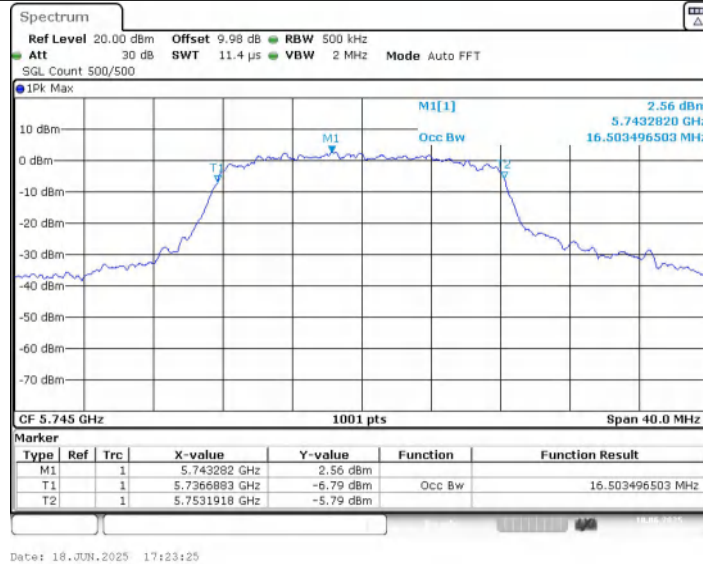


11AC20SISO_Ant1_5785

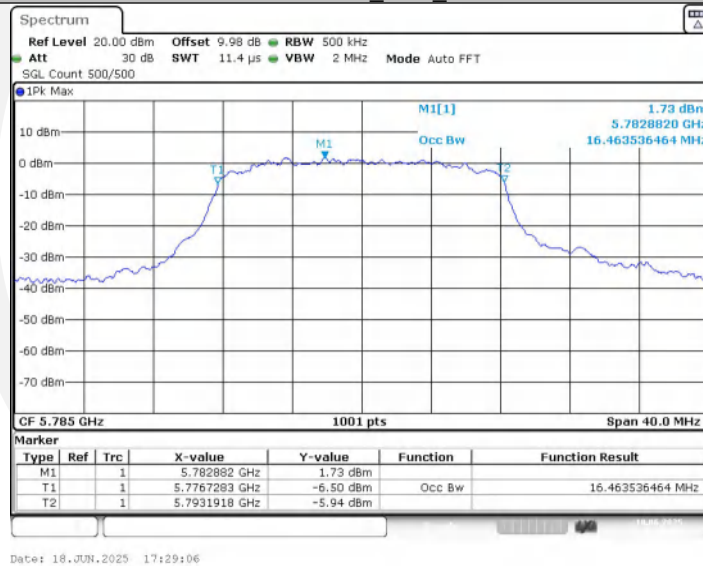


11AC20SISO_Ant1_5825

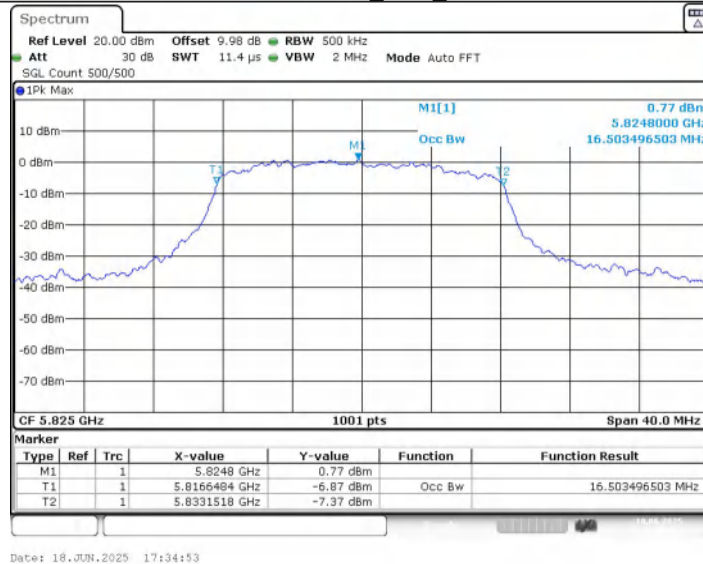


11AC40SISO_Ant1_5190

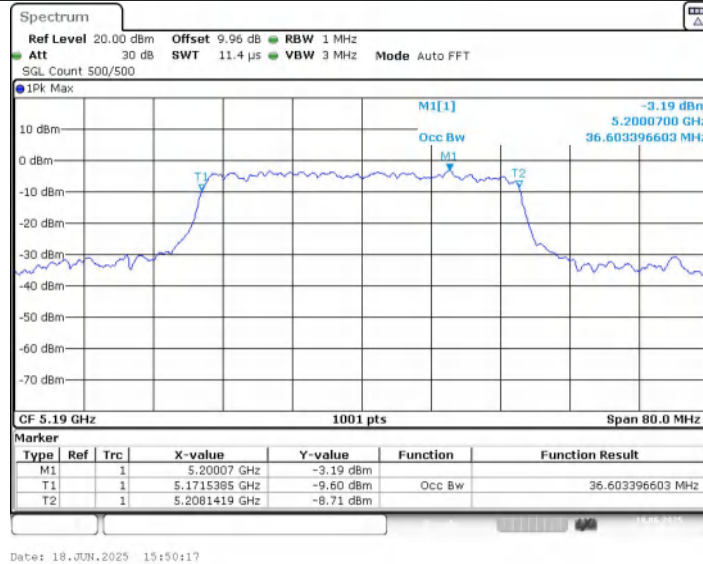


11AC40SISO_Ant1_5230

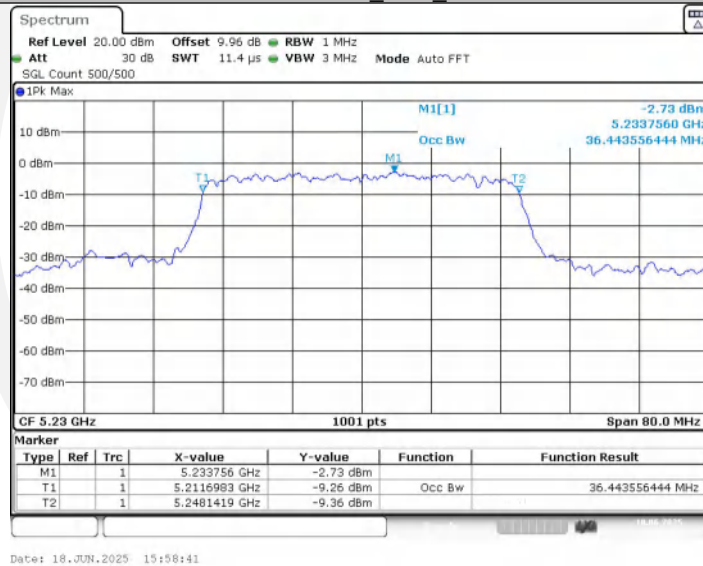


11AC40SISO_Ant1_5270

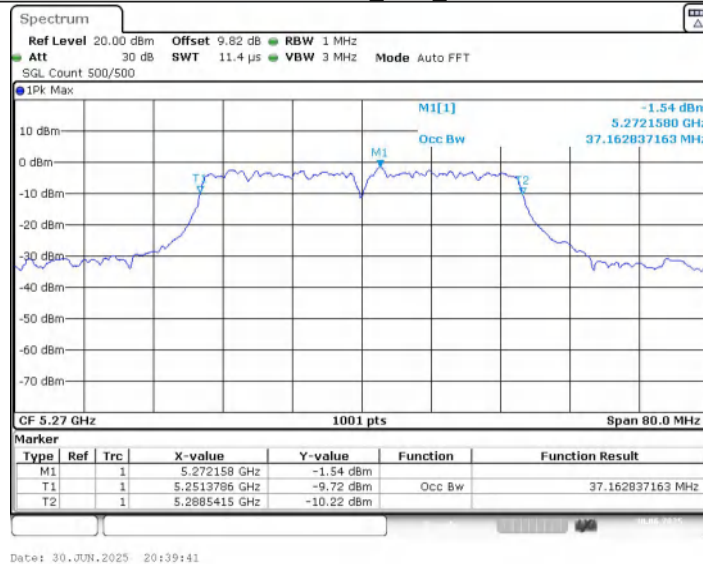


11AC40SISO_Ant1_5310

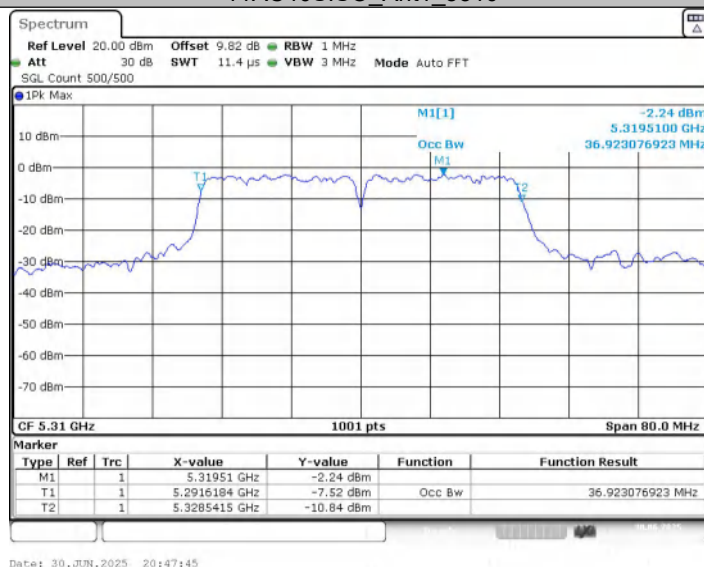


11AC40SISO_Ant1_5510

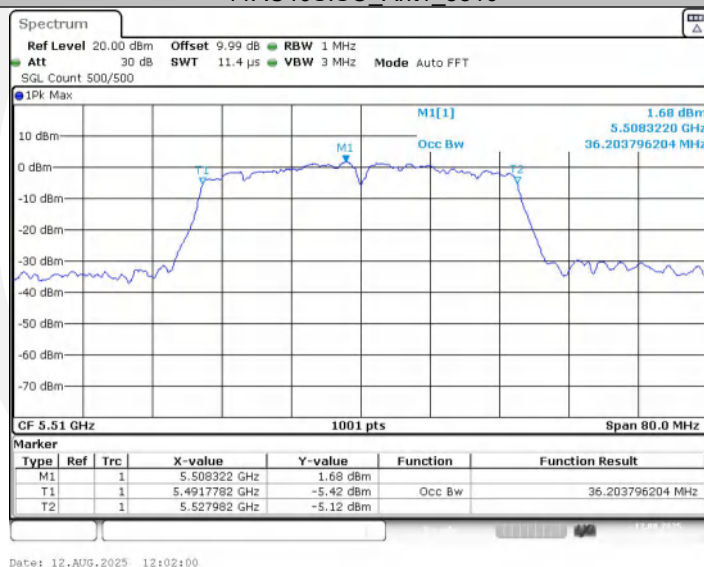


11AC40SISO_Ant1_5550

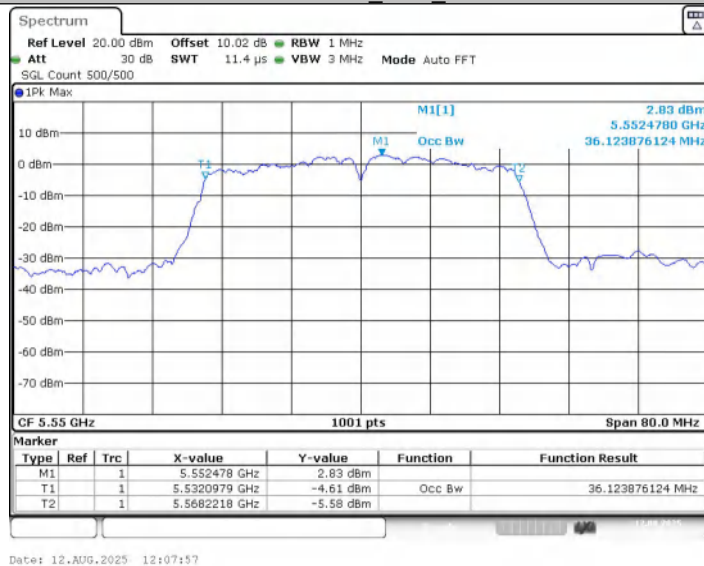


11AC40SISO_Ant1_5670

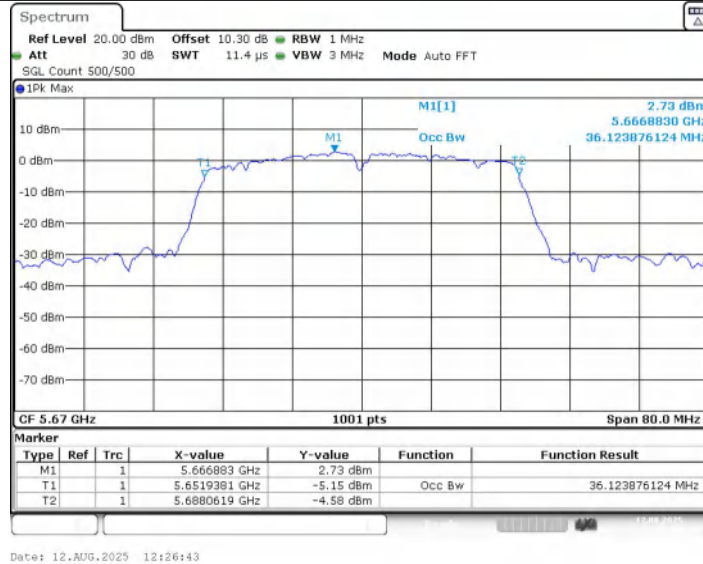


11AC40SISO_Ant1_5755

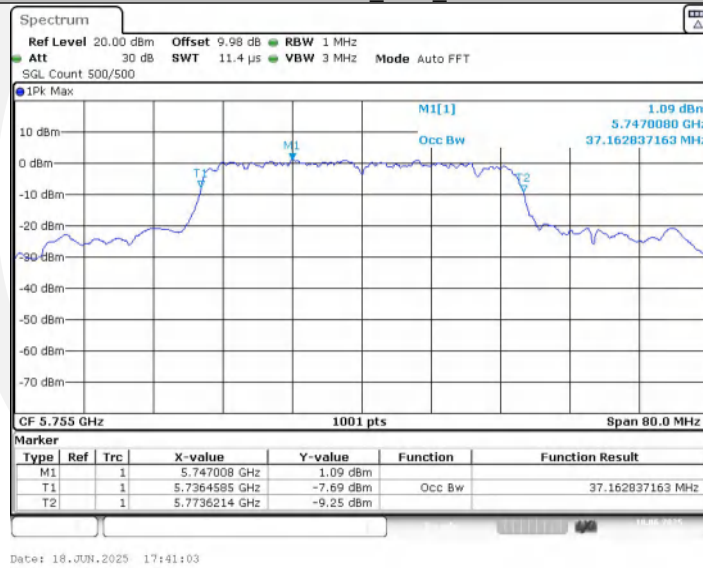


11AC40SISO_Ant1_5795

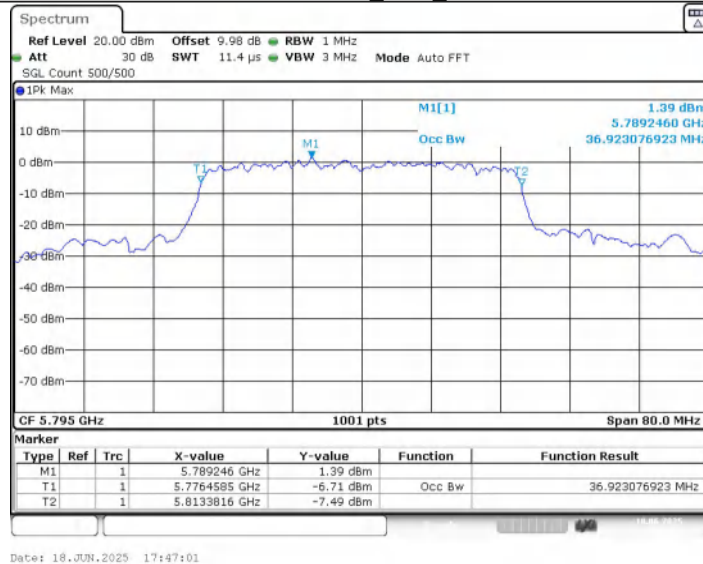


11AC80SISO_Ant1_5210

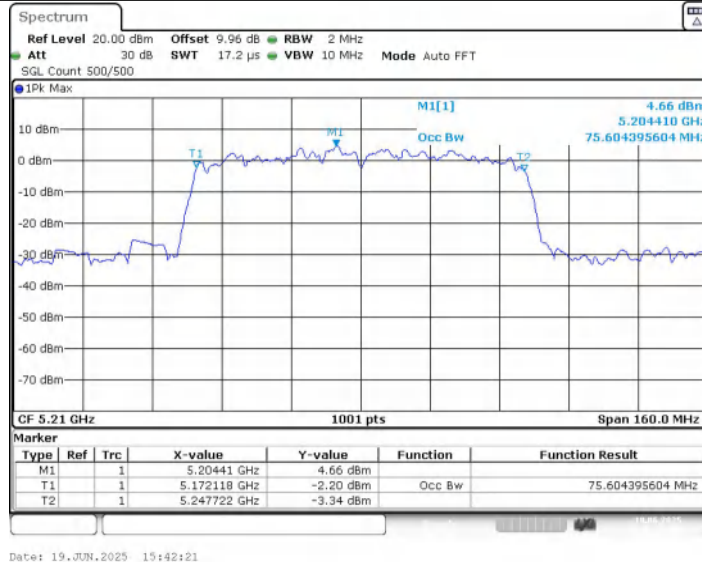


11AC80SISO_Ant1_5290

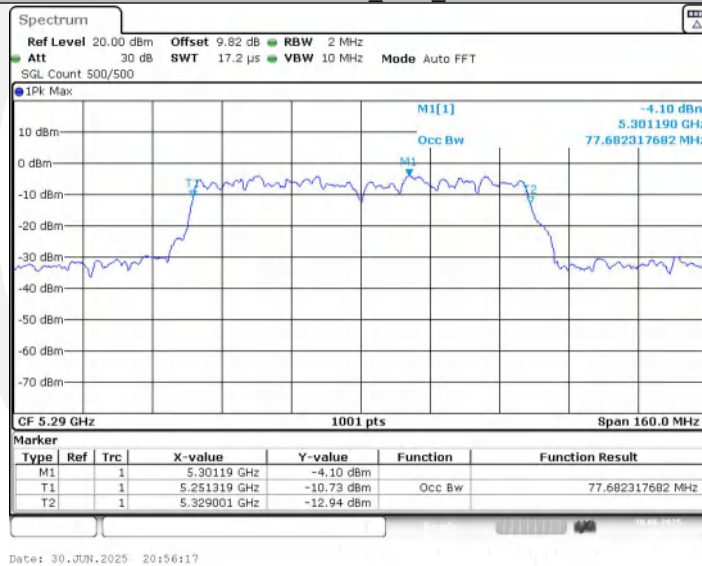


11AC80SISO_Ant1_5530

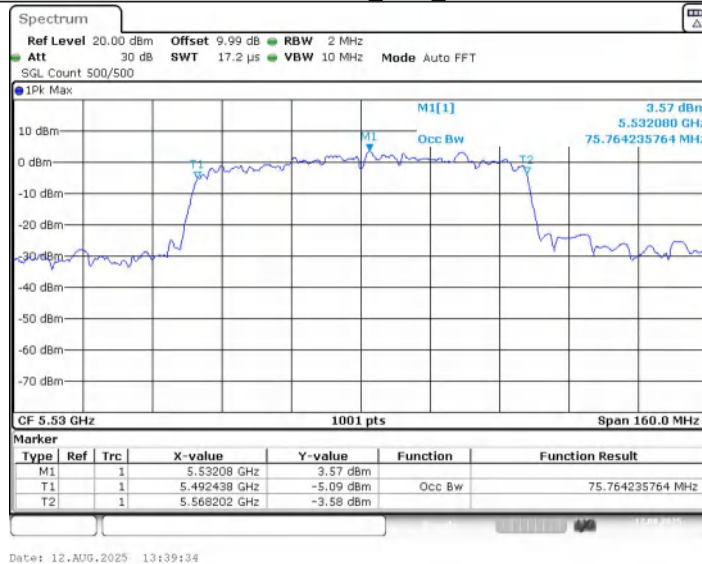

11AC80SISO_Ant1_5610

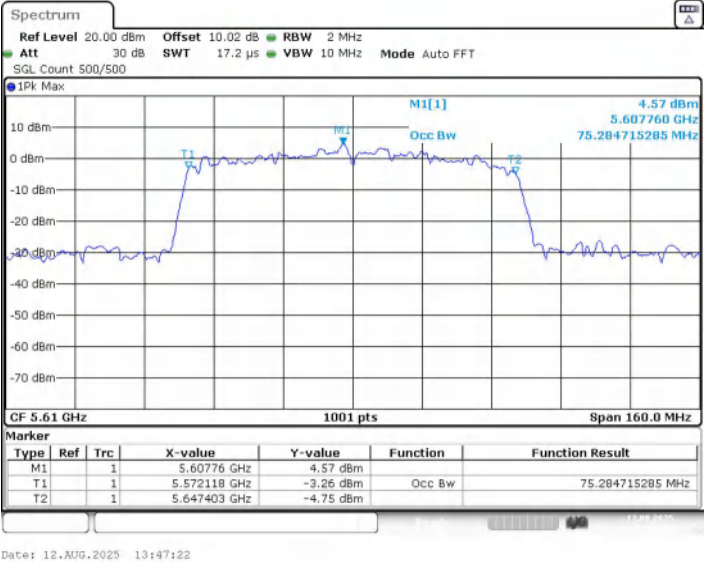


11AC80SISO_Ant1_5775

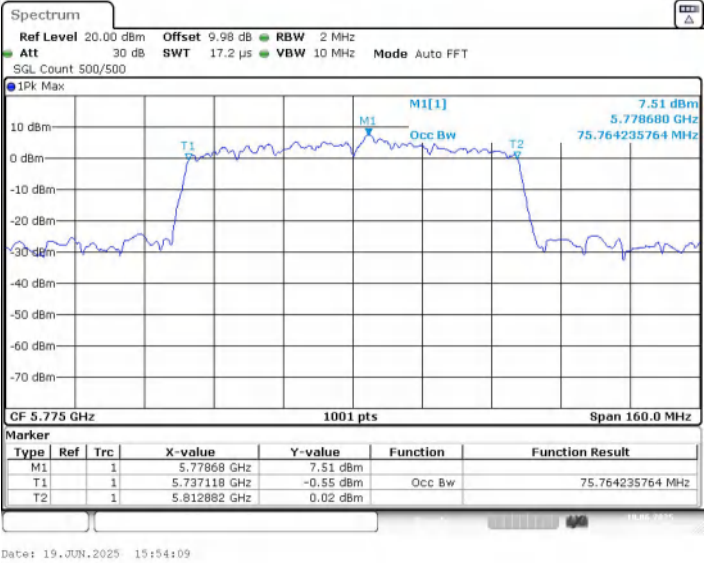


TestMode	Antenna	Freq(MHz)	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.44	5170.44	5189.88	---	---
		5200	18.56	5190.68	5209.24	---	---
		5240	20.28	5229.92	5250.20	---	---
		5260	20.04	5249.92	5269.96	---	---
		5280	19.16	5270.40	5289.56	---	---
		5320	20.04	5309.96	5330.00	---	---
		5500	19.36	5490.40	5509.76	---	---
		5580	19.72	5570.20	5589.92	---	---
		5700	19.68	5690.16	5709.84	---	---
		5745	37.36	5726.40	5763.76	---	---
		5785	34.32	5767.40	5801.72	---	---
		5825	34.08	5808.36	5842.44	---	---
11N20SISO	Ant1	5180	22.60	5168.12	5190.72	---	---
		5200	22.92	5188.40	5211.32	---	---
		5240	21.00	5229.56	5250.56	---	---
		5260	22.32	5249.00	5271.32	---	---
		5280	21.60	5268.96	5290.56	---	---
		5320	21.76	5309.36	5331.12	---	---
		5500	20.32	5489.84	5510.16	---	---
		5580	20.36	5569.76	5590.12	---	---
		5700	19.84	5690.12	5709.96	---	---
		5745	20.20	5735.04	5755.24	---	---
		5785	21.16	5774.48	5795.64	---	---
		5825	21.56	5814.24	5835.80	---	---
11N40SISO	Ant1	5190	40.56	5169.92	5210.48	---	---
		5230	40.08	5210.16	5250.24	---	---
		5270	43.60	5247.68	5291.28	---	---
		5310	44.64	5288.16	5332.80	---	---
		5510	39.28	5490.32	5529.60	---	---
		5550	40.00	5530.16	5570.16	---	---
		5670	39.76	5650.08	5689.84	---	---
		5755	43.28	5733.96	5777.24	---	---
		5795	39.92	5775.16	5815.08	---	---
11AC20SISO	Ant1	5180	19.52	5170.56	5190.08	---	---
		5200	19.32	5189.96	5209.28	---	---
		5240	20.00	5230.16	5250.16	---	---
		5260	20.00	5250.24	5270.24	---	---
		5280	19.32	5270.36	5289.68	---	---

		5320	19.92	5309.92	5329.84	---	---
		5500	20.44	5489.84	5510.28	---	---
		5580	20.40	5569.88	5590.28	---	---
		5700	20.08	5690.04	5710.12	---	---
		5745	20.04	5735.12	5755.16	---	---
		5785	20.56	5775.44	5796.00	---	---
		5825	19.68	5815.12	5834.80	---	---
11AC40SISO	Ant1	5190	41.68	5169.28	5210.96	---	---
		5230	39.84	5209.52	5249.36	---	---
		5270	50.64	5242.96	5293.60	---	---
		5310	49.52	5290.08	5339.60	---	---
		5510	40.32	5489.76	5530.08	---	---
		5550	40.32	5530.08	5570.40	---	---
		5670	40.16	5649.84	5690.00	---	---
		5755	69.84	5721.32	5791.16	---	---
		5795	66.96	5764.12	5831.08	---	---
11AC80SISO	Ant1	5210	79.84	5170.16	5250.00	---	---
		5290	82.24	5249.36	5331.60	---	---
		5530	80.48	5490.32	5570.80	---	---
		5610	80.00	5570.00	5650.00	---	---
		5775	79.68	5735.16	5814.84	---	---

11A_Ant1_5180

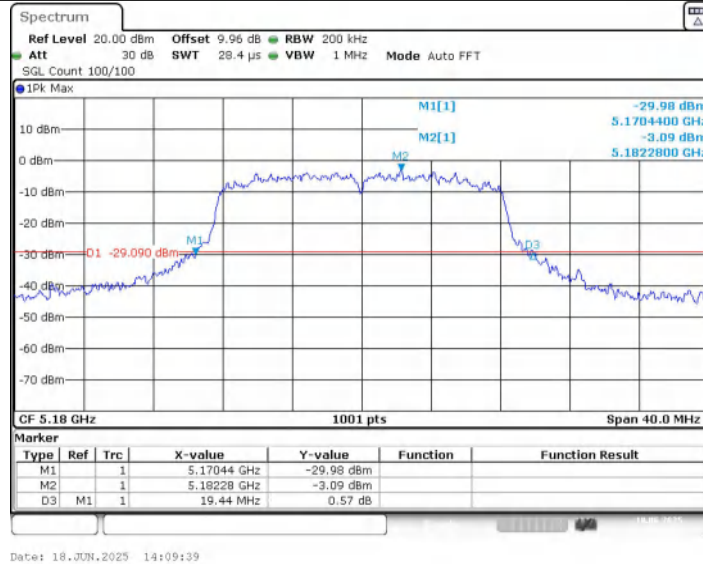

11A_Ant1_5200

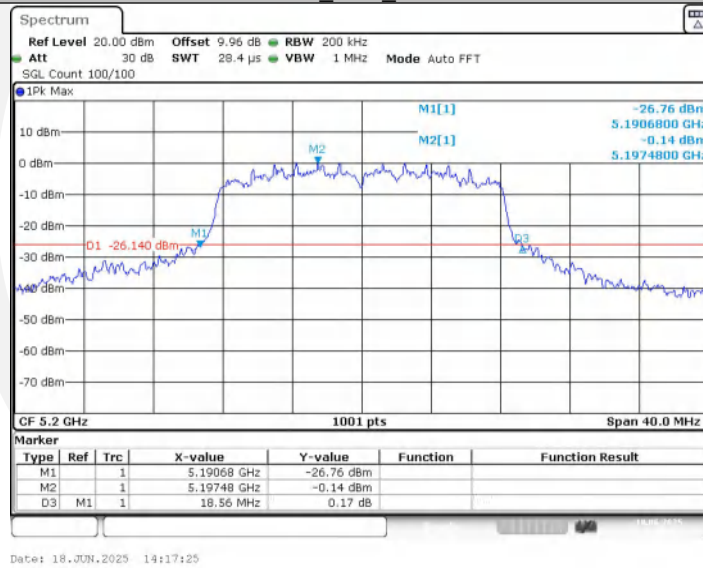

11A_Ant1_5240

