



Test Mode: 40; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

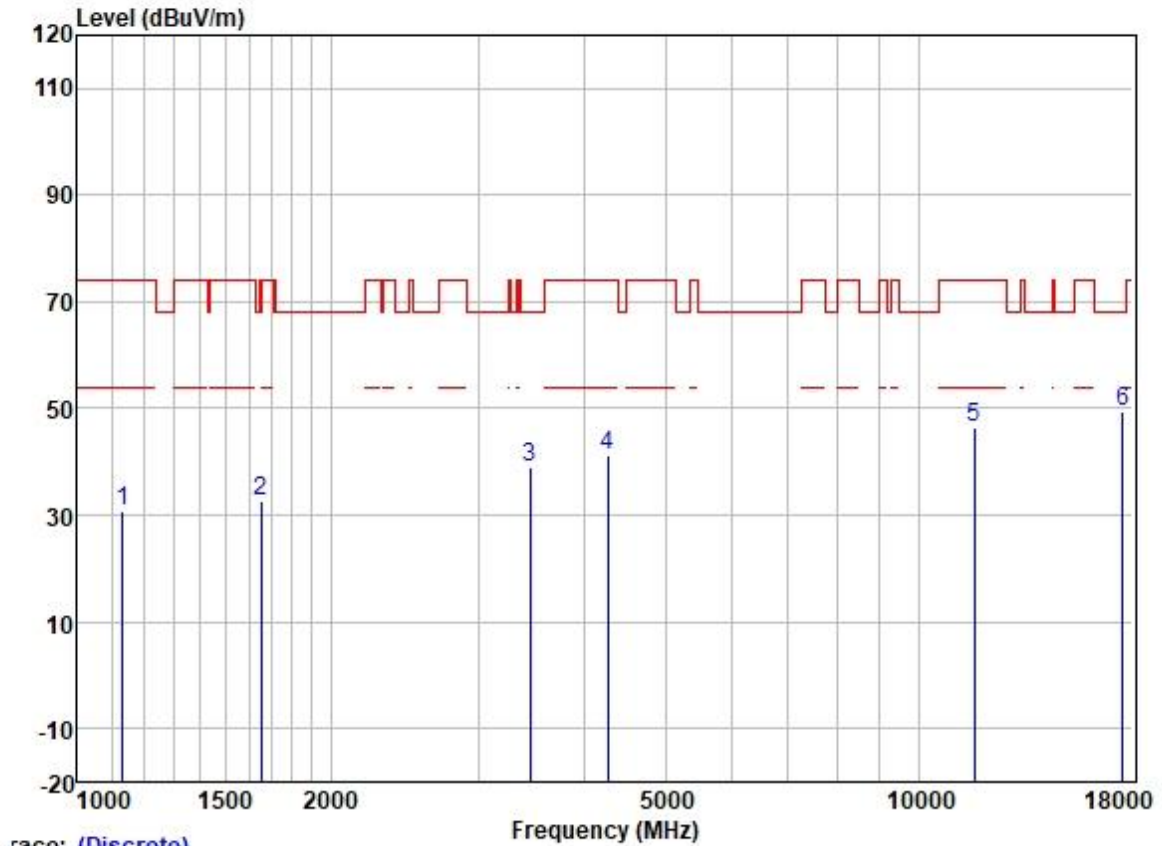

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1132.340	42.37	24.44	2.22	38.43	30.60	74.00	-43.40	HORIZONTAL	Peak
2	1653.550	42.00	25.64	2.80	37.93	32.51	68.20	-35.69	HORIZONTAL	Peak
3	3455.508	42.80	28.88	4.20	36.96	38.92	68.20	-29.28	HORIZONTAL	Peak
4	4267.237	42.85	30.38	4.63	36.81	41.05	74.00	-32.95	HORIZONTAL	Peak
5	11650.000	35.67	39.65	8.35	37.13	46.54	74.00	-27.46	HORIZONTAL	Peak
6	17475.000	30.04	43.90	10.77	35.32	49.39	68.20	-18.81	HORIZONTAL	Peak

Test Mode: 40; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

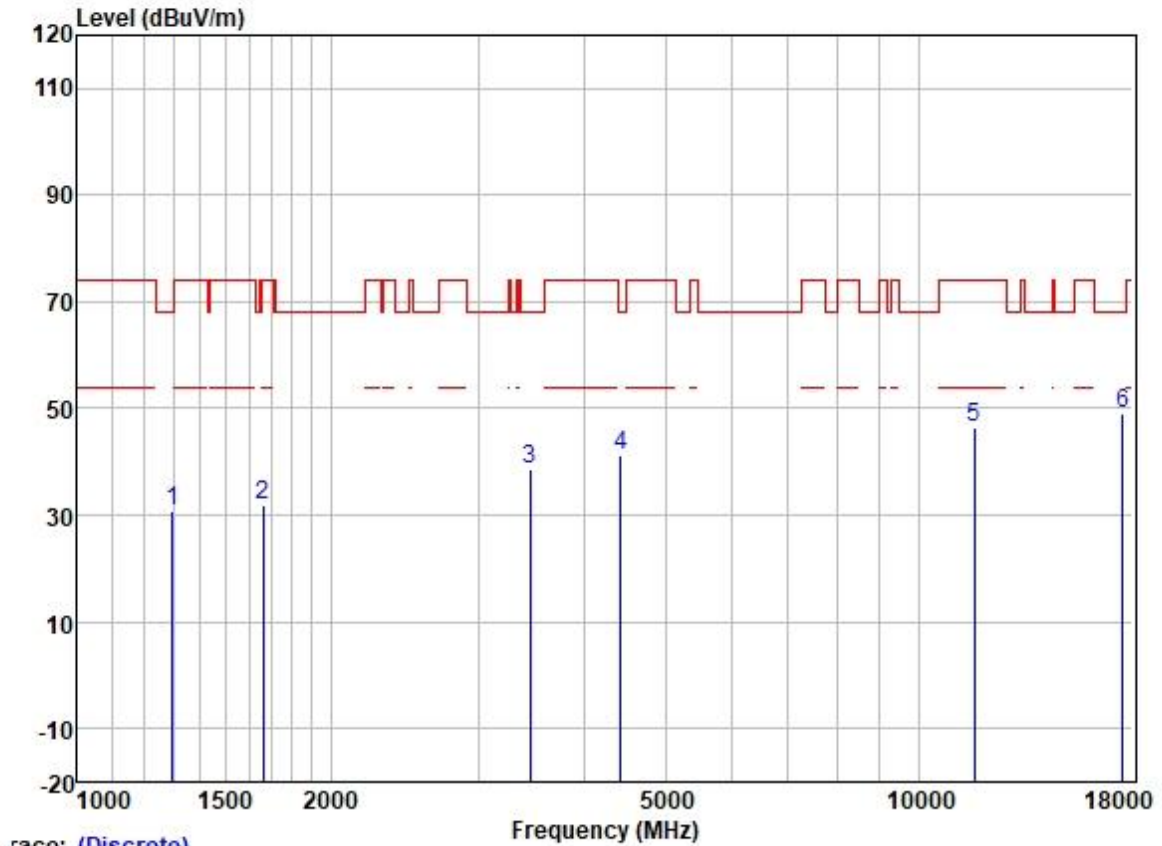

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1297.103	41.21	25.19	2.58	38.31	30.67	68.20	-37.53	VERTICAL Peak
2	1663.137	41.19	25.65	2.80	37.91	31.73	74.00	-42.27	VERTICAL Peak
3	3455.508	42.61	28.88	4.20	36.96	38.73	68.20	-29.47	VERTICAL Peak
4	4430.628	42.49	30.72	4.78	36.81	41.18	68.20	-27.02	VERTICAL Peak
5	11650.000	35.59	39.65	8.35	37.13	46.46	74.00	-27.54	VERTICAL Peak
6	17475.000	29.74	43.90	10.77	35.32	49.09	68.20	-19.11	VERTICAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 40; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

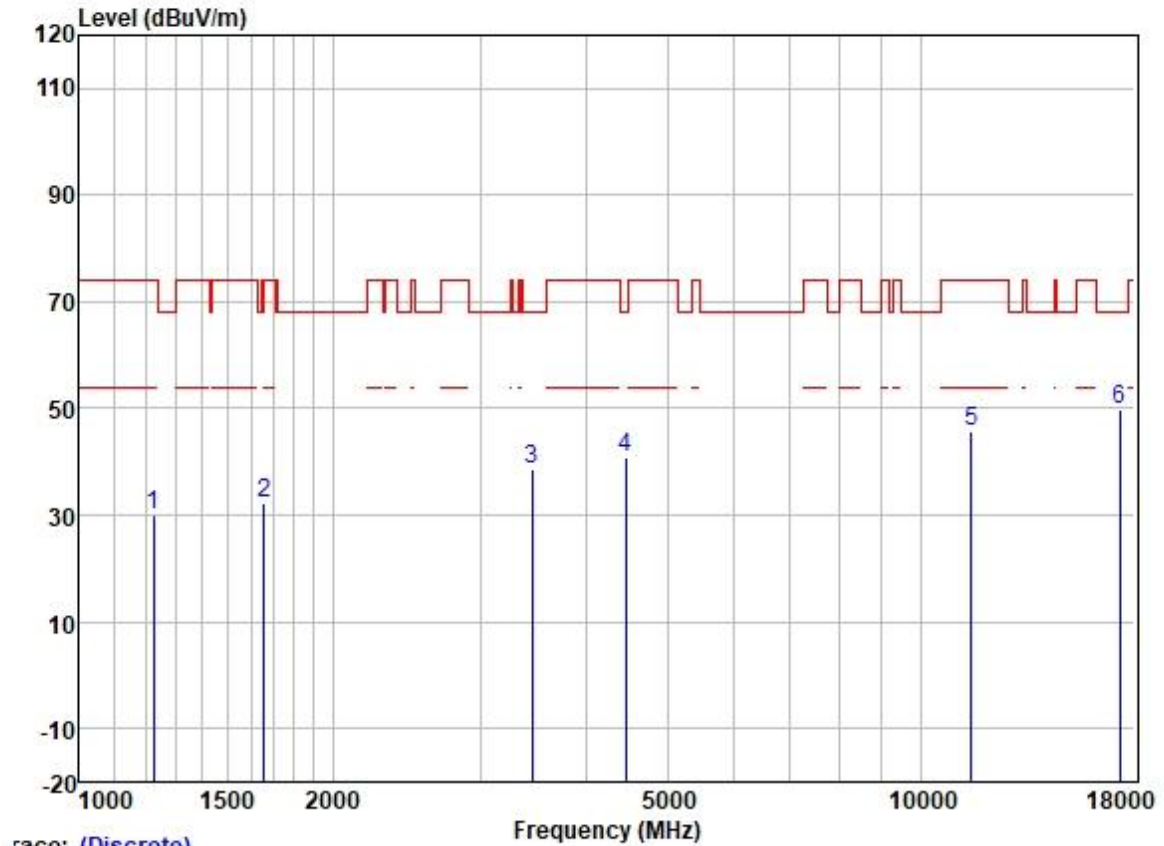

Trace: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1224.247	41.29	24.85	2.31	38.37	30.08	74.00	-43.92	HORIZONTAL	Peak
2	1658.337	41.61	25.65	2.80	37.93	32.13	68.20	-36.07	HORIZONTAL	Peak
3	3455.508	42.58	28.88	4.20	36.96	38.70	68.20	-29.50	HORIZONTAL	Peak
4	4456.315	42.15	30.75	4.88	36.81	40.97	68.20	-27.23	HORIZONTAL	Peak
5	11510.000	34.42	39.90	8.41	37.15	45.58	74.00	-28.42	HORIZONTAL	Peak
6	17265.000	31.83	43.21	10.24	35.33	49.95	68.20	-18.25	HORIZONTAL	Peak


Test Mode: 40; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

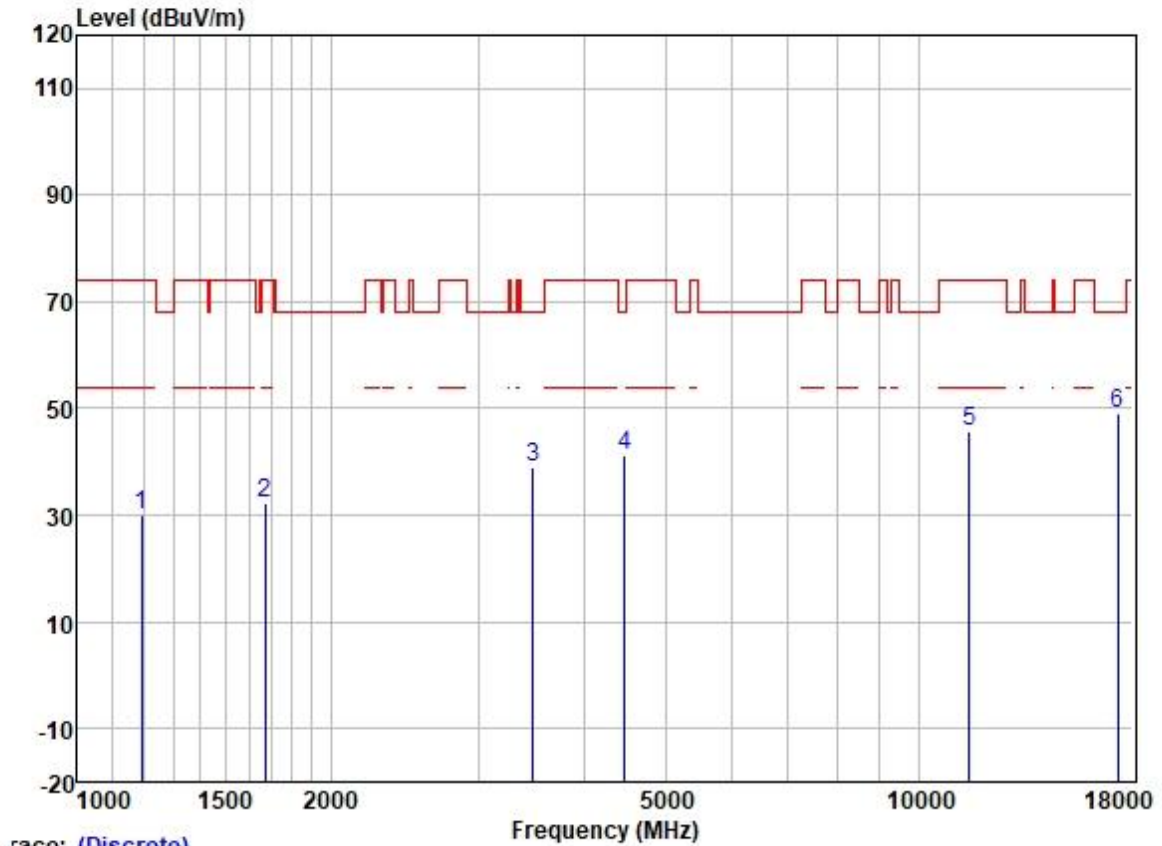

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1192.811	41.34	24.65	2.36	38.39	29.96	74.00	-44.04	VERTICAL	Peak
2	1672.779	41.75	25.67	2.80	37.91	32.31	74.00	-41.69	VERTICAL	Peak
3	3485.601	42.70	28.89	4.27	36.95	38.91	68.20	-29.29	VERTICAL	Peak
4	4469.214	42.25	30.77	4.93	36.81	41.14	68.20	-27.06	VERTICAL	Peak
5	11510.000	34.55	39.90	8.41	37.15	45.71	74.00	-28.29	VERTICAL	Peak
6	17265.000	31.04	43.21	10.24	35.33	49.16	68.20	-19.04	VERTICAL	Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

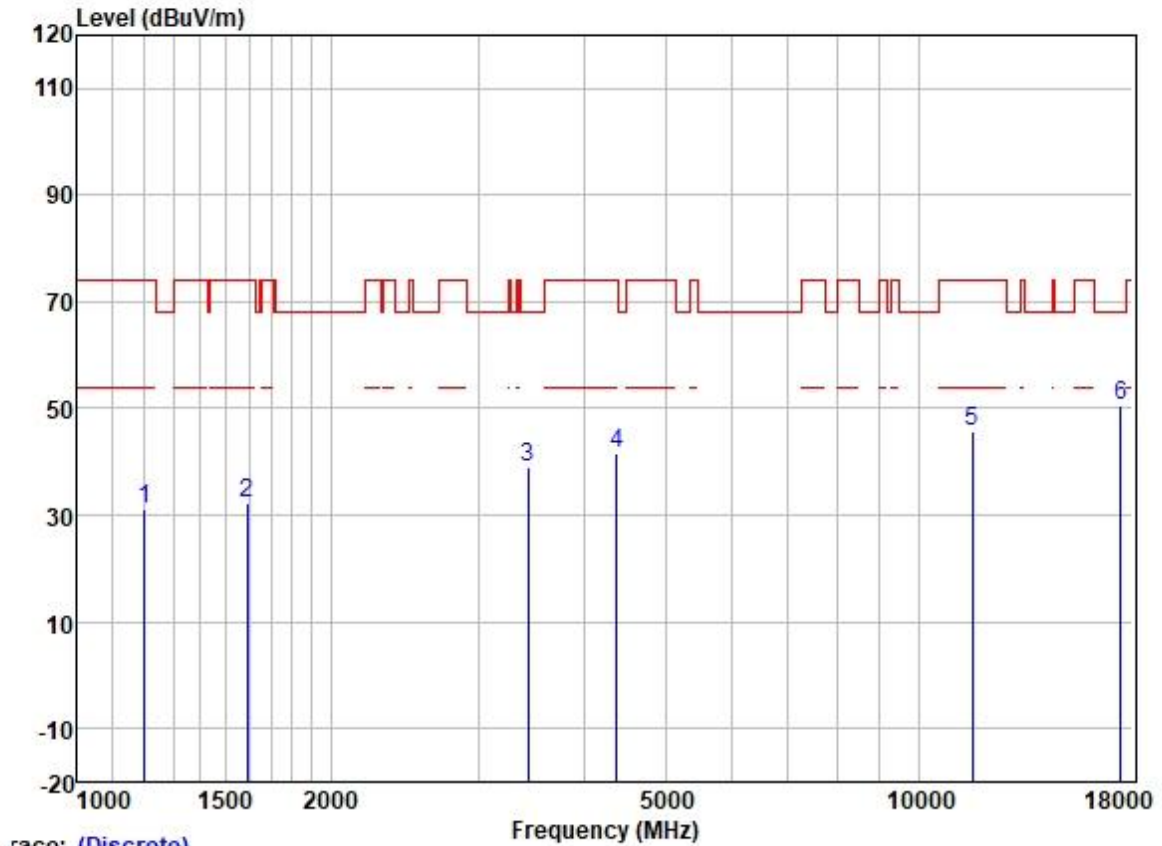

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
		Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1203.199	42.53	24.70	2.34	38.39	31.18	74.00	-42.82	HORIZONTAL	Peak
2	1592.571	41.69	25.57	2.80	37.98	32.08	74.00	-41.92	HORIZONTAL	Peak
3	3435.590	42.84	28.87	4.16	36.97	38.90	68.20	-29.30	HORIZONTAL	Peak
4	4379.699	43.03	30.64	4.69	36.81	41.55	74.00	-32.45	HORIZONTAL	Peak
5	11590.000	34.76	39.72	8.37	37.14	45.71	74.00	-28.29	HORIZONTAL	Peak
6	17385.000	31.74	43.57	10.53	35.32	50.52	68.20	-17.68	HORIZONTAL	Peak


Test Mode: 40; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

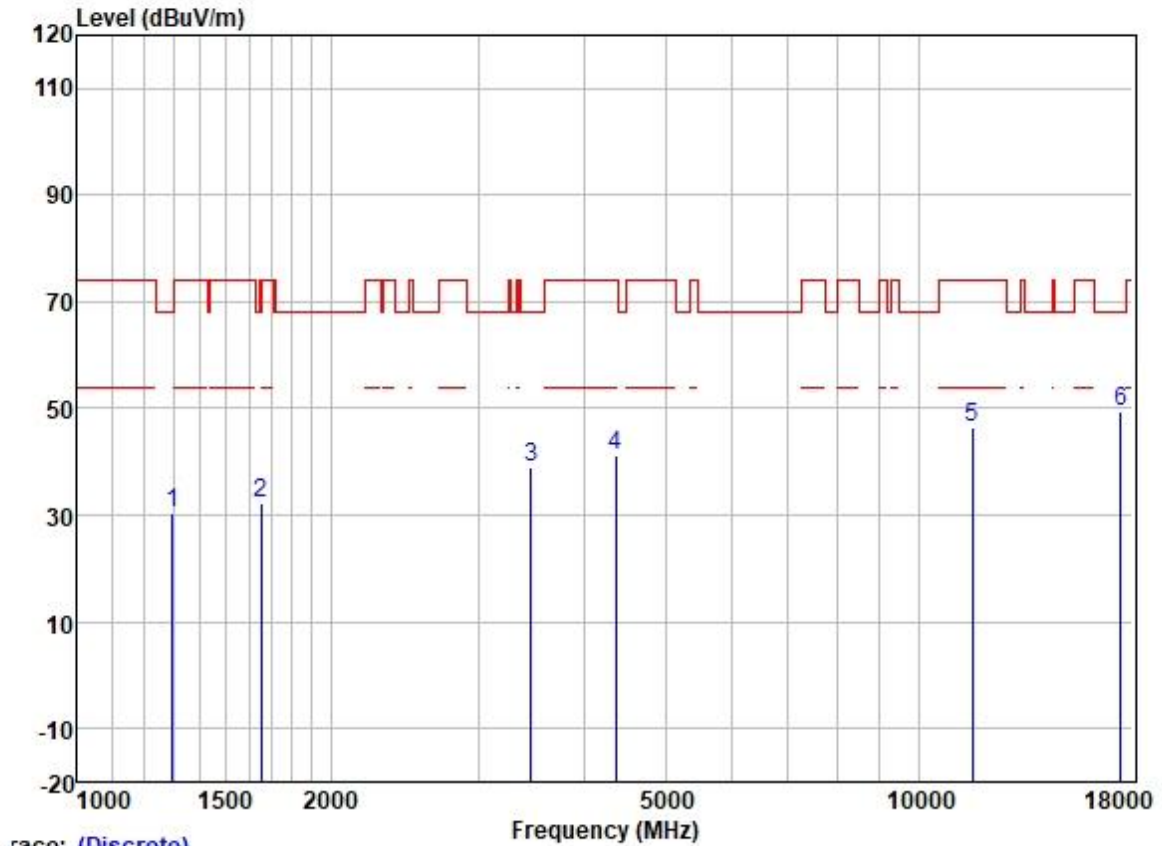

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1297.103	40.83	25.19	2.58	38.31	30.29	68.20	-37.91 VERTICAL	Peak
2	1653.550	41.63	25.64	2.80	37.93	32.14	68.20	-36.06 VERTICAL	Peak
3	3465.510	42.98	28.88	4.22	36.95	39.13	68.20	-29.07 VERTICAL	Peak
4	4367.058	42.77	30.62	4.68	36.81	41.26	74.00	-32.74 VERTICAL	Peak
5	11590.000	35.51	39.72	8.37	37.14	46.46	74.00	-27.54 VERTICAL	Peak
6	17385.000	30.74	43.57	10.53	35.32	49.52	68.20	-18.68 VERTICAL	Peak

Test Mode: 40; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

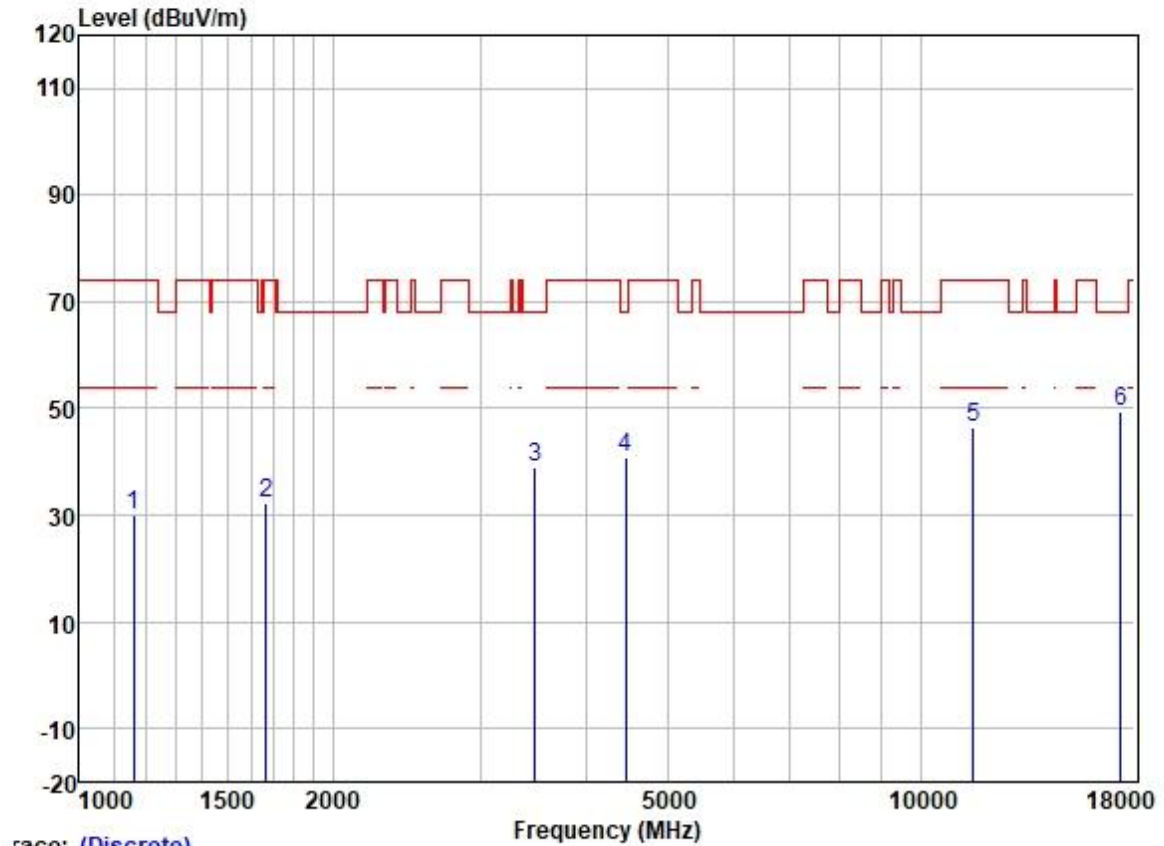

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1158.828	41.51	24.52	2.40	38.42	30.01	74.00	-43.99	HORIZONTAL	Peak
2	1667.951	41.76	25.66	2.80	37.91	32.31	74.00	-41.69	HORIZONTAL	Peak
3	3485.601	42.63	28.89	4.27	36.95	38.84	68.20	-29.36	HORIZONTAL	Peak
4	4456.315	42.12	30.75	4.88	36.81	40.94	68.20	-27.26	HORIZONTAL	Peak
5	11550.000	35.37	39.84	8.40	37.14	46.47	74.00	-27.53	HORIZONTAL	Peak
6	17325.000	30.86	43.40	10.39	35.32	49.33	68.20	-18.87	HORIZONTAL	Peak

Test Mode: 40; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

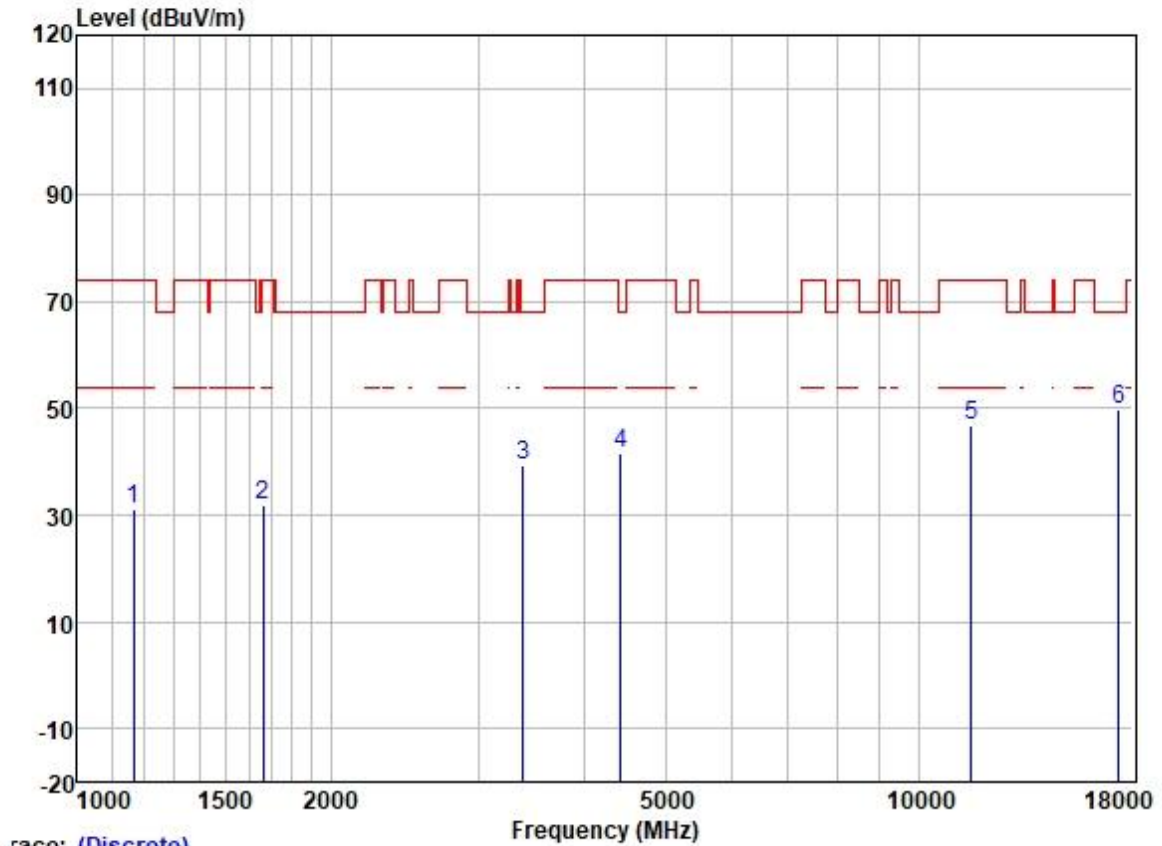

Trace: (Discrete)

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1165.546	42.76	24.54	2.39	38.40	31.29	74.00	-42.71	VERTICAL Peak
2	1663.137	41.41	25.65	2.80	37.91	31.95	74.00	-42.05	VERTICAL Peak
3	3386.297	43.31	28.83	4.10	36.99	39.25	68.20	-28.95	VERTICAL Peak
4	4430.628	42.79	30.72	4.78	36.81	41.48	68.20	-26.72	VERTICAL Peak
5	11550.000	35.74	39.84	8.40	37.14	46.84	74.00	-27.16	VERTICAL Peak
6	17325.000	31.31	43.40	10.39	35.32	49.78	68.20	-18.42	VERTICAL Peak

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for GZCR2112021591AT.

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for GZCR2112021591AT

- End of the Report -