


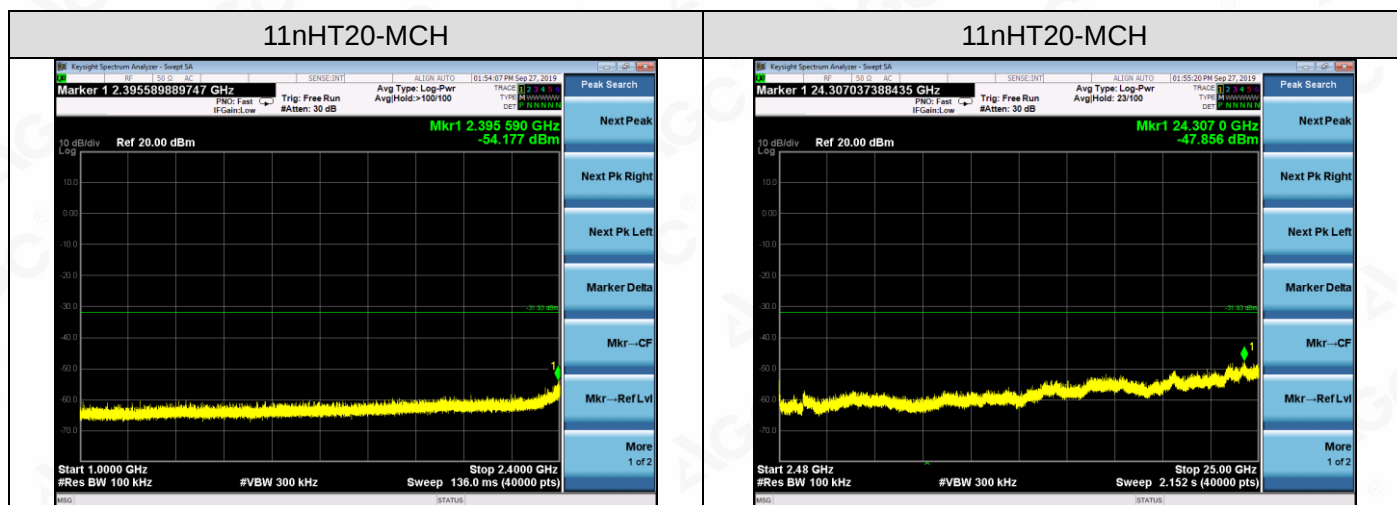
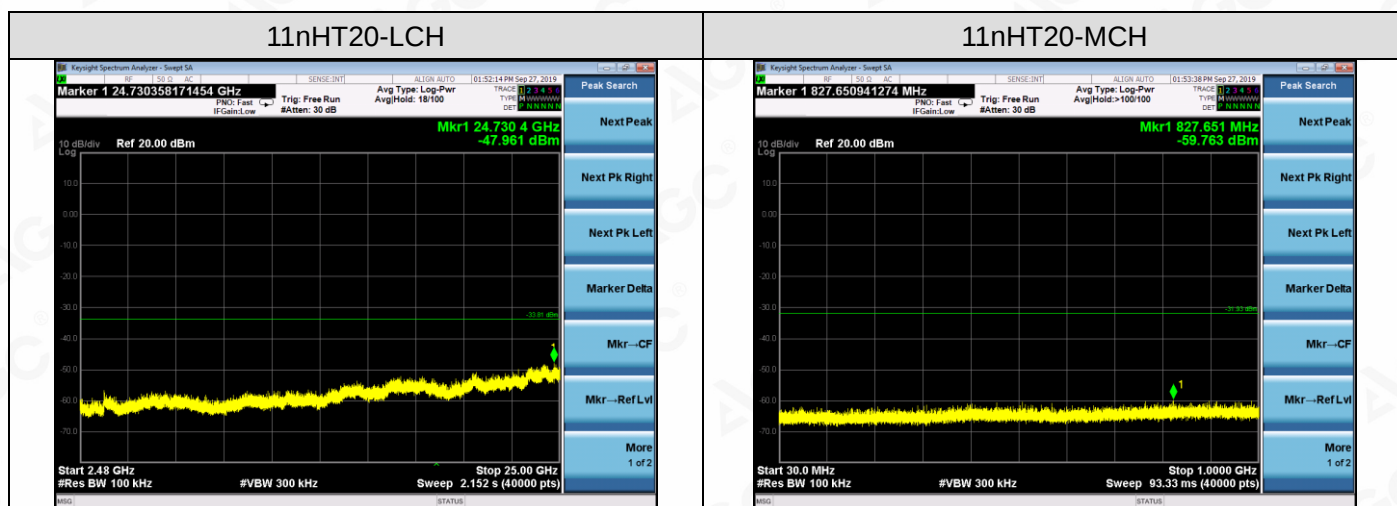
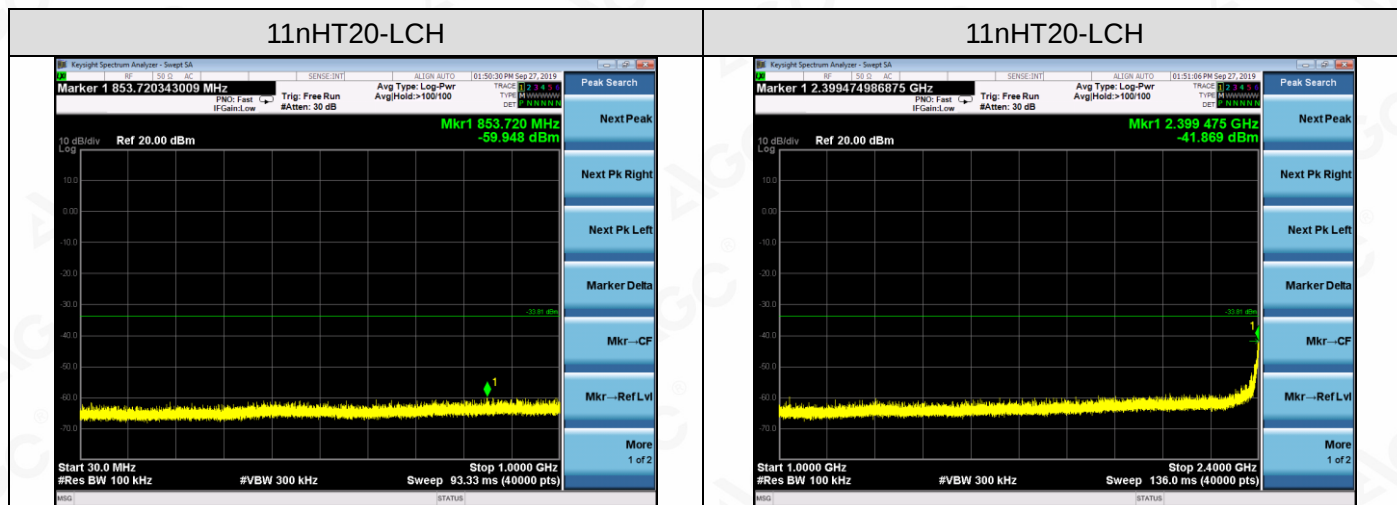
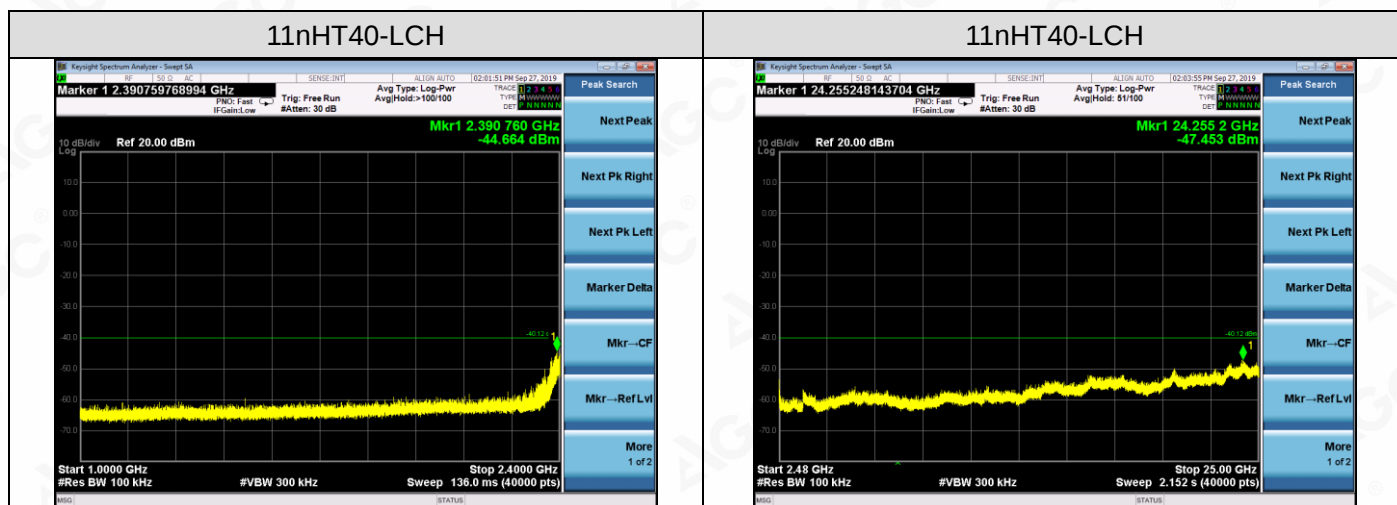
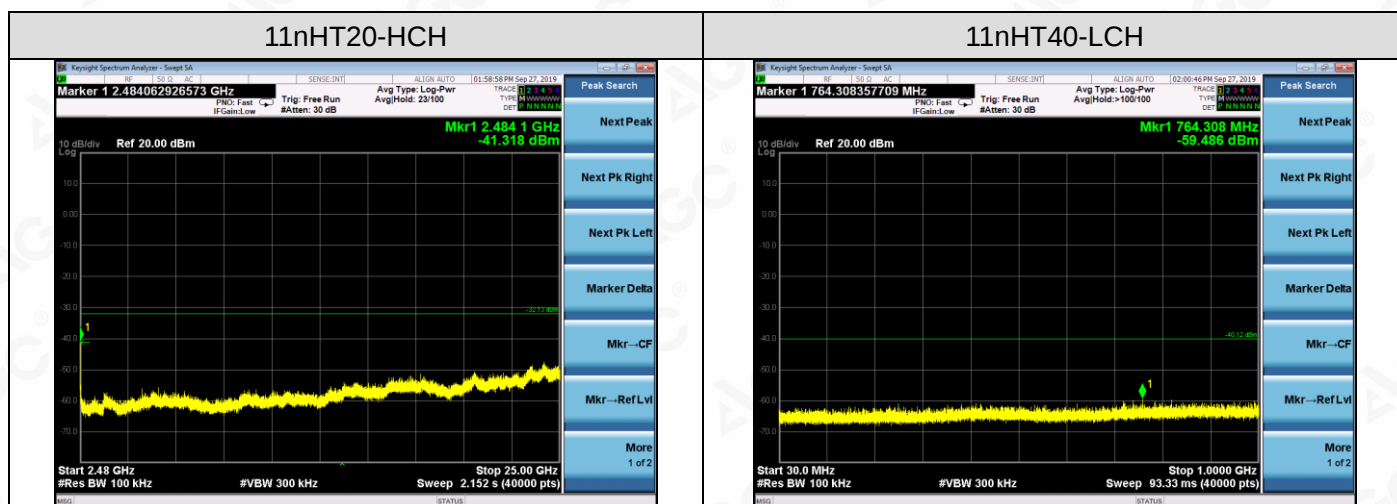
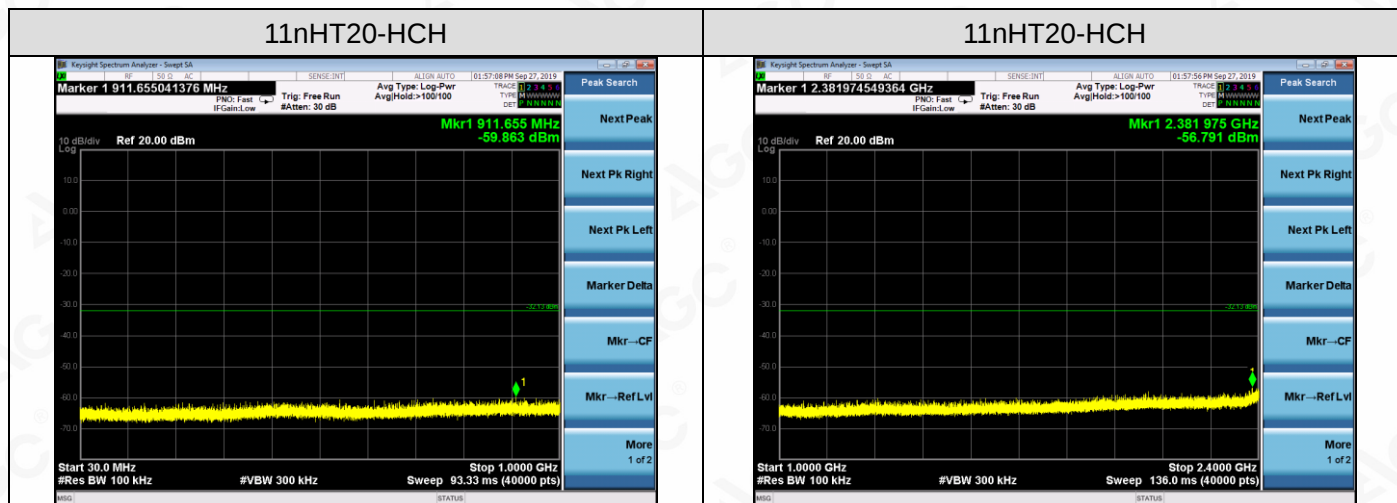


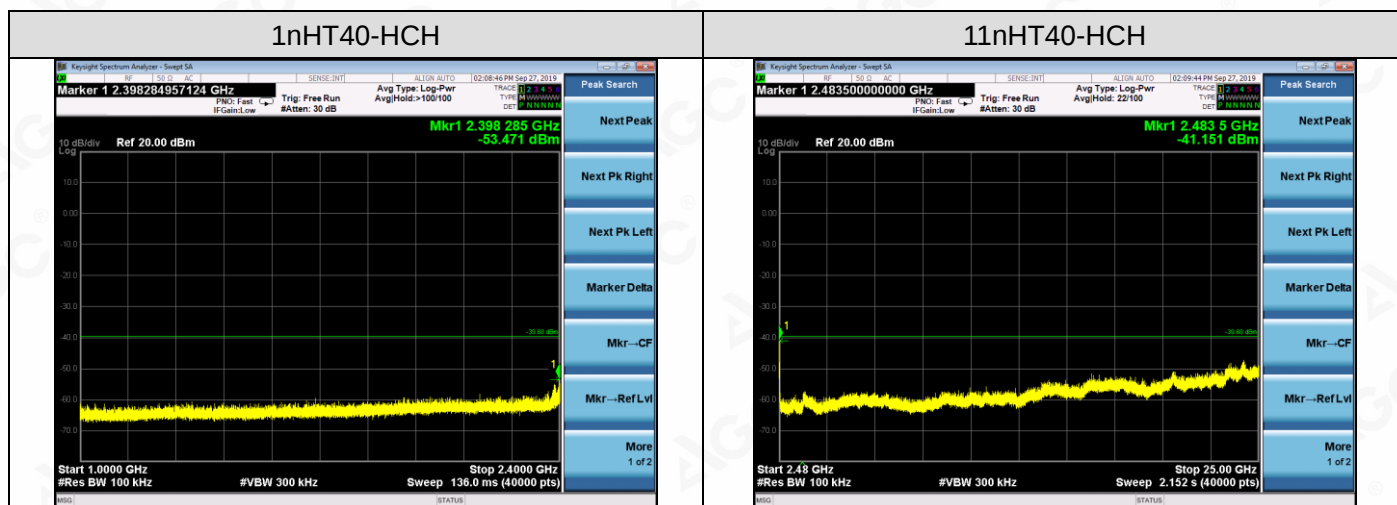

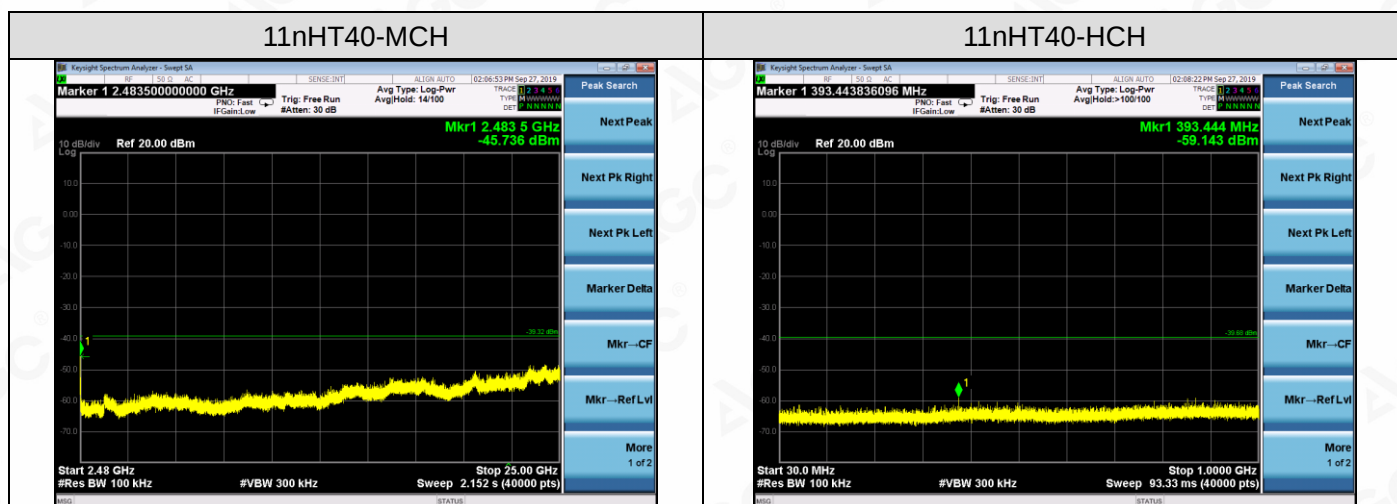

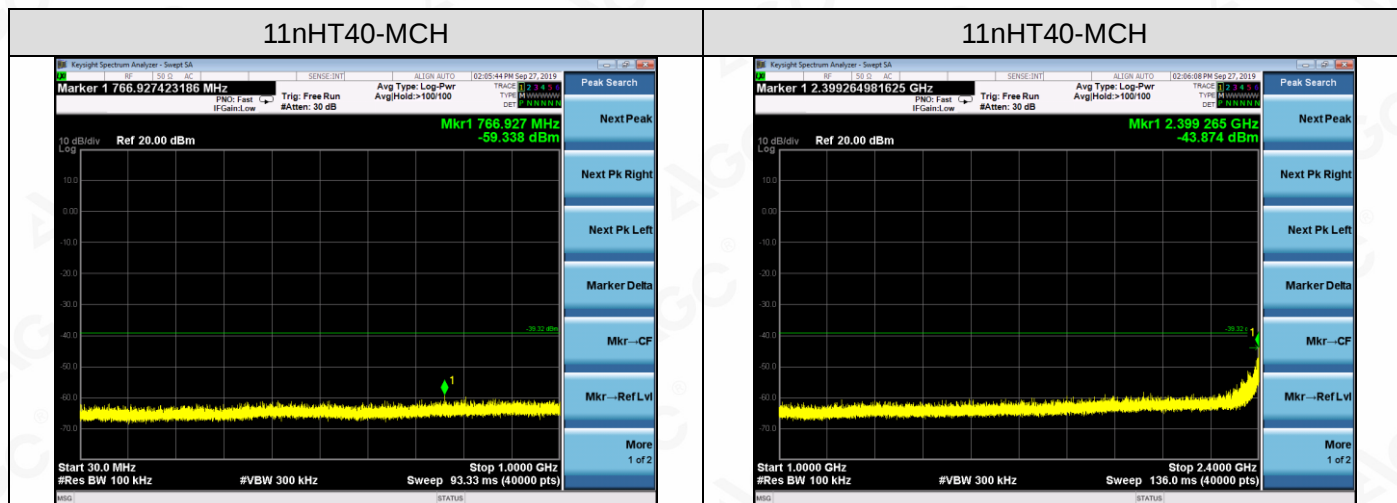

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPS-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer To Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer To Section 6.




10.4 LIMITS AND MEASUREMENT RESULT

Mode	Channel	PSD [dBm/20kHz]	Limit[dBm/3kHz]	Verdict
11b	LCH	-3.607	8	PASS
	MCH	-3.699	8	PASS
	HCH	-4.045	8	PASS
11g	LCH	-8.578	8	PASS
	MCH	-7.295	8	PASS
	HCH	-7.121	8	PASS
11nHT20	LCH	-9.238	8	PASS
	MCH	-6.686	8	PASS
	HCH	-7.787	8	PASS
11NHT40	LCH	-13.702	8	PASS
	MCH	-14.259	8	PASS
	HCH	-14.240	8	PASS



Test Graph

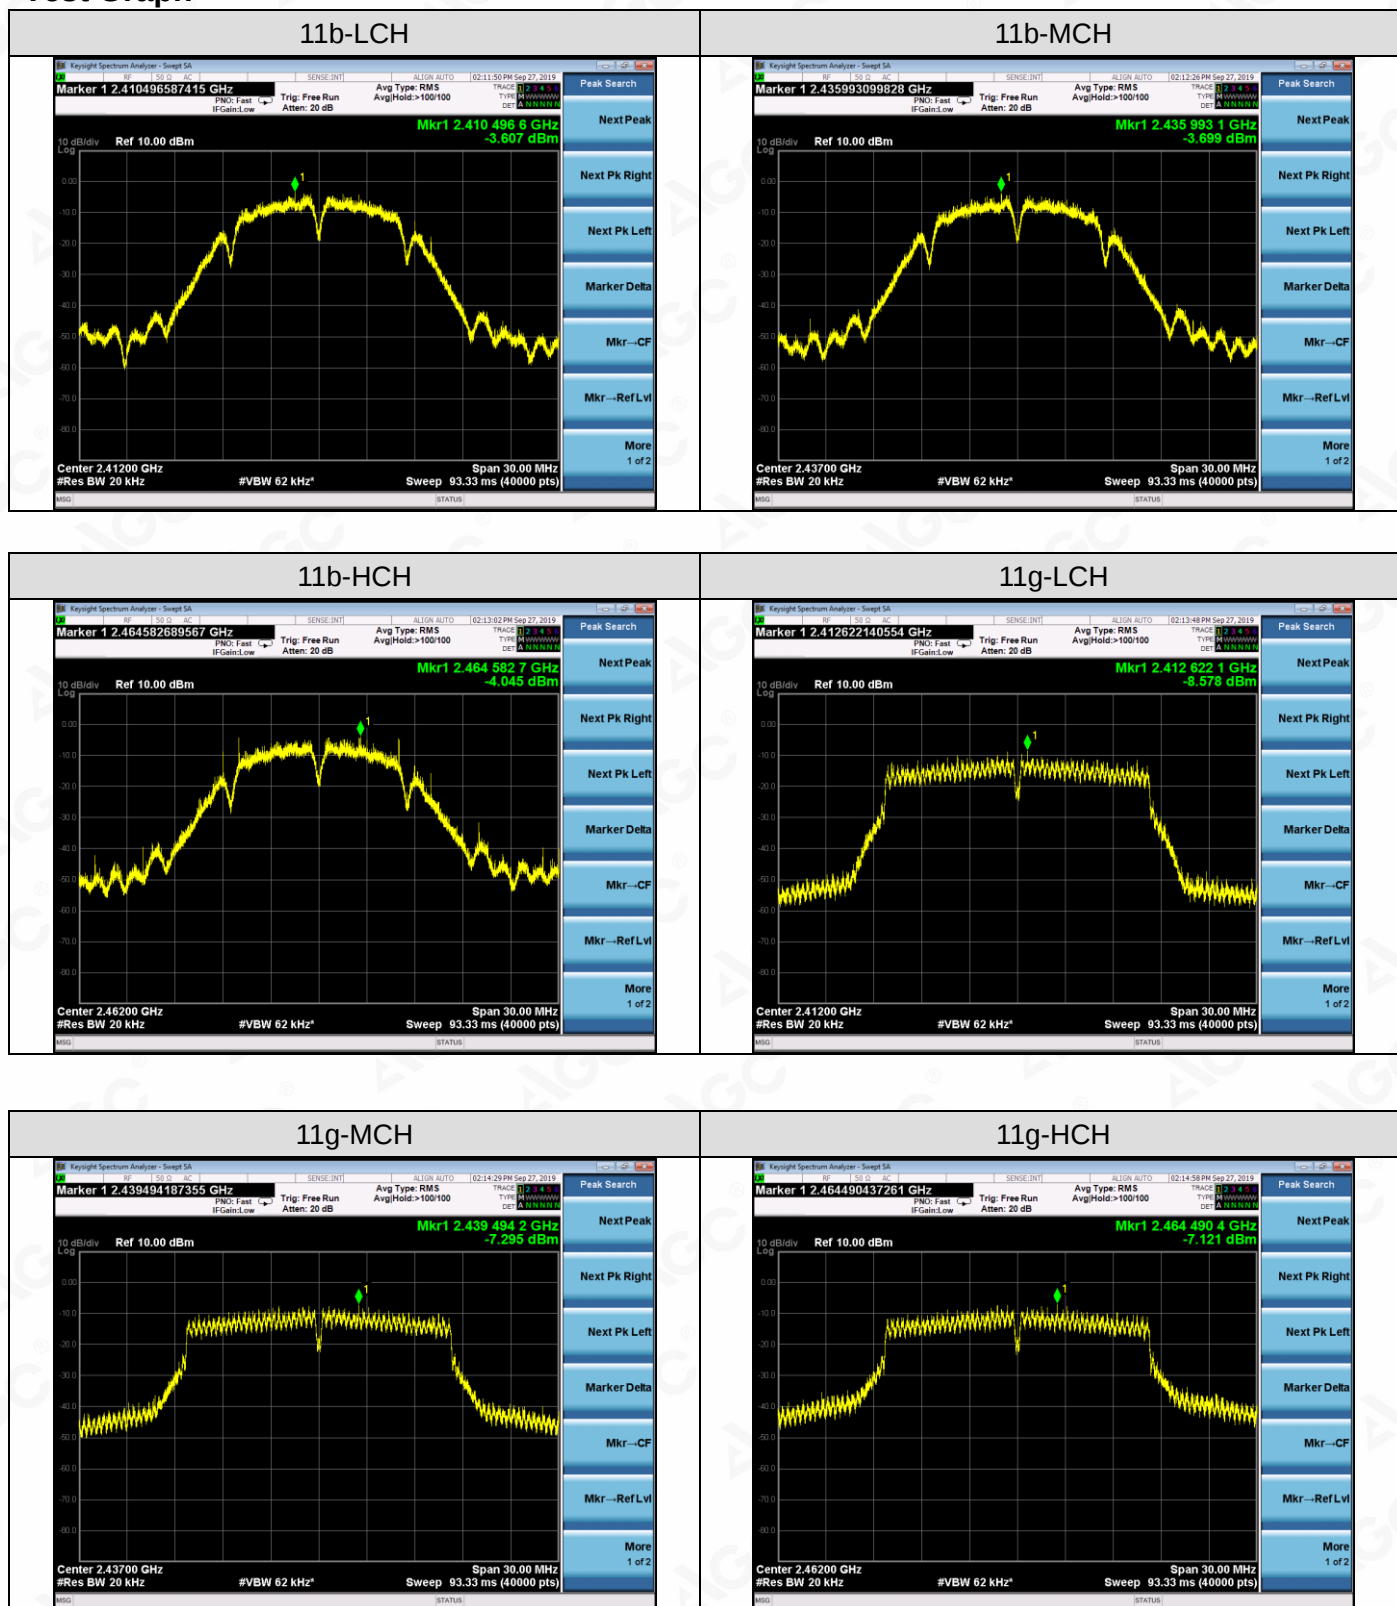

Attestation of Global Compliance

Attestation of Global Compliance(Shenzhen)Co.,Ltd.

Add: 2/F., Building 2, Sanwei Chaxi Industrial Park, Sanwei Community,

Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755 2523 4088

E-mail: agc@agc-cert.com

Service Hotline: 400 089 2118

