



SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch

198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technological
Development District, Guangzhou, China 510663

Telephone: +86 (0) 20 82155555

Fax: +86 (0) 20 82075059

Email: ee.guangzhou@sgs.com

Report No.: GZEM180500272202

Page: 1 of 11

Human Exposure Report

Application No.: GZEM1805002722CR
Applicant: SUNVALLEYTEK INTERNATIONAL, INC.
Address of Applicant: 46724 Lakeview Blvd, Fremont, CA 94538
Manufacturer / Factory: Shenzhen NearbyExpress Technology Development Company Limited
Address of Manufacturer / Factory: 9 Floor, Block A, Galaxy World, 1 Yabao Rd, Longgang District, Shenzhen, China 518131
Equipment Under Test (EUT):
EUT Name: Wireless Charging Car Mount
Model No.: BWA19WI702
FCC ID: 2AFDGBWA19WI702
Trade mark: blackweb
Standards: 47 CFR PART 1, Subpart I, Section 1.1310
Date of Receipt: 2018-05-24
Date of Test: 2018-05-28 to 2018-06-01
Date of Issue: 2018-06-04

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above



Kobe Jian
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



1 Contents

	Page
1 COVER PAGE	1
1 CONTENTS	2
2 GENERAL INFORMATION	3
2.1 DETAILS OF E.U.T.	3
2.2 DESCRIPTION OF SUPPORT UNITS	3
2.3 TEST LOCATION	4
2.4 TEST FACILITY	5
2.5 DEVIATION FROM STANDARDS	6
2.6 ABNORMALITIES FROM STANDARD CONDITIONS	6
3 EQUIPMENTS USED DURING TEST	7
4 TEST RESULTS	8
4.1 RF EXPOSURE TEST	8
4.1.1 E.U.T. Operation	8
Operating Environment:	8
EUT Operation:	8
4.1.2 Measurement Data	9
5 PHOTOGRAPHS	11
5.1 RF EXPOSURE TEST TEST SETUP	11



2 General Information

2.1 Details of E.U.T.

Power supply: DC 5V, 2A & DC 9V, 2A powered by AC/DC adapter
Output: DC 10W MAX

Cable: USB charging line: 110 cm, unshielded
DC line: 180cm, unshielded

Operation frequency: 110 kHz to 148 kHz

Antenna type: Loop antenna

Modulation type: Load modulation

Remark: Tests were conducted in all the load modes and the worst case (5W) is reported only.

2.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Mobile Phone	SANSUNG	SM-9508	R28K110W9JV
Adapter 1(EMCA021)	SGS	MJ4105	N/A



2.3 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.



2.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818, Jul 13, 2017.

- **Industry Canada (Registration No.: 4620B-1)**

The 3m/10m Alternate Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering of Industry Canada for radio equipment testing with Registration No. 4620B-1.

- **VCCI (Registration No.: R-2460, C-2584, G-449 and T-1179)**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2460, C-2584, G-449 and T-1179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2005, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.



3 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Due date (yyyy-mm-dd)
1	10m Semi- Anechoic Chamber	ETS	N/A	N/A	2019-06-18
2	Electric Field Meter	narda	EHP-50F	EMC2143	2021-02-06



4 Test Results

4.1 RF Exposure test

Test Requirement: 47 CFR PART 1, Subpart I, Section 1.1310

Measurement Distance: 15cm

Limit:

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
*=Plane-wave equivalent power density
RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

4.1.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 52% RH Atmospheric Pressure: 1015 mbar

EUT Operation:

This device has been tested the worst status of full load and the device has been tested with mobile phone at zero charge, intermediate charge, and full charge.



4.1.2 Measurement Data

Output Voltage=DC 5V; The max output power =5W;Calculation of resistor value=5Ω

Electric Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (V/m)	50% Limit (V/m)
110-148kHz	15	Side 1	4.38	307
		Side 2	4.56	307
		Side 3	4.43	307
		Side 4	4.23	307
	20	Top	3.87	307

Magnetic Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result (A/m)	50% Limit (A/m)
110-148kHz	15	Side 1	0.0524	0.815
		Side 2	0.0527	0.815
		Side 3	0.0552	0.815
		Side 4	0.0515	0.815
	20	Top	0.1357	0.815



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch

Report No.: GZEM180500272202
Page: 10 of 11

Mobile phone has been charge at zero charge, intermediate charge, and full charge.

Electric Field Emissions


Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result(V/m)			50%Limit (V/m)
			zero charge	intermediate charge	full charge	
110-148kHz	15	Side 1	4.43	4.46	4.49	307
		Side 2	4.23	5.32	4.75	307
		Side 3	4.28	5.10	5.36	307
		Side 4	4.31	4.57	4.79	307
	20	Top	3.32	4.16	3.78	307

Magnetic Field Emissions

Operation frequency	Test Distance (cm)	Test Position	Probe Measure Result(A/m)			50%Limit (A/m)
			zero charge	intermediate charge	full charge	
110-148kHz	15	Side 1	0.0833	0.0937	0.0857	0.815
		Side 2	0.0869	0.0887	0.0832	0.815
		Side 3	0.0812	0.0901	0.0945	0.815
		Side 4	0.0821	0.0908	0.0907	0.815
	20	Top	0.1889	0.2098	0.2015	0.815

5 Photographs

5.1 RF Exposure test Test Setup

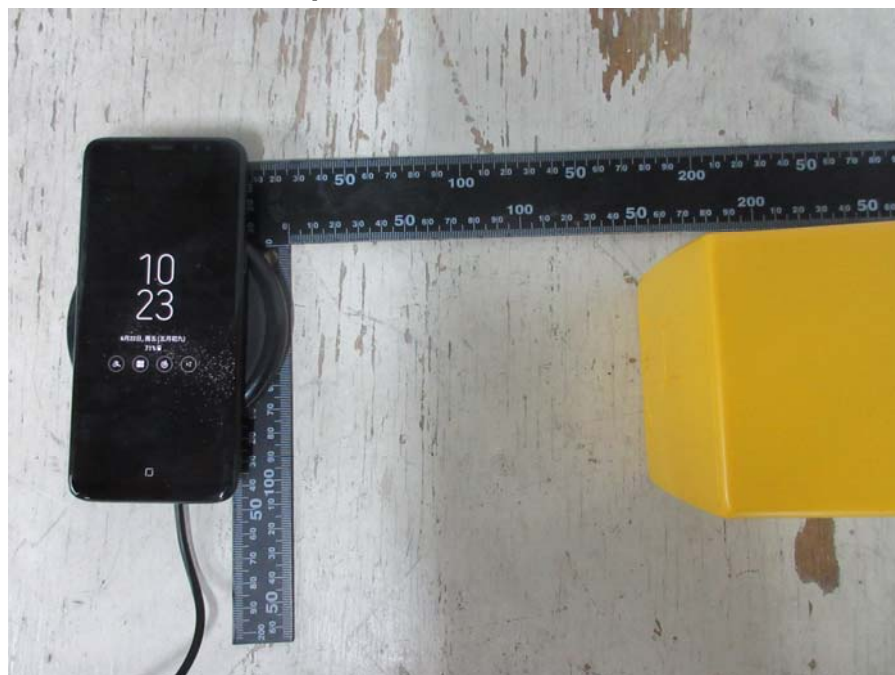

- End of the Report -