

Prüfbericht-Nr.: Test report no.:	60429423 001	Auftrags-Nr.: Order no.:	170109889	Seite 1 von 27 Page 1 of 27
Kunden-Referenz-Nr.: Client Reference No.:	1458770	Auftragsdatum: Order date.:	2019.05.14	
Auftraggeber: Client:	Adam Hall GmbH Adam-Hall-Str. 1, 61267 Neu-Anspach, Germany			
Prüfgegenstand: Test item:	Loudspeaker System			
Bezeichnung / Typ-Nr.: Identification / Type No.:	CURV500S			
Auftrags-Inhalt: Order content:	FCC approval			
Prüfgrundlage: Test specification:	CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 CFR47 FCC Part 2: Section 2.1091			
Wareneingangsdatum: Date of sample receipt:	2019.11.05			
Prüfmuster-Nr.: Test sample No.:	A000974947 001-002			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Guangdong) Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Guangdong) Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	<i>Webb Luo</i>		genehmigt von: authorized by:	<i>Amy Wang</i>
Datum: 2021.01.29 Date:			Datum: 2021.02.02 Date:	
Stellung/Position:	Webb Luo/Assistant PE		Stellung/Position:	Amy Wang/TC
Sonstiges / Other:				
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specifications(s) F(ail) = failed a.m. test specifications(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH

RESULT: Pass

5.1.6 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.7 20dB BANDWIDTH

RESULT: Pass

5.1.8 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.9 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.10 TIME OF OCCUPANCY

RESULT: Pass

5.1.11 CONDUCTED EMISSION ON AC MAINS

RESULT: Pass

6.1.1 ELECTROMAGNETIC FIELDS

RESULT: Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	6
2.6	LOCATION OF ORIGINAL DATA.....	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	11
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	11
3.5	SUBMITTED DOCUMENTS.....	11
4	TEST SET-UP AND OPERATION MODES	12
4.1	PRINCIPLE OF CONFIGURATION SELECTION	12
4.2	TEST OPERATION AND TEST SOFTWARE	12
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	12
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	12
4.5	TEST SETUP DIAGRAM	13
5	TEST RESULTS	15
5.1	TRANSMITTER REQUIREMENT & TEST SUITES	15
5.1.1	<i>Antenna Requirement</i>	<i>15</i>
5.1.2	<i>Maximum Peak Conducted Output Power</i>	<i>16</i>
5.1.3	<i>Conducted Power Spectral Density</i>	<i>17</i>
5.1.4	<i>6dB Bandwidth</i>	<i>18</i>
5.1.5	<i>Conducted Spurious Emissions Measured in 100 kHz Bandwidth</i>	<i>19</i>
5.1.6	<i>Radiated Spurious Emission</i>	<i>20</i>
5.1.7	<i>20dB Bandwidth</i>	<i>21</i>
5.1.8	<i>Carrier Frequency Separation.....</i>	<i>22</i>
5.1.9	<i>Number of Hopping Frequency</i>	<i>23</i>
5.1.10	<i>Time of Occupancy</i>	<i>24</i>
5.1.11	<i>Conducted Emission on AC Mains</i>	<i>25</i>
6	SAFETY HUMAN EXPOSURE	26
6.1	RADIO FREQUENCY EXPOSURE COMPLIANCE	26
6.1.1	<i>Electromagnetic Fields</i>	<i>26</i>
7	PHOTOGRAPHS OF THE TEST SET-UP	27

8	LIST OF TABLES.....	27
----------	----------------------------	-----------

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R. China

FCC Accreditation Designation No.: CN1207

The tests at the test sites have been conducted under the supervision of a TÜV engineer.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

For the measurement Equipment list, refer to the appendix B.

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Item		Extended Uncertainty
Conducted Emission		± 3.17 dB
Radiated Emission (9kHz-30MHz)	Field strength (dB μ V/m)	U=5.16dB, k=2, σ =95%
Radiated Emission (30-1000MHz)	Field strength (dB μ V/m)	U=5.16dB, k=2, σ =95%
Radiated Emission (above 1000MHz)	Field strength (dB μ V/m)	U=5.16dB, k=2, σ =95%
Radio Spectrum		± 0.60 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory
No.102, 1F of Southwest and No.205, 2F of West Warehouse Building, No.767 Tianyuan Road, Tianhe District, Guangzhou, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements

3 General Product Information

3.1 Product Function and Intended Use

The submitted sample is a Loudspeaker System for indoor use. The unit supports Bluetooth wireless technologies.

According to the above information, all applicable tests have been performed.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment	Loudspeaker System
Type Designation	CURV500S
FCC ID	2AFF6-LDCURV500S
Operating Voltage	AC 100-240V, 50-60Hz
Testing Voltage	AC120V,60Hz
Technical Specification of Bluetooth (double mode)	
Operating Frequency	2402 - 2480 MHz
Type of Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Channel Number	79 Channels(for FHSS) 40 Channels(for DTS)
Channel Separation	1 MHz (for FHSS) 2 MHz (for DTS)
Antenna Type	Integral Antenna
Gain	0 dBi

Table 3: RF Channel and Frequency of BDR/EDR

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	20	2422.00	40	2442.00	60	2462.00
1	2403.00	21	2423.00	41	2443.00	61	2463.00
2	2404.00	22	2424.00	42	2444.00	62	2464.00
3	2405.00	23	2425.00	43	2445.00	63	2465.00
4	2406.00	24	2426.00	44	2446.00	64	2466.00
5	2407.00	25	2427.00	45	2447.00	65	2467.00
6	2408.00	26	2428.00	46	2448.00	66	2468.00
7	2409.00	27	2429.00	47	2449.00	67	2469.00
8	2410.00	28	2430.00	48	2450.00	68	2470.00
9	2411.00	29	2431.00	49	2451.00	69	2471.00
10	2412.00	30	2432.00	50	2452.00	70	2472.00
11	2413.00	31	2433.00	51	2453.00	71	2473.00
12	2414.00	32	2434.00	52	2454.00	72	2474.00
13	2415.00	33	2435.00	53	2455.00	73	2475.00
14	2416.00	34	2436.00	54	2456.00	74	2476.00
15	2417.00	35	2437.00	55	2457.00	75	2477.00
16	2418.00	36	2438.00	56	2458.00	76	2478.00
17	2419.00	37	2439.00	57	2459.00	77	2479.00
18	2420.00	38	2440.00	58	2460.00	78	2480.00
19	2421.00	39	2441.00	59	2461.00	/	/

Table 4: RF Channel and Frequency of Bluetooth Low Energy

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
00	2402.00	10	2422.00	20	2442.00	30	2462.00
01	2404.00	11	2424.00	21	2444.00	31	2464.00
02	2406.00	12	2426.00	22	2446.00	32	2466.00
03	2408.00	13	2428.00	23	2448.00	33	2468.00
04	2410.00	14	2430.00	24	2450.00	34	2470.00
05	2412.00	15	2432.00	25	2452.00	35	2472.00
06	2414.00	16	2434.00	26	2454.00	36	2474.00
07	2416.00	17	2436.00	27	2456.00	37	2476.00
08	2418.00	18	2438.00	28	2458.00	38	2478.00
09	2420.00	19	2440.00	29	2460.00	39	2480.00

Test frequencies are lowest channel: 2402 MHz, middle channel: 2441/2440 MHz and highest channel: 2480 MHz.

Table 5: Frequency Hopping Information

Technical Specification	Description
Hopping Range	Hereby we declare that the frequency range of this device is: 2402-2480MHz. This is according the Bluetooth Core Specification V4.0 (double mode) for devices which will be operated in the USA. This was checked during the Bluetooth Qualification tests (Test Case: TRM/CA/04-E).
Hopping Sequence	Example of a 79 hopping sequence in data mode: 33,04,21,44,23,42,53,46,55,48,40,59,72,29,76,31,08,73,07,75,09,45,60,39,58,13,47,11,77,52,35,50,65,54,67,56,69,62,71,64, 7,25,27,66,57,70,74,61,78,63,10,41,05,43,15,44,64,68,02,70,06,01,51,03,55,05,03,66,53,49,36,47,
Receiver input bandwidth	The input bandwidth of the receiver is 1MHz. In every connection one Bluetooth device is the master and the other one is the slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings. Repeating of a packer has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Traditional Bluetooth (BDR & EDR mode)
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
 - 2. Low Energy mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Traditional Bluetooth on Hopping channel
- C. On, Normal operation mode with Bluetooth connected
- D. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|----------------------------------|------------------|
| - Application Form | - Photo Document |
| - Block Diagram | - Schematics |
| - FCC/IC Label and Location Info | - User Manual |
| - Operation Description | |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model CURV500S in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 6: List of Accessories and Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Notebook	Lenovo	E46A	EB24320428	N/A
iPhone	Apple	A1586	/	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

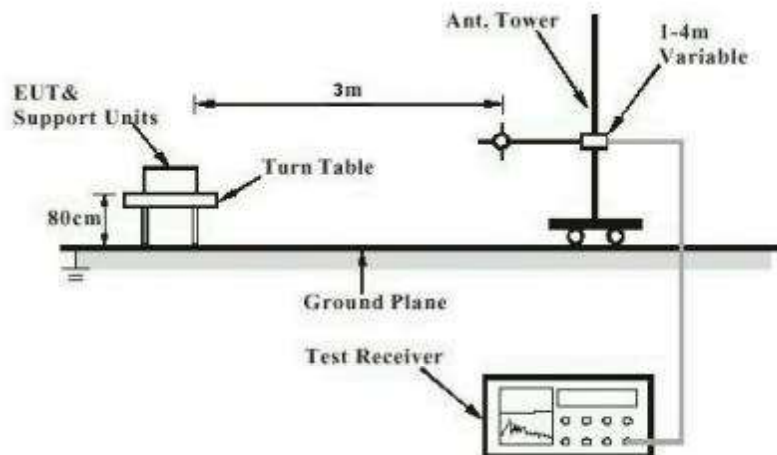


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

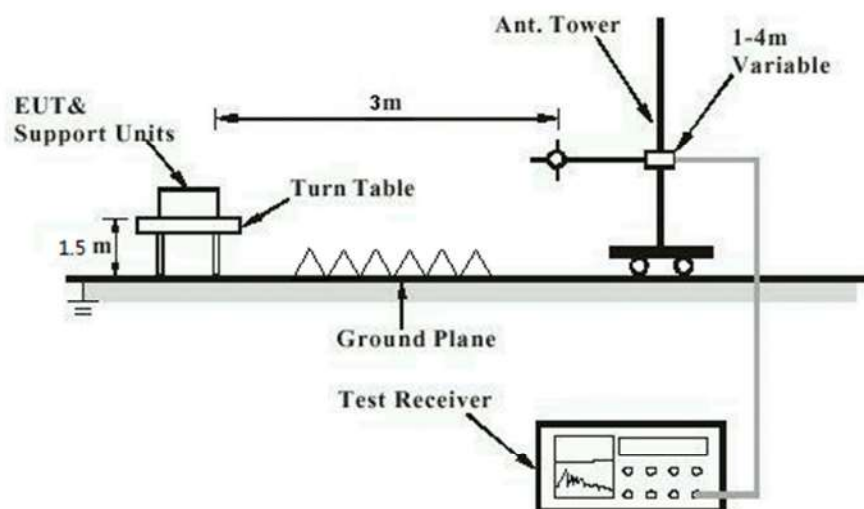


Diagram of Measurement Configuration for Mains Conduction Measurement


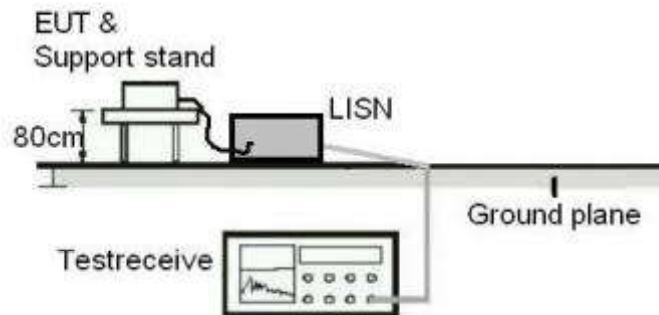


Diagram of Measurement Configuration for Conducted Transmitter Measurement

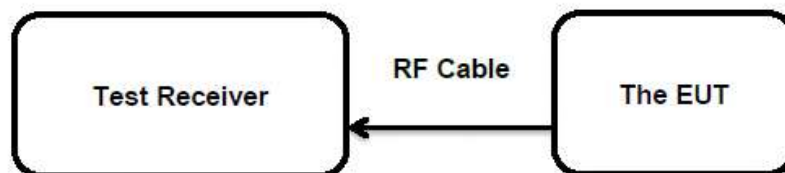

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has one internal antenna, the directional gain of antenna is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(1)&(3)
Basic standard : ANSI C63.10: 2013
Limits : FHSS < 0.125 Watts
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC120V,60Hz
Operation mode : A.1, A.2
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For details refer to following test result.

Table 7: Test Result of Maximum Peak Conducted Output Power

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
BDR	2402	-24.55	0.0035	< 0.125
	2441	-20.93	0.0081	
	2480	-18.38	0.0145	
Maximum Measured Value		-18.38	0.0145	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
EDR	2402	-23.24	0.0047	< 0.125
	2441	-20.34	0.0092	
	2480	-18.05	0.0157	
Maximum Measured Value		-18.05	0.0157	

Test Mode	Test Channel (MHz)	Measured Peak Power		Limit (W)
		(dBm)	(mW)	
Low Energy	2402	-16.23	0.0238	< 1.0
	2440	-14.66	0.0342	
	2480	-14.20	0.038	
Maximum Measured Value		-14.20	0.038	

Note:

- 1) The cable loss has been taken into account in results.
- 2) Antenna gain(G): 0dBi,

5.1.3 Conducted Power Spectral Density

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(e)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC120V,60Hz
Operation mode : A.2
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 8: Test Result of Power Spectral Density, Low Energy

Test Mode	Test Channel (MHz)	Power Spectrum Density(dBm/3kHz)	Limit (dBm/3kHz)
Low Energy	2402	-32.61	< 8.0
	2440	-30.76	
	2480	-29.63	
Maximum Measured Value		-29.63	

5.1.4 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(a)(2)
Basic standard : ANSI C63.10: 2013
Limits : More than 500 KHz
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC 120V 60Hz
Operation mode : A.2
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 9: Test Result of 6dB Bandwidth, Low Energy

Test Mode	Test Channel (MHz)	-6dB Bandwidth (kHz)	Limit (kHz)
Low Energy	2402	720	> 500
	2440	708	
	2480	708	
Minimum Measured Value		708	

5.1.5 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: Refer to test result
Input voltage	: AC120V,60Hz
Operation mode	: A,B
Test channel	: Low / Middle / High
Ambient temperature	: 24 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

For the measurement records, refer to the appendix B.

Prüfbericht - Nr.: 60429423 001
Test Report No.**Seite 20 von 27**
Page 20 of 27

5.1.6 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard : FCC Part 15.247(d) & FCC Part 15.205
Basic standard : ANSI C63.10: 2013
Limits : Refer to 15.209(a) of FCC part 15.247(d)

Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : Refer to test result
Input voltage : AC120V,60Hz
Operation mode : A.1 and A.2
Test channel : Low / Middle / High
Ambient temperature : 22 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

Remark:

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix B.

5.1.7 20dB Bandwidth

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10: 2013
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC120V,60Hz
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 10: Test Result of 20dB Bandwidth

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	2/3 of 20dB Bandwidth (kHz)	Limit (MHz)
BDR	2402	940	626.67	/
	2440	940	626.67	
	2480	936	624.00	
Maximum Measured Value		940	626.67	

Test Mode	Test Channel (MHz)	20dB Bandwidth (kHz)	2/3 of 20dB Bandwidth (kHz)	Limit (MHz)
EDR	2402	1360	906.67	/
	2441	1216	810.67	
	2480	1290	860.00	
Maximum Measured Value		1360	906.67	

5.1.8 Carrier Frequency Separation

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(a)(1)
Basic standard : ANSI C63.10: 2013
Limits : $\geq 25\text{kHz}$ or 2/3 of 20dB bandwidth, whichever is greater
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC120V,60Hz
Operation mode : C
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For details refer to following test result.
For the measurement records, refer to the appendix B.

Table 11: Test Result of Carrier Frequency Separation, Worst case

Test Mode	Test Channel	Test Channel (MHz)	Measured Channel Separation (KHz)	Limit (kHz)
BDR	Middle Channel	2441	990	≥ 25kHz or 2/3 of 20dB bandwidth
	Adjacency Channel	2440		
EDR	Middle Channel	2441	1008	
	Adjacency Channel	2440		

5.1.9 Number of Hopping Frequency

RESULT:**Pass****Test Specification**

Test standard : FCC part 15.247(a)(1)(iii)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2019
Input voltage : AC120V,60Hz
Operation mode : C
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For details refer to following test result.

For the measurement records, refer to the appendix B.

Table 12: Test Result of Number of Hopping Frequency

Test Mode	Frequency Range	Measured Quantity of Hopping Channel	Limit
FHSS	2402 - 2480 MHz	79	≥ 15

5.1.10 Time of Occupancy

RESULT:

Pass

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
Basic standard : ANSI C63.10: 2013
Limits : < 0.4s
Kind of test site : Shielded Room

Test Setup

Date of testing : 05.09.2029
Input voltage : AC120V,60Hz
Operation mode : B
Test channel : Low / Middle / High
Ambient temperature : 24 °C
Relative humidity : 50 %
Atmospheric pressure : 101 kPa

For details refer to following test result.

For the measurement records, refer to the appendix B.

Table 13: Test Result of Time of Occupancy, Worst case

Test Mode	Test Channel (MHz)	Pulse Width(ms)	Measured Dwell Time(s)	Limit (s)
BDR (DH1)	2402	0.410	0.150	0.4s
	2441	0.400	0.146	
	2480	0.400	0.147	

Test Mode	Test Channel (MHz)	Pulse Width(ms)	Measured Dwell Time(s)	Limit (s)
EDR(DH5)	2402	2.92	0.317	0.4s
	2441	2.96	0.322	
	2480	2.96	0.322	

Note:

Dwell time = Pulse width x Number of channels in Period

Period = 0.4 (seconds/ channel) x 79 (channel) = 31.6 seconds

Prüfbericht - Nr.: 60429423 001
Test Report No.**Seite 25 von 27**
Page 25 of 27**5.1.11 Conducted Emission on AC Mains****RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.207(a)
Basic standard	: ANSI C63.10: 2013
Frequency range	: 0.15 – 30MHz
Limits	: FCC Part 15.207(a)
Kind of test site	: Shielded Room

Test Setup

Date of testing	: Refer to test result
Input voltage	: AC120V,60Hz
Operation mode	: C
Earthing	: Not connected
Ambient temperature	: 20 °C
Relative humidity	: 50 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix B.

6 Safety Human Exposure

6.1 Radio Frequency Exposure Compliance

6.1.1 Electromagnetic Fields

RESULT:**Pass****Test Specification**

Test standard : CFR47 FCC Part 2: Section 2.1093
CFR47 FCC Part 1: Section 1.1310
FCC KDB Publication 447498 D01 v06

Hence the EUT is excluded from SAR evaluation according to FCC KDB Publication 447498 D01 General RF Exposure Guidance v06.

The maximum peak output power of the transmitter is -14.20dBm (0.038 mW), which is far below the SAR exclusion threshold level 10 mW.

7 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

8 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Technical Specification of EUT	8
Table 3: RF Channel and Frequency of BDR/EDR	9
Table 4: RF Channel and Frequency of Bluetooth Low Energy	9
Table 5: Frequency Hopping Information.....	10
Table 6: List of Accessories and Auxiliary Equipment.....	12
Table 7: Test Result of Maximum Peak Conducted Output Power.....	16
Table 8: Test Result of Power Spectral Density, Low Energy	17
Table 9: Test Result of 6dB Bandwidth, Low Energy	18
Table 10: Test Result of 20dB Bandwidth.....	21
Table 11: Test Result of Carrier Frequency Separation, Worst case	22
Table 12: Test Result of Number of Hopping Frequency	23
Table 13: Test Result of Time of Occupancy, Worst case.....	24