


APsystems

Energy Communication Unit
Model: ECU-R

DC Input: 5VDC $\equiv$ 2A Max

USB Interface: 5Vdc-1.4A Output

Enclosure Rating: IP20/NEMA1

Power Consumption: 1.7W

Ambient Temperature Range: -20°C to +65°C







IEEE 2030.5
CSIP

CERTIFIED


Certificate No.:
SAA203487

FCC ID: 2AFGR-ECUR2
IC: 20481-ECUR2

CS-000012

HVIN: ECU2
CAN ICES-3(B)/NMB-3(B)

Altenergy Power System Inc. www.APsystems.com

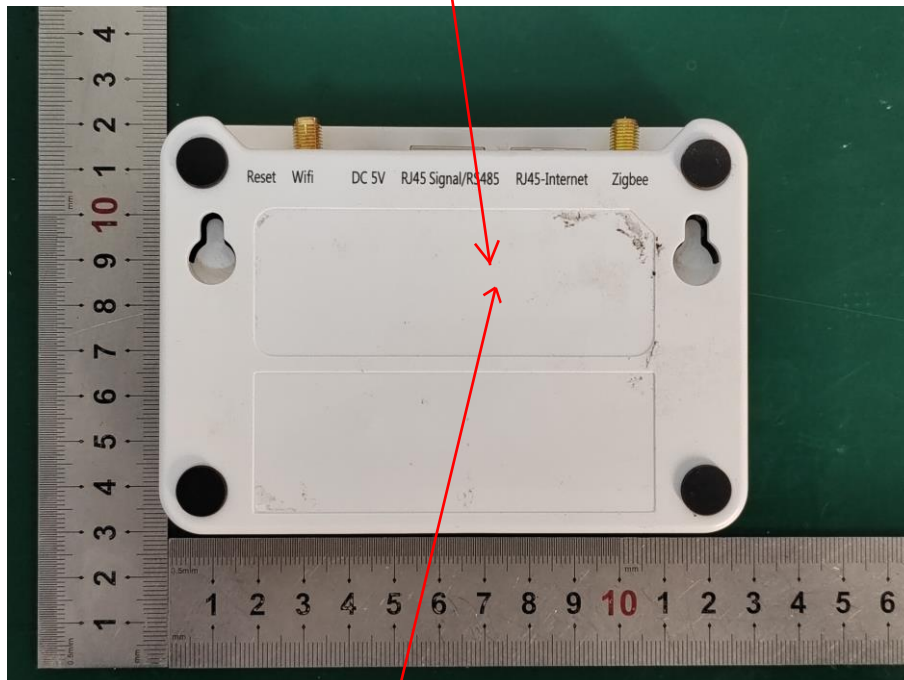


APsystems

Energy Communication Unit
Model: ECU-B

DC Input: 5VDC $\equiv$ 2A Max

USB Interface: 5Vdc-1.4A Output

Enclosure Rating: IP20/NEMA1

Power Consumption: 1.7W

Ambient Temperature Range: -20°C to +65°C







Certificate No.:
SAA203487

FCC ID: 2AFGR-ECUR2
IC: 20481-ECUR2

HVIN: ECU2
CAN ICES-3(B)/NMB-3(B)

Altenergy Power System Inc. www.APsystems.com