

TEST REPORT

Application No.: SZCR2603001079AT
Applicant: INNOVATIVE TECHNOLOGY ELECTRONICS LLC
Address of Applicant: 3350 Walnut St Denver Colorado 80205 United States
Manufacturer: INNOVATIVE TECHNOLOGY ELECTRONICS LLC
Address of Manufacturer: 3350 Walnut St Denver Colorado 80205 United States
Factory: Zhongshan City Richsound Electronic Industrial Ltd
Address of Factory: No. 16, East Shagang Road, Gangkou Town, Zhongshan City, 528447 Guangdong, P.R. China

Equipment Under Test (EUT):

EUT Name: VICTROLA SOUNDSTAGE
Model No.: VPS-2100
Trade Mark: **VICTROLA**
FCC ID: 2AFHW-VPS2100
Standard(s) : 47 CFR Part 15, Subpart C 15.247
Date of Receipt: 2026-03-19
Date of Test: 2026-03-25 to 2026-05-21
Date of Issue: 2026-05-22

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu
 Keny Xu
 EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 2 of 79

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2026-05-22		Original

Authorized for issue by:				
		Gebin Sun		
		Gebin Sun/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6 & 11.12	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Maximum Conducted Output Power		ANSI C63.10 (2020) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectral Density		ANSI C63.10 (2020) Section 11.10.3	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location	8
4.5 Test Facility	8
4.6 Deviation from Standards	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	11
6.1 Antenna Requirement	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
7 Radio Spectrum Matter Test Results	12
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	12
7.1.1 E.U.T. Operation	12
7.1.2 Test Mode Description	12
7.1.3 Test Setup Diagram	13
7.1.4 Measurement Procedure and Data	13
7.2 Radiated Emissions which fall in the restricted bands	16
7.2.1 E.U.T. Operation	16
7.2.2 Test Mode Description	16
7.2.3 Test Setup Diagram	17
7.2.4 Measurement Procedure and Data	18
7.3 Radiated Spurious Emissions Below 1GHz	23
7.3.1 E.U.T. Operation	23
7.3.2 Test Mode Description	23
7.3.3 Test Setup Diagram	24
7.3.4 Measurement Procedure and Data	25
7.4 Radiated Spurious Emissions Above 1GHz	32
7.4.1 E.U.T. Operation	32
7.4.2 Test Mode Description	32
7.4.3 Test Setup Diagram	33
7.4.4 Measurement Procedure and Data	33
7.5 Maximum Conducted Output Power	47
7.5.1 E.U.T. Operation	47



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 5 of 79

7.5.2	Test Mode Description	47
7.5.3	Test Setup Diagram	48
7.5.4	Measurement Procedure and Data.....	48
7.6	Minimum 6dB Bandwidth	49
7.6.1	E.U.T. Operation	49
7.6.2	Test Mode Description	49
7.6.3	Test Setup Diagram	49
7.6.4	Measurement Procedure and Data.....	49
7.7	Power Spectral Density	50
7.7.1	E.U.T. Operation	50
7.7.2	Test Mode Description	50
7.7.3	Test Setup Diagram	50
7.7.4	Measurement Procedure and Data.....	50
7.8	Conducted Band Edges Measurement	51
7.8.1	E.U.T. Operation	51
7.8.2	Test Mode Description	51
7.8.3	Test Setup Diagram	52
7.8.4	Measurement Procedure and Data.....	52
7.9	Conducted Spurious Emissions	53
7.9.1	E.U.T. Operation	53
7.9.2	Test Mode Description	53
7.9.3	Test Setup Diagram	54
7.9.4	Measurement Procedure and Data.....	54
8	Test Setup Photo	55
9	EUT Constructional Details (EUT Photos)	55
10	Appendix.....	56



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	AC 110-240V,50/60Hz 3V DC(1.5V x 2 "AAA" Size Batteries) for remote controller
Cable(s):	AC cable:150cm unshielded Audio cable:30cm unshielded
Operation Frequency:	2402MHz to 2480MHz
Modulation Type:	GFSK
Number of Channels:	40
Channel Spacing:	2MHz
Antenna Type:	FPC Antenna
Antenna Gain:	3.28dBi

Remark:The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
--	--	--	--

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	$\pm 3.2\text{dB}$
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (Below 1GHz); $\pm 4.6\text{dB}$ (Above 1GHz)
Radiated Spurious Emissions Below 1GHz	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Spurious Emissions Above 1GHz	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Maximum Conducted Output Power	$\pm 0.4\text{dB}$
Minimum 6dB Bandwidth	$\pm 0.3\%$
Power Spectral Density	$\pm 0.4\text{dB}$
Conducted Band Edges Measurement	$\pm 2.7\text{dB}$
Conducted Spurious Emissions	$\pm 2.7\text{dB}$

Remark:

The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 8 of 79

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 9 of 79

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2025-05-07	2028-05-06
EMI Test Receiver	Rohde&Schwarz	ESR	SZ-WRG-M-047	2025-12-15	2026-12-14
Measurement Software	AUDIX	e3 V8.2014-6-27a	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2025-07-05	2026-07-04
LISN	Rohde&Schwarz	ENV216	SEM007-01	2025-07-25	2026-07-24
LISN	ETS-LINDGREN	3816/2	SEM007-02	2026-02-24	2027-02-23

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2026-02-02	2027-02-01
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04

Radiated Spurious Emissions Below 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2025-11-17	2027-11-16
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2025-07-25	2026-07-24
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2025-08-29	2027-08-28
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2026-02-02	2027-02-01
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2025-07-05	2026-07-04



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 10 of 79

Radiated Spurious Emissions Above 1GHz					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
3m Fully-Anechoic Chamber	AUDIX	N/A	SEM001-02	2025-05-07	2028-05-06
Signal Analyzer	Rohde & Schwarz	FSV40	SEM008-04	2026-02-02	2027-02-01
Horn Antenna	Rohde&Schwarz	HF907	SEM003-07	2025-07-22	2026-07-21
Microwave system amplifier	Agilent	83017A	SEM005-25	2025-09-10	2026-09-09
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM026-01	2025-07-05	2026-07-04
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	SEM003-15	2025-07-22	2027-07-21
Pre-Amplifier	TST PASS	LNA180400G40	SEM005-39	2025-05-22	2026-05-21

RF Conducted Test					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Power Sensor	TST PASS	TSPS2023R	SEM009-26	2026-02-04	2027-02-03
Power Sensor	KEYSIGHT	U2021XA	SEM009-16	2026-02-04	2027-02-03
DC Power Supply	Chroma	62012P-80-60	SEM011-11	2025-07-24	2026-07-23
MXA Signal Analyzer	KEYSIGHT	N9020A	SEM004-19	2026-02-03	2027-02-02
Measurement Software	TST PASS	TST PASS V2.0	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM031-01	2025-07-05	2026-07-04
Attenuator	Huber+Suhner	6620_SMA-50-1	SEM021-09	2026-02-02	2027-02-01

General used equipment					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2025-07-23	2026-07-22
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2025-07-23	2026-07-22
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2026-02-14	2027-02-13



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is FPC antenna and no consideration of replacement. The best case gain of the antenna is 3.28dBi

Antenna location: Refer to internal photo.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Test Engineer: Mason Wu

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 23.4 °C Humidity: 42.5 % RH Atmospheric Pressure: 1020 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.1.3 Test Setup Diagram

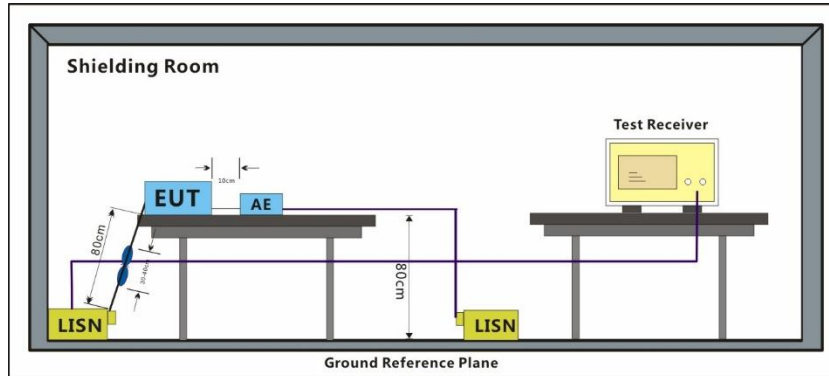


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 02; Line: Live line

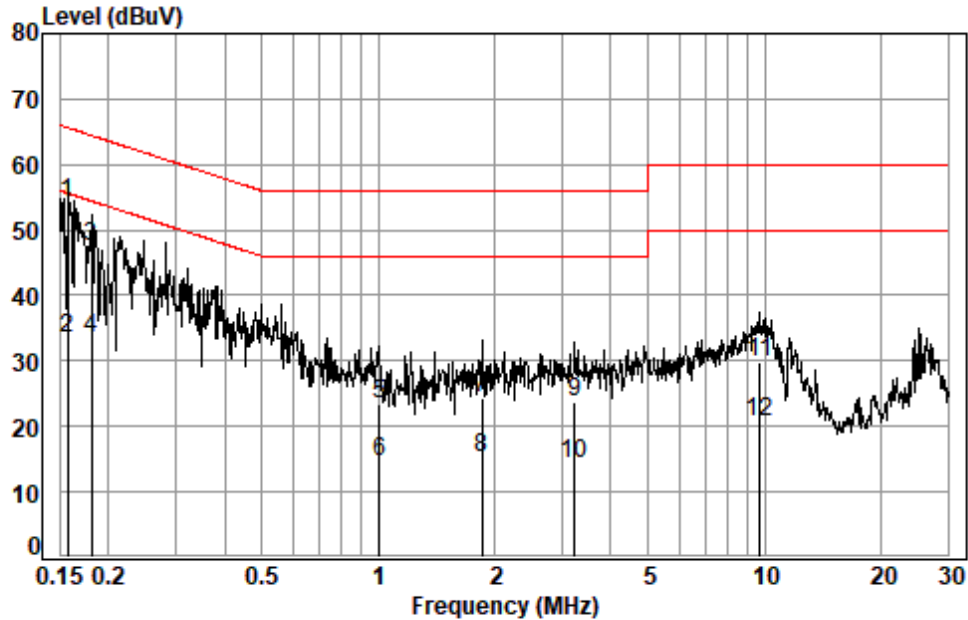

Site : Shielding Room
Condition: Line
Job No. : 01079AT/01080AT
Test mode: 02

		Cable	LISN	Read	Limit	Over	
	Freq	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB
1 *	0.1573	0.06	9.63	44.57	54.26	65.60	-11.34 QP
2	0.1573	0.06	9.63	23.71	33.40	55.60	-22.20 Average
3	0.1806	0.07	9.63	37.70	47.40	64.46	-17.06 QP
4 *	0.1806	0.07	9.63	23.91	33.61	54.46	-20.85 Average
5	1.0050	0.11	9.67	13.52	23.30	56.00	-32.70 QP
6	1.0050	0.11	9.67	4.91	14.69	46.00	-31.31 Average
7	1.8581	0.12	9.71	14.54	24.37	56.00	-31.63 QP
8	1.8581	0.12	9.71	5.38	15.21	46.00	-30.79 Average
9	3.2239	0.13	9.82	13.92	23.87	56.00	-32.13 QP
10	3.2239	0.13	9.82	4.41	14.36	46.00	-31.64 Average
11	9.7051	0.15	10.61	19.10	29.86	60.00	-30.14 QP
12	9.7051	0.15	10.61	9.88	20.64	50.00	-29.36 Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 15 of 79

Test Mode: 02; Line: Neutral Line

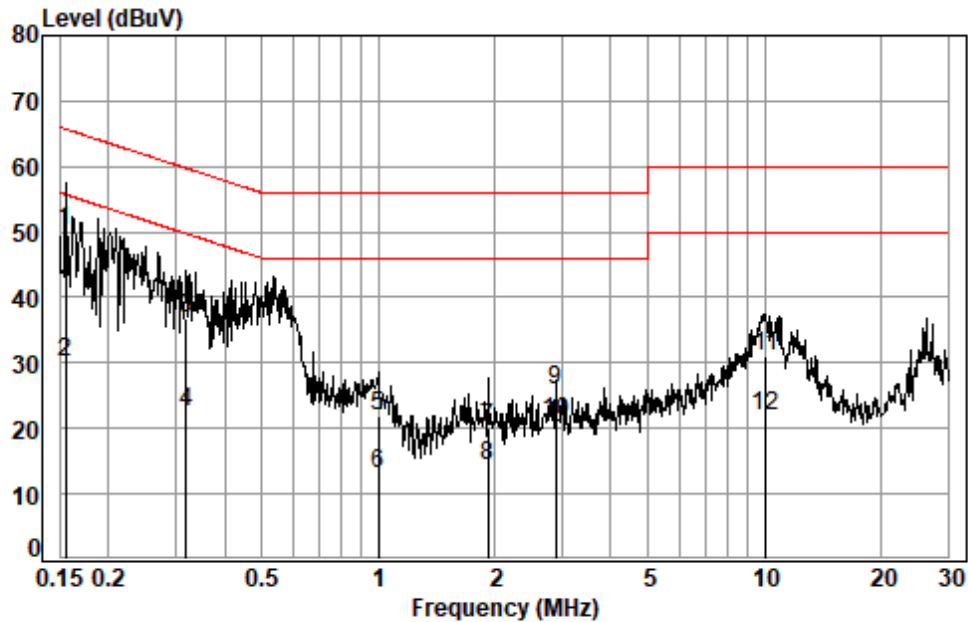

Site : Shielding Room
Condition: Neutral
Job No. : 01079AT/01080AT
Test mode: 02

		Cable	LISN	Read	Limit	Over	
Freq	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1 *	0.1548	0.06	9.64	40.52	50.22	65.74	-15.52 QP
2	0.1548	0.06	9.64	20.45	30.15	55.74	-25.59 Average
3	0.3183	0.08	9.63	27.09	36.80	59.75	-22.95 QP
4	0.3183	0.08	9.63	12.72	22.43	49.75	-27.32 Average
5	0.9997	0.11	9.66	12.15	21.92	56.00	-34.08 QP
6	0.9997	0.11	9.66	3.31	13.08	46.00	-32.92 Average
7	1.9284	0.12	9.72	10.34	20.18	56.00	-35.82 QP
8	1.9284	0.12	9.72	4.59	14.43	46.00	-31.57 Average
9	2.8845	0.13	9.80	15.87	25.80	56.00	-30.20 QP
10 *	2.8845	0.13	9.80	11.19	21.12	46.00	-24.88 Average
11	10.0719	0.15	10.74	20.28	31.17	60.00	-28.83 QP
12	10.0719	0.15	10.74	10.92	21.81	50.00	-28.19 Average



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.10.5 & 11.12
 Measurement Distance: 3m
 Test Engineer: Tommy Luo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C Humidity: 50.2 % RH Atmospheric Pressure: 1015 mbar

7.2.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区W-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.2.3 Test Setup Diagram

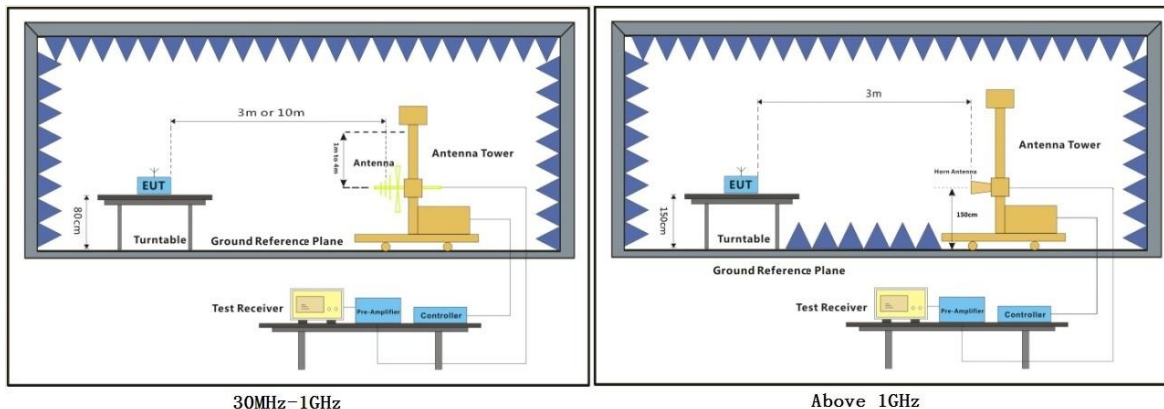

30MHz-1GHz

Above 1GHz

7.2.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark 3: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 4: For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_1M_TX_CH_00_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	2372.907	16.11	29.10	32.79	40.19	52.61	74.00	-21.39	Peak		0.00
2	2390.000	16.13	29.10	32.78	38.79	51.24	74.00	-22.76	Peak		0.00
3 p	2402.000	16.15	29.09	32.77	86.30	98.77	74.00	24.77	Peak		0.00


BLE_1M_TX_CH_00_Horizontal-AVG



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	2370.998	16.11	29.10	32.79	28.50	40.92	54.00	-13.08	Average		0.00
2	2390.000	16.13	29.10	32.78	28.04	40.49	54.00	-13.51	Average		0.00
3 q	2402.000	16.15	29.09	32.77	85.57	98.04	54.00	44.04	Average		0.00


BLE_1M_TX_CH_00_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	2360.070	16.09	29.10	32.80	41.51	53.90	74.00	-20.10	Peak		0.00
2	2390.000	16.13	29.10	32.78	39.21	51.66	74.00	-22.34	Peak		0.00
3 p	2402.000	16.15	29.09	32.77	78.82	91.29	74.00	17.29	Peak		0.00


BLE_1M_TX_CH_00_Vertical-AVG

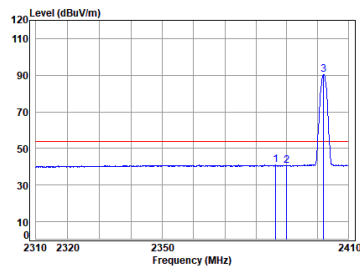

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 1M

	Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1	2386.421	16.13	29.10	32.78	28.52	40.97	54.00	-13.03	Average		0.00
2	2390.000	16.13	29.10	32.78	28.17	40.62	54.00	-13.38	Average		0.00
3 q	2402.000	16.15	29.09	32.77	78.01	90.48	54.00	36.48	Average		0.00


BLE_1M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p	2480.000	16.27	28.90	32.73	85.97	98.41	74.00	24.41	Peak	0.00
2	2483.500	16.28	28.90	32.73	40.71	53.16	74.00	-20.84	Peak	0.00
3	2484.520	16.28	28.90	32.73	43.10	55.55	74.00	-18.45	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-AVG

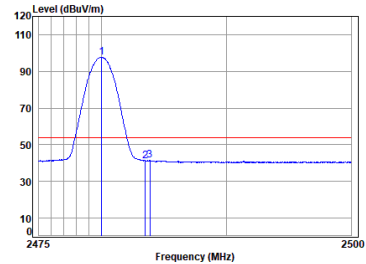

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2480.000	16.27	28.90	32.73	85.30	97.74	54.00	43.74	Average	0.00
2	2483.500	16.28	28.90	32.73	28.73	41.18	54.00	-12.82	Average	0.00
3	2483.646	16.28	28.90	32.73	28.99	41.44	54.00	-12.56	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p	2480.000	16.27	28.90	32.73	80.50	92.94	74.00	18.94	Peak	0.00
2	2483.500	16.28	28.90	32.73	39.16	51.61	74.00	-22.39	Peak	0.00
3	2495.030	16.29	28.90	32.73	41.15	53.61	74.00	-20.39	Peak	0.00


BLE_1M_TX_CH_39_Vertical-AVG

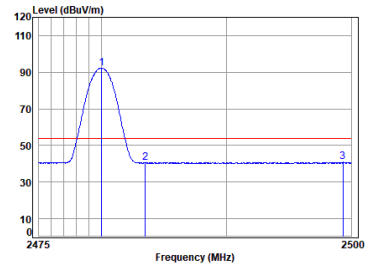

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 1M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q	2480.000	16.27	28.90	32.73	79.86	92.30	54.00	38.30	Average	0.00
2	2483.500	16.28	28.90	32.73	27.97	40.42	54.00	-13.58	Average	0.00
3	2499.347	16.30	28.90	32.73	28.40	40.87	54.00	-13.13	Average	0.00


BLE_2M_TX_CH_00_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2335.396	16.05	28.90	32.81	40.70	52.92	74.00	-21.08	Peak	0.00
2	2390.000	16.13	29.10	32.78	38.74	51.19	74.00	-22.81	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	86.37	98.84	74.00	24.84	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-AVG



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2371.299	16.11	29.10	32.79	28.60	41.02	54.00	-12.98	Average	0.00
2	2390.000	16.13	29.10	32.78	28.09	40.54	54.00	-13.46	Average	0.00
3 q	2402.000	16.15	29.09	32.77	83.62	96.09	54.00	42.09	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2374.115	16.11	29.10	32.79	40.39	52.81	74.00	-21.19	Peak	0.00
2	2390.000	16.13	29.10	32.78	38.66	51.11	74.00	-22.89	Peak	0.00
3 p	2402.000	16.15	29.09	32.77	78.78	91.25	74.00	17.25	Peak	0.00


BLE_2M_TX_CH_00_Vertical-AVG



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 Band edge
BLE 2M

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1	2352.780	16.08	29.10	32.80	28.62	41.00	54.00	-13.00	Average	0.00
2	2390.000	16.13	29.10	32.78	28.01	40.46	54.00	-13.54	Average	0.00
3 q	2402.000	16.15	29.09	32.77	76.16	88.63	54.00	34.63	Average	0.00


BLE_2M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	85.87	90.31	74.00	24.31	Peak	0.00
2 2483.500	16.28	28.90	32.73	39.75	52.20	74.00	-21.80	Peak	0.00
3 2484.620	16.28	28.90	32.73	42.81	55.26	74.00	-18.74	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-AVG

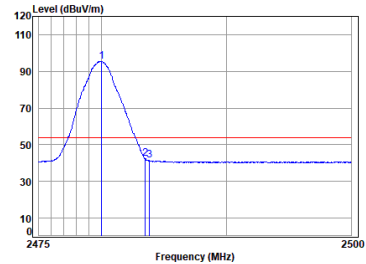

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	83.15	95.59	54.00	41.59	Average	0.00
2 2483.500	16.28	28.90	32.73	30.03	42.48	54.00	-11.52	Average	0.00
3 2483.821	16.28	28.90	32.73	28.89	41.34	54.00	-12.66	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 p 2480.000	16.27	28.90	32.73	80.44	92.88	74.00	18.88	Peak	0.00
2 2483.500	16.28	28.90	32.73	38.00	51.25	74.00	-22.75	Peak	0.00
3 2484.420	16.28	28.90	32.73	41.34	53.79	74.00	-20.21	Peak	0.00

BLE_2M_TX_CH_39_Vertical-AVG

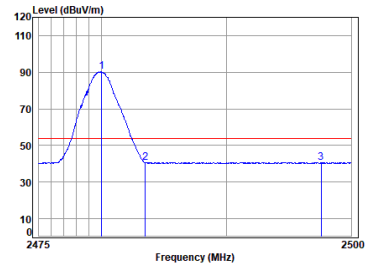

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 Band edge
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 q 2480.000	16.27	28.90	32.73	77.81	90.25	54.00	36.25	Average	0.00
2 2483.500	16.28	28.90	32.73	28.13	40.58	54.00	-13.42	Average	0.00
3 2497.589	16.30	28.90	32.73	28.33	40.80	54.00	-13.20	Average	0.00

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.4,6.5
 Measurement Distance: 3m
 Test Engineer: Kaito Zeng

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

Note

1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

2. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C Humidity: 46.8 % RH Atmospheric Pressure: 1020 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Pre-scan	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.3.3 Test Setup Diagram

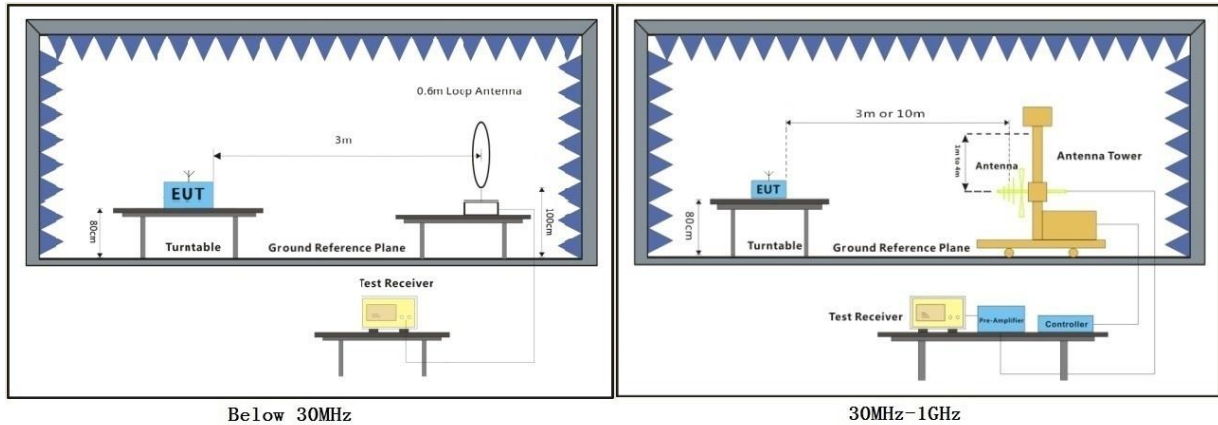

7.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8m above the ground at a semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3m or 10m away from the interference-receiving antenna, which was mounted on the variable-height antenna tower.
- c. The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1m) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. At frequencies below 1GHz, measurements may be performed at a distance different to specified in the regulations.

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Below 30MHz, Aux Factor = 40 dB/decade of distance, the aux factor is $40\log(3/300) = -80\text{dB}$ (for 3m test distance).

EX. Above 30MHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(10/3) = 10.46\text{dB}$ (for 10m test distance).

2. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the worst-case test curve is displayed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 26 of 79

Test Mode: 02; Polarity: Horizontal

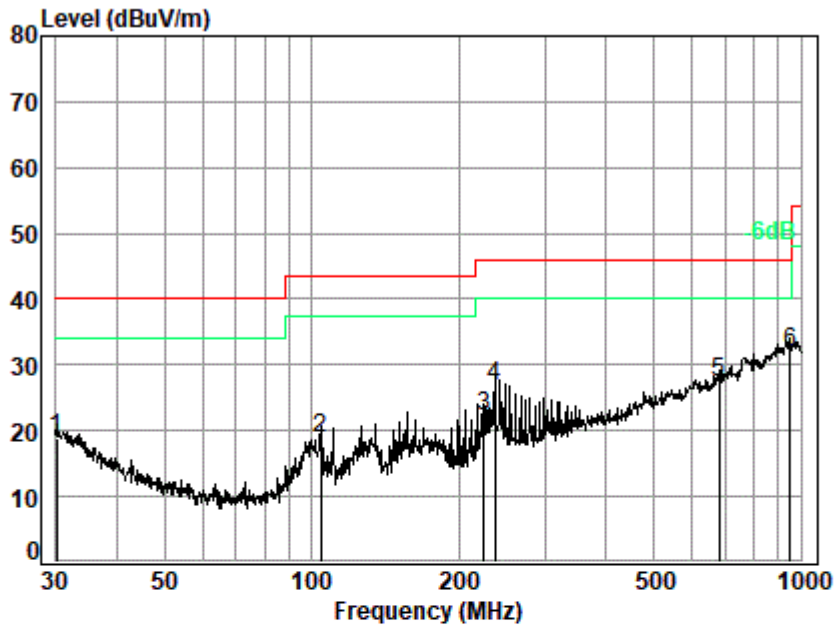

Site : chamber
Condition: 3m HORIZONTAL
Job No. : 01079AT/01080AT
Test Mode: 02

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.105	21.40	0.74	27.65	24.46	18.95	40.00 -21.05 QP
2	104.170	12.48	1.25	27.61	32.59	18.71	43.50 -24.79 QP
3	224.519	15.87	1.82	27.71	32.17	22.15	46.00 -23.85 QP
4	236.645	17.00	1.87	27.68	35.53	26.72	46.00 -19.28 QP
5	682.348	25.64	3.36	27.88	26.23	27.35	46.00 -18.65 QP
6 q	952.094	29.21	4.08	26.66	25.45	32.08	46.00 -13.92 QP



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 27 of 79

Test Mode: 02; Polarity: Vertical

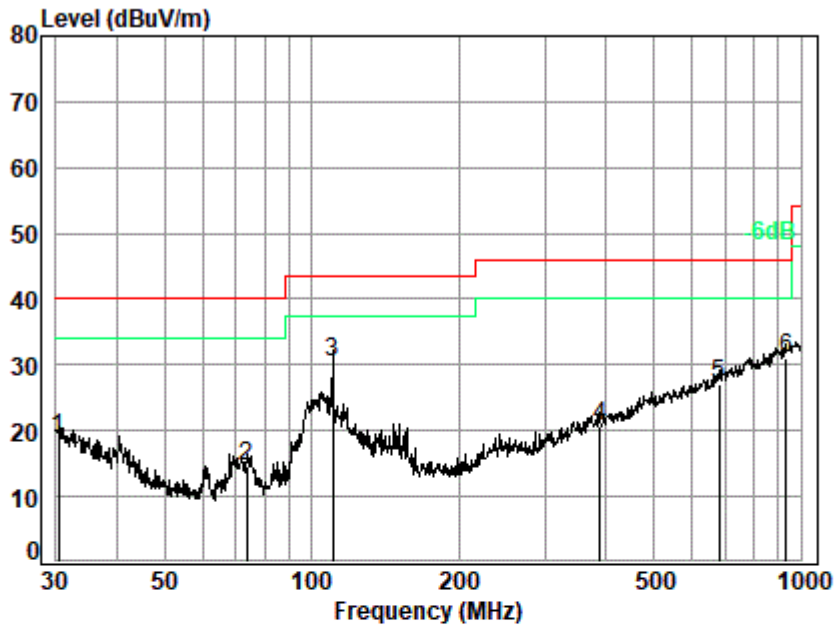

Site : chamber
Condition: 3m VERTICAL
Job No. : 01079AT/01080AT
Test Mode: 02

	Ant Freq	Cable Factor	Preamp Loss	Read Level	Limit Level	Over Line	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.317	21.29	0.74	27.65	24.36	18.74	40.00 -21.26 QP
2	73.617	10.51	1.03	27.61	30.62	14.55	40.00 -25.45 QP
3 q	110.569	12.21	1.29	27.63	44.44	30.31	43.50 -13.19 QP
4	387.992	20.35	2.45	27.72	25.70	20.78	46.00 -25.22 QP
5	679.960	25.62	3.35	27.88	26.04	27.13	46.00 -18.87 QP
6	932.272	28.86	4.04	26.78	25.03	31.15	46.00 -14.85 QP




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode:02

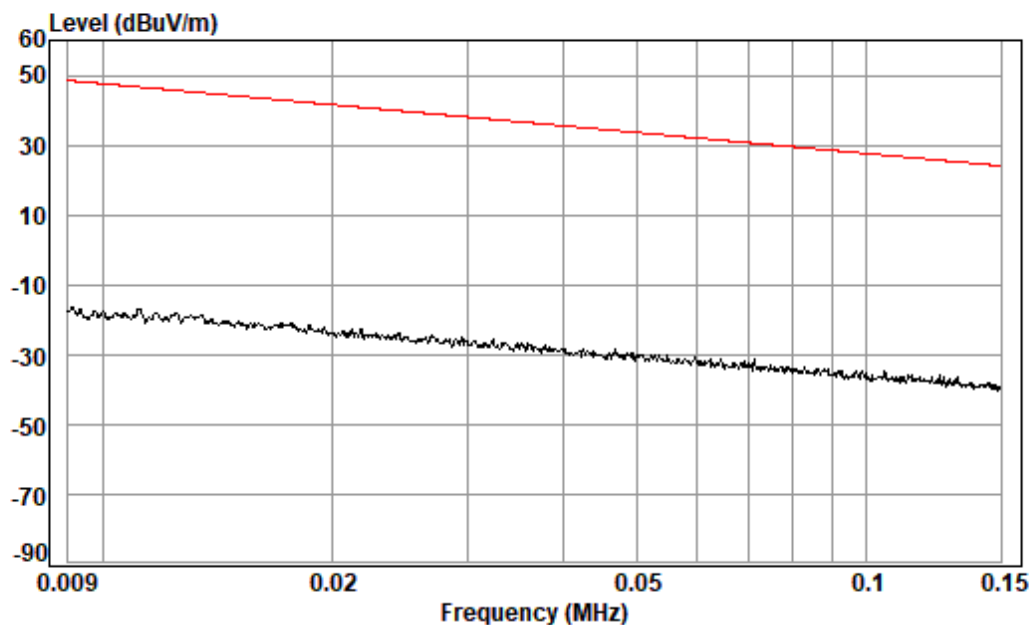

Condition: 3m

Job No. : 01079AT

Test Mode: 02

: coaxial




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode:02

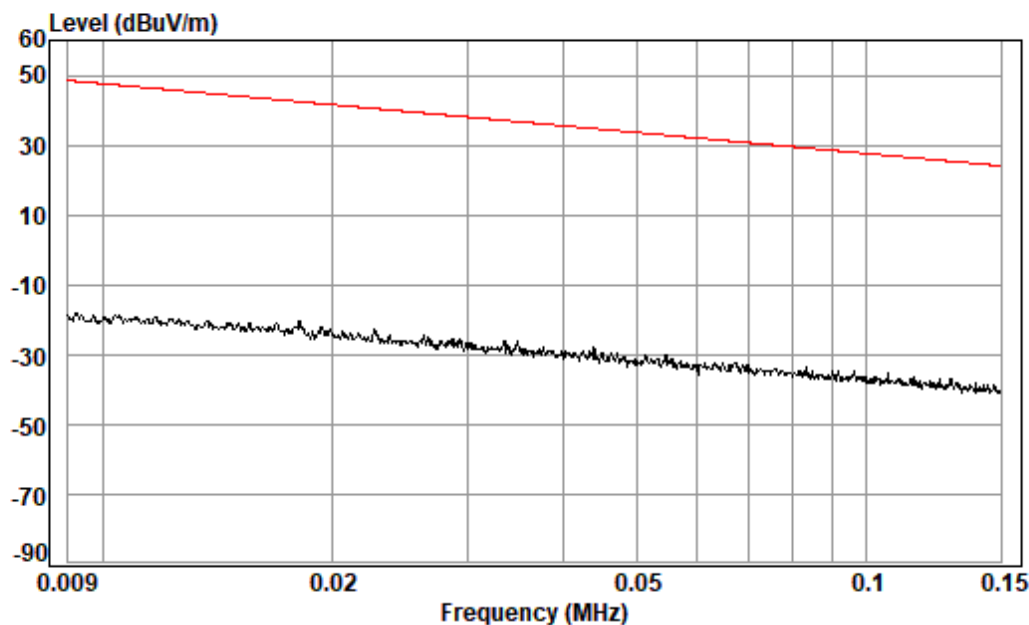

Condition: 3m

Job No. : 01079AT

Test Mode: 02

: coplanar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode:02

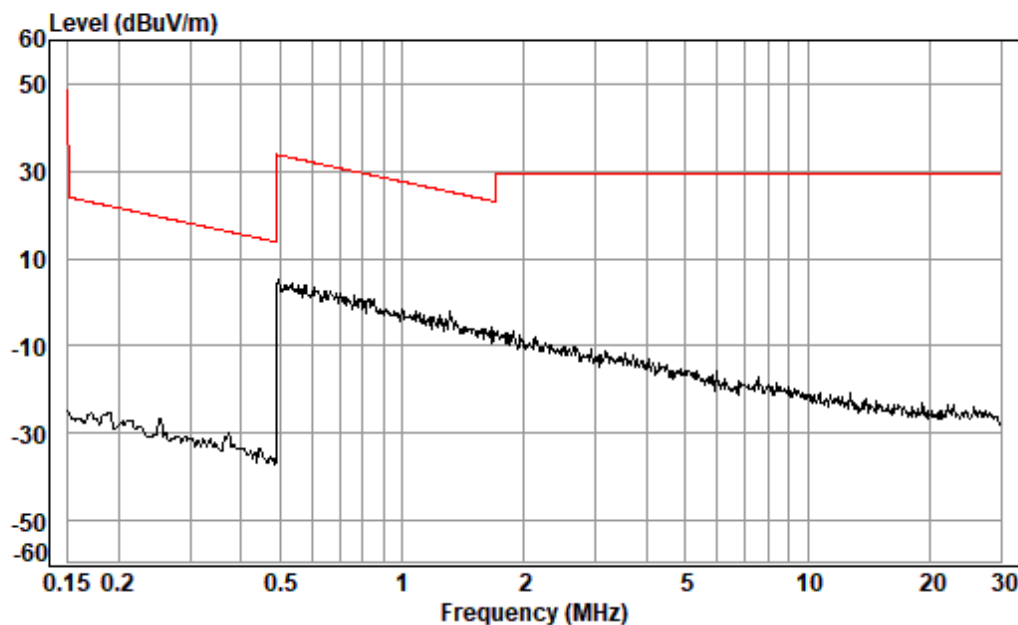

Condition: 3m

Job No. : 01079AT

Test Mode: 02

: coaxial




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode:02

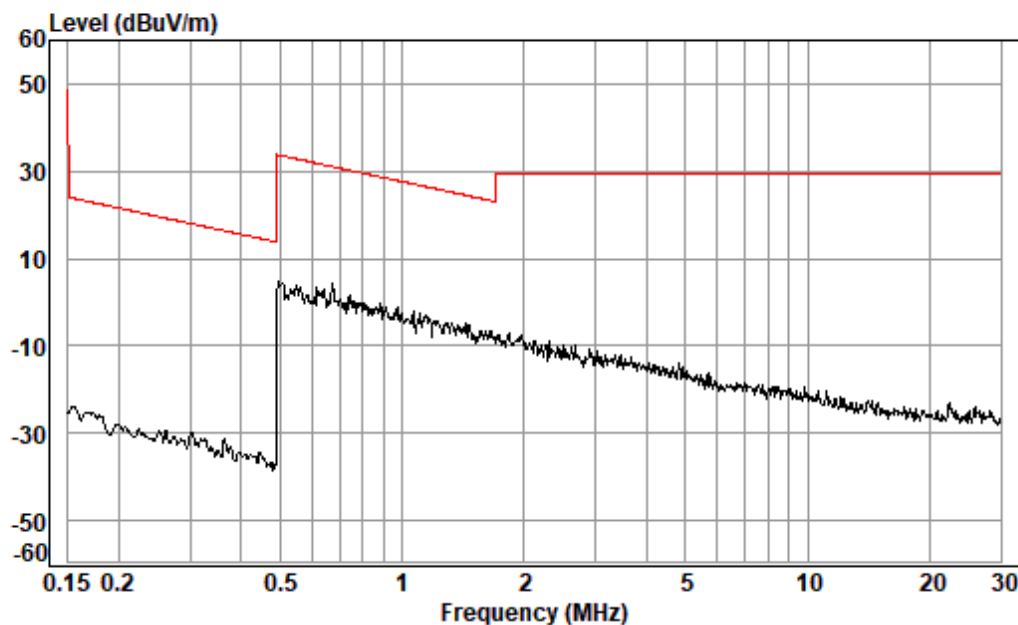

Condition: 3m

Job No. : 01079AT

Test Mode: 02

: coplanar



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 32 of 79

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209
 Test Method: ANSI C63.10 (2020) Section 6.6 & 11.12
 Measurement Distance: 3m
 Test Engineer: Tommy Luo

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

Note:

At Above 18GHz, measurements may be performed at a distance shorter than that specified in the regulations

Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor+ Aux Factor (if applicable)

The aux factor needs to be added when measurements are performed at a distance other than the limit distance provided.

EX. Above 18GHz, Aux Factor = 20 dB/decade of distance, the aux factor is $20\log(1/3) = -9.54\text{dB}$ (for 1m test distance).

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C Humidity: 50.2 % RH Atmospheric Pressure: 1020 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.4.3 Test Setup Diagram

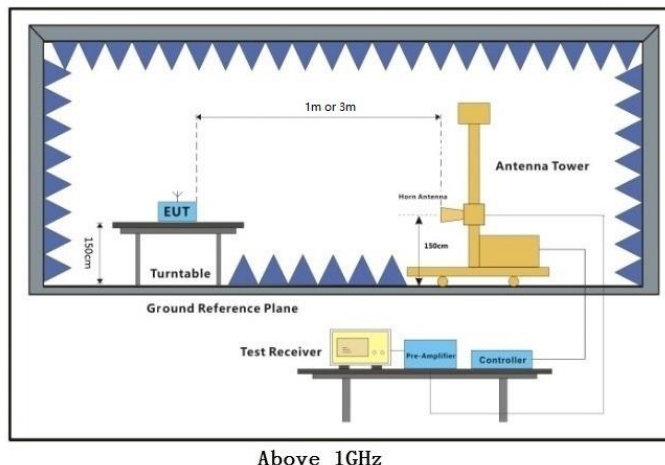

7.4.4 Measurement Procedure and Data

- For above 1GHz, the EUT was placed on the top of a rotating table 1.5m above the ground at a 3m fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3m away from the interference-receiving antenna from 1GHz to 18GHz, and 1m away from the interference-receiving antenna above 18GHz.
- The interference-receiving antenna was mounted on the variable-height antenna tower, with its boresight facing the EUT throughout the test.
- The antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1m to 4m and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:

- Scan from 1GHz to 10th harmonic of the highest frequency or 40 GHz, whichever is lower.
- As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
- For the frequency above 18GHz, testing had been executed under all test modes, only the worst-case test curve is displayed in the report.
- For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s).




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_1M_TX_CH_00_Horizontal-Peak

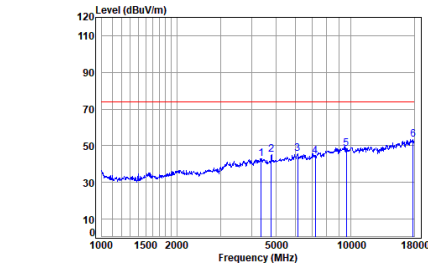

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4367.058	7.10	34.54	54.26	55.56	42.94	74.00	-31.06	Peak	0.00
2 4804.000	7.41	34.32	54.22	57.46	44.97	74.00	-29.03	Peak	0.00
3 6124.292	8.92	35.00	53.11	54.62	45.43	74.00	-28.57	Peak	0.00
4 7206.000	8.50	35.70	53.18	53.21	44.23	74.00	-29.77	Peak	0.00
5 9608.000	10.74	37.42	53.35	53.66	48.47	74.00	-25.53	Peak	0.00
6 p17793.090	11.38	43.89	52.50	50.67	53.44	74.00	-20.56	Peak	0.00


BLE_1M_TX_CH_00_Horizontal-Avg

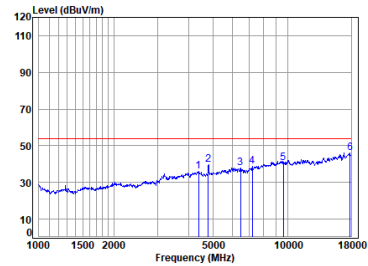

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.63	36.12	54.00	-17.88	Average	0.00
2 4804.000	7.41	34.32	54.22	52.29	39.80	54.00	-14.20	Average	0.00
3 6470.626	8.88	35.54	53.15	46.52	37.79	54.00	-16.21	Average	0.00
4 7206.000	8.50	35.70	53.18	47.59	38.61	54.00	-15.39	Average	0.00
5 9608.000	10.74	37.42	53.35	45.89	40.70	54.00	-13.30	Average	0.00
6 q17793.090	11.38	43.89	52.50	43.13	45.90	54.00	-8.10	Average	0.00


BLE_1M_TX_CH_00_Vertical-Peak

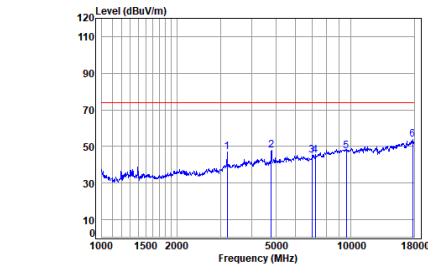

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	63.24	47.19	74.00	-26.81	Peak	0.00
2 4804.000	7.41	34.32	54.22	60.60	48.11	74.00	-25.89	Peak	0.00
3 6995.172	8.56	35.71	53.20	54.05	45.12	74.00	-28.88	Peak	0.00
4 7206.000	8.50	35.70	53.18	53.93	44.95	74.00	-29.05	Peak	0.00
5 9608.000	10.74	37.42	53.35	52.58	47.39	74.00	-26.61	Peak	0.00
6 p17793.740	11.38	43.84	52.53	51.01	53.67	74.00	-20.33	Peak	0.00


BLE_1M_TX_CH_00_Vertical-Avg

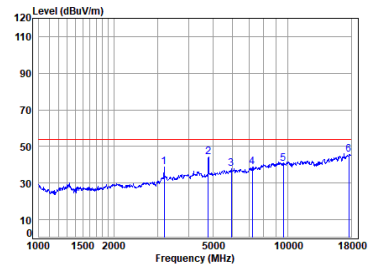

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable Loss Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.02	38.97	54.00	-15.03	Average	0.00
2 4804.000	7.41	34.32	54.22	56.89	44.40	54.00	-9.60	Average	0.00
3 5932.638	8.83	34.67	53.17	47.52	37.85	54.00	-16.15	Average	0.00
4 7206.000	8.50	35.70	53.18	47.59	38.61	54.00	-15.39	Average	0.00
5 9608.000	10.74	37.42	53.35	45.84	40.65	54.00	-13.35	Average	0.00
6 q17639.470	11.28	43.68	52.58	43.35	45.73	54.00	-8.27	Average	0.00


BLE_1M_TX_CH_19_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4392.376	7.11	34.74	54.26	55.87	43.46	74.00	-30.54	Peak	0.00
2 4880.000	7.47	34.62	54.21	58.59	46.47	74.00	-27.53	Peak	0.00
3 6053.894	8.92	35.01	53.11	54.46	45.28	74.00	-28.72	Peak	0.00
4 7320.000	8.46	35.70	53.17	53.27	44.26	74.00	-29.74	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.69	48.47	74.00	-25.53	Peak	0.00
6 p17793.090	11.36	43.89	52.50	50.54	53.31	74.00	-20.69	Peak	0.00


BLE_1M_TX_CH_19_Horizontal-Avg

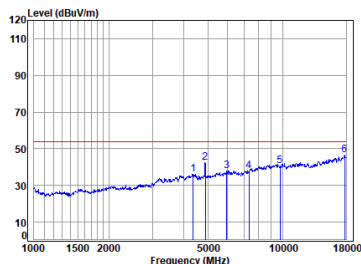

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4367.850	7.10	34.54	54.26	48.62	36.00	54.00	-18.00	Average	0.00
2 4880.000	7.47	34.62	54.21	54.76	42.64	54.00	-11.36	Average	0.00
3 5949.811	8.86	34.70	53.15	47.45	37.86	54.00	-16.14	Average	0.00
4 7320.000	8.46	35.70	53.17	46.93	37.92	54.00	-16.08	Average	0.00
5 9760.000	10.69	37.38	53.29	45.97	40.75	54.00	-13.25	Average	0.00
6 q17741.740	11.35	43.84	52.53	43.73	46.39	54.00	-7.61	Average	0.00


BLE_1M_TX_CH_19_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	64.34	48.29	74.00	-25.71	Peak	0.00
2 4880.000	7.47	34.62	54.21	59.01	46.89	74.00	-27.11	Peak	0.00
3 7320.000	8.46	35.70	53.17	53.46	44.45	74.00	-29.55	Peak	0.00
4 7989.893	9.07	36.40	53.10	57.73	50.10	74.00	-23.90	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.10	47.88	74.00	-26.12	Peak	0.00
6 p17793.090	11.36	43.89	52.50	51.50	54.27	74.00	-19.73	Peak	0.00


BLE_1M_TX_CH_19_Vertical-Avg

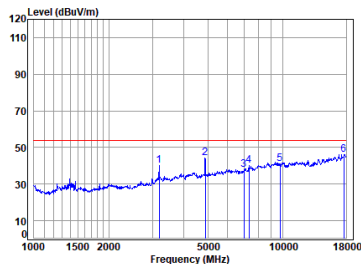

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.99	39.94	54.00	-14.06	Average	0.00
2 4880.000	7.47	34.62	54.21	56.24	44.12	54.00	-9.88	Average	0.00
3 6995.172	8.56	35.71	53.20	46.96	38.03	54.00	-15.97	Average	0.00
4 7320.000	8.46	35.70	53.17	48.99	39.98	54.00	-14.02	Average	0.00
5 9760.000	10.69	37.38	53.29	46.19	40.97	54.00	-13.03	Average	0.00
6 q17639.470	11.28	43.68	52.50	43.67	46.05	54.00	-7.95	Average	0.00


BLE_1M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4392.376	7.11	34.74	54.26	55.61	43.20	74.00	-30.80	Peak	0.00
2 4960.000	7.53	34.56	54.20	59.93	47.82	74.00	-26.18	Peak	0.00
3 6080.991	8.92	35.00	53.11	55.76	46.65	74.00	-27.35	Peak	0.00
4 7440.000	8.43	35.96	53.15	55.78	47.02	74.00	-26.98	Peak	0.00
5 9920.000	10.64	37.30	53.23	52.79	47.50	74.00	-26.50	Peak	0.00
6 17639.470	11.28	43.68	52.58	51.45	53.83	74.00	-20.17	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.41	35.90	54.00	-18.10	Average	0.00
2 4960.000	7.53	34.56	54.20	58.40	46.29	54.00	-7.71	Average	0.00
3 5949.811	8.86	34.70	53.15	47.65	38.06	54.00	-15.94	Average	0.00
4 7440.000	8.43	35.96	53.15	49.91	41.15	54.00	-12.85	Average	0.00
5 9920.000	10.64	37.30	53.23	45.87	40.58	54.00	-13.42	Average	0.00
6 17639.470	11.28	43.68	52.58	43.57	45.95	54.00	-8.05	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	63.78	47.73	74.00	-26.27	Peak	0.00
2 4960.000	7.53	34.56	54.20	60.33	48.22	74.00	-25.78	Peak	0.00
3 6470.026	8.88	35.54	53.15	53.61	44.88	74.00	-29.12	Peak	0.00
4 7440.000	8.43	35.96	53.15	56.25	47.49	74.00	-26.51	Peak	0.00
5 9920.000	10.64	37.30	53.23	52.92	47.63	74.00	-26.37	Peak	0.00
6 17644.500	11.41	43.90	52.48	50.36	53.19	74.00	-20.81	Peak	0.00


BLE_1M_TX_CH_39_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 1M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.00	38.95	54.00	-15.05	Average	0.00
2 4960.000	7.53	34.56	54.20	59.66	47.55	54.00	-6.45	Average	0.00
3 6071.417	8.92	35.04	53.11	47.60	38.45	54.00	-15.55	Average	0.00
4 7440.000	8.43	35.96	53.15	50.78	42.02	54.00	-11.98	Average	0.00
5 9920.000	10.64	37.30	53.23	46.38	43.09	54.00	-10.91	Average	0.00
6 17639.470	11.28	43.68	52.58	43.90	46.28	54.00	-7.72	Average	0.00


BLE_2M_TX_CH_00_Horizontal-Peak

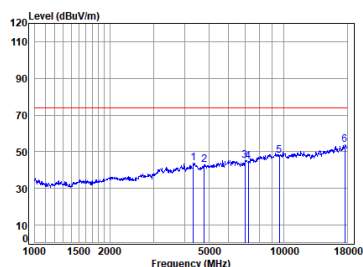

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4329.354	7.08	34.23	54.26	56.64	43.69	74.00	-30.31	Peak	0.00
2 4804.000	7.41	34.32	54.22	55.45	42.96	74.00	-31.04	Peak	0.00
3 6995.172	8.56	35.71	53.20	54.19	45.26	74.00	-28.74	Peak	0.00
4 7206.000	8.50	35.70	53.18	53.53	44.55	74.00	-29.45	Peak	0.00
5 9608.000	10.74	37.42	53.35	53.24	48.05	74.00	-25.95	Peak	0.00
6 p17639.470	11.28	43.68	52.58	51.27	53.65	74.00	-20.35	Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg

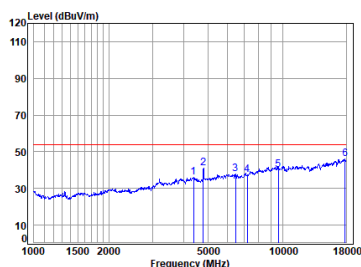

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.57	36.06	54.00	-17.94	Average	0.00
2 4804.000	7.41	34.32	54.22	53.66	41.17	54.00	-12.83	Average	0.00
3 6470.026	8.88	35.54	53.15	46.69	37.96	54.00	-16.04	Average	0.00
4 7206.000	8.50	35.70	53.18	46.49	37.51	54.00	-16.49	Average	0.00
5 9608.000	10.74	37.42	53.35	45.22	40.03	54.00	-13.97	Average	0.00
6 q17793.090	11.38	43.89	52.58	43.49	46.26	54.00	-7.74	Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak

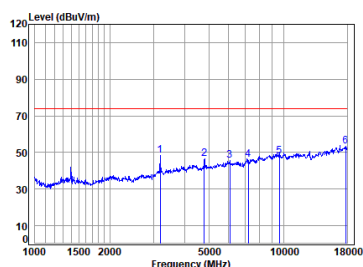

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	64.19	48.14	74.00	-25.86	Peak	0.00
2 4804.000	7.41	34.32	54.22	59.20	46.71	74.00	-27.29	Peak	0.00
3 6071.417	8.92	35.04	53.11	54.92	45.77	74.00	-28.23	Peak	0.00
4 7206.000	8.50	35.70	53.18	55.13	46.15	74.00	-27.85	Peak	0.00
5 9608.000	10.74	37.42	53.35	53.05	47.86	74.00	-26.14	Peak	0.00
6 p17741.740	11.35	43.84	52.53	50.60	53.26	74.00	-20.74	Peak	0.00

BLE_2M_TX_CH_00_Vertical-Avg

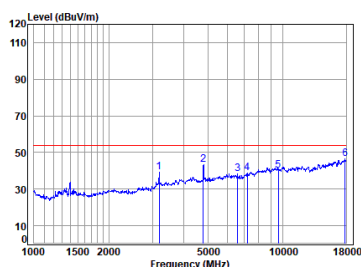

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.45	39.40	54.00	-14.60	Average	0.00
2 4804.000	7.41	34.32	54.22	55.87	43.38	54.00	-10.62	Average	0.00
3 6583.209	8.83	35.37	53.16	47.21	38.25	54.00	-15.75	Average	0.00
4 7206.000	8.50	35.70	53.18	47.65	38.67	54.00	-15.33	Average	0.00
5 9608.000	10.74	37.42	53.35	45.53	40.34	54.00	-13.66	Average	0.00
6 q17793.090	11.38	43.89	52.58	43.70	46.55	54.00	-7.45	Average	0.00




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


BLE_2M_TX_CH_19_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4341.086	7.09	34.34	54.26	57.02	44.19	74.00	-29.81	Peak	0.00
2 4880.000	7.47	34.62	54.21	56.69	44.57	74.00	-29.43	Peak	0.00
3 5567.137	8.27	34.70	53.55	55.42	44.84	74.00	-29.16	Peak	0.00
4 7320.000	8.46	35.70	53.17	54.03	45.02	74.00	-28.98	Peak	0.00
5 9760.000	10.69	37.38	53.29	52.68	47.38	74.00	-26.62	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.89	53.72	74.00	-20.28	Peak	0.00


BLE_2M_TX_CH_19_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.44	35.93	54.00	-18.07	Average	0.00
2 4880.000	7.47	34.62	54.21	51.77	39.65	54.00	-14.35	Average	0.00
3 6488.754	8.88	35.50	53.15	46.15	37.46	54.00	-16.54	Average	0.00
4 7320.000	8.46	35.70	53.17	47.10	38.09	54.00	-15.91	Average	0.00
5 9760.000	10.69	37.38	53.29	46.07	40.85	54.00	-13.15	Average	0.00
6 q17690.530	11.32	43.78	52.55	43.78	46.33	54.00	-7.67	Average	0.00


BLE_2M_TX_CH_19_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3196.094	6.01	32.87	54.85	63.51	47.54	74.00	-26.46	Peak	0.00
2 4880.000	7.47	34.62	54.21	58.73	46.61	74.00	-27.39	Peak	0.00
3 7320.000	8.46	35.70	53.17	53.02	44.01	74.00	-29.99	Peak	0.00
4 7989.893	9.07	36.40	53.10	56.72	49.09	74.00	-24.91	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.63	48.41	74.00	-25.59	Peak	0.00
6 p17487.100	11.19	43.40	52.65	51.48	53.42	74.00	-20.58	Peak	0.00


BLE_2M_TX_CH_19_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2440 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	56.43	40.38	54.00	-13.62	Average	0.00
2 4880.000	7.47	34.62	54.21	54.53	42.41	54.00	-11.59	Average	0.00
3 5949.811	8.86	34.70	53.15	47.50	37.91	54.00	-16.09	Average	0.00
4 7320.000	8.46	35.70	53.17	47.09	38.00	54.00	-15.92	Average	0.00
5 9760.000	10.69	37.38	53.29	45.73	40.51	54.00	-13.49	Average	0.00
6 q17793.890	11.30	43.89	52.50	43.26	46.03	54.00	-7.97	Average	0.00


BLE_2M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4279.589	7.05	33.92	54.27	56.51	43.21	74.00	-30.79	Peak	0.00
2 4960.000	7.53	34.56	54.20	59.58	47.47	74.00	-26.53	Peak	0.00
3 6358.789	8.89	34.95	53.14	54.54	45.24	74.00	-28.76	Peak	0.00
4 7440.000	8.43	35.96	53.15	54.36	45.60	74.00	-28.40	Peak	0.00
5 9920.000	10.64	37.30	53.23	53.58	48.29	74.00	-25.71	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.81	53.64	74.00	-20.36	Peak	0.00


BLE_2M_TX_CH_39_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4392.376	7.11	34.74	54.26	49.11	36.70	54.00	-17.30	Average	0.00
2 4960.000	7.53	34.56	54.20	57.21	45.10	54.00	-8.90	Average	0.00
3 6071.417	8.92	35.04	53.11	46.89	37.74	54.00	-16.26	Average	0.00
4 7440.000	8.43	35.96	53.15	48.21	39.45	54.00	-14.55	Average	0.00
5 9920.000	10.64	37.30	53.23	46.40	41.11	54.00	-12.89	Average	0.00
6 q17741.740	11.35	43.84	52.53	43.36	46.02	54.00	-7.98	Average	0.00


BLE_2M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	63.54	47.49	74.00	-26.51	Peak	0.00
2 4960.000	7.53	34.56	54.20	60.63	48.52	74.00	-25.48	Peak	0.00
3 5949.811	8.86	34.70	53.15	54.68	45.09	74.00	-28.91	Peak	0.00
4 7440.000	8.43	35.96	53.15	54.77	46.01	74.00	-27.99	Peak	0.00
5 9920.000	10.64	37.30	53.23	53.45	48.16	74.00	-25.84	Peak	0.00
6 p17844.590	11.41	43.90	52.48	51.11	53.54	74.00	-20.06	Peak	0.00


BLE_2M_TX_CH_39_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2400 RSE TX
BLE 2M

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.19	39.14	54.00	-14.86	Average	0.00
2 q 4960.000	7.53	34.56	54.20	58.45	46.34	54.00	-7.66	Average	0.00
3 5967.033	8.88	34.77	53.13	47.69	38.21	54.00	-15.79	Average	0.00
4 7440.000	8.43	35.96	53.15	50.47	41.71	54.00	-12.29	Average	0.00
5 9920.000	10.64	37.30	53.23	46.83	41.54	54.00	-12.46	Average	0.00
6 17690.530	11.32	43.78	52.55	43.73	46.28	54.00	-7.72	Average	0.00


BLE_1M_TX_CH_00_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 1M
ST=5

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	4367.058	7.10	34.54	54.26	55.56	42.94	74.00	-31.06 Peak	0.00
2	4804.000	7.41	34.32	54.22	57.46	44.97	74.00	-29.03 Peak	0.00
3	6124.222	8.92	35.00	53.11	54.62	45.43	74.00	-28.57 Peak	0.00
4	7206.000	8.50	35.70	53.18	53.21	44.23	74.00	-29.77 Peak	0.00
5	9608.000	10.74	37.42	53.35	53.66	48.47	74.00	-25.53 Peak	0.00
6	p17793.090	11.38	43.89	52.50	50.67	53.44	74.00	-20.56 Peak	0.00


BLE_1M_TX_CH_00_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 1M
ST=5

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	4379.699	7.11	34.64	54.26	48.63	36.12	54.00	-17.88 Average	0.00
2	4804.000	7.41	34.32	54.22	52.29	39.00	54.00	-14.20 Average	0.00
3	6470.026	8.88	35.54	53.15	46.52	37.79	54.00	-16.21 Average	0.00
4	7206.000	8.50	35.70	53.18	47.59	38.61	54.00	-15.39 Average	0.00
5	9608.000	10.74	37.42	53.35	45.89	40.70	54.00	-13.30 Average	0.00
6	q17793.090	11.38	43.89	52.50	43.13	45.90	54.00	-8.10 Average	0.00


BLE_1M_TX_CH_00_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 1M
ST=5

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	3186.869	6.01	32.79	54.85	63.24	47.19	74.00	-26.81 Peak	0.00
2	4804.000	7.41	34.32	54.22	60.60	48.11	74.00	-25.89 Peak	0.00
3	6995.172	8.56	35.71	53.20	54.05	45.12	74.00	-28.88 Peak	0.00
4	7206.000	8.50	35.70	53.18	53.93	44.95	74.00	-29.05 Peak	0.00
5	9608.000	10.74	37.42	53.35	52.58	47.39	74.00	-26.61 Peak	0.00
6	p17741.740	11.35	43.84	52.53	51.01	53.67	74.00	-20.33 Peak	0.00


BLE_1M_TX_CH_00_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 1M
ST=5

Freq	Cable	Loss	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	dB	dB/m	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
1	3186.869	6.01	32.79	54.85	55.02	38.97	54.00	-15.03 Average	0.00
2	4804.000	7.41	34.32	54.22	56.89	44.40	54.00	-9.60 Average	0.00
3	5932.638	8.83	34.67	53.17	47.52	37.85	54.00	-16.15 Average	0.00
4	7206.000	8.50	35.70	53.18	47.59	38.61	54.00	-15.39 Average	0.00
5	9608.000	10.74	37.42	53.35	45.84	40.65	54.00	-13.35 Average	0.00
6	q17639.478	11.28	43.68	52.58	43.35	45.73	54.00	-8.27 Average	0.00


BLE_1M_TX_CH_19_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4392.376	7.11	34.74	54.26	55.87	43.46	74.00	-30.54	Peak	0.00
2 4880.000	7.47	34.62	54.21	58.59	46.47	74.00	-27.53	Peak	0.00
3 6053.894	8.92	35.01	53.11	54.46	45.28	74.00	-28.72	Peak	0.00
4 7320.000	8.46	35.70	53.17	53.27	44.26	74.00	-29.74	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.69	48.47	74.00	-25.53	Peak	0.00
6 p17793.090	11.38	43.89	52.50	50.54	53.31	74.00	-20.69	Peak	0.00


BLE_1M_TX_CH_19_Horizontal-Avg

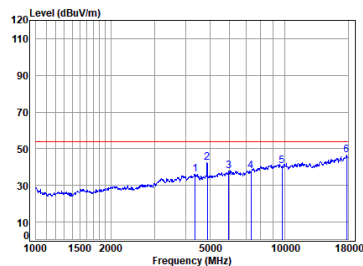

Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4367.058	7.10	34.54	54.26	48.62	36.00	54.00	-18.00	Average	0.00
2 4880.000	7.47	34.62	54.21	54.76	42.64	54.00	-11.36	Average	0.00
3 5949.811	8.86	34.70	53.15	47.45	37.86	54.00	-16.14	Average	0.00
4 7320.000	8.46	35.70	53.17	46.93	37.92	54.00	-16.08	Average	0.00
5 9760.000	10.69	37.38	53.29	45.97	40.75	54.00	-13.25	Average	0.00
6 q17741.740	11.35	43.84	52.53	43.73	46.39	54.00	-7.61	Average	0.00


BLE_1M_TX_CH_19_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	64.34	48.29	74.00	-25.71	Peak	0.00
2 4880.000	7.47	34.62	54.21	59.01	46.89	74.00	-27.11	Peak	0.00
3 7320.000	8.46	35.70	53.17	53.46	44.45	74.00	-29.55	Peak	0.00
4 7989.093	9.07	36.40	53.10	57.73	50.10	74.00	-23.90	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.10	47.88	74.00	-26.12	Peak	0.00
6 p17793.090	11.38	43.89	52.50	51.50	54.27	74.00	-19.73	Peak	0.00


BLE_1M_TX_CH_19_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.99	39.94	54.00	-14.06	Average	0.00
2 4880.000	7.47	34.62	54.21	56.24	44.12	54.00	-9.88	Average	0.00
3 6995.172	8.56	35.71	53.20	46.96	38.03	54.00	-15.97	Average	0.00
4 7320.000	8.46	35.70	53.17	48.99	39.98	54.00	-14.02	Average	0.00
5 9760.000	10.69	37.38	53.29	46.19	40.97	54.00	-13.03	Average	0.00
6 q17639.470	11.28	43.68	52.58	43.67	46.05	54.00	-7.95	Average	0.00


BLE_1M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4392.376	7.11	34.74	54.26	55.61	43.20	74.00	-30.80	Peak	0.00
2 4960.000	7.53	34.56	54.20	59.93	47.82	74.00	-26.18	Peak	0.00
3 6085.991	8.92	35.08	53.11	55.76	46.65	74.00	-27.35	Peak	0.00
4 7440.000	8.43	35.96	53.15	55.78	47.02	74.00	-26.98	Peak	0.00
5 9920.000	10.64	37.30	53.23	52.79	47.50	74.00	-26.50	Peak	0.00
6 p17639.470	11.28	43.68	52.58	51.45	53.83	74.00	-20.17	Peak	0.00


BLE_1M_TX_CH_39_Horizontal-Avg

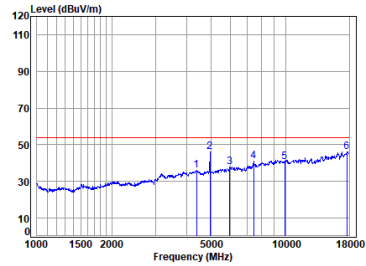

Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.41	35.90	54.00	-18.10	Average	0.00
2 q 4960.000	7.53	34.56	54.20	50.40	46.29	54.00	-7.71	Average	0.00
3 5949.811	8.86	34.70	53.15	47.65	38.06	54.00	-15.94	Average	0.00
4 7440.000	8.43	35.96	53.15	49.91	41.15	54.00	-12.85	Average	0.00
5 9920.000	10.64	37.30	53.23	45.87	40.58	54.00	-13.42	Average	0.00
6 17639.470	11.28	43.68	52.58	43.57	45.95	54.00	-8.05	Average	0.00


BLE_1M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	63.78	47.73	74.00	-26.27	Peak	0.00
2 4960.000	7.53	34.56	54.20	60.33	48.22	74.00	-25.78	Peak	0.00
3 6470.026	8.88	35.54	53.15	53.61	44.88	74.00	-29.12	Peak	0.00
4 7440.000	8.43	35.96	53.15	56.25	47.49	74.00	-26.51	Peak	0.00
5 9920.000	10.64	37.30	53.23	52.92	47.63	74.00	-26.37	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.36	53.19	74.00	-20.81	Peak	0.00


BLE_1M_TX_CH_39_Vertical-Avg

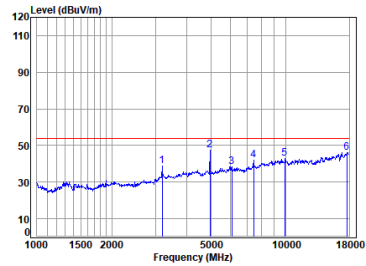

Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 1M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	55.00	38.95	54.00	-15.05	Average	0.00
2 q 4960.000	7.53	34.56	54.20	59.66	47.55	54.00	-6.45	Average	0.00
3 6071.417	8.92	35.04	53.11	47.60	38.45	54.00	-15.55	Average	0.00
4 7440.000	8.43	35.96	53.15	50.78	42.02	54.00	-11.98	Average	0.00
5 9920.000	10.64	37.30	53.23	46.38	43.09	54.00	-10.91	Average	0.00
6 17639.470	11.28	43.68	52.58	43.90	46.28	54.00	-7.72	Average	0.00


BLE_2M_TX_CH_00_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4329.354	7.08	34.23	54.26	56.64	43.69	74.00	-30.31 Peak	0.00
2 4804.000	7.41	34.32	54.22	55.45	42.96	74.00	-31.04 Peak	0.00
3 6995.172	8.56	35.71	53.20	54.19	45.26	74.00	-28.74 Peak	0.00
4 7206.000	8.50	35.70	53.18	53.53	44.55	74.00	-29.45 Peak	0.00
5 9600.000	10.74	37.42	53.35	53.24	48.05	74.00	-25.95 Peak	0.00
6 p17639.470	11.28	43.68	52.58	51.27	53.65	74.00	-20.35 Peak	0.00


BLE_2M_TX_CH_00_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 4379.699	7.11	34.64	54.26	48.57	36.06	54.00	-17.94 Average	0.00
2 4804.000	7.41	34.32	54.22	53.66	41.17	54.00	-12.83 Average	0.00
3 6470.026	8.88	35.54	53.15	46.69	37.96	54.00	-16.04 Average	0.00
4 7206.000	8.50	35.70	53.18	46.49	37.51	54.00	-16.49 Average	0.00
5 9600.000	10.74	37.42	53.35	45.22	40.03	54.00	-13.97 Average	0.00
6 q17793.090	11.38	43.89	52.50	43.40	46.28	54.00	-7.74 Average	0.00


BLE_2M_TX_CH_00_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 3186.869	6.01	32.79	54.85	64.19	48.14	74.00	-25.86 Peak	0.00
2 4804.000	7.41	34.32	54.22	59.20	46.71	74.00	-27.29 Peak	0.00
3 6071.417	8.92	35.04	53.11	54.92	45.77	74.00	-28.23 Peak	0.00
4 7206.000	8.50	35.70	53.18	55.13	46.15	74.00	-27.85 Peak	0.00
5 9600.000	10.74	37.42	53.35	53.05	47.86	74.00	-26.14 Peak	0.00
6 p17741.740	11.35	43.84	52.53	50.60	53.26	74.00	-20.74 Peak	0.00


BLE_2M_TX_CH_00_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2402 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Aux
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 3186.869	6.01	32.79	54.85	55.45	39.40	54.00	-14.60 Average	0.00
2 4804.000	7.41	34.32	54.22	55.87	43.38	54.00	-10.62 Average	0.00
3 6583.209	8.83	35.37	53.16	47.21	38.25	54.00	-15.75 Average	0.00
4 7206.000	8.50	35.70	53.18	47.65	38.67	54.00	-15.33 Average	0.00
5 9600.000	10.74	37.42	53.35	45.53	40.34	54.00	-13.66 Average	0.00
6 q17793.090	11.38	43.89	52.50	43.78	46.55	54.00	-7.45 Average	0.00


BLE_2M_TX_CH_19_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4341.886	7.09	34.34	54.26	57.82	44.19	74.00	-29.81	Peak	0.00
2 4880.000	7.47	34.62	54.21	56.69	44.57	74.00	-29.43	Peak	0.00
3 5567.137	8.27	34.70	53.55	55.42	44.84	74.00	-29.16	Peak	0.00
4 7320.000	8.46	35.70	53.17	54.03	45.02	74.00	-28.98	Peak	0.00
5 9760.000	10.69	37.38	53.29	52.60	47.38	74.00	-26.62	Peak	0.00
6 p17844.590	11.41	43.90	52.48	50.89	53.72	74.00	-20.28	Peak	0.00


BLE_2M_TX_CH_19_Horizontal-Avg



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 4379.699	7.11	34.64	54.26	48.44	35.93	54.00	-18.07	Average	0.00
2 4880.000	7.47	34.62	54.21	51.77	39.65	54.00	-14.35	Average	0.00
3 6488.754	8.88	35.58	53.15	46.15	37.46	54.00	-16.54	Average	0.00
4 7320.000	8.46	35.70	53.17	47.10	38.09	54.00	-15.91	Average	0.00
5 9760.000	10.69	37.38	53.29	46.87	40.85	54.00	-13.15	Average	0.00
6 q17690.530	11.32	43.78	52.55	43.78	46.33	54.00	-7.67	Average	0.00


BLE_2M_TX_CH_19_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3196.094	6.01	32.87	54.85	63.51	47.54	74.00	-26.46	Peak	0.00
2 4880.000	7.47	34.62	54.21	58.73	46.61	74.00	-27.39	Peak	0.00
3 7320.000	8.46	35.70	53.17	53.02	44.01	74.00	-29.99	Peak	0.00
4 7989.093	9.07	36.40	53.10	56.72	49.09	74.00	-24.91	Peak	0.00
5 9760.000	10.69	37.38	53.29	53.63	46.41	74.00	-25.59	Peak	0.00
6 p17487.180	11.19	43.40	52.65	51.48	53.42	74.00	-20.58	Peak	0.00


BLE_2M_TX_CH_19_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2440 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		dB
1 3186.869	6.01	32.79	54.85	56.43	40.38	54.00	-13.62	Average	0.00
2 4880.000	7.47	34.62	54.21	54.53	42.41	54.00	-11.59	Average	0.00
3 5949.811	8.86	34.70	53.15	47.50	37.91	54.00	-16.09	Average	0.00
4 7320.000	8.46	35.70	53.17	47.09	38.00	54.00	-15.92	Average	0.00
5 9760.000	10.69	37.38	53.29	45.73	40.51	54.00	-13.49	Average	0.00
6 q17793.090	11.38	43.89	52.50	43.26	46.03	54.00	-7.97	Average	0.00


BLE_2M_TX_CH_39_Horizontal-Peak



Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4279.589	7.05	33.92	54.27	56.51	43.21	74.00	-30.79	Peak		0.00
2 4960.000	7.53	34.56	54.20	59.58	47.47	74.00	-26.53	Peak		0.00
3 6358.789	8.89	34.95	53.14	54.54	45.24	74.00	-28.76	Peak		0.00
4 7440.000	8.43	35.96	53.15	54.36	45.60	74.00	-28.40	Peak		0.00
5 9920.000	10.64	37.30	53.23	53.58	48.29	74.00	-25.71	Peak		0.00
6 p17844.590	11.41	43.90	52.48	50.81	53.64	74.00	-20.36	Peak		0.00


BLE_2M_TX_CH_39_Horizontal-Avg

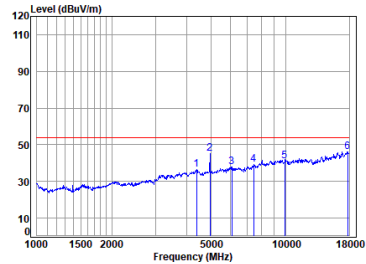

Site : chamber
Condition: 3m HORIZONTAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 4392.376	7.11	34.74	54.26	49.11	36.70	54.00	-17.30	Average		0.00
2 4960.000	7.53	34.56	54.20	57.21	45.10	54.00	-8.90	Average		0.00
3 6071.417	8.92	35.04	53.11	46.89	37.74	54.00	-16.26	Average		0.00
4 7440.000	8.43	35.96	53.15	48.21	39.45	54.00	-14.55	Average		0.00
5 9920.000	10.64	37.30	53.23	46.40	41.11	54.00	-12.89	Average		0.00
6 q17741.740	11.35	43.84	52.53	43.36	46.02	54.00	-7.98	Average		0.00


BLE_2M_TX_CH_39_Vertical-Peak



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 3186.869	6.01	32.79	54.85	63.54	47.49	74.00	-26.51	Peak		0.00
2 4960.000	7.53	34.56	54.20	60.63	48.52	74.00	-25.48	Peak		0.00
3 5949.811	8.86	34.70	53.15	54.68	45.89	74.00	-28.91	Peak		0.00
4 7440.000	8.43	35.96	53.15	54.77	46.81	74.00	-27.99	Peak		0.00
5 9920.000	10.64	37.30	53.23	53.45	48.16	74.00	-25.84	Peak		0.00
6 p17844.590	11.41	43.90	52.48	51.11	53.94	74.00	-20.06	Peak		0.00


BLE_2M_TX_CH_39_Vertical-Avg



Site : chamber
Condition: 3m VERTICAL
Job No : 5-12
Mode : 2480 RSE TX
BLE 2M
ST=5

Freq	Cable Loss	Factor	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over	Remark	Aux Factor
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB		dB
1 3186.869	6.01	32.79	54.85	55.19	39.14	54.00	-14.86	Average		0.00
2 q 4960.000	7.53	34.56	54.20	58.45	46.34	54.00	-7.66	Average		0.00
3 5967.033	8.88	34.77	53.13	47.69	38.21	54.00	-15.79	Average		0.00
4 7440.000	8.43	35.96	53.15	50.47	41.71	54.00	-12.29	Average		0.00
5 9920.000	10.64	37.30	53.23	46.83	41.54	54.00	-12.46	Average		0.00
6 17690.530	11.32	43.78	52.55	43.73	46.28	54.00	-7.72	Average		0.00


BLE_2M_TX_CH_00_Horizontal

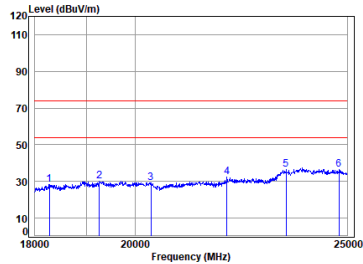

Site : chamber
Condition: 3m HORIZONTAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	dBuV/m	dBuV/m	Limit	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 18274.070	5.83	36.52	56.41	52.83	28.43	74.00	-45.57 Peak	-9.54
2 19266.580	5.95	37.80	56.62	52.47	30.06	74.00	-43.94 Peak	-9.54
3 20339.710	5.91	38.16	56.43	51.19	29.29	74.00	-44.71 Peak	-9.54
4 22029.930	5.98	37.59	54.27	52.54	32.30	74.00	-41.70 Peak	-9.54
5 23448.760	6.76	38.60	50.77	51.35	36.40	74.00	-37.60 Peak	-9.54
6 p24787.380	6.84	39.23	51.83	51.77	36.47	74.00	-37.53 Peak	-9.54

BLE_2M_TX_CH_00_Vertical

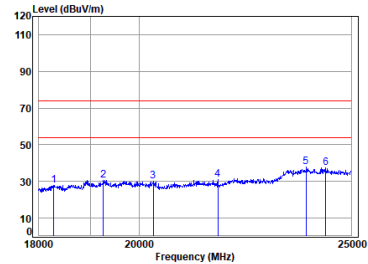

Site : chamber
Condition: 3m VERTICAL
Job No : 01079AT/01080AT
Mode : 2402 RSE TX
BLE 1M

Freq	Cable	Ant	Preamp	Read	Level	Limit	Over	Aux
MHz	Loss	Factor	Factor	Level	dBuV	dBuV/m	dBuV/m	Factor
	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	dB
1 18286.800	5.85	36.53	56.40	52.32	27.96	74.00	-46.04 Peak	-9.54
2 19260.250	5.95	37.80	56.61	53.02	30.62	74.00	-43.38 Peak	-9.54
3 20299.660	5.90	38.10	56.46	51.97	30.05	74.00	-43.95 Peak	-9.54
4 21728.060	5.99	37.40	54.57	51.60	30.88	74.00	-43.12 Peak	-9.54
5 p23844.920	6.77	38.94	50.37	52.12	37.92	74.00	-36.08 Peak	-9.54
6 24343.550	6.80	39.04	51.23	52.44	37.51	74.00	-36.49 Peak	-9.54

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 47 of 79

7.5 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Test Engineer: Mingli Hu

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 27.6 °C

Humidity: 43.5 % RH

Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.5.3 Test Setup Diagram

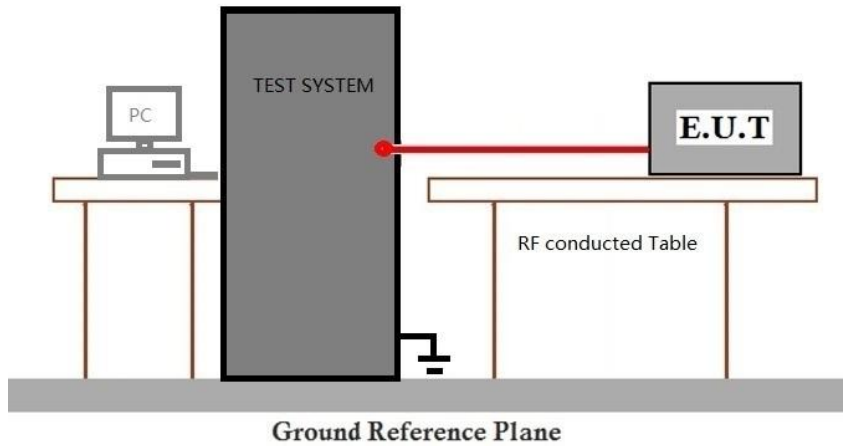

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2020) Section 11.8.1
 Test Engineer: Mingli Hu

Limit:
 ≥500 kHz


7.6.1 E.U.T. Operation

Operating Environment:
 Temperature: 27.6 °C Humidity: 43.5 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.6.3 Test Setup Diagram

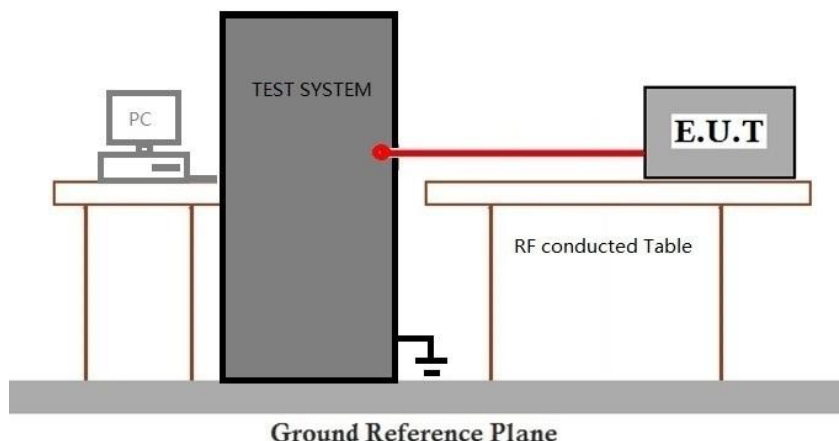

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.7 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
 Test Method: ANSI C63.10 (2020) Section 11.10.3
 Test Engineer: Mingli Hu

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation


Operating Environment:

Temperature: 27.6 °C Humidity: 43.5 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.

7.7.3 Test Setup Diagram

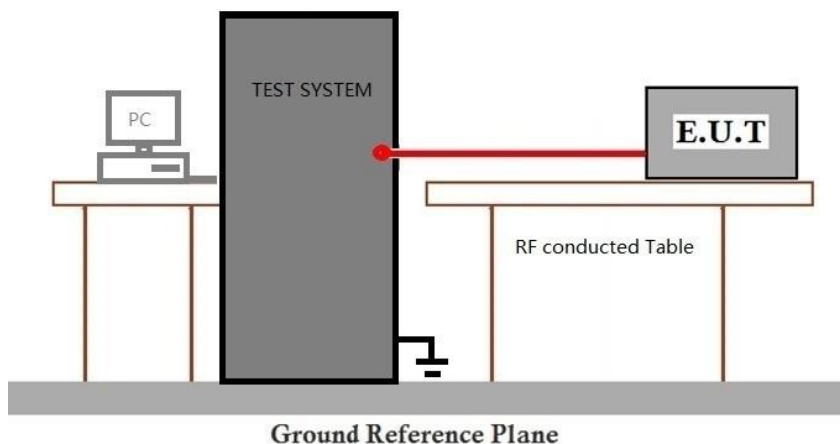

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 6.10.4
 Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 27.6 °C Humidity: 43.5 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.8.3 Test Setup Diagram

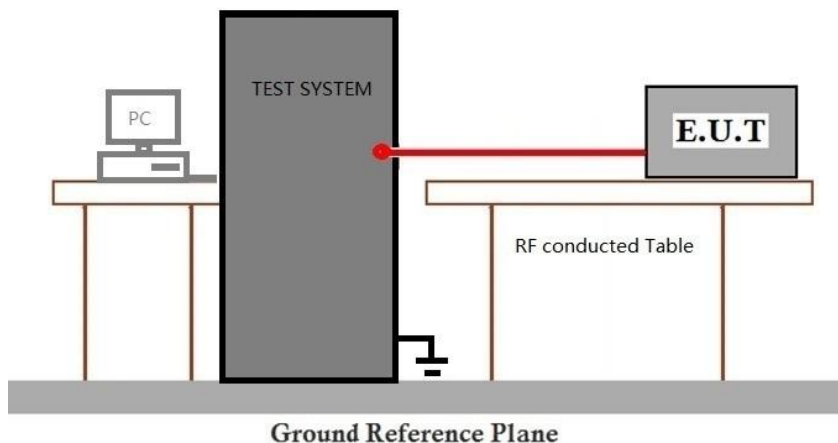

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/2

Report No.: SZCR260300107903

Page: 53 of 79

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)
 Test Method: ANSI C63.10 (2020) Section 11.11
 Test Engineer: Mingli Hu

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 27.6 °C Humidity: 43.5 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.
Final test	03	TX mode(2Mbps)_Keep the EUT in continuously transmitting mode with GFSK modulation.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Inspection Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

7.9.3 Test Setup Diagram

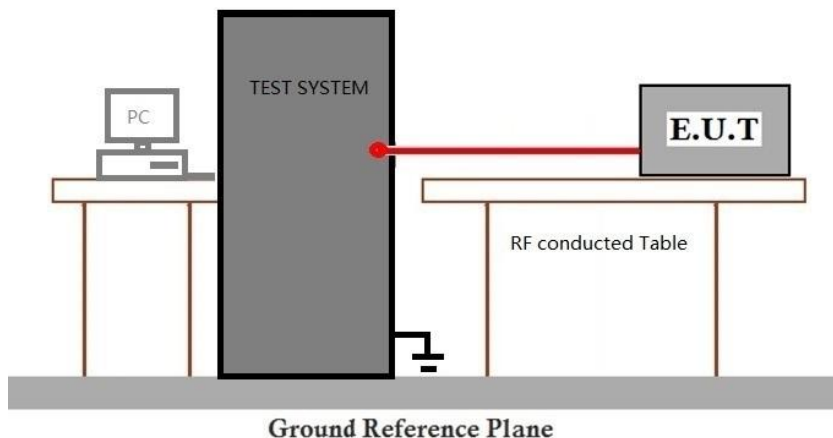

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

8 Test Setup Photo

Refer to Setup Photo for SZCR2603001079AT

9 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2603001079AT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	T _{on} (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	0.416	0.625	66.56	1.77	0.03
		2440	0.416	0.625	66.56	1.77	0.00
		2480	0.416	0.625	66.56	1.77	0.03
2M	SISO	2402	0.232	0.625	37.12	4.30	0.03
		2440	0.232	0.625	37.12	4.30	0.00
		2480	0.232	0.625	37.12	4.30	0.00



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1.2 Test Graph

1.2.1 Ant1

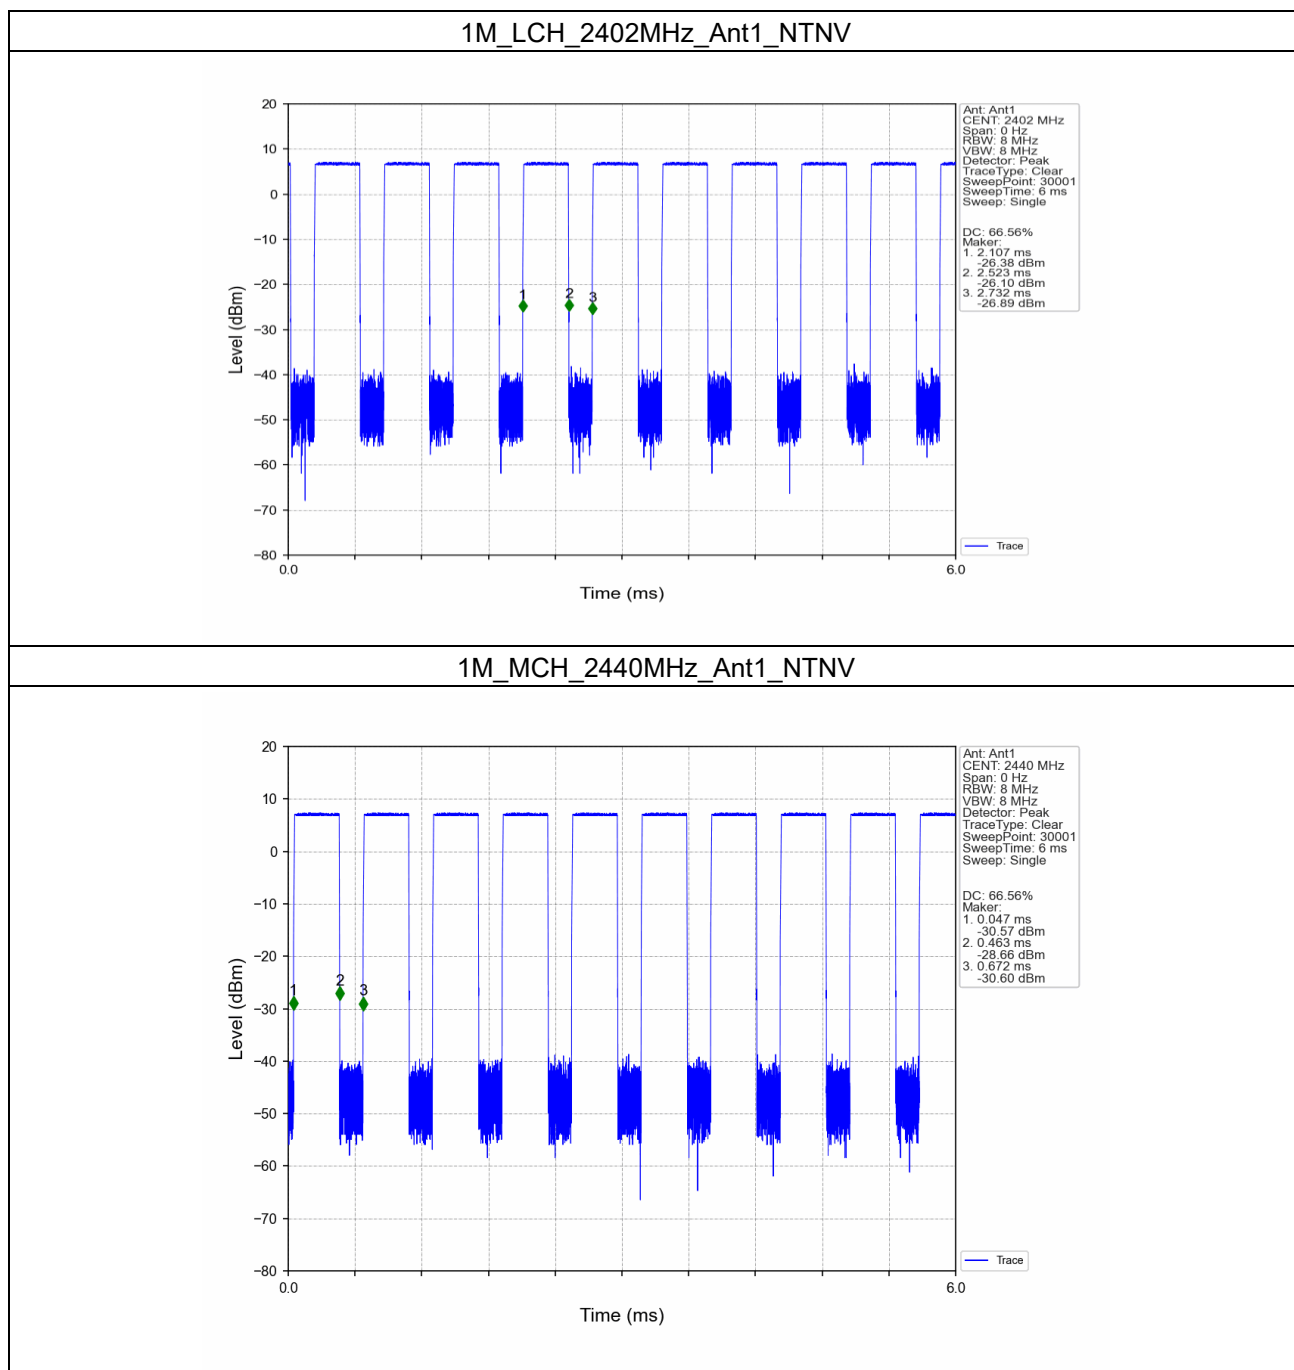


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


1M_HCH_2480MHz_Ant1_NTNV

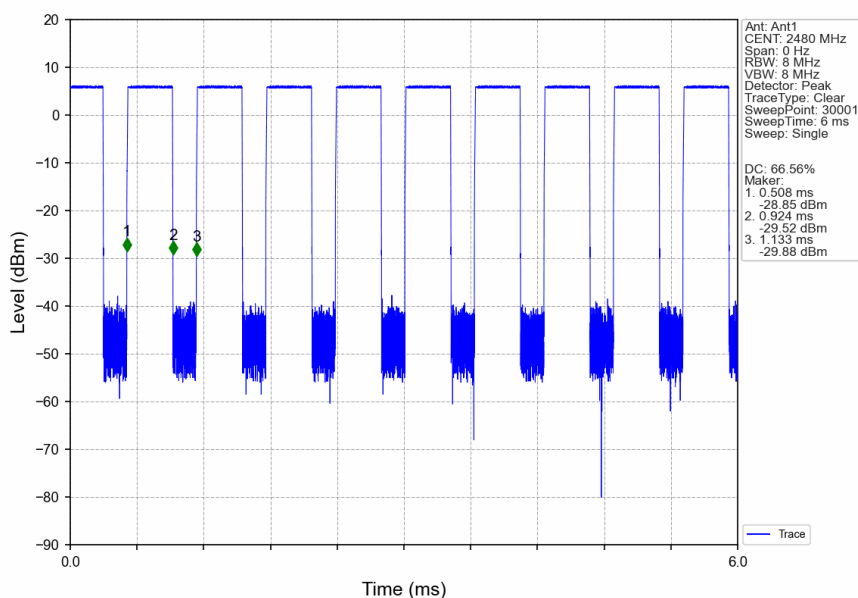


2M_LCH_2402MHz_Ant1_NTNV

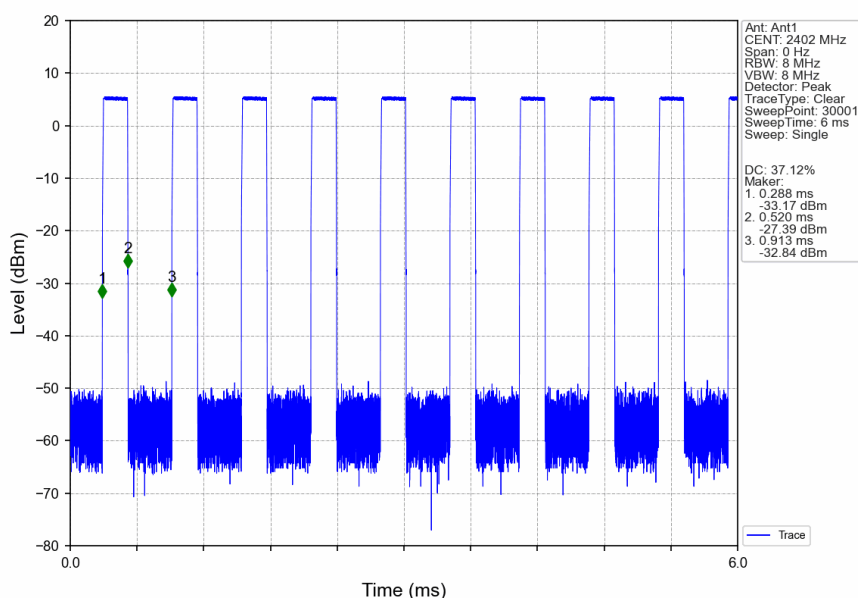

2M_MCH_2440MHz_Ant1_NTNV

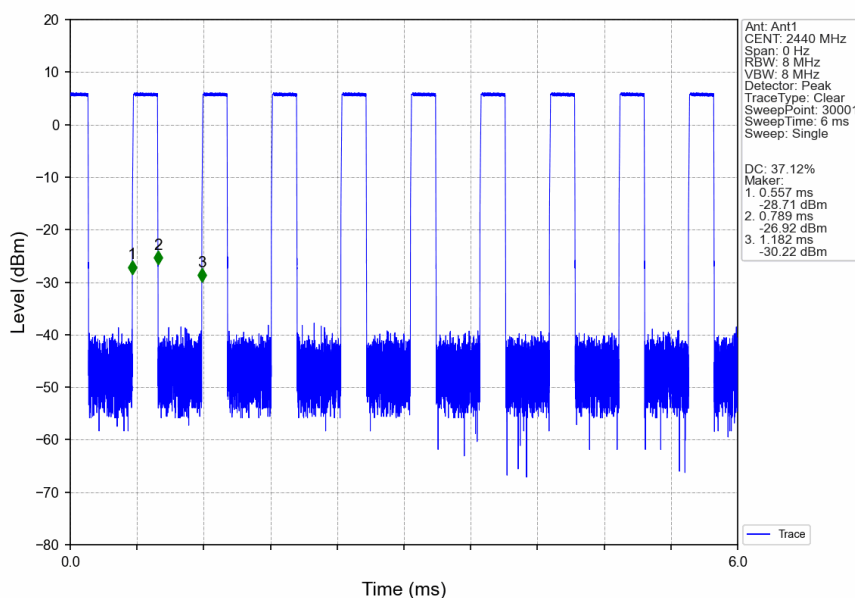

2M_HCH_2480MHz_Ant1_NTNV

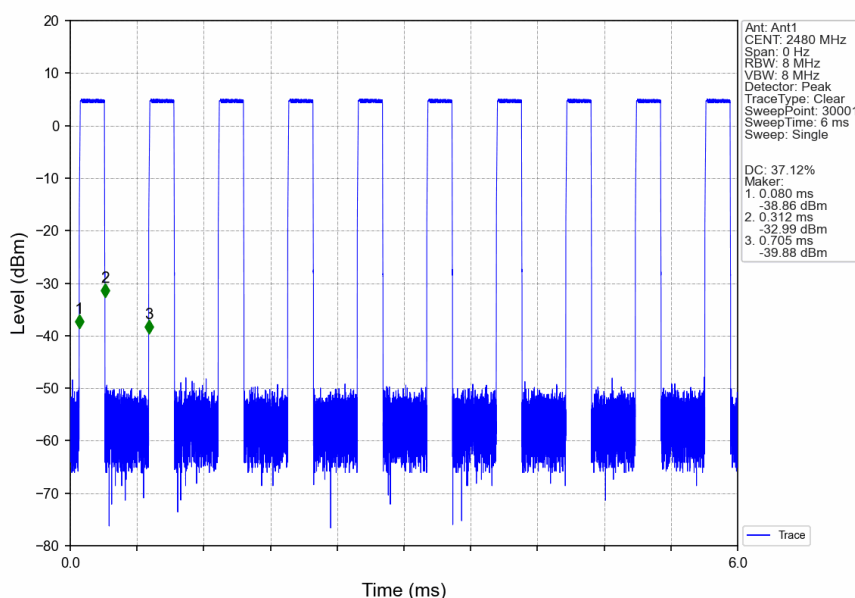

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.008	/	Pass
		2440	1	1.010	/	Pass
		2480	1	1.008	/	Pass
2M	SISO	2402	1	1.994	/	Pass
		2440	1	1.999	/	Pass
		2480	1	1.995	/	Pass


2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.662	≥ 0.5	Pass
		2440	1	0.659	≥ 0.5	Pass
		2480	1	0.662	≥ 0.5	Pass
2M	SISO	2402	1	1.164	≥ 0.5	Pass
		2440	1	1.159	≥ 0.5	Pass
		2480	1	1.147	≥ 0.5	Pass



2.2 Test Graph

2.2.1 OBW

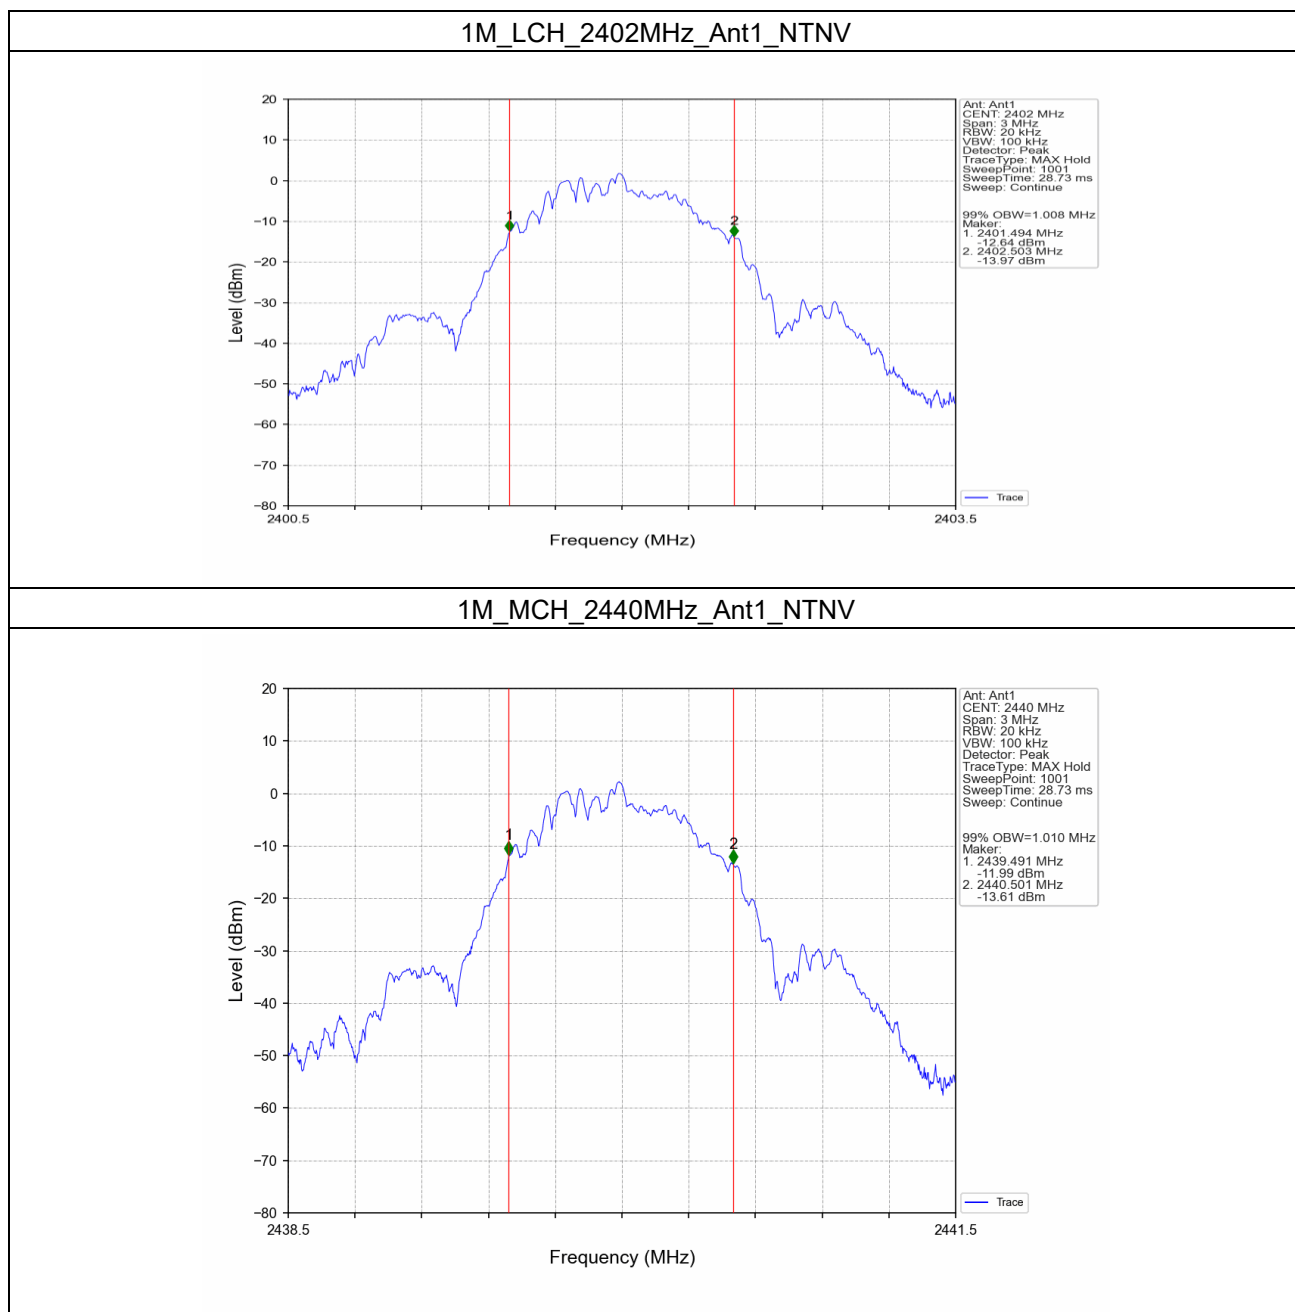


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Services Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1M_HCH_2480MHz_Ant1_NTNV

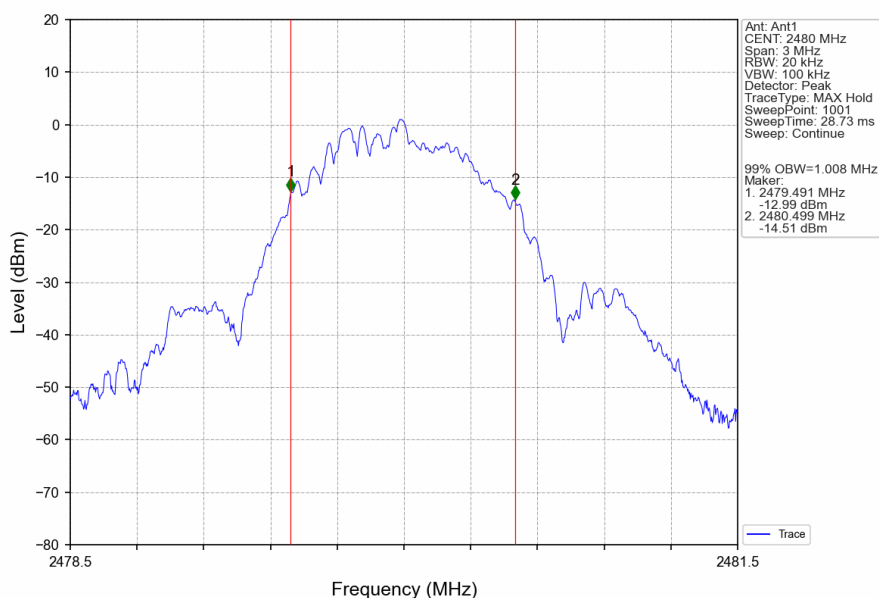

2M_LCH_2402MHz_Ant1_NTNV

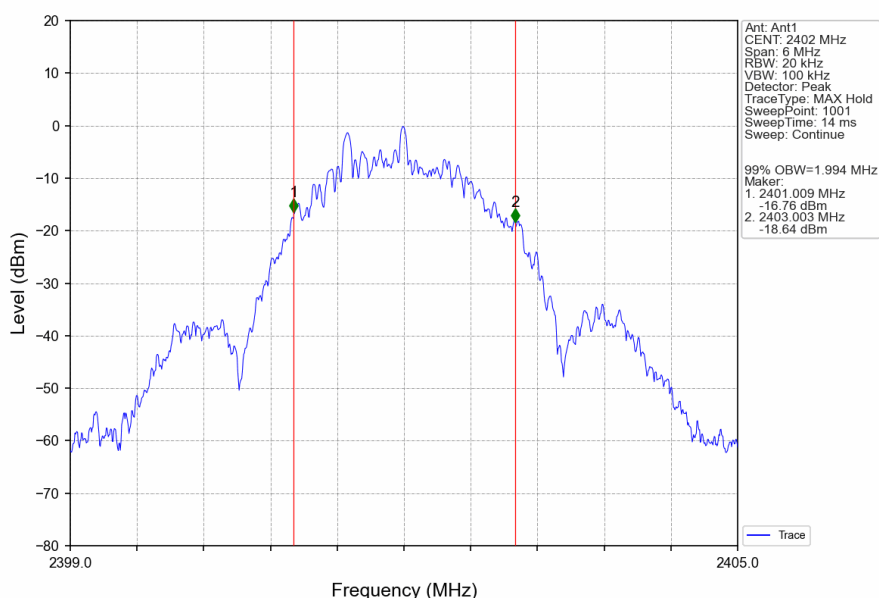


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_MCH_2440MHz_Ant1_NTNV

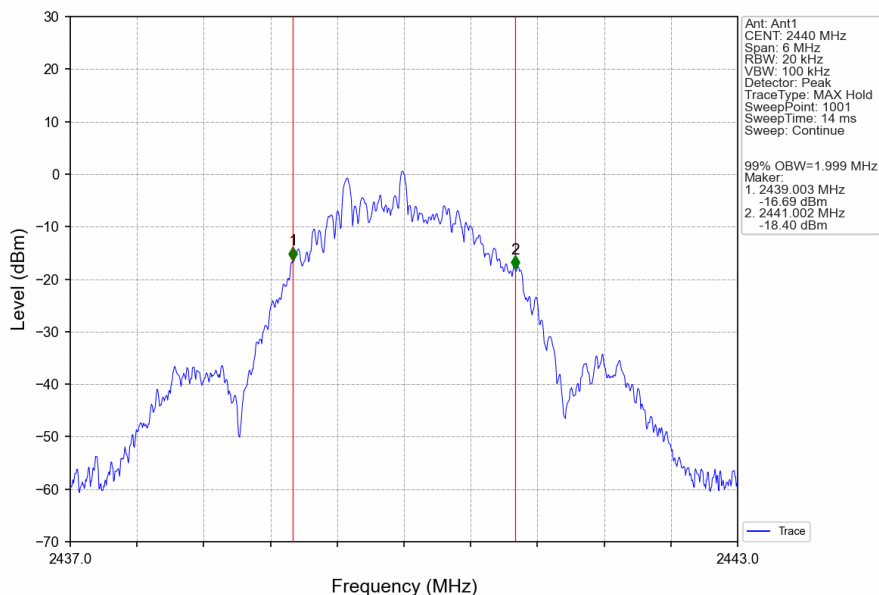

2M_HCH_2480MHz_Ant1_NTNV

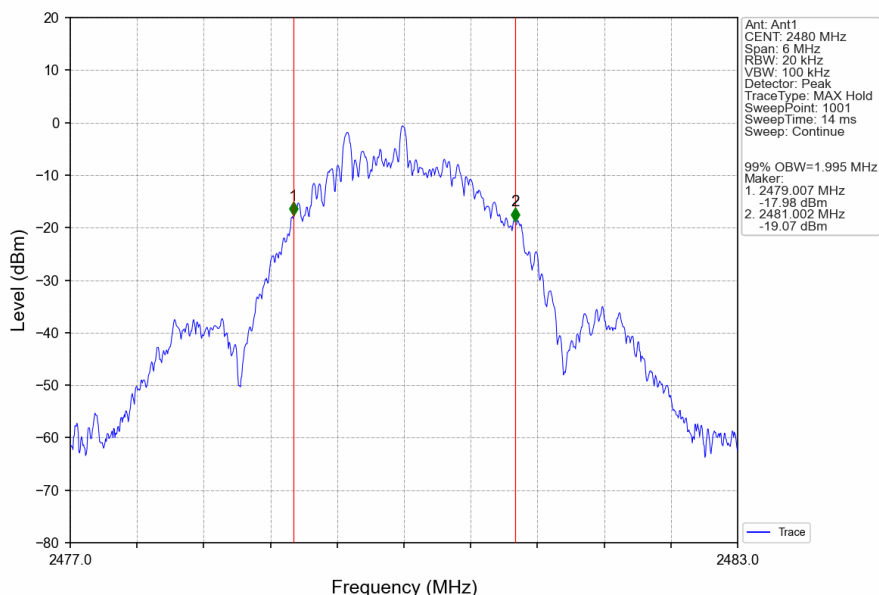


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


2.2.2 6dB BW

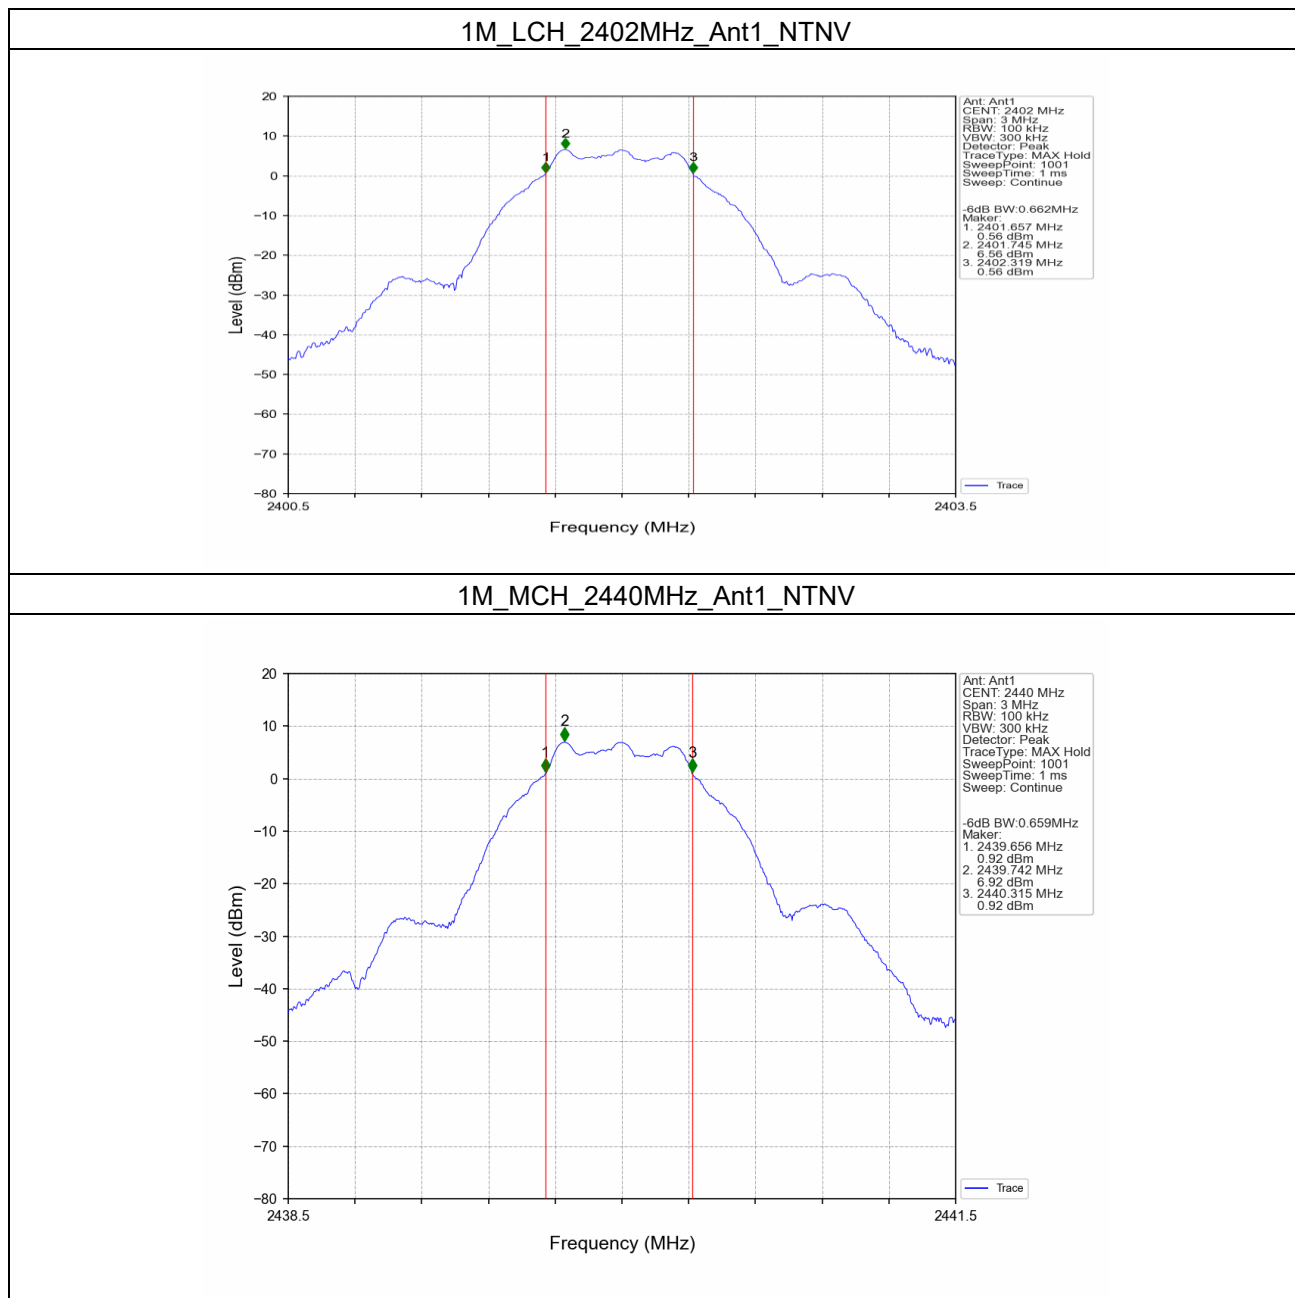

1M_HCH_2480MHz_Ant1_NTNV

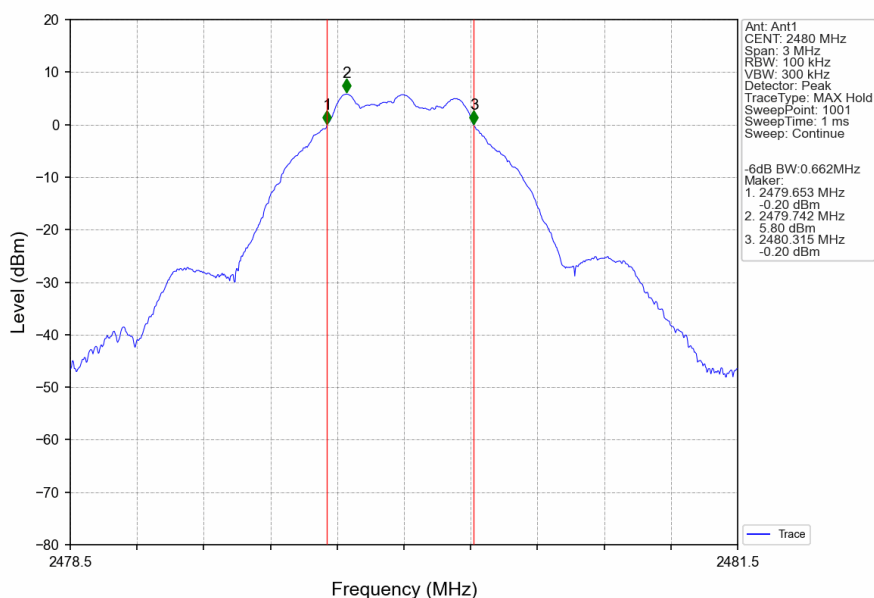

2M_LCH_2402MHz_Ant1_NTNV

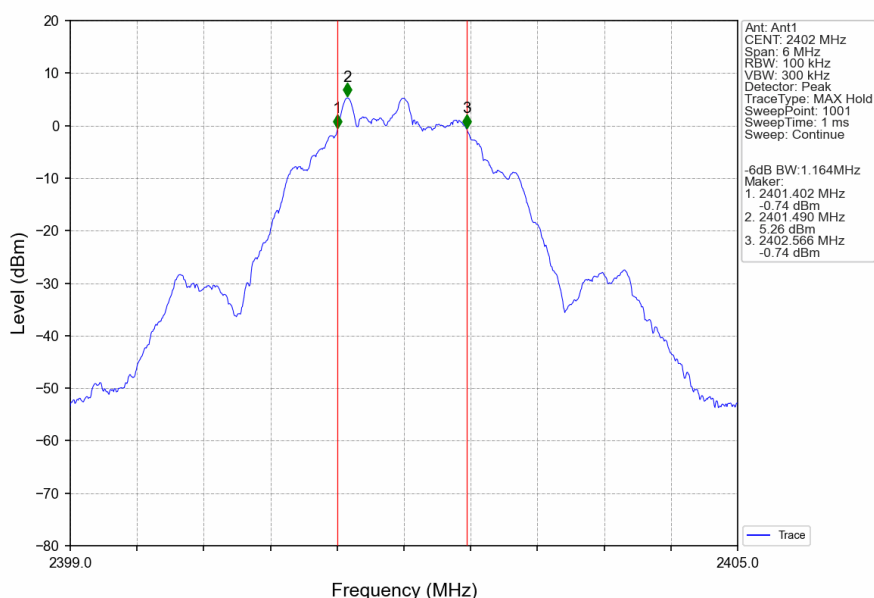


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_MCH_2440MHz_Ant1_NTNV

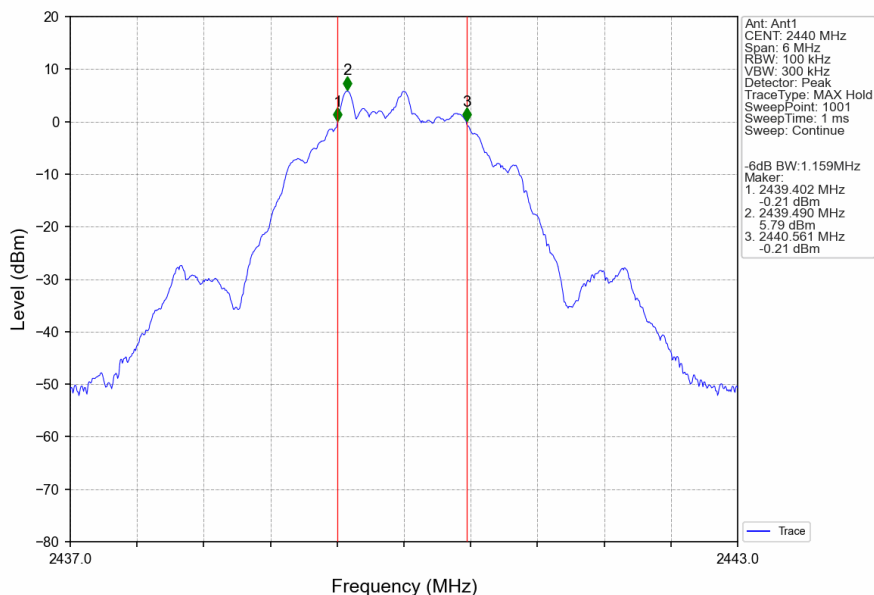

2M_HCH_2480MHz_Ant1_NTNV

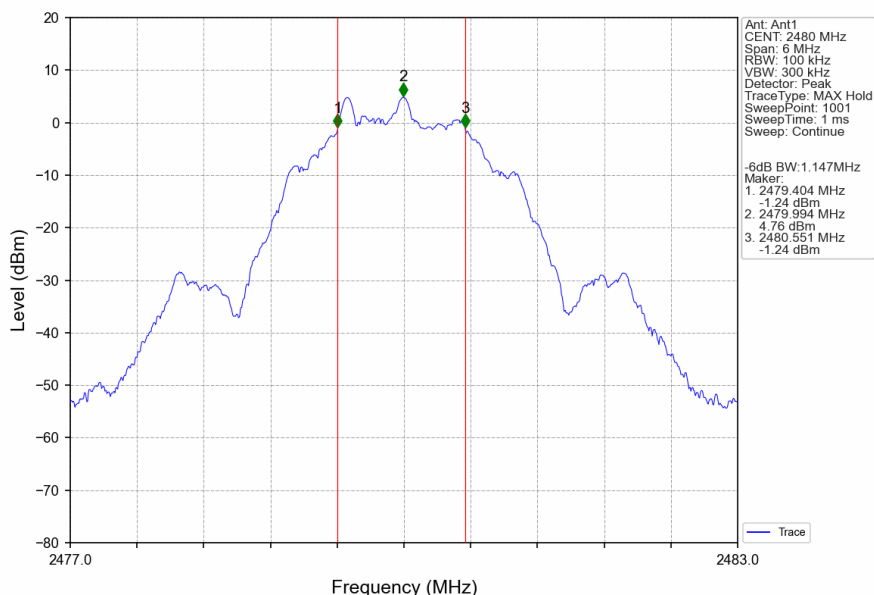

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	6.95	<=30	Pass
		2440	7.23	<=30	Pass
		2480	6.09	<=30	Pass
2M	SISO	2402	5.42	<=30	Pass
		2440	5.97	<=30	Pass
		2480	4.94	<=30	Pass

Note1: Antenna Gain: Ant1: 3.28dBi;

4. Maximum Power Spectral Density

4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit(dBm/3kHz)	
1M	SISO	2402	-8.72dBm/3kHz	<=8	Pass
		2440	-8.25dBm/3kHz	<=8	Pass
		2480	-9.35dBm/3kHz	<=8	Pass
2M	SISO	2402	-12.93dBm/3kHz	<=8	Pass
		2440	-12.07dBm/3kHz	<=8	Pass
		2480	-13.28dBm/3kHz	<=8	Pass

Note1: Antenna Gain: Ant1: 3.28dBi;



4.2 Test Graph

4.2.1 PSD

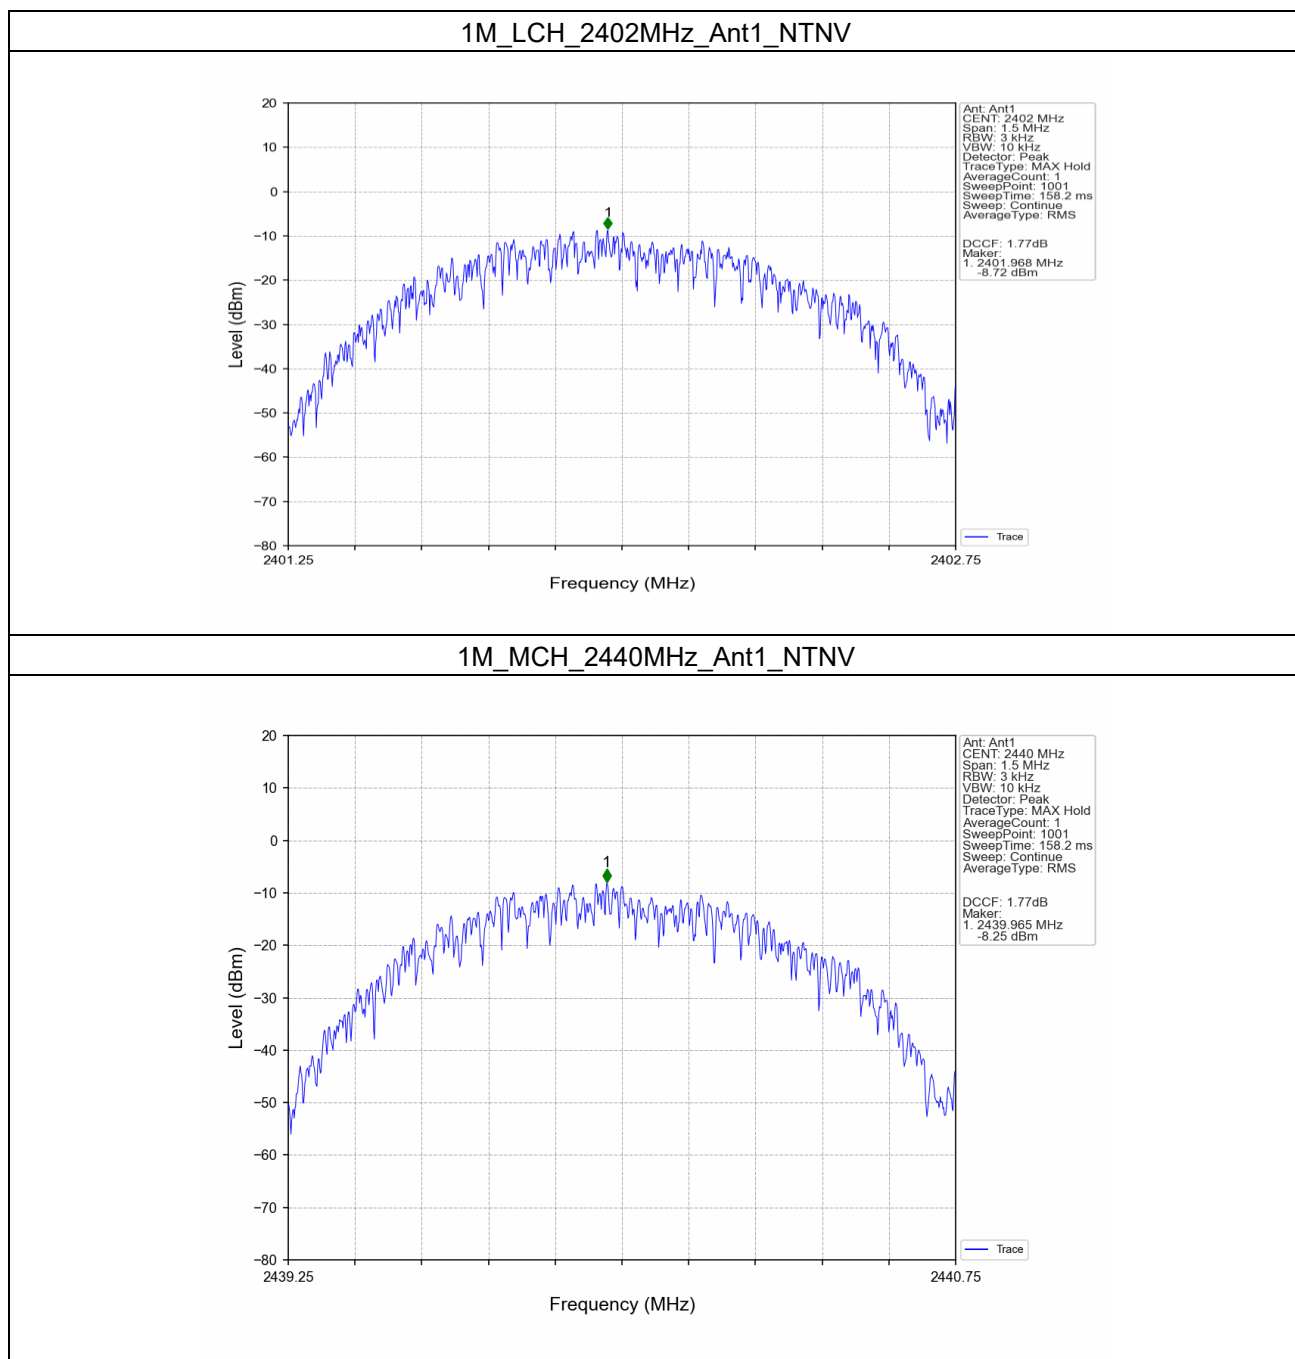


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1M_HCH_2480MHz_Ant1_NTNV

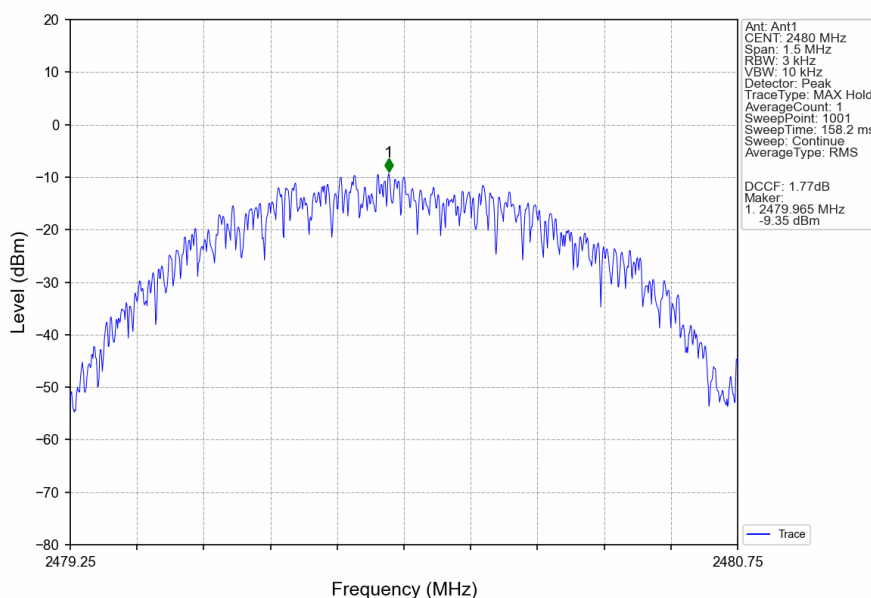

2M_LCH_2402MHz_Ant1_NTNV

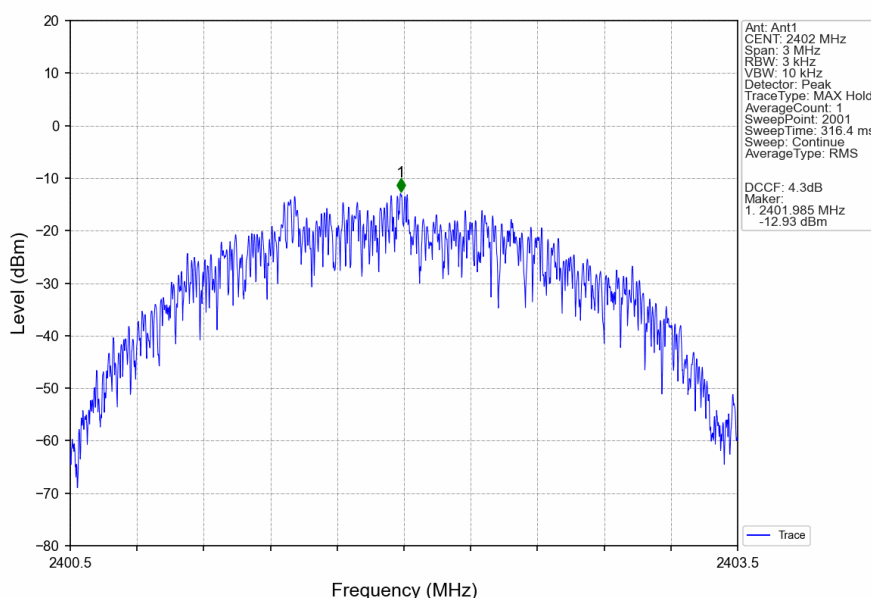


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_MCH_2440MHz_Ant1_NTNV

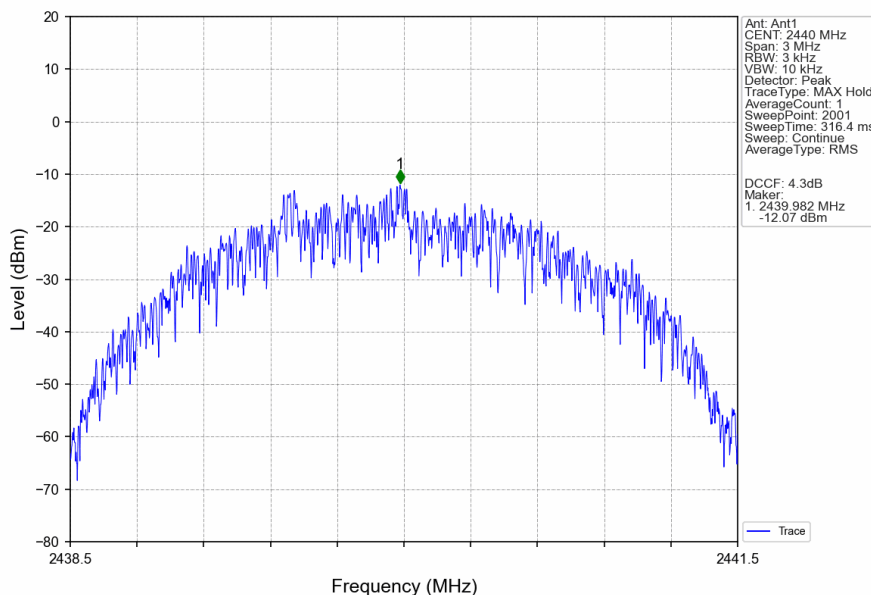

2M_HCH_2480MHz_Ant1_NTNV

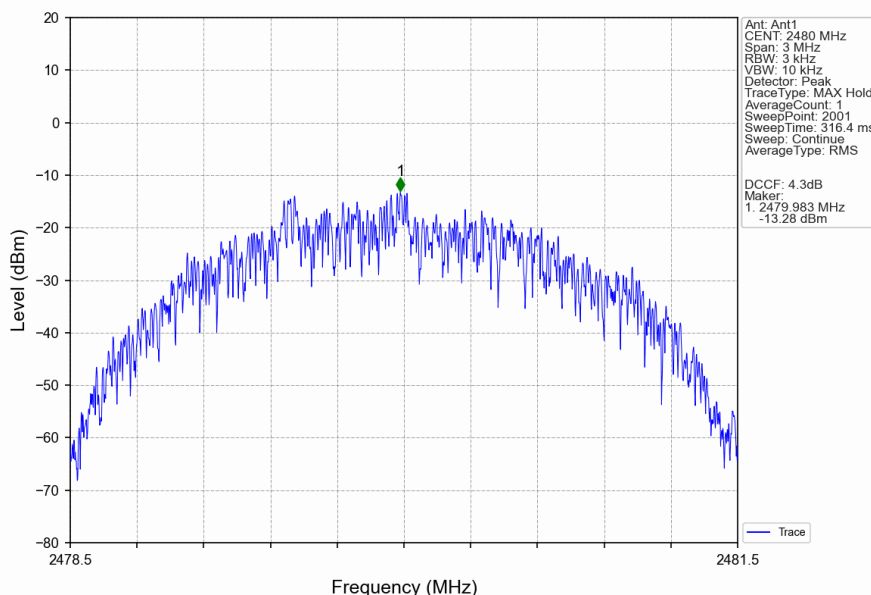

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	6.31
		2440	1	6.92
		2480	1	5.78
2M	SISO	2402	1	5.24
		2440	1	5.81
		2480	1	4.74

5.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	6.92	-13.08	Pass
		2440	1	6.92	-13.08	Pass
		2480	1	6.92	-13.08	Pass
2M	SISO	2402	1	5.81	-14.19	Pass
		2440	1	5.81	-14.19	Pass
		2480	1	5.81	-14.19	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Inspection & Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.2 Test Graph

5.2.1 Ref

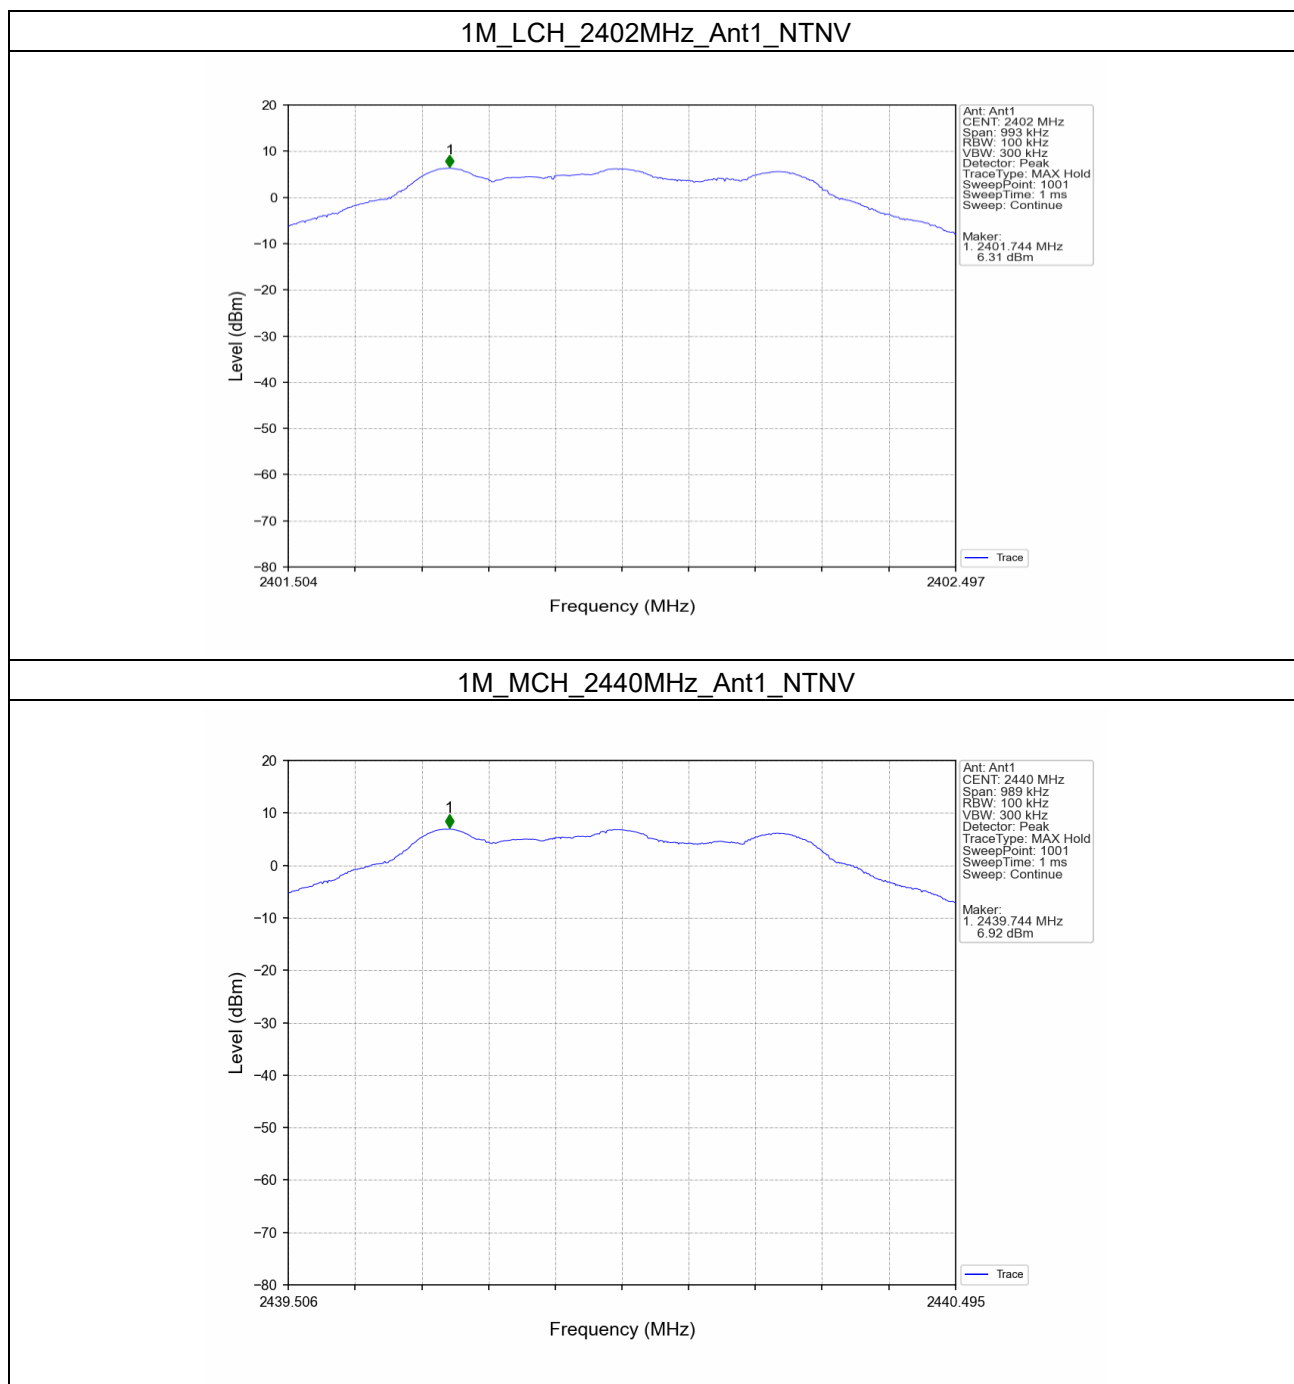


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1M_HCH_2480MHz_Ant1_NTNV

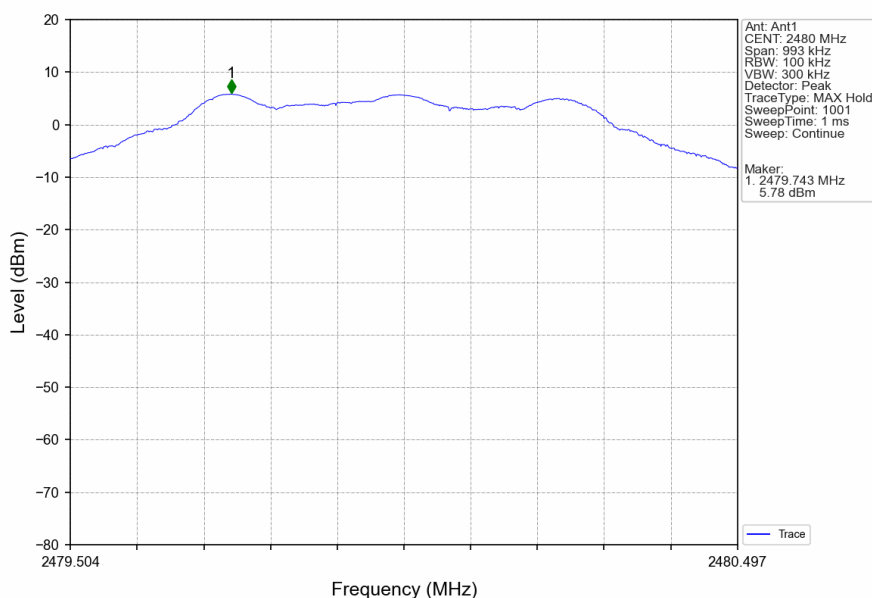

2M_LCH_2402MHz_Ant1_NTNV

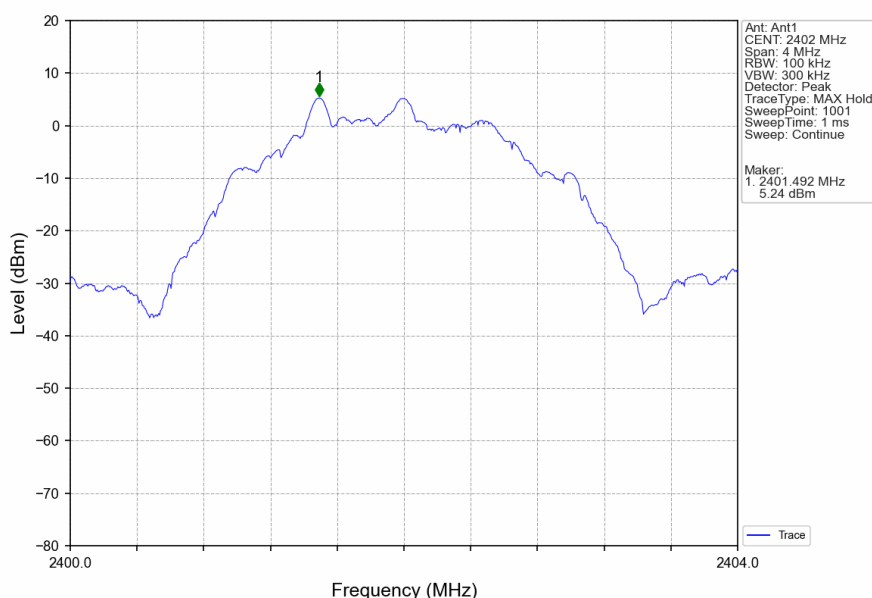


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_MCH_2440MHz_Ant1_NTNV

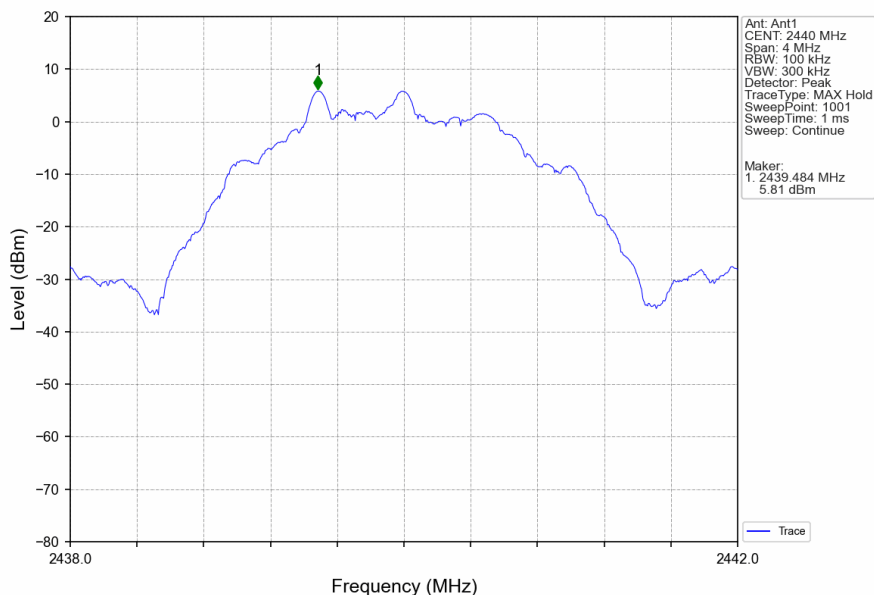

2M_HCH_2480MHz_Ant1_NTNV

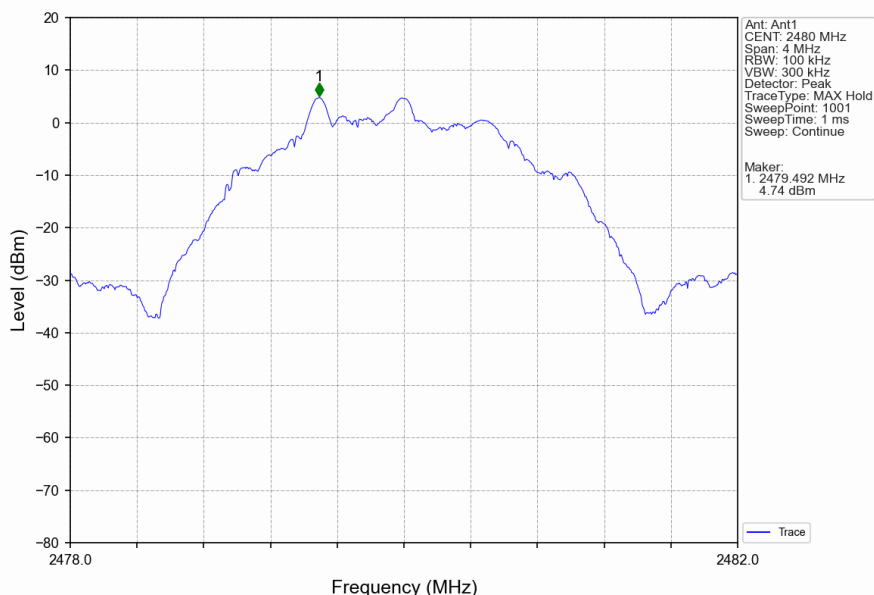


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5.2.2 CSE

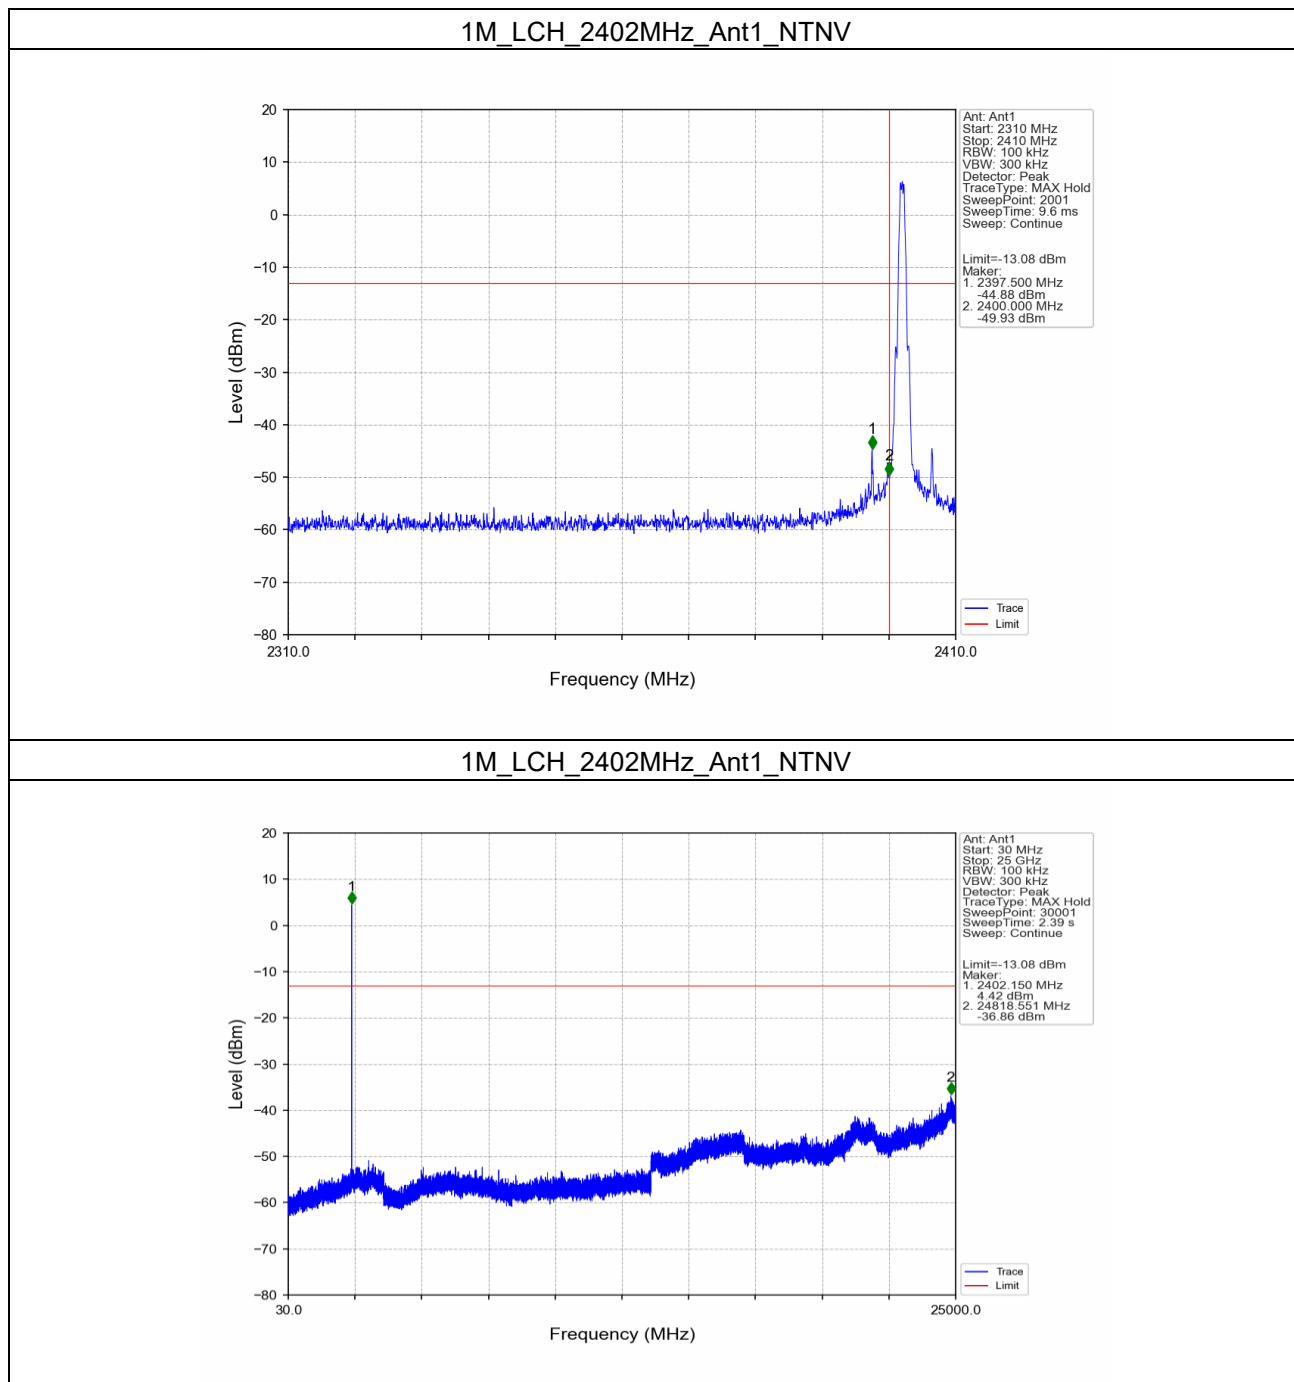


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1M_MCH_2440MHz_Ant1_NTNV

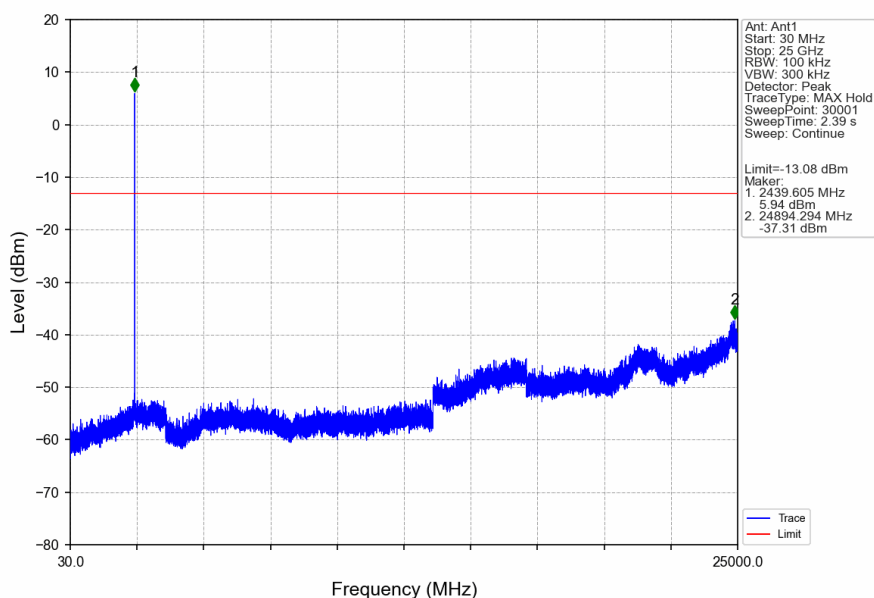

1M_HCH_2480MHz_Ant1_NTNV

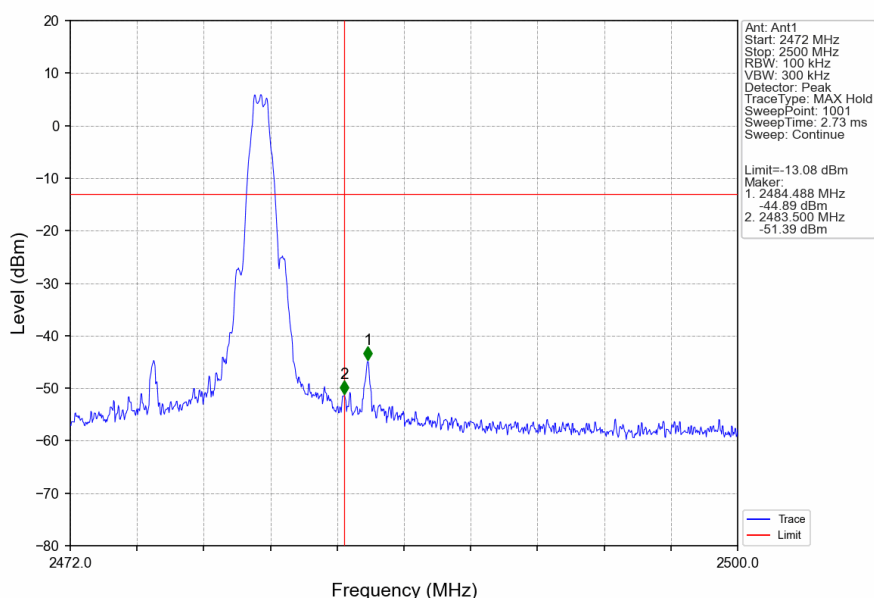


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

1M_HCH_2480MHz_Ant1_NTNV

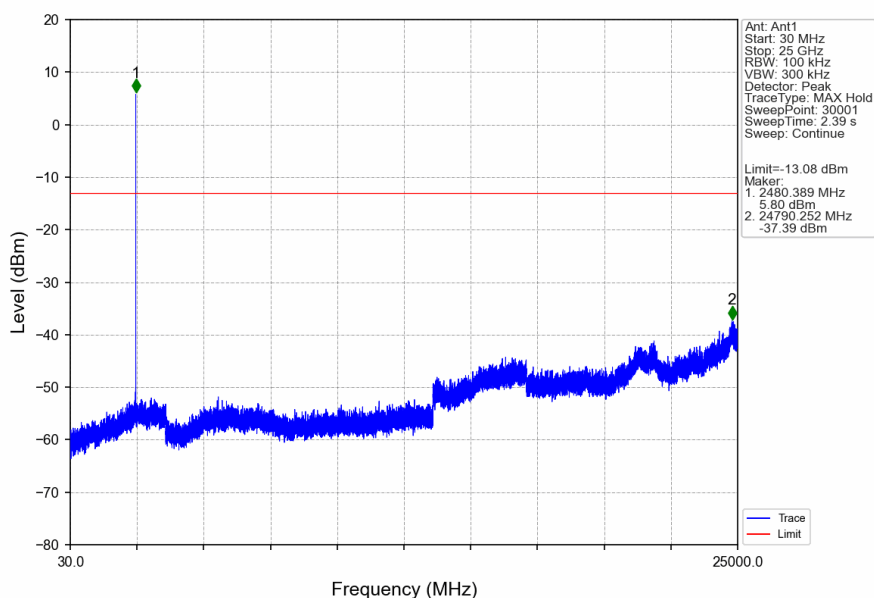

2M_LCH_2402MHz_Ant1_NTNV

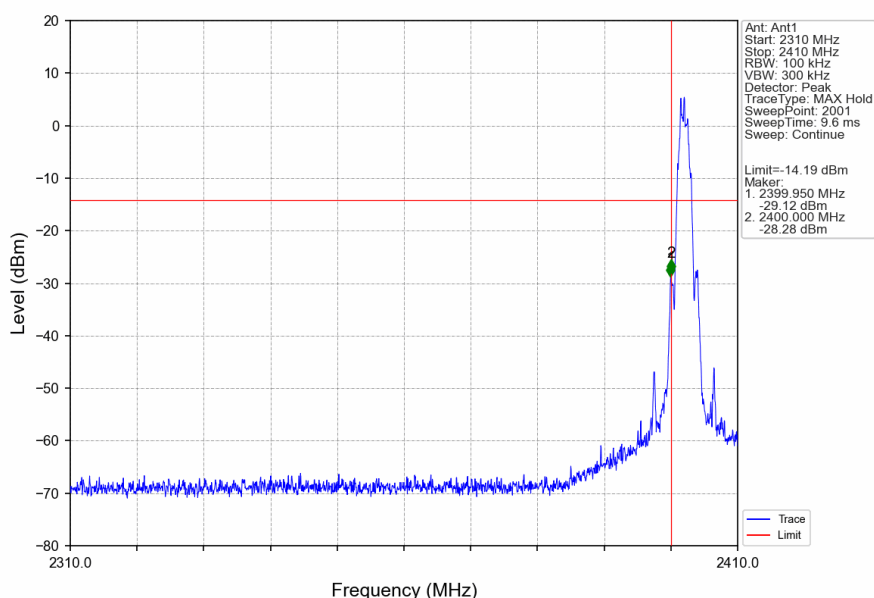


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_LCH_2402MHz_Ant1_NTNV

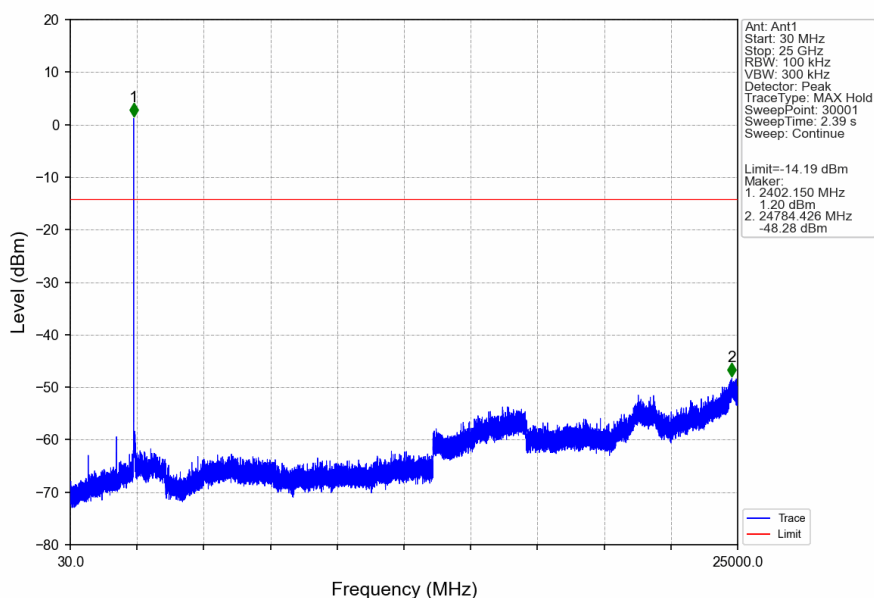

2M_MCH_2440MHz_Ant1_NTNV

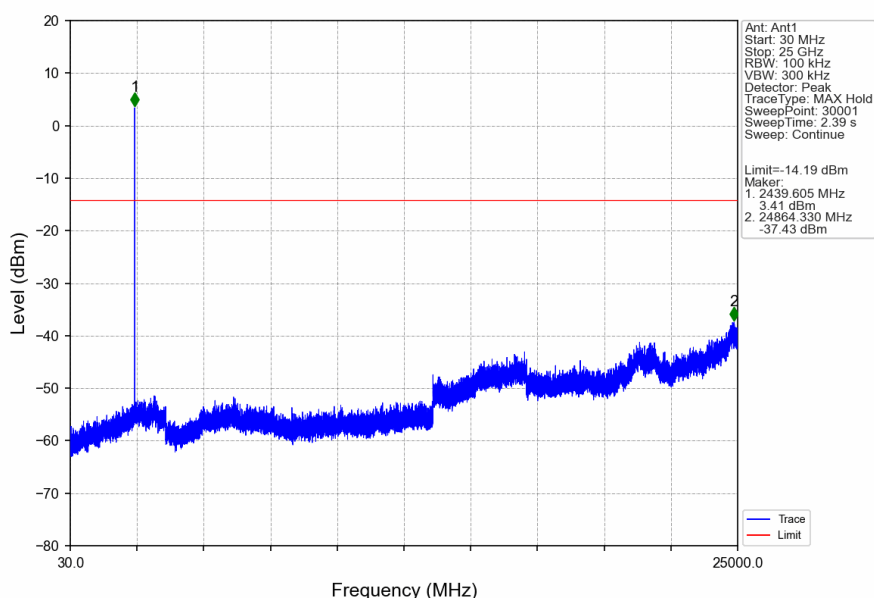


Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2M_HCH_2480MHz_Ant1_NTNV

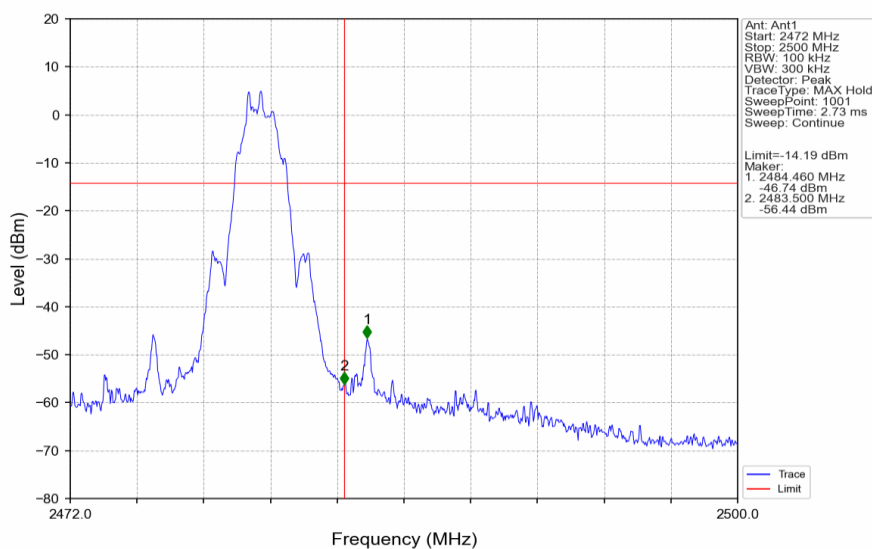

2M_HCH_2480MHz_Ant1_NTNV

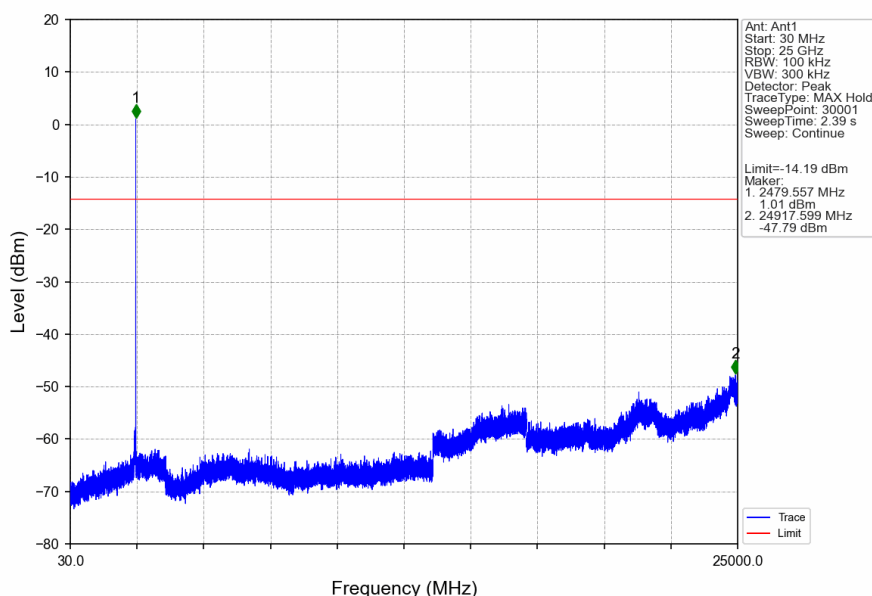

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com