

FCC PART 15.247


TEST REPORT

For

Shanghai Xiaoyi Technology Co., Ltd.

6F, Building E, No.2889, Jinke Road, Shanghai, China

FCC ID: 2AFIB-YCS1015

Report Type: Original Report	Product Type: YI Smart Dash Camera
Test Engineer: Matt Yao	
Report Number: RKS151229003-00A	
Report Date: 2016-01-22	
Reviewed By: EMC Manager	Jesse Huang 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) Chenghu Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE.....	9
EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 - ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY	11
EUT SETUP	11
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	12
TEST PROCEDURE	12
TEST EQUIPMENT LIST AND DETAILS.....	13
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST RESULTS SUMMARY	13
TEST DATA	14
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST EQUIPMENT LIST AND DETAILS.....	23

TEST DATA	23
FCC §15.247(e) - POWER SPECTRAL DENSITY	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Shanghai Xiaoyi Technology Co., Ltd.'s product, model number: YCS.1015.INT (FCC ID: 2AFIB-YCS1015) or ("EUT") in this report is a YI Smart Dash Camera, which was measured approximately: 75 mm (L) x 50 mm (W) x 20mm (H), Weight: 75g (contain battery), rated input voltage: 5VDC.

All measurement and test data in this report was gathered from production sample serial number: 20151229001 (Assigned by BACL, Kunshan). The EUT was received on 2015-12-29.

Objective

This report is prepared on behalf of Shanghai Xiaoyi Technology Co., Ltd. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB558074 D01 DTS Meas Guidance v03r04.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement uncertainty with RF radiated emission is 5.91 dB for 30MHz-1GHz.and 4.92 dB for above 1GHz, 1.95dB for conducted measurement.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the Chenghu Lake Road, Kunshan Development Zone No.248, Kunshan, Jiangsu, China

Test site at Bay Area Compliance Laboratories Corp. (Kunshan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 06, 2014. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 815570. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11n-HT20 mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11n-HT20 mode, EUT was tested with Channel 1, 6 and 11.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

RF test tool built-in the EUT.

The worst case was performed under:
802.11n-HT20: Data rate: MCS0, Power level: 12

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
SH	DC power supply	N/A	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
USB Cable	0.9	EUT	Charger

Block Diagram of Test Setup

For Radiation emission

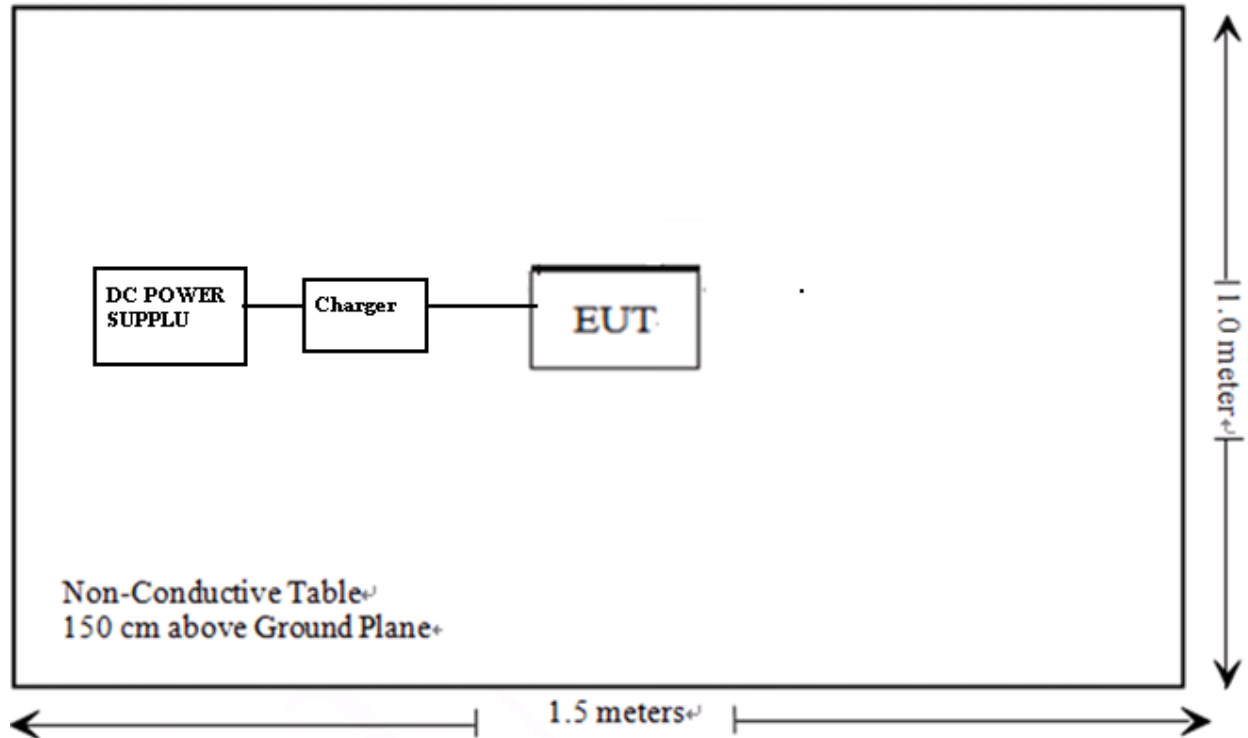

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Note: the EUT was supplied by DC power with car charger.

FCC§15.247 (i), §1.1310& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Target Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11n HT20	2412	3.14	2.061	14.50	28.18	20	0.012	1.0

Note: The target output power: 802.11n:14 ± 0.5dBm, which declared by the Manufacturer.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a antenna arrangement for wifi, which the antenna gain is 3.14 dBi, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of radiation emissions at Bay Area Compliance Laboratories Corp. (Kunshan) is 5.91 dB for 30MHz-1GHz and 4.92 dB for above 1GHz, 1.95dB for conducted measurement at antenna port. And the uncertainty will not be taken into consideration for the test data recorded in the report

EUT Setup

Below 1 GHz:

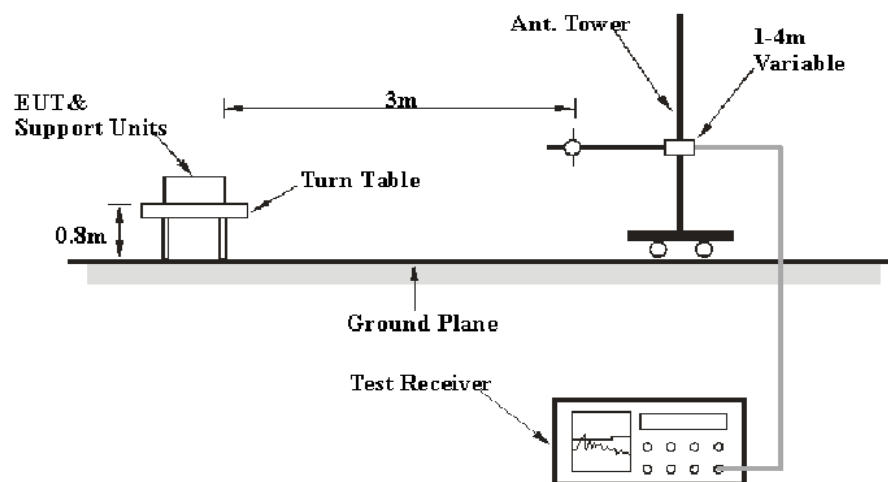

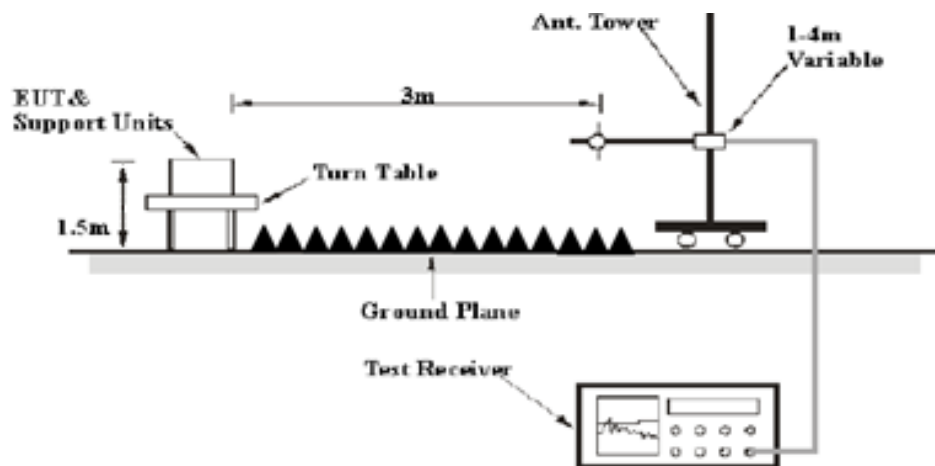Above 1GHz:

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrunent	Amplifier	330	171377	2015-09-16	2016-09-16
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2015-11-12	2016-11-11
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2015-11-07	2016-11-06
ETS	Horn Antenna	3115	6229	2015-11-07	2016-11-06
EMCO	Horn Antenna	3116	9510-2384	2015-11-07	2016-11-06
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
Mini	Pre-amplifier	ZVA-183-S+	857001418	2015-09-16	2016-09-16
DUCOMMUN	Pre-amplifier	ALN-22093530-01	990147	2015-09-16	2016-09-16
champrotek	Chamber	Chamber A	1#	2015-09-17	2016-09-17
R&S	Auto test Software	EMC32	V 09.10.0	-	-
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15
BACL	RF cable	KS-LAB-010	KS-LAB-010	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

**1.83 dB at 240 MHz in the Horizontal polarization
for 802.11n-HT20 mode**

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level complies with the limit if

$$L_m + U_{(Lm)} \leq L_{lim} + U_{cispr}$$


In BACL, $U_{(Lm)}$ is less than U_{cispr} , if L_m is less than L_{lim} , it implies that the EUT complies with the limit.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-01-15.

EUT operation mode: Transmitting

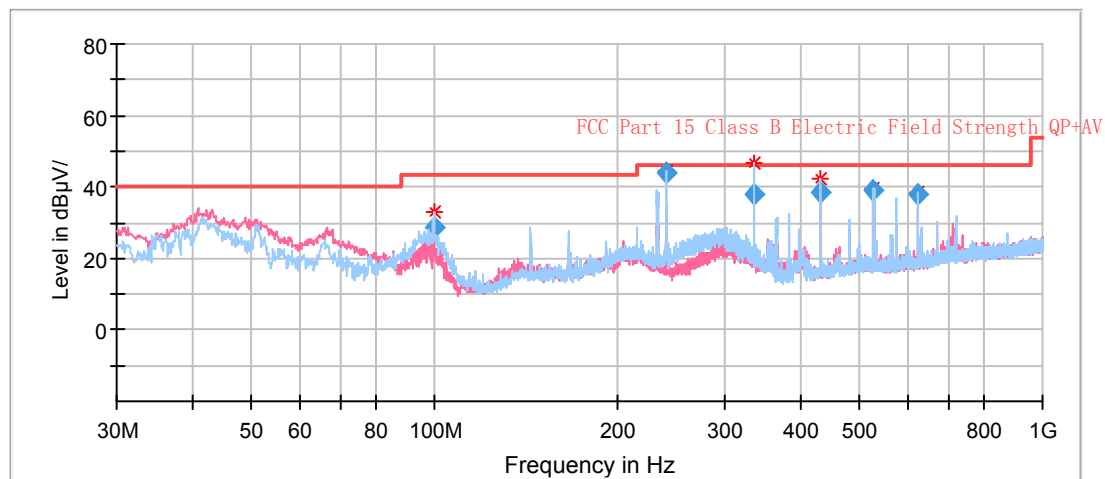30 MHz-1 GHz:

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dB μ V/m)	Margin (dB)
99.840000	45.36	QP	9.0	199.0	H	-16.8	28.56	43.50	14.94
240.005000	56.07	QP	27.0	100.0	H	-11.9	44.17	46.00	1.83
335.913750	47.46	QP	60.0	199.0	H	-9.5	37.96	46.00	8.04
431.943750	46.06	QP	27.0	199.0	H	-7.4	38.66	46.00	7.34
527.973750	44.37	QP	359.0	100.0	H	-5.3	39.07	46.00	6.93
624.003750	42.49	QP	128.0	100.0	H	-4.3	38.19	46.00	7.81

1GHz-25GHz**802.11n-HT20 Mode:**


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
Low Channel (2412 MHz)									
2412	90.80	PK	120.0	150.0	V	3.00	93.80	/	/
2412	89.39	Ave	120.0	150.0	V	3.00	90.39	/	/
2412	89.93	PK	66.0	200.00	H	3.00	92.93	/	/
2412	88.13	Ave	66.0	200.00	H	3.00	88.83	/	/
2280	34.04	PK	212.0	150.00	V	1.10	35.14	74.00	38.86
2280	19.10	Ave	212.0	150.00	V	1.10	20.20	54.00	33.80
2390	37.81	PK	76.0	150.00	V	1.80	39.61	74.00	34.39
2390	19.44	Ave	76.0	150.00	V	1.80	21.24	54.00	32.76
4824	33.09	PK	0.0	200.00	H	13.80	46.89	74.00	27.11
4824	21.55	Ave	0.0	200.00	H	13.80	35.35	54.00	18.65
5875	31.88	PK	310.0	150.00	V	17.20	49.08	74.00	24.92
5875	18.84	Ave	310.0	150.00	V	17.20	36.04	54.00	17.96
7236	32.24	PK	194.0	200.00	H	18.80	51.04	74.00	22.96
7236	20.48	Ave	194.0	200.00	H	18.80	39.28	54.00	14.72

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBµV/m)	FCC Part 15.247/205/209	
	Reading (dBµV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBµV/m)	Margin (dB)
Middle Channel (2437 MHz)									
2437	90.73	PK	150.0	150.00	V	3.00	93.73	/	/
2437	88.94	Ave	150.0	150.00	V	3.00	90.24	/	/
2437	89.72	PK	90.0	150.0	H	3.00	92.72	/	/
2437	87.74	Ave	90.0	150.0	H	3.00	87.72	/	/
1527	38.60	PK	220.0	150.00	V	0.00	38.60	74.00	35.40
1527	21.07	Ave	220.0	150.00	V	0.00	21.07	54.00	32.93
2210	39.81	PK	110.0	200.0	H	0.70	40.51	74.00	33.49
2210	26.19	Ave	110.0	200.0	H	0.70	26.89	54.00	27.11
4874	40.17	PK	30.0	200.0	V	13.90	54.07	74.00	19.93
4874	29.19	Ave	30.0	200.0	V	13.90	43.09	54.00	10.91
6010	30.82	PK	340.0	150.0	H	18.80	49.62	74.00	24.38
6010	17.59	Ave	340.0	150.0	H	18.80	36.39	54.00	17.61
7311	30.04	PK	224.0	200.0	H	18.90	48.94	74.00	25.06
7311	17.19	Ave	224.0	200.0	H	18.90	36.09	54.00	17.91


Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBμV/m)	FCC Part 15.247/205/209	
	Reading (dBμV)	Detector (PK/QP/Ave.)		Height (cm)	Polar (H/V)			Limit (dBμV/m)	Margin (dB)
High Channel (2462 MHz)									
2462	90.41	PK	126.0	200.0	V	3.10	93.51	/	/
2462	87.98	Ave	126.0	200.0	V	3.10	89.12	/	/
2462	89.66	PK	66.0	200.0	H	3.10	92.76	/	/
2462	87.42	Ave	66.0	200.0	H	3.10	88.43	/	/
2483.5	50.40	PK	196.0	200.0	V	4.20	54.60	74.00	19.40
2483.5	39.84	Ave	196.0	200.0	V	4.20	44.04	54.00	9.96
2531	38.28	PK	90.0	150.0	H	4.20	42.48	74.00	31.52
2531	23.58	Ave	90.0	150.0	H	4.20	27.78	54.00	26.22
6230	43.41	PK	10.0	200.0	V	14.00	57.41	74.00	16.59
6230	31.37	Ave	10.0	200.0	V	14.00	45.37	54.00	8.63
4924	30.63	PK	316.0	150.0	H	18.70	49.33	74.00	24.67
4924	17.62	Ave	316.0	150.0	H	18.70	36.32	54.00	17.68
7386	29.55	PK	200.0	200.0	V	19.80	49.35	74.00	24.65
7386	16.73	Ave	200.0	200.0	V	19.80	36.53	54.00	17.47

Conducted Spurious Emissions at Antenna Port


802.11n-HT20 Low Channel

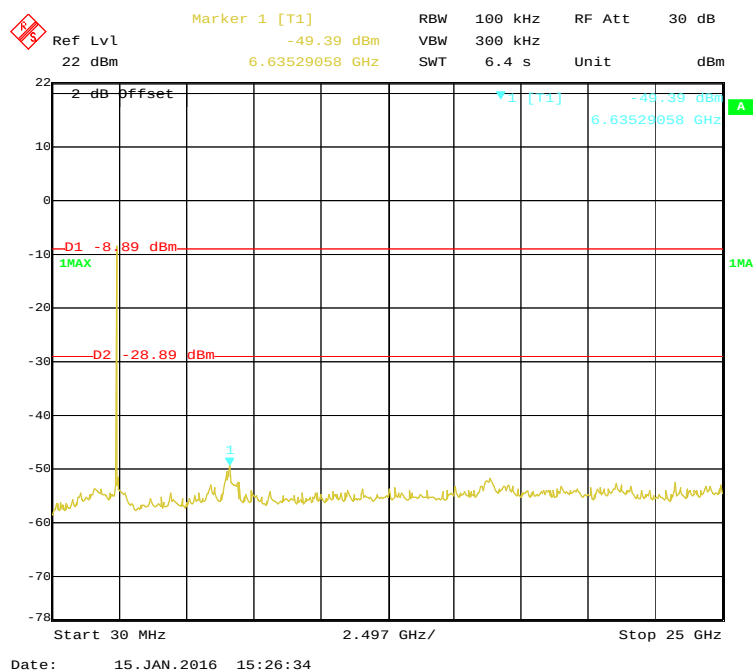

802.11n-HT20 Middle Channel

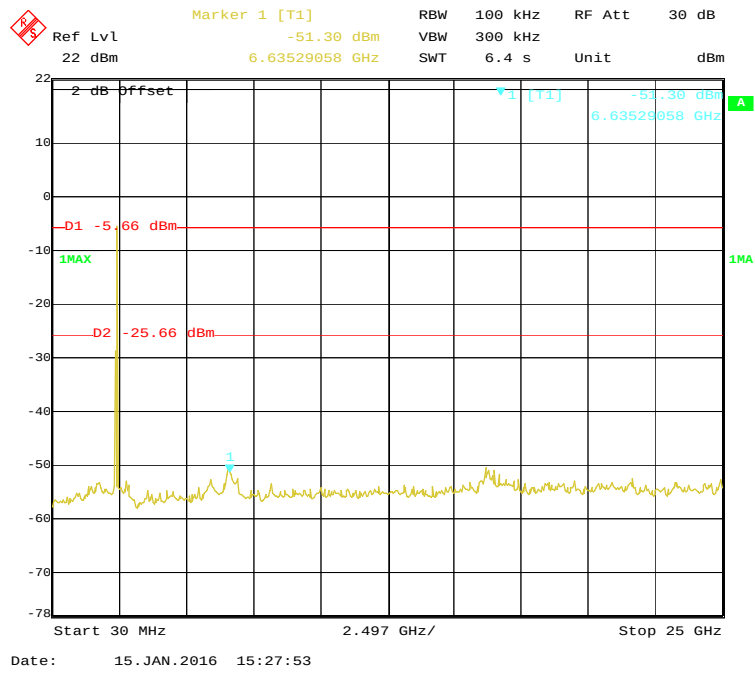

802.11n-HT20 High Channel

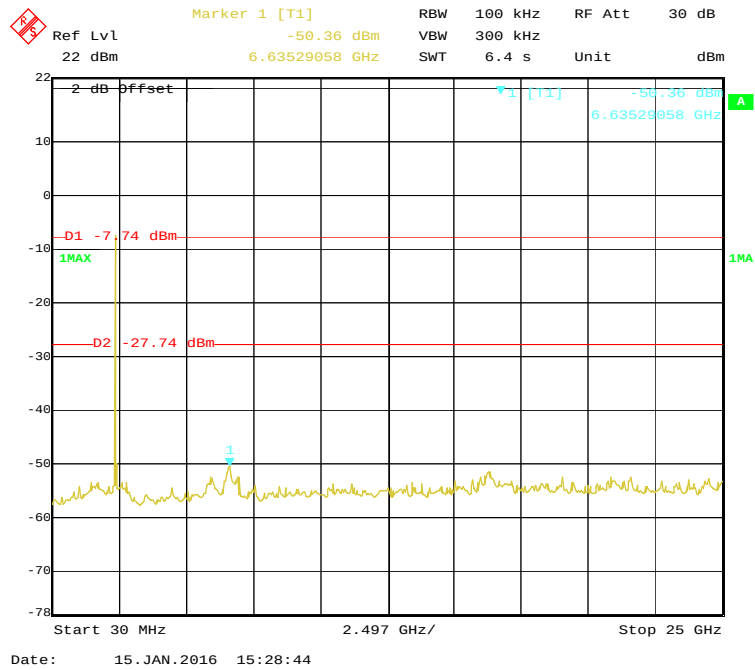


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-01-15.


Test Result: Pass.

Please refer to the following tables and plots.

EUT operation mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (kHz)
802.11n-HT20 mode			
Low	2412	17.74	≥ 500
Middle	2437	17.62	≥ 500
High	2462	17.62	≥ 500

802.11n-HT20 Low Channel

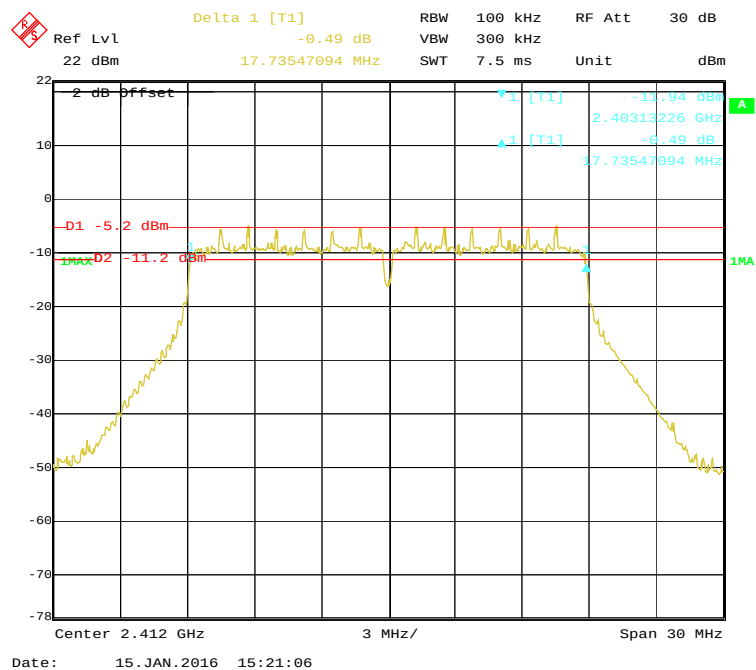

[illegible]

Delta 1 [T1] 0.03 dB

Ref Lvl 22 dBm

RBW 100 kHz

VBW 300 kHz

RF Att 30 dB

SWT 7.5 ms

Unit dBm

Center 2.462 GHz

Span 30 MHz

2 dB Offset

-4.74 dBm

-10.74 dBm

-16.74 dBm

2.45319238 GHz

0.03 dB

17.61523046 MHz

1MAX

1MA

1 [T1]

2 [T1]

3 [T1]

4 [T1]

5 [T1]

6 [T1]

7 [T1]

8 [T1]

9 [T1]

10 [T1]

11 [T1]

12 [T1]

13 [T1]

14 [T1]

15 [T1]

16 [T1]

17 [T1]

18 [T1]

19 [T1]

20 [T1]

21 [T1]

22 [T1]

23 [T1]

24 [T1]

25 [T1]

26 [T1]

27 [T1]

28 [T1]

29 [T1]

30 [T1]

31 [T1]

32 [T1]

33 [T1]

34 [T1]

35 [T1]

36 [T1]

37 [T1]

38 [T1]

39 [T1]

40 [T1]

41 [T1]

42 [T1]

43 [T1]

44 [T1]

45 [T1]

46 [T1]

47 [T1]

48 [T1]

49 [T1]

50 [T1]

51 [T1]

52 [T1]

53 [T1]

54 [T1]

55 [T1]

56 [T1]

57 [T1]

58 [T1]

59 [T1]

60 [T1]

61 [T1]

62 [T1]

63 [T1]

64 [T1]

65 [T1]

66 [T1]

67 [T1]

68 [T1]

69 [T1]

70 [T1]

71 [T1]

72 [T1]

73 [T1]

74 [T1]

75 [T1]

76 [T1]

77 [T1]

78 [T1]

79 [T1]

80 [T1]

81 [T1]

82 [T1]

83 [T1]

84 [T1]

85 [T1]

86 [T1]

87 [T1]

88 [T1]

89 [T1]

90 [T1]

91 [T1]

92 [T1]

93 [T1]

94 [T1]

95 [T1]

96 [T1]

97 [T1]

98 [T1]

99 [T1]

100 [T1]

101 [T1]

102 [T1]

103 [T1]

104 [T1]

105 [T1]

106 [T1]

107 [T1]

108 [T1]

109 [T1]

110 [T1]

111 [T1]

112 [T1]

113 [T1]

114 [T1]

115 [T1]

116 [T1]

117 [T1]

118 [T1]

119 [T1]

120 [T1]

121 [T1]

122 [T1]

123 [T1]

124 [T1]

125 [T1]

126 [T1]

127 [T1]

128 [T1]

129 [T1]

130 [T1]

131 [T1]

132 [T1]

133 [T1]

134 [T1]

135 [T1]

136 [T1]

137 [T1]

138 [T1]

139 [T1]

140 [T1]

141 [T1]

142 [T1]

143 [T1]

144 [T1]

145 [T1]

146 [T1]

147 [T1]

148 [T1]

149 [T1]

150 [T1]

151 [T1]

152 [T1]

153 [T1]

154 [T1]

155 [T1]

156 [T1]

157 [T1]

158 [T1]

159 [T1]

160 [T1]

161 [T1]

162 [T1]

163 [T1]

164 [T1]

165 [T1]

166 [T1]

167 [T1]

168 [T1]

169 [T1]

170 [T1]

171 [T1]

172 [T1]

173 [T1]

174 [T1]

175 [T1]

176 [T1]

177 [T1]

178 [T1]

179 [T1]

180 [T1]

181 [T1]

182 [T1]

183 [T1]

184 [T1]

185 [T1]

186 [T1]

187 [T1]

188 [T1]

189 [T1]

190 [T1]

191 [T1]

192 [T1]

193 [T1]

194 [T1]

195 [T1]

196 [T1]

197 [T1]

198 [T1]

199 [T1]

200 [T1]

201 [T1]

202 [T1]

203 [T1]

204 [T1]

205 [T1]

206 [T1]

207 [T1]

208 [T1]

209 [T1]

210 [T1]

211 [T1]

212 [T1]

213 [T1]

214 [T1]

215 [T1]

216 [T1]

217 [T1]

218 [T1]

219 [T1]

220 [T1]

221 [T1]

222 [T1]

223 [T1]

224 [T1]

225 [T1]

226 [T1]

227 [T1]

228 [T1]

229 [T1]

230 [T1]

231 [T1]

232 [T1]

233 [T1]

234 [T1]

235 [T1]

236 [T1]

237 [T1]

238 [T1]

239 [T1]

240 [T1]

241 [T1]

242 [T1]

243 [T1]

244 [T1]

245 [T1]

246 [T1]

247 [T1]

248 [T1]

249 [T1]

250 [T1]

251 [T1]

252 [T1]

253 [T1]

254 [T1]

255 [T1]

256 [T1]

257 [T1]

258 [T1]

259 [T1]

260 [T1]

261 [T1]

262 [T1]

263 [T1]

264 [T1]

265 [T1]

266 [T1]

267 [T1]

268 [T1]

269 [T1]

270 [T1]

271 [T1]

272 [T1]

273 [T1]

274 [T1]

275 [T1]

276 [T1]

277 [T1]

278 [T1]

279 [T1]

280 [T1]

281 [T1]

282 [T1]

283 [T1]

284 [T1]

285 [T1]

286 [T1]

287 [T1]

288 [T1]

289 [T1]

290 [T1]

291 [T1]

292 [T1]

293 [T1]

294 [T1]

295 [T1]

296 [T1]

297 [T1]

298 [T1]

299 [T1]

300 [T1]

301 [T1]

302 [T1]

303 [T1]

304 [T1]

305 [T1]

306 [T1]

307 [T1]

308 [T1]

309 [T1]

310 [T1]

311 [T1]

312 [T1]

313 [T1]

314 [T1]

315 [T1]

316 [T1]

317 [T1]

318 [T1]

319 [T1]

320 [


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	OSP120 BASE UNIT	OSP120	101247	2014-05-27	2016-05-27
Rohde & Schwarz	Power Sensor	NRP-Z91	200014	2015-08-01	2017-07-31
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-01-15

EUT operation mode: Transmitting

Channel	Frequency (MHz)	Max Conducted Output Power (dBm)	Limit (dBm)
802.11n-HT20			
Low	2412	13.59	30
Middle	2437	13.28	30
High	2462	13.05	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa

The testing was performed by Matt Yao on 2016-01-15


Test Result: *Compliance*

Please refer to the following table and plots.

802.11n-HT20: Band Edge, Left Side

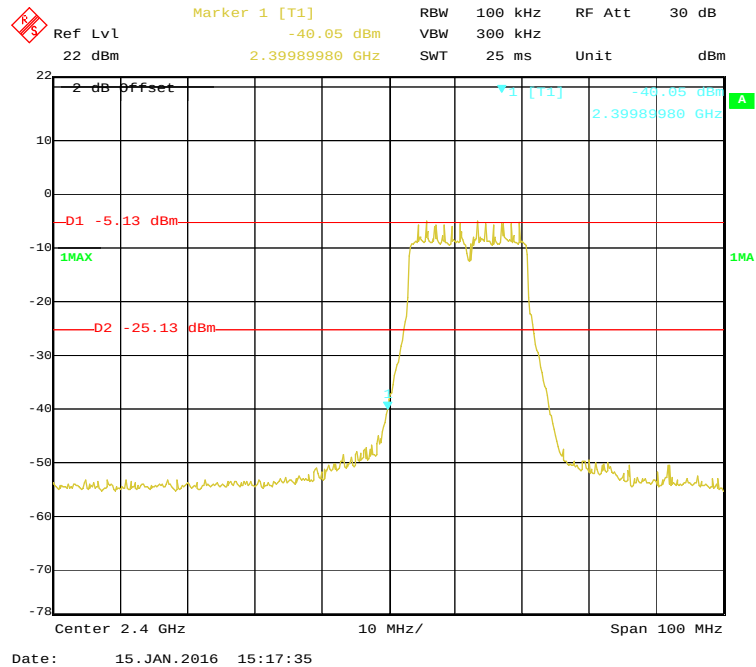

802.11n-HT20: Band Edge, Right Side

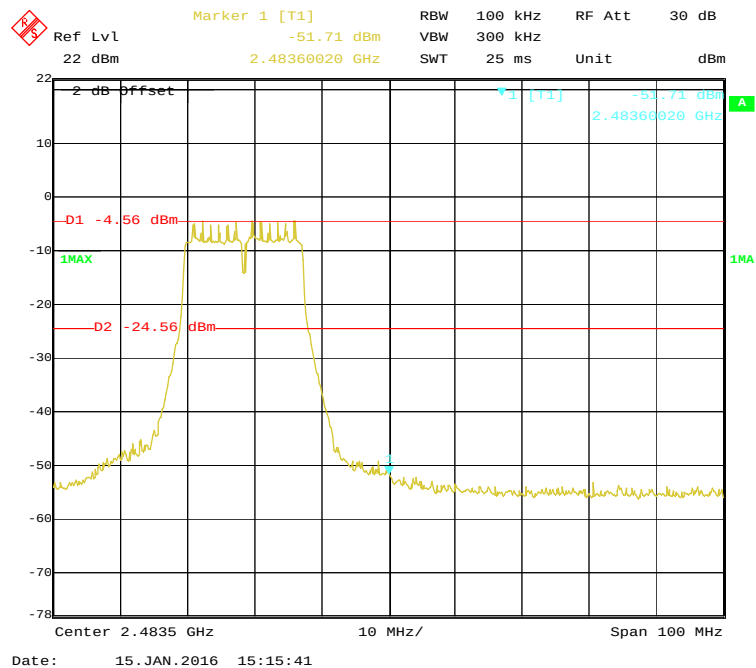

FCC §15.247(e) - POWER SPECTRAL DENSITY**Applicable Standard**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to KDB558074 D01 DTS Meas Guidance v03r04 sub-clause 10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	100048	2015-11-12	2016-11-11
BACL	RF cable	KS-LAB-012	KS-LAB-012	2015-06-16	2016-12-15

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27 °C
Relative Humidity:	55 %
ATM Pressure:	101.0 kPa


The testing was performed by Matt Yao on 2016-01-15

EUT operation mode: Transmitting


Test Result: Pass

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
802.11n-HT20 mode			
Low	2412	-18.57	≤ 8
Middle	2437	-19.95	≤ 8
High	2462	-19.51	≤ 8


Power Spectral Density, 802.11n-HT20 Low Channel

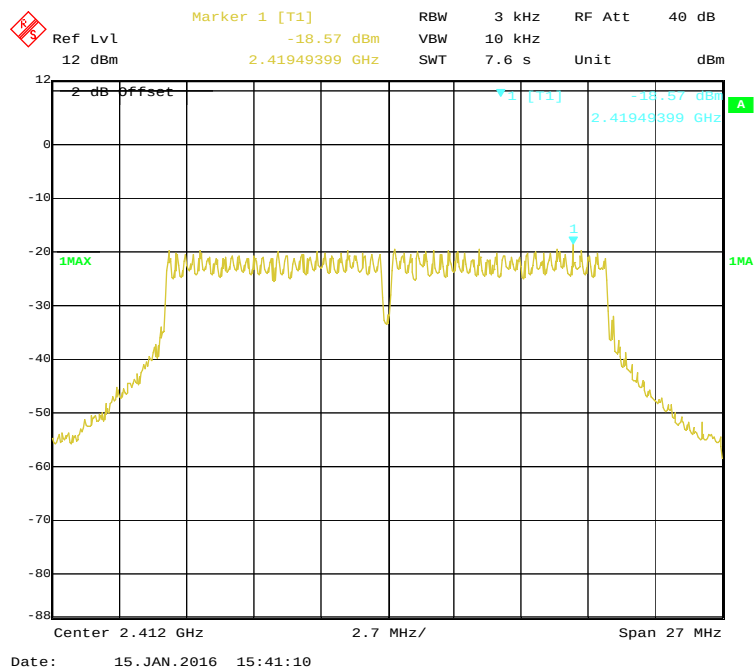

Power Spectral Density, 802.11n-HT20 Middle Channel

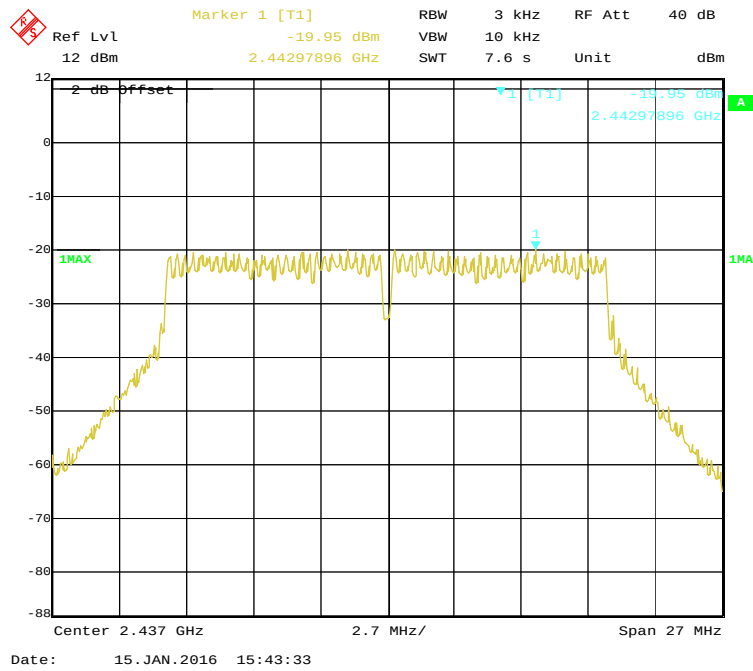

Power Spectral Density, 802.11n-HT20 High Channel

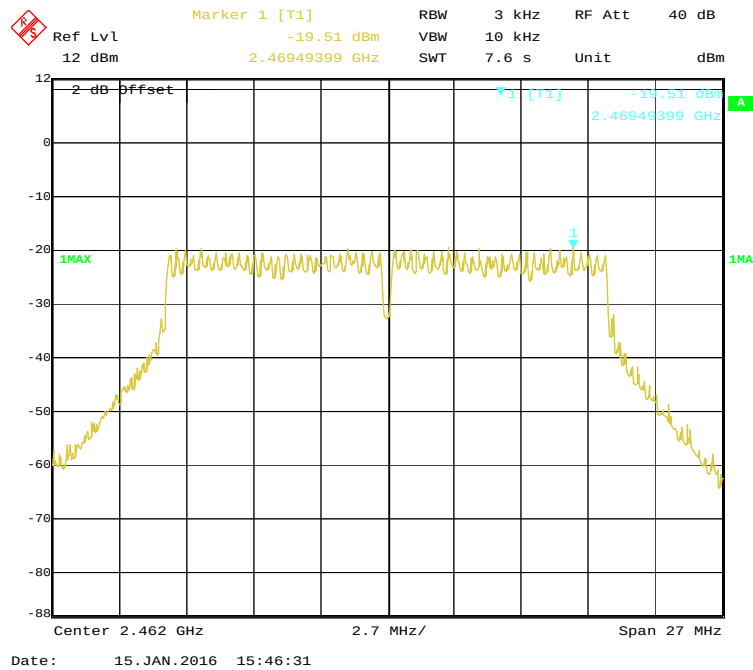

***** END OF REPORT *****