


H19 Antenna SPECIFICATIONS FOR APPROVAL

Data:2014-11-27

Ver.1.0

South Star Technology

Test Equipments

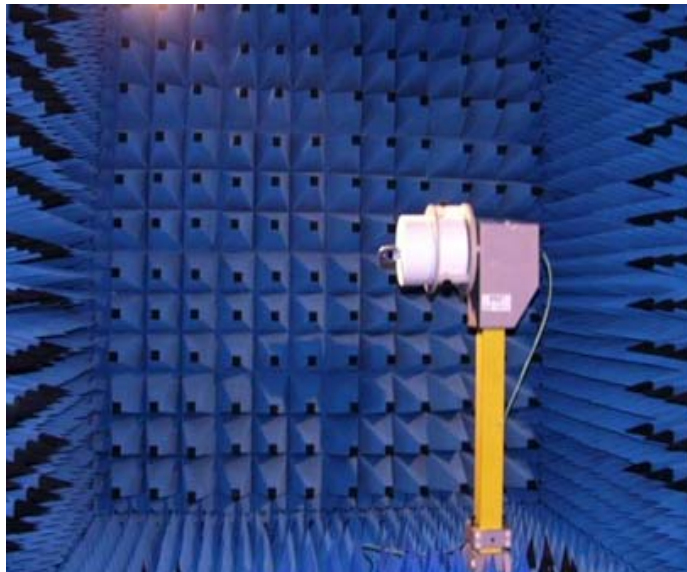


Strengthening Customer's Satisfaction

Strengthening Customer's Satisfaction

S11



VSWR

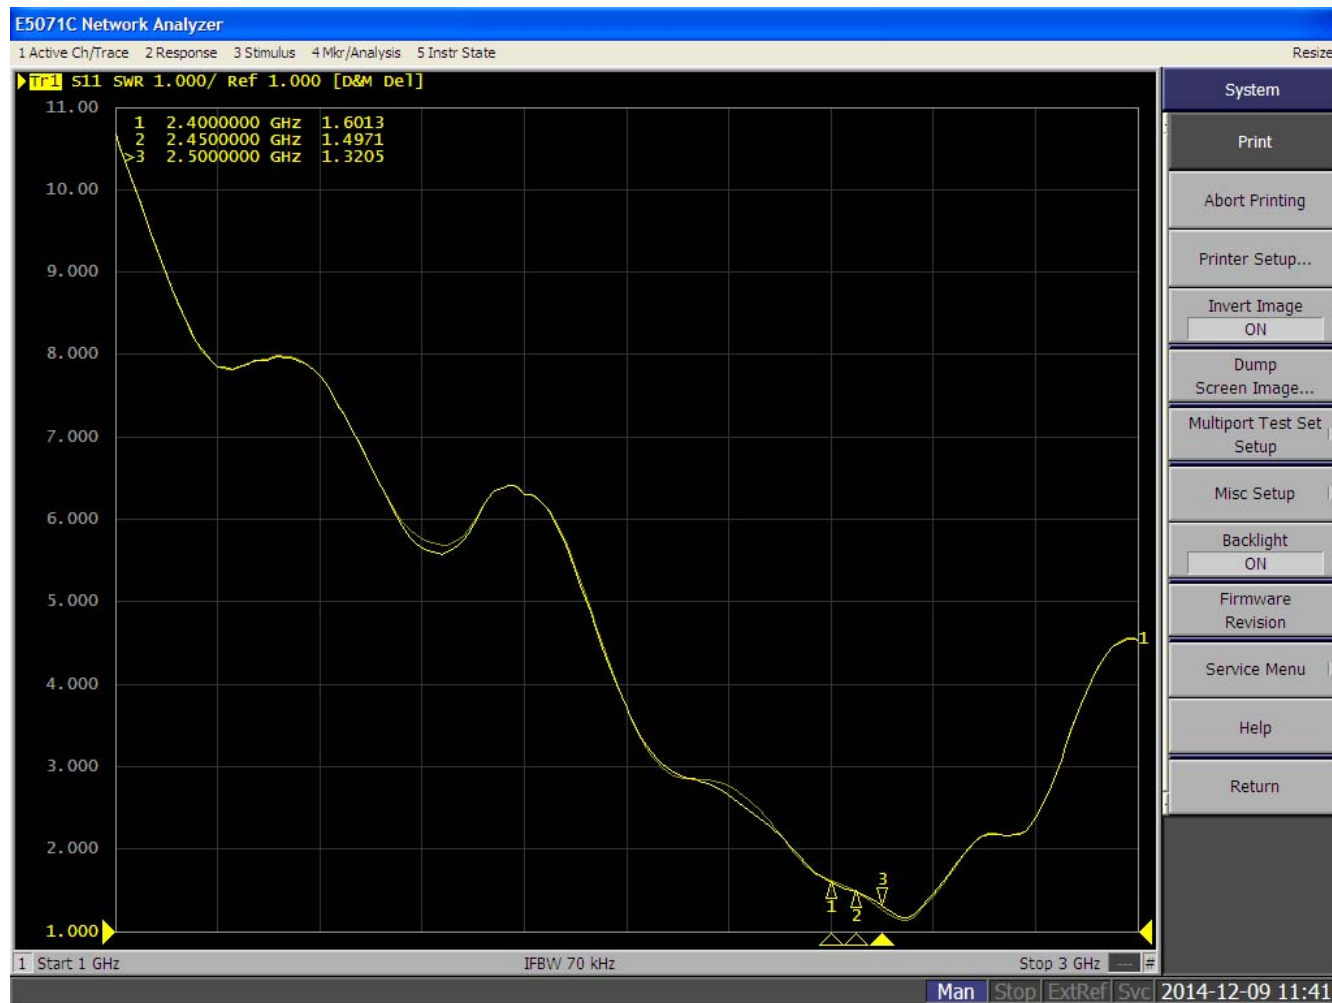





Antenna test data

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	62.18	-2.06	1.86
2410	63.02	-2.05	1.85
2420	63.97	-1.94	2.07
2430	64.22	-1.92	2.12
2440	67.54	-1.70	2.45
2450	68.37	-1.65	2.33
2460	68.62	-1.63	2.05
2470	67.41	-1.71	2.13
2480	66.77	-1.75	1.95
2490	65.96	-1.81	1.87
2500	64.46	-1.91	1.86




3D Picture

2400.000MHz

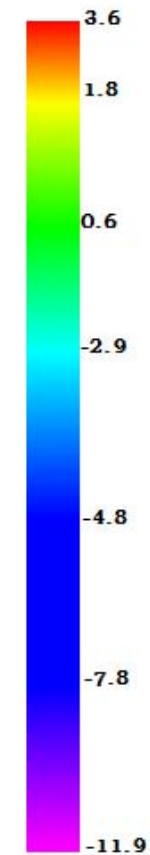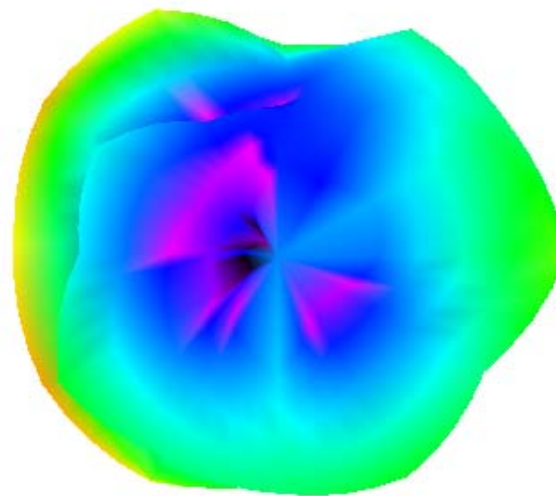



2450.000MHz

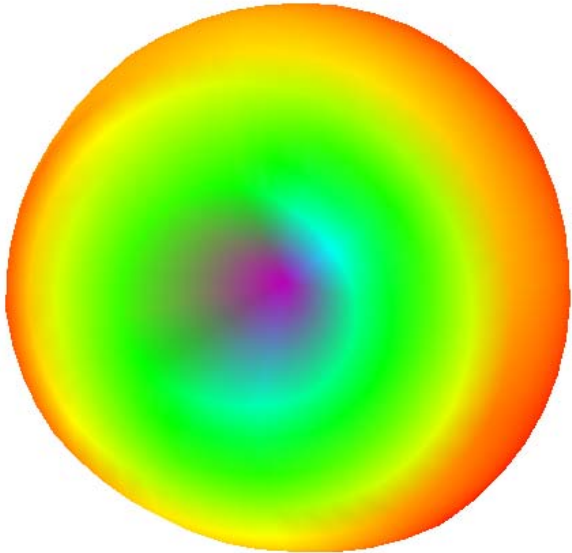

3D分析 2d分析

数据类型

综合数据

显示类型


只显示画面

选择项目

2400.000MHz
2410.000MHz
2420.000MHz
2430.000MHz
2440.000MHz
2450.000MHz
2460.000MHz
2470.000MHz
2480.000MHz
2490.000MHz
2500.000MHz



2450.000MHz H

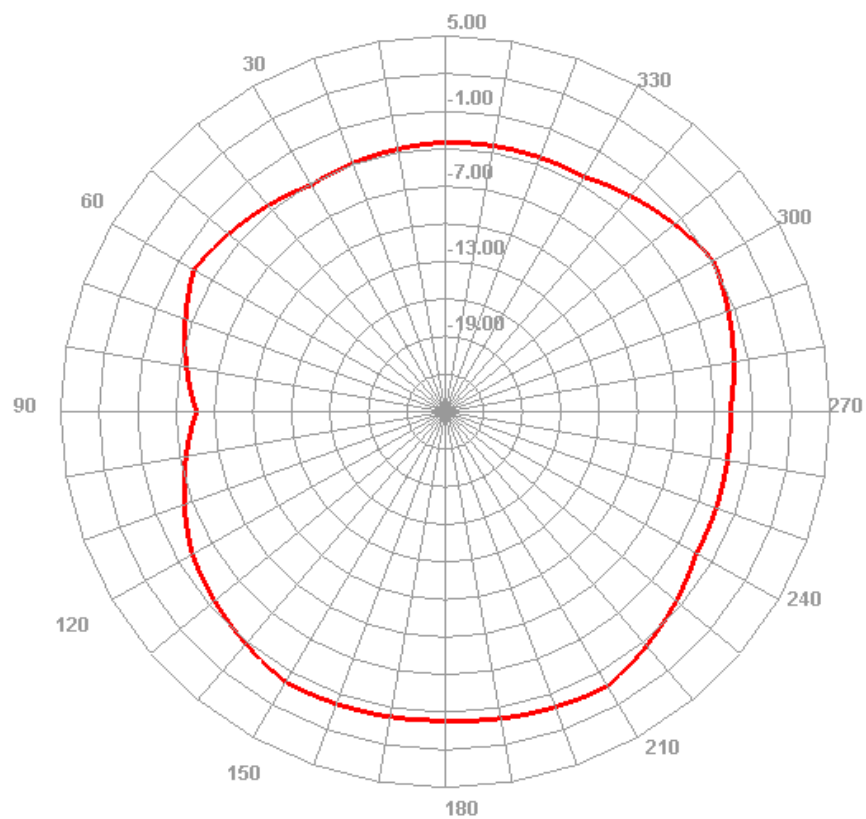

3D分析 2d分析

显示类型


显示H面

选择项目

2400.000MHz
2410.000MHz
2420.000MHz
2430.000MHz
2440.000MHz
2450.000MHz
2460.000MHz
2470.000MHz
2480.000MHz
2490.000MHz
2500.000MHz



2450.000MHz E1

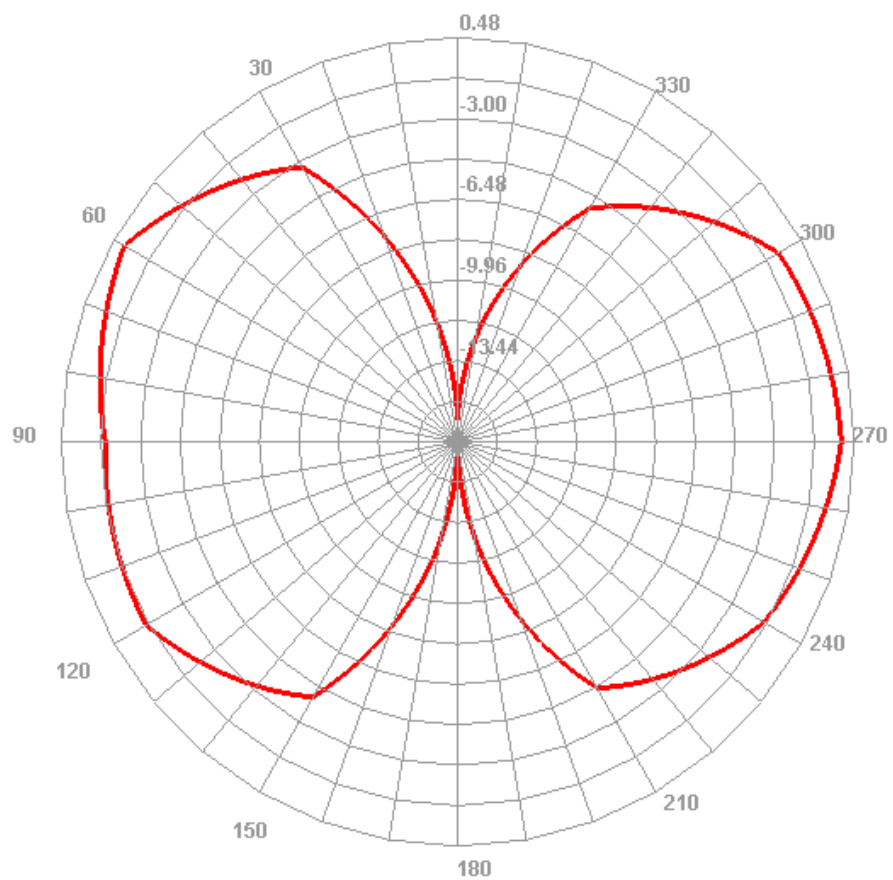

3D分析 | 2d分析

显示类型


显示E1面

选择项目

2400.000MHz
2410.000MHz
2420.000MHz
2430.000MHz
2440.000MHz
2450.000MHz
2460.000MHz
2470.000MHz
2480.000MHz
2490.000MHz
2500.000MHz



2450.000MHz E2

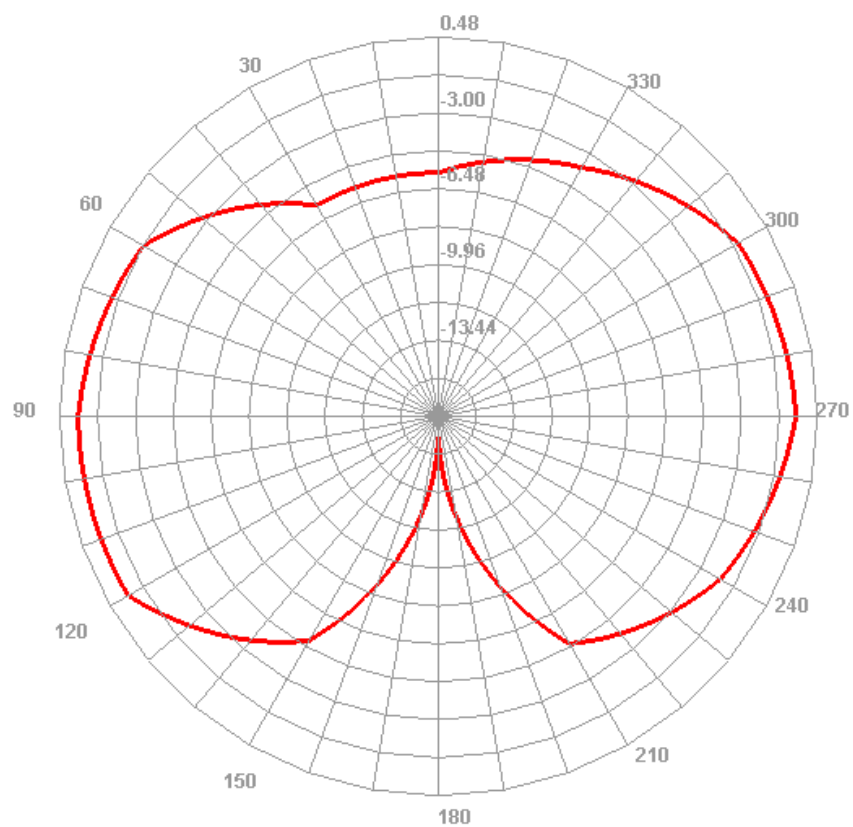

3D分析 2d分析

显示类型

显示E2面

选择项目

2400.000MHz
2410.000MHz
2420.000MHz
2430.000MHz
2440.000MHz
2450.000MHz
2460.000MHz
2470.000MHz
2480.000MHz
2490.000MHz
2500.000MHz

Drawing

