



**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 ISSUE 2**

CERTIFICATION TEST REPORT

For

Kami Wire Free Camera

MODEL NUMBER: YWS.1018

PROJECT NUMBER: 4788754157

REPORT NUMBER: 4788754157-1

FCC ID: 2AFIB-YWS1018

IC: 20436-YWS1018

ISSUE DATE: Mar. 11, 2019

Prepared for

Shanghai Xiaoyi Technology Co., Ltd.

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake
Hi-Tech Development Zone Dongguan, People's Republic of China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	03/11/2019	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC/IC Rules	Test Results
1	6dB Bandwidth and 99% Occupied Bandwidth	FCC Part 15.247 (a) (2) RSS-247 Clause 5.2 (a) ISED RSS-Gen Clause 6.7	Pass
2	Peak Conducted Output Power	FCC Part 15.247 (b) (3) RSS-247 Clause 5.4 (d)	Pass
3	Power Spectral Density	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d) RSS-247 Clause 5.5	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 8.10	Pass
6	Conducted Emission Test For AC Power Port	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
7	Antenna Requirement	FCC Part 15.203 RSS-GEN Clause 6.8	Pass
Remark: 1) The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C, ISED RSS-GEN Issue 5 and ISED RSS-247 Issue 2> when <Accuracy Method> decision rule is applied.			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. CMEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. CHANNEL LIST	10
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE CONFIGURATIONS	11
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.7. DESCRIPTION OF TEST SETUP	13
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. MEASUREMENT METHODS	15
8. ANTENNA PORT TEST RESULTS	16
8.1. ON TIME AND DUTY CYCLE	16
8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH	19
8.3. PEAK CONDUCTED OUTPUT POWER	27
8.4. POWER SPECTRAL DENSITY	29
8.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	37
9. RADIATED TEST RESULTS	68
9.1. RESTRICTED BANDEDGE	74
9.1.1. 802.11b MODE	74
9.1.2. 802.11g MODE	78
9.1.3. 802.11n HT20 MODE	82
9.1.4. 802.11n HT40 MODE	86
9.2. SPURIOUS EMISSIONS (1~18GHz)	90
9.2.1. 802.11b MODE	90
9.2.2. 802.11g MODE	96
9.2.3. 802.11n HT20 MODE	102
9.2.1. 802.11n HT40 MODE	108



9.3.	<i>SPURIOUS EMISSIONS (18~25GHz)</i>	114
9.3.1.	802.11G MODE	114
9.4.	<i>SPURIOUS EMISSIONS (0.03 ~ 1 GHz)</i>	116
9.4.1.	802.11G MODE	116
9.5.	<i>SPURIOUS EMISSIONS BELOW 30M</i>	118
9.5.1.	802.11G MODE	118
10.	AC POWER LINE CONDUCTED EMISSIONS	121
11.	ANTENNA REQUIREMENTS	124



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Shanghai Xiaoyi Technology Co., Ltd.
Address: 6F, Building E, No. 2889, Jinke Road Shanghai, China

Manufacturer Information

Company Name: Shanghai Xiaoyi Technology Co., Ltd.
Address: 6F, Building E, No. 2889, Jinke Road Shanghai, China

EUT Description

Product Name: Kami Wire Free Camera
Model Name: YWS.1018
Sample Number: 1913395
Data of Receipt Sample: November 7, 2018
Date Tested: Feb. 10~ Mar. 4, 2019

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS
ISED RSS-247 Issue 2	PASS
ISED RSS-GEN Issue 5	PASS

Tested By:

Denny Huang
Engineer Project Associate

Check By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 DTS Meas Guidance v05, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 2 and ISED RSS-GEN Issue 5.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OATS.

Note 3: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. CMEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62dB
Radiation Emission test (include Fundamental emission) (9KHz-30MHz)	2.2dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	4.00dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	5.78dB (1GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Product Name:	Kami Wire Free Camera	
Model No.:	YWS.1018	
Operating Frequency:	IEEE 802.11B/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz	
Type of Modulation:	IEEE for 802.11B: DSSS (CCK, DQPSK, DBPSK) IEEE for 802.11G: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n (HT20 & HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)	
Channel Number:	IEEE 802.11B/g, IEEE 802.11n(HT20): 11 Channels IEEE 802.11n(HT40): 7 Channels	
Channels Step:	Channels with 5MHz step	
Sample Type:	Fixed production	
Test power grade:	11B	5a
	11G	0a
	11n(HT20)	81
	11n(HT40)	81
Test software of EUT:	SecureCRT (manufacturer declare)	
Antenna Type:	Internal Antenna	
Antenna Gain:	1.91dBi	
Power Supply	Battery	DC 7.4V

5.2. MAXIMUM OUTPUT POWER

Frequency Range (MHz)	Number of Transmit Chains (NTX)	IEE Std. 802.11	Channel Number	Max PK Conducted Power-Antenna 1 (dBm)
2412-2462	1	IEEE 802.11B	1-11[11]	19.28
2412-2462	1	IEEE 802.11G	1-11[11]	16.14
2412-2462	1	IEEE 802.11nHT20	1-11[11]	15.57
2422-2452	1	IEEE 802.11nHT40	3-9[7]	15.30



5.3. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WIFI TX (802.11b)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WIFI TX (802.11g)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WIFI TX (802.11n HT20)	CH 1, CH 6, CH 11	2412MHz, 2437MHz, 2462MHz
WIFI TX (802.11n HT40)	CH 3, CH 6, CH 9	2422MHz, 2437MHz, 2452MHz



5.5. THE WORSE CASE CONFIGURATIONS

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		cart					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	5a	5a	5a	N/A		
802.11g	1	0a	0a	0a			
802.11n HT20	1	81	81	81			
802.11n HT40	1	N/A			81	81	81



5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2400-2483.5	Internal Antenna	1.91

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒ 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒ 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna.
IEEE 802.11N (HT20) SISO	☒ 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna.
IEEE 802.11N (HT40) SISO	☒ 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna.



5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	FCC ID
1	Laptop	ThinkPad	E550c	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB to TTL	USB to TTL	USB	2.0 m	N/A


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	N/A	N/A	N/A	N/A

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

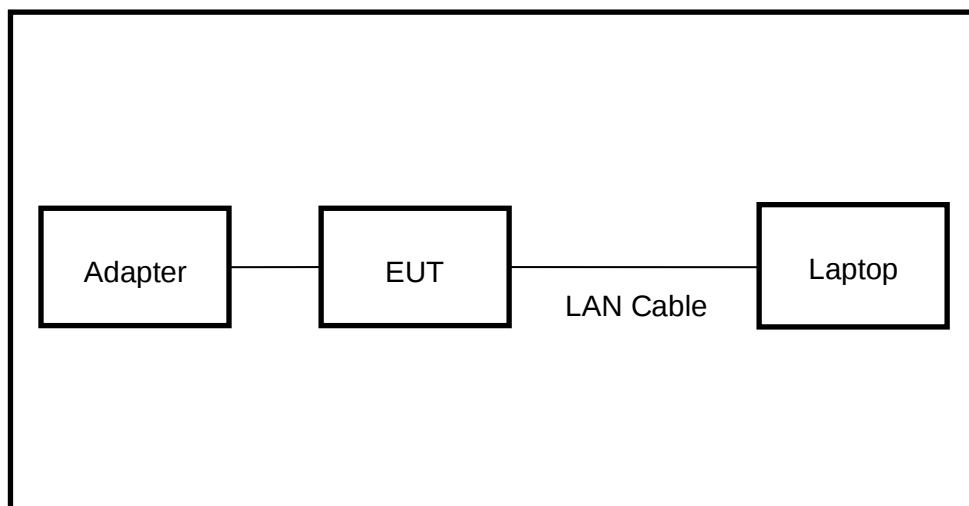



6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions							
Used	Equipment	Manufactur	Model No.	Serial No.	Upper Cal.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
Software							
Used	Description		Manufacturer	Name		Version	
☒	Test Software for Conducted disturbance		UL	Antenna port		Ver. 7.2	
Radiated Emissions							
Used	Equipment	Manufactur	Model No.	Serial No.	Upper Cal.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY564000	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Sept. 17, 2018	Sept. 17, 2021
☒	Preamplifier	HP	8447D	2944A0909	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Sept. 17,2018	Sept. 17, 2021
☒	High Gain Horn	Schwarzbe	BBHA-9170	691	Jan.06, 2016	Aug. 11, 2018	Aug. 11, 2019
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.12,2017	Dec. 10, 2018	Dec. 10, 2019
☒	Loop antenna	Schwarzbe	1519B	00008	Mar. 26,	Mar. 26, 2016	Mar. 26, 2019
Software							
Used	Description		Manufacturer	Name		Version	
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1	
Other instruments							
Used	Equipment	Manufactur er	Model No.	Serial No.	Upper Cal.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.12,2017	Dec.10,2018	Dec.10,2019
☒	Power Sensor	Keysight	U2021XA	MY57030004	Dec.12,2017	Dec.10,2018	Dec.10,2019
☒	Power Meter	Keysight	N1911A	MY55416024	Dec.12,2017	Dec.11,2018	Dec.10,2019
☒	High Pass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Dec.12,2017	Dec.11,2018	Dec.10,2019
☒	Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Dec.12,2017	Dec.11,2018	Dec.10,2019



7. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v05	8.2
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v05	8.3.1.3/8.3.2.3
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v05	8.4
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v05	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v05	8.6
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v05	8.7
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	6.2



8. ANTENNA PORT TEST RESULTS

8.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP



TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.4V


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
11B	16.41	16.45	1	99.76%	0.01	0.0609
11G	2.726	2.767	1	98.52%	0.06	0.3368
11N HT20 SISO	2.524	2.564	1	98.44%	0.07	0.3962
11N HT40 SISO	1.229	1.266	1	97.08%	0.13	0.8137


Note: 1) Duty Cycle Correction Factor=10log(1/x).
2) Where: x is Duty Cycle (Linear)
3) Where: T is On Time (transmit duration)
4) Pre-testing all the modes, only the data of worse case is shown in this test report.




11B ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

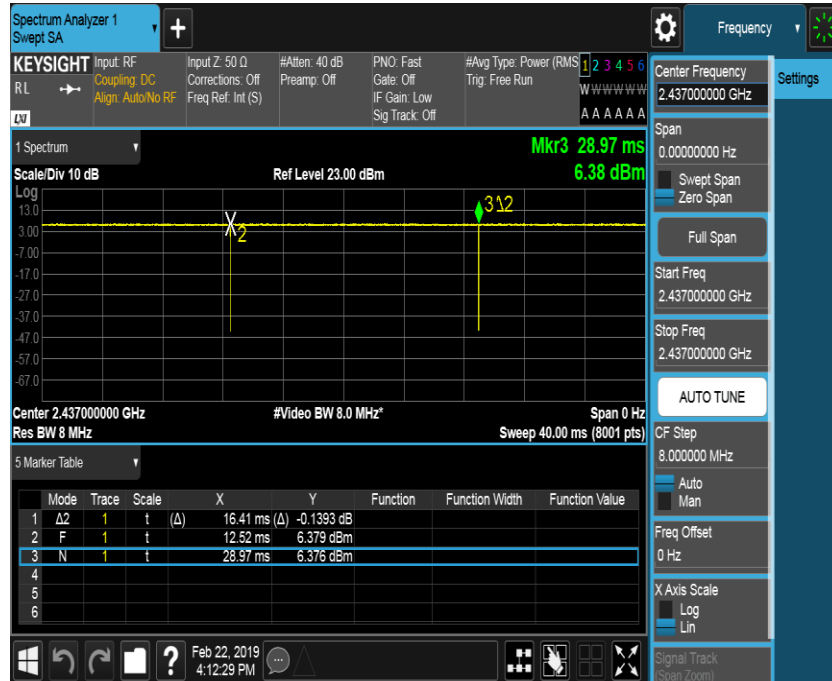


11G ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

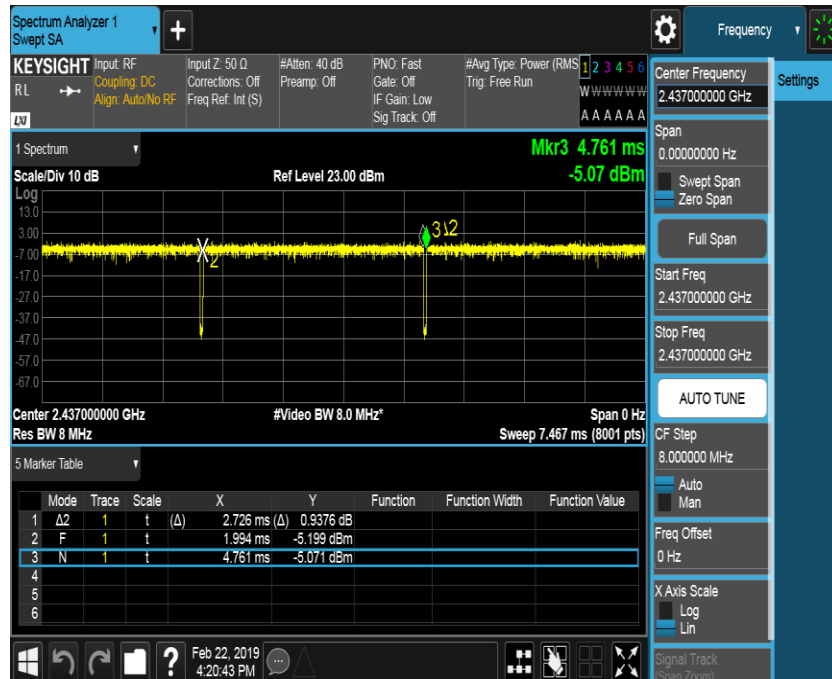

11N HT20 SISO ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

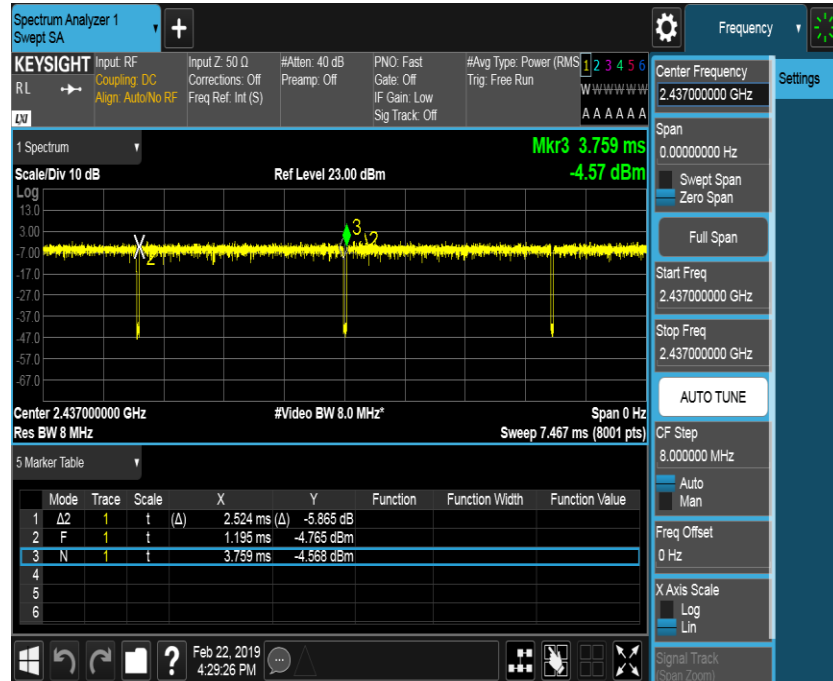

11N HT40 SISO ON TIME AND DUTY CYCLE MID CH (WORSE CASE)

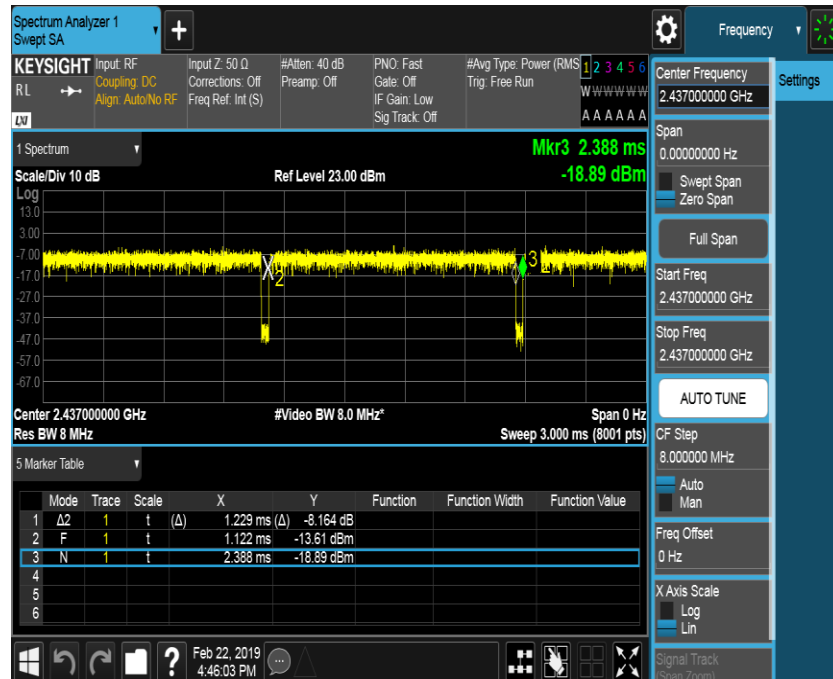

Remark:

- 1) For the period time = N (the end time of the burst) – F (the start time of the burst)



8.2. 6 dB DTS BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5
ISED RSS-Gen Clause 6.7	99% Occupied Bandwidth	For reporting purposes only.	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	For 6dB Bandwidth :100K For 99% Occupied Bandwidth :1% to 5% of the occupied bandwidth
VBW	For 6dB Bandwidth: $\geq 3 \times \text{RBW}$ For 99% Occupied Bandwidth: approximately $3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB and 99% relative to the maximum level measured in the fundamental emission.

TEST SETUP





TEST ENVIRONMENT



Temperature	25°C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.4V



RESULTS



Test Mode	Test Antenna	Test Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Result
11B	Antenna 1	LCH	9.105	11.281	Pass
		MCH	9.105	11.449	Pass
		HCH	9.561	11.456	Pass
11G	Antenna 1	LCH	16.36	16.437	Pass
		MCH	16.41	16.437	Pass
		HCH	16.38	16.443	Pass
11N HT20 SISO	Antenna 1	LCH	17.61	17.607	Pass
		MCH	17.59	17.595	Pass
		HCH	17.61	17.603	Pass
11N HT40 SISO	Antenna 1	LCH	35.90	35.980	Pass
		MCH	35.43	35.915	Pass
		HCH	35.50	35.978	Pass







Test Graphs

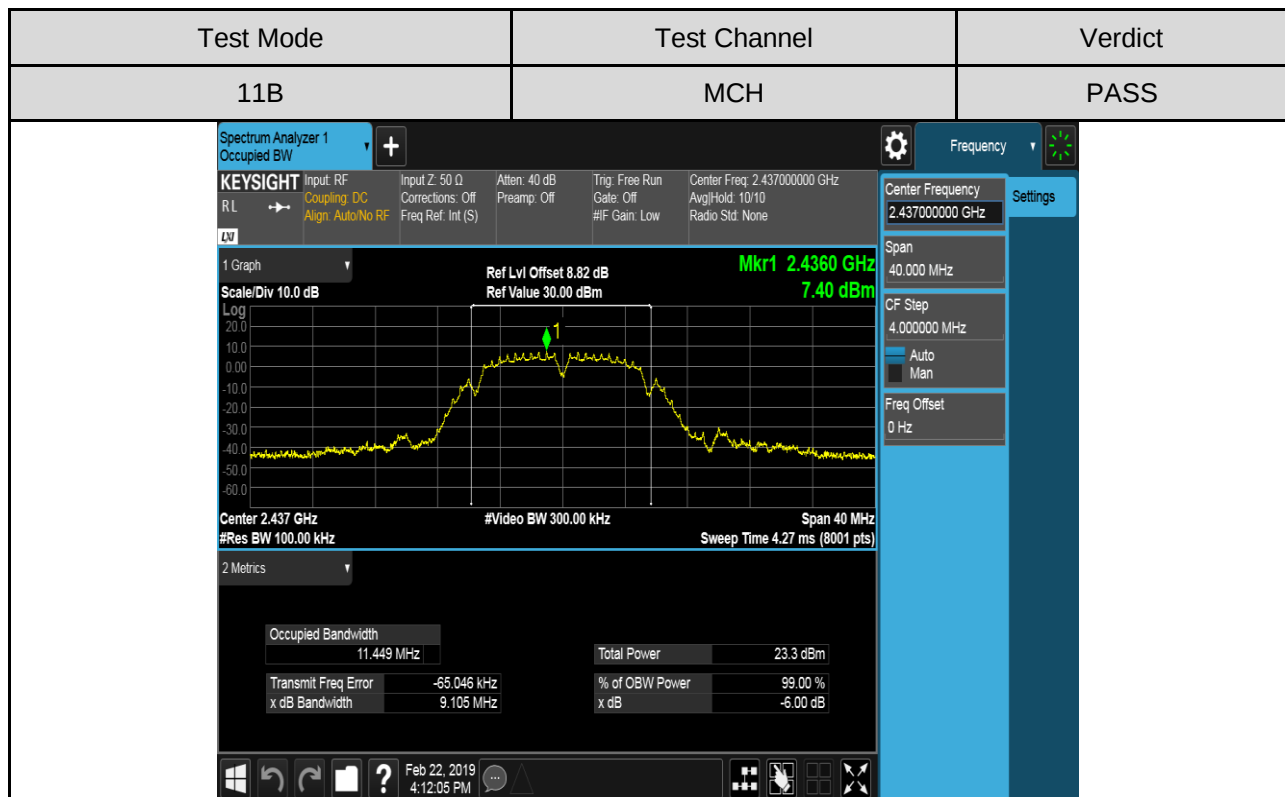
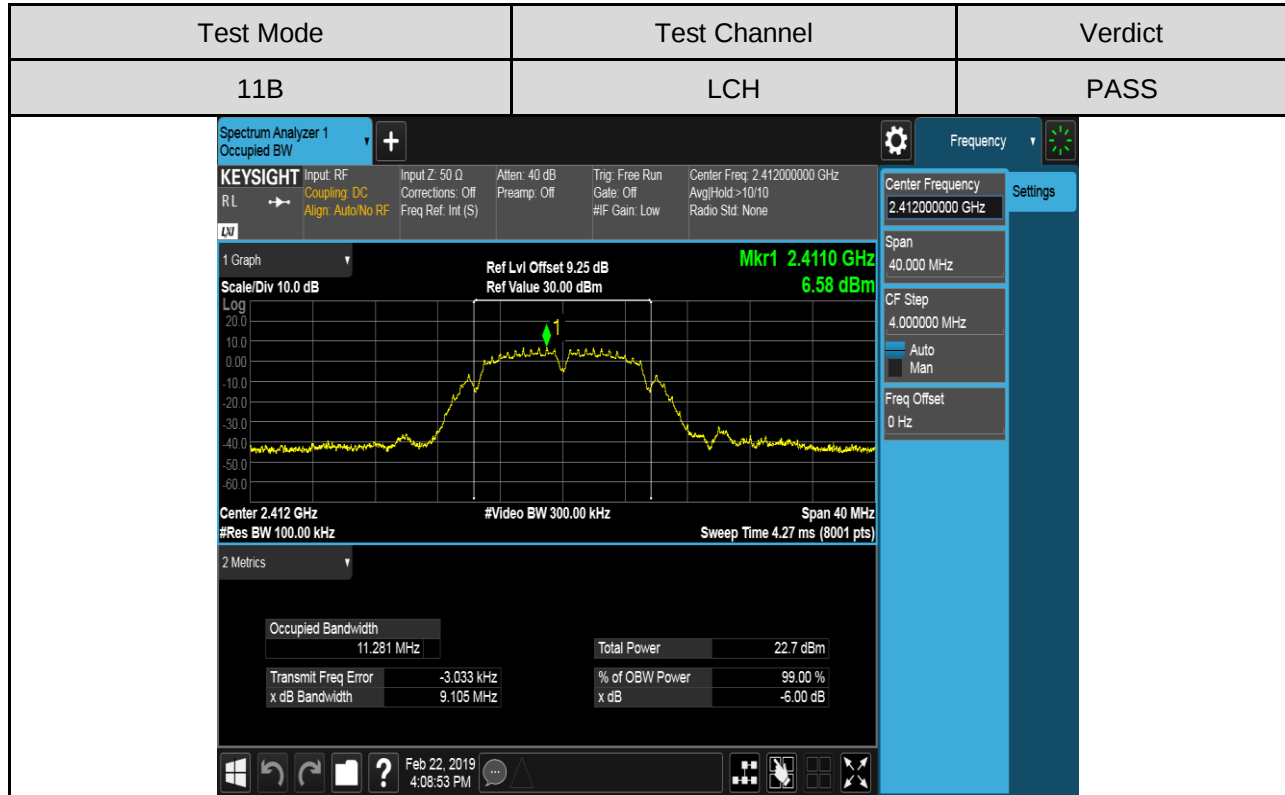


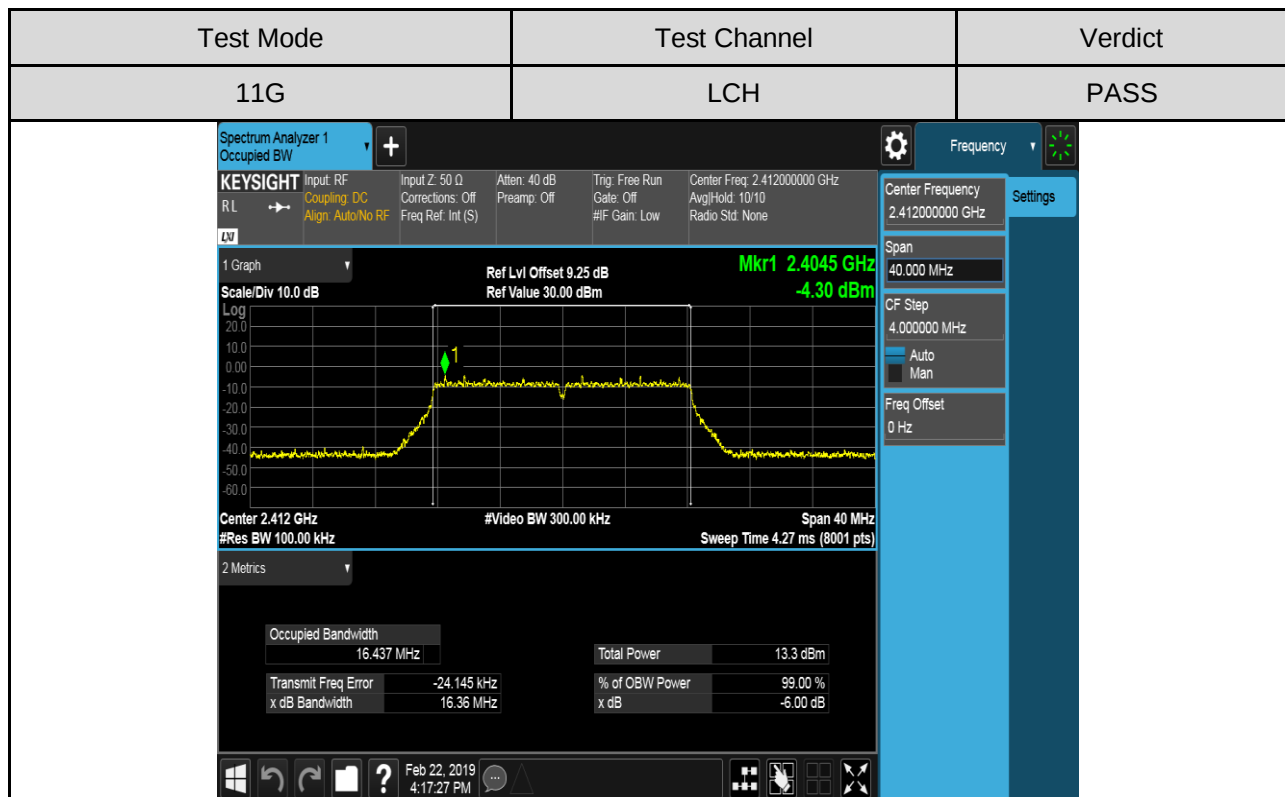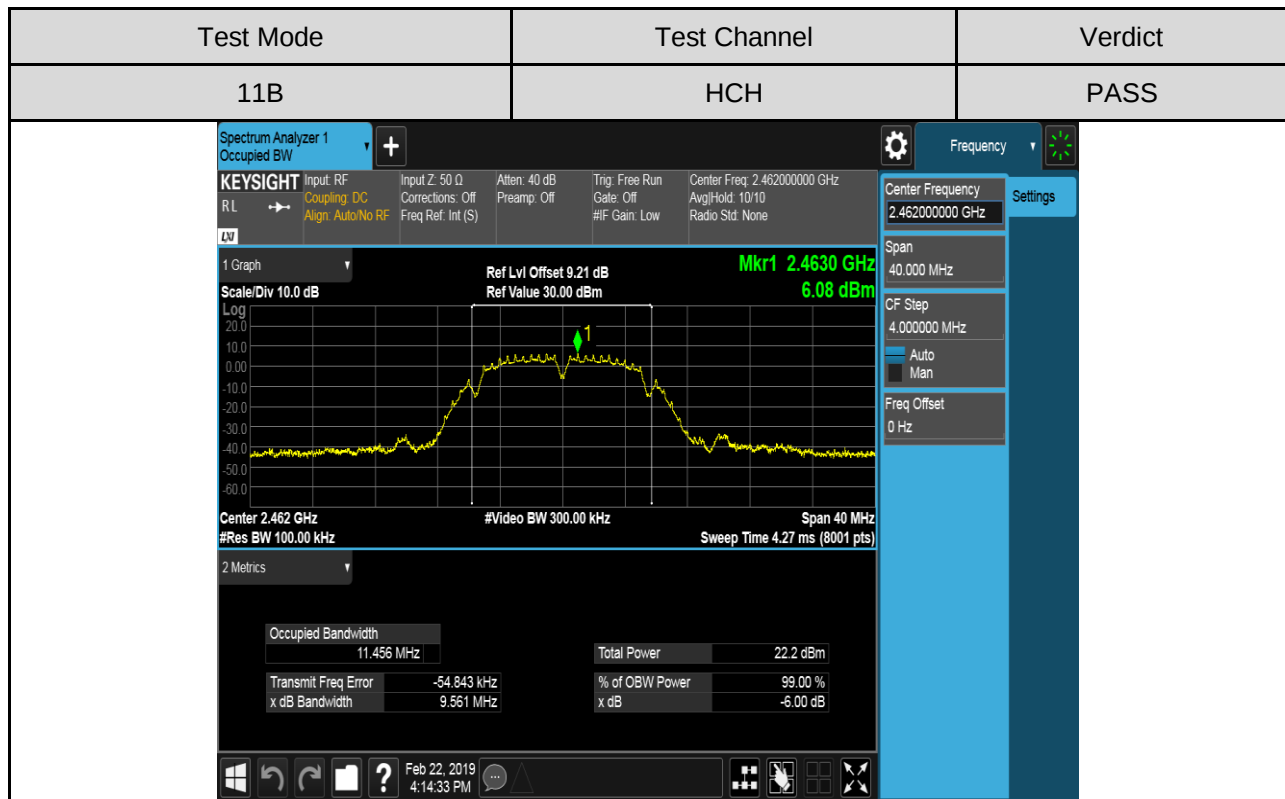

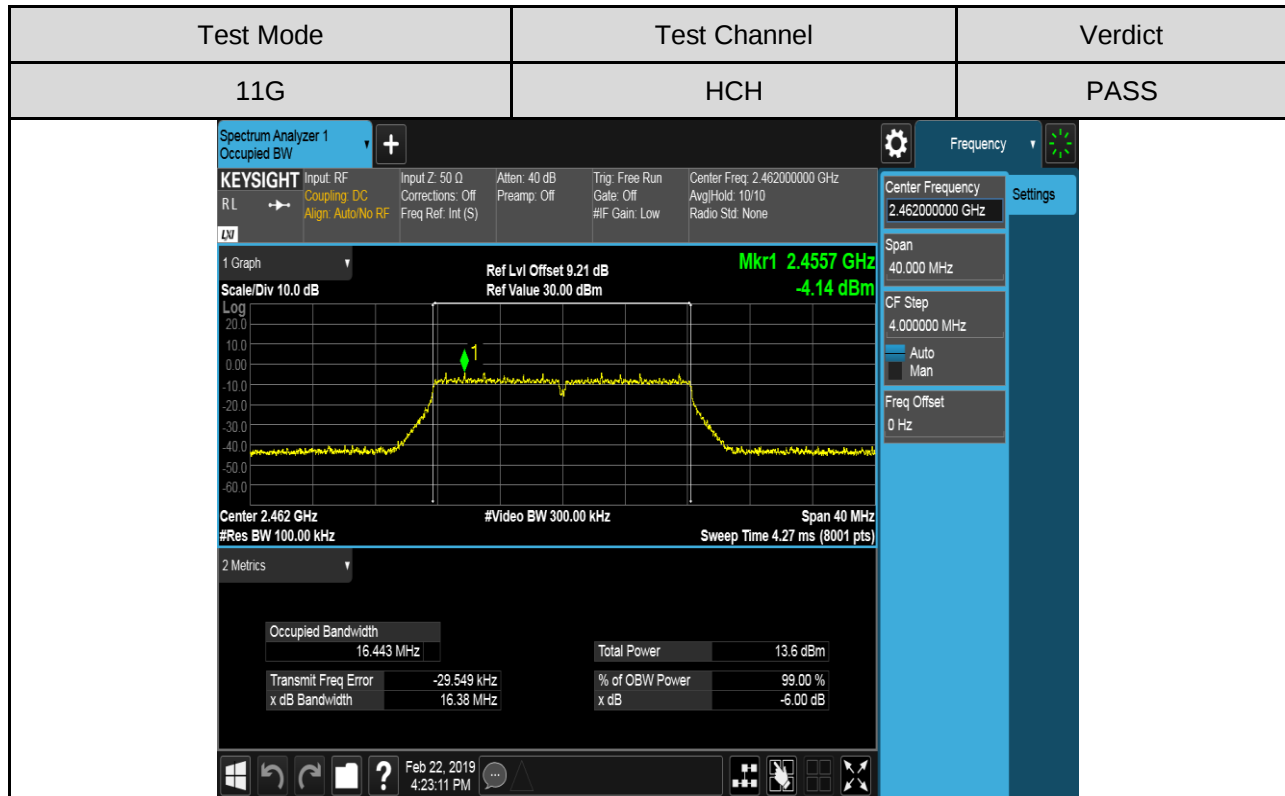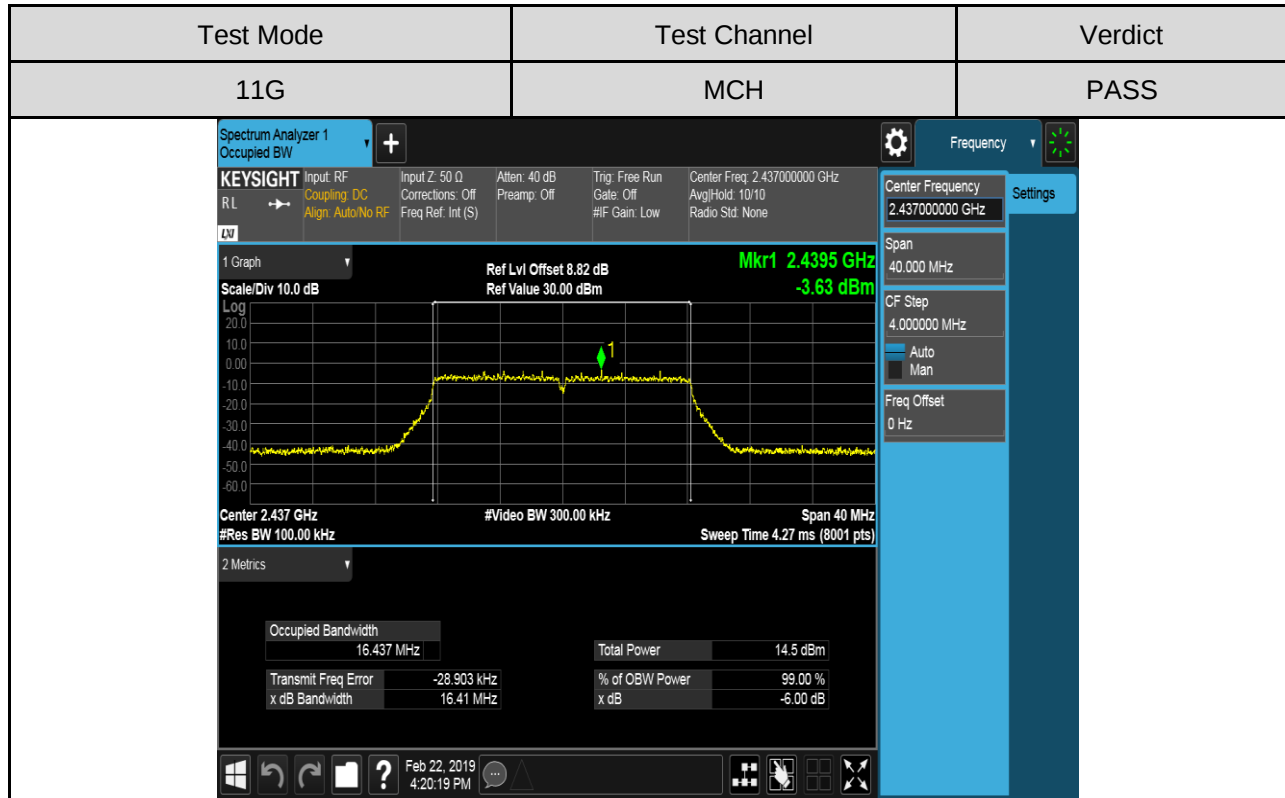

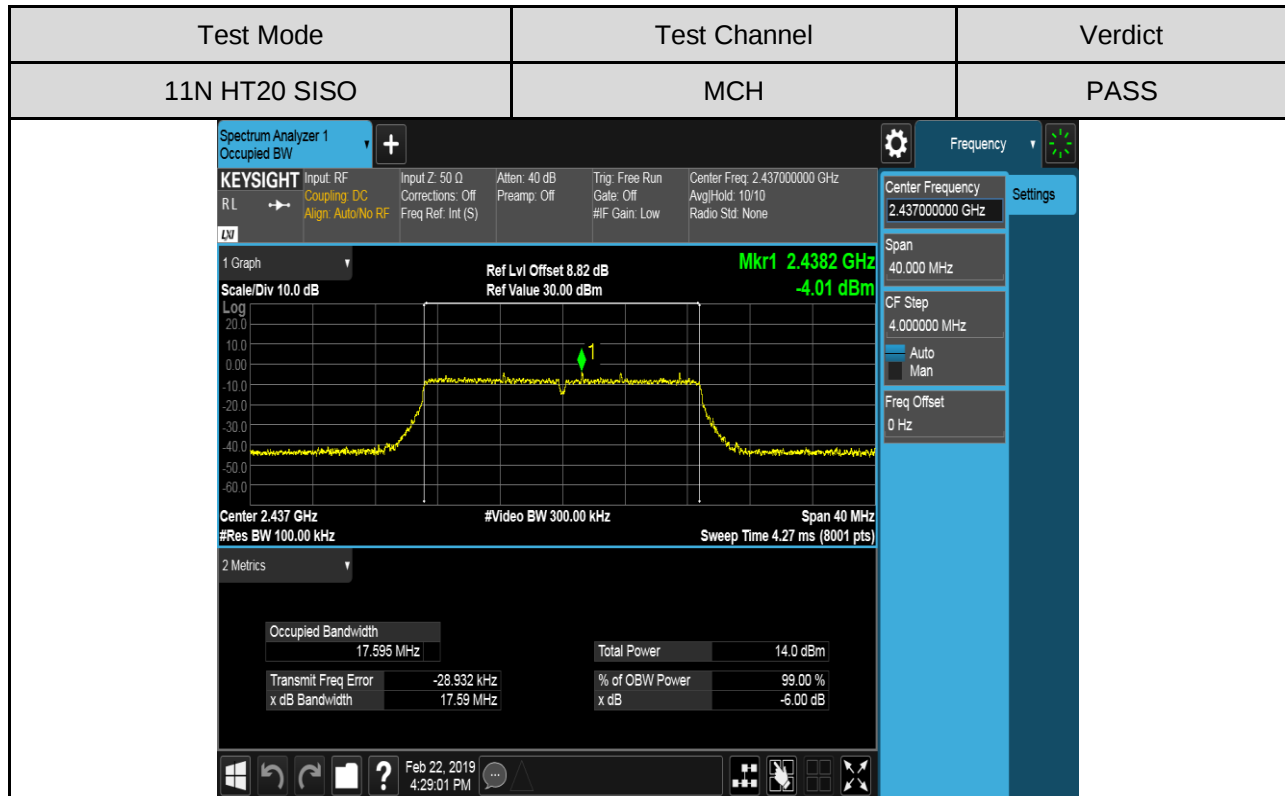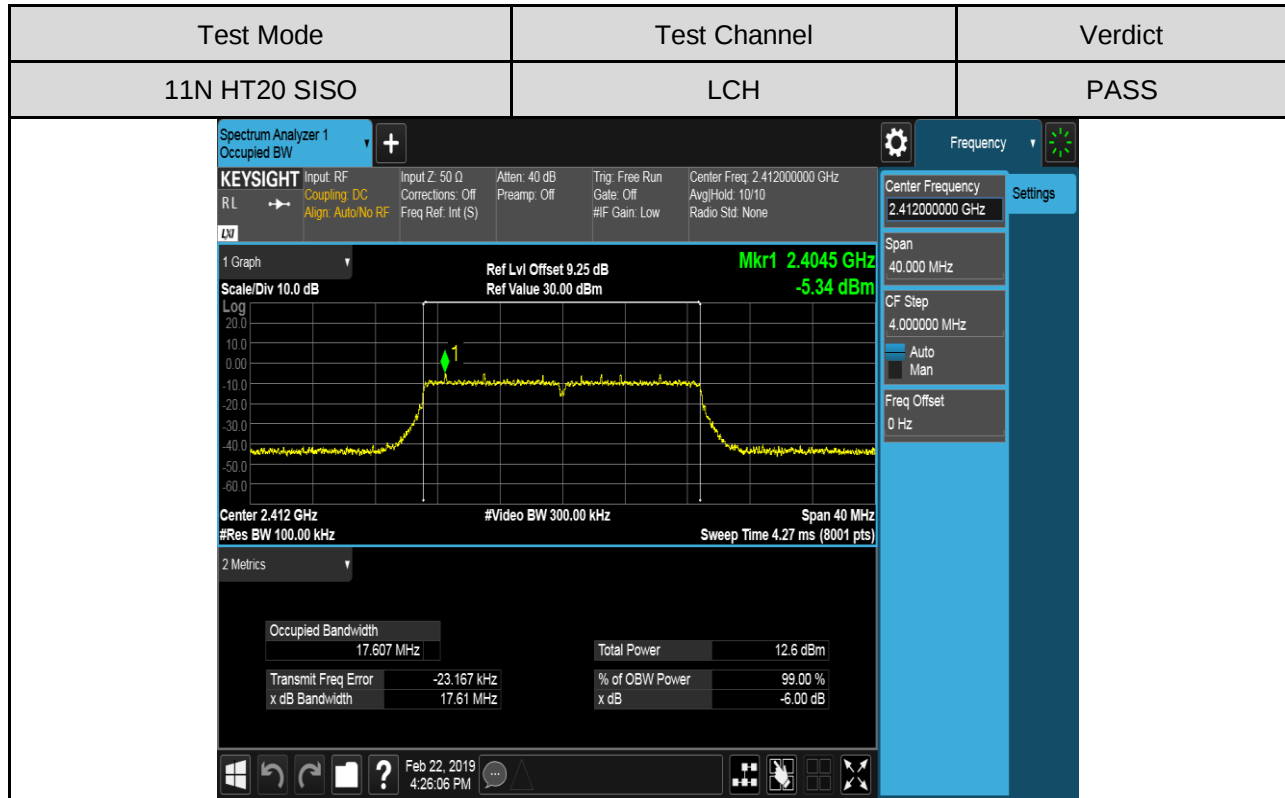

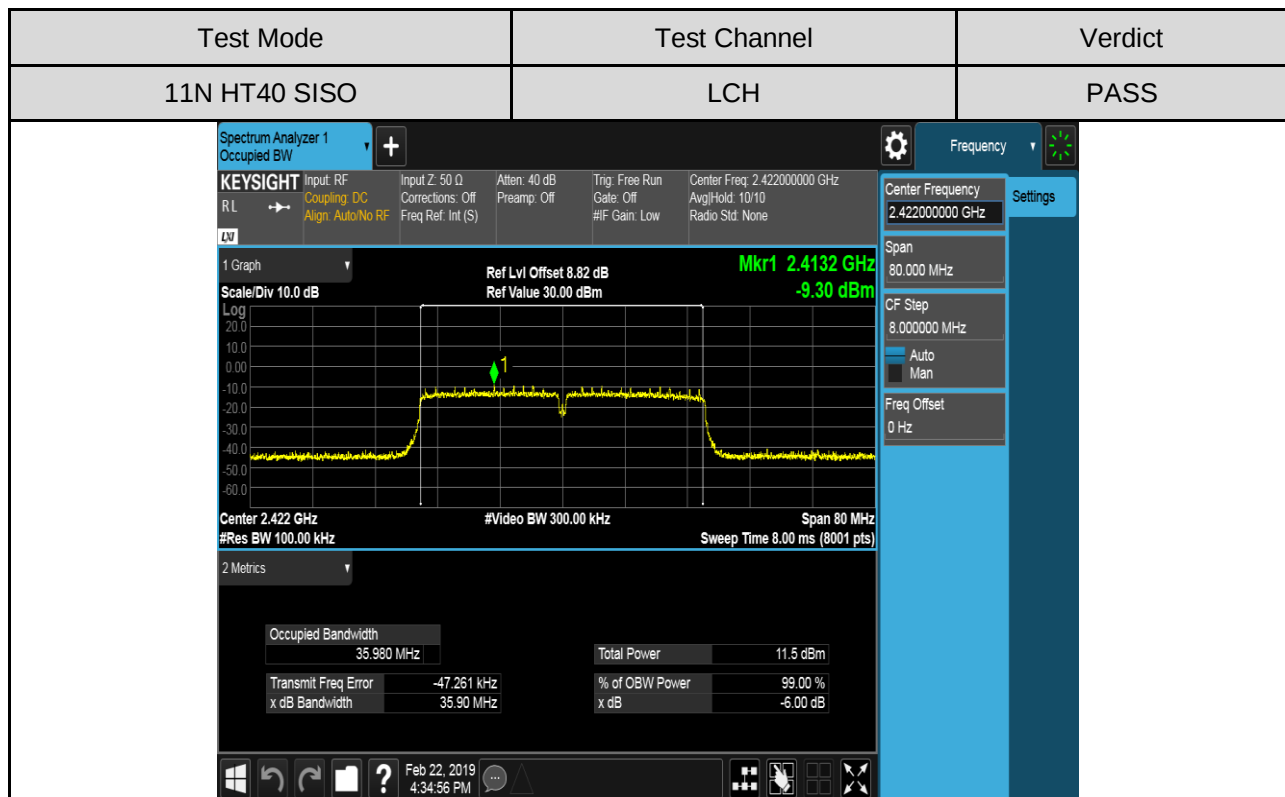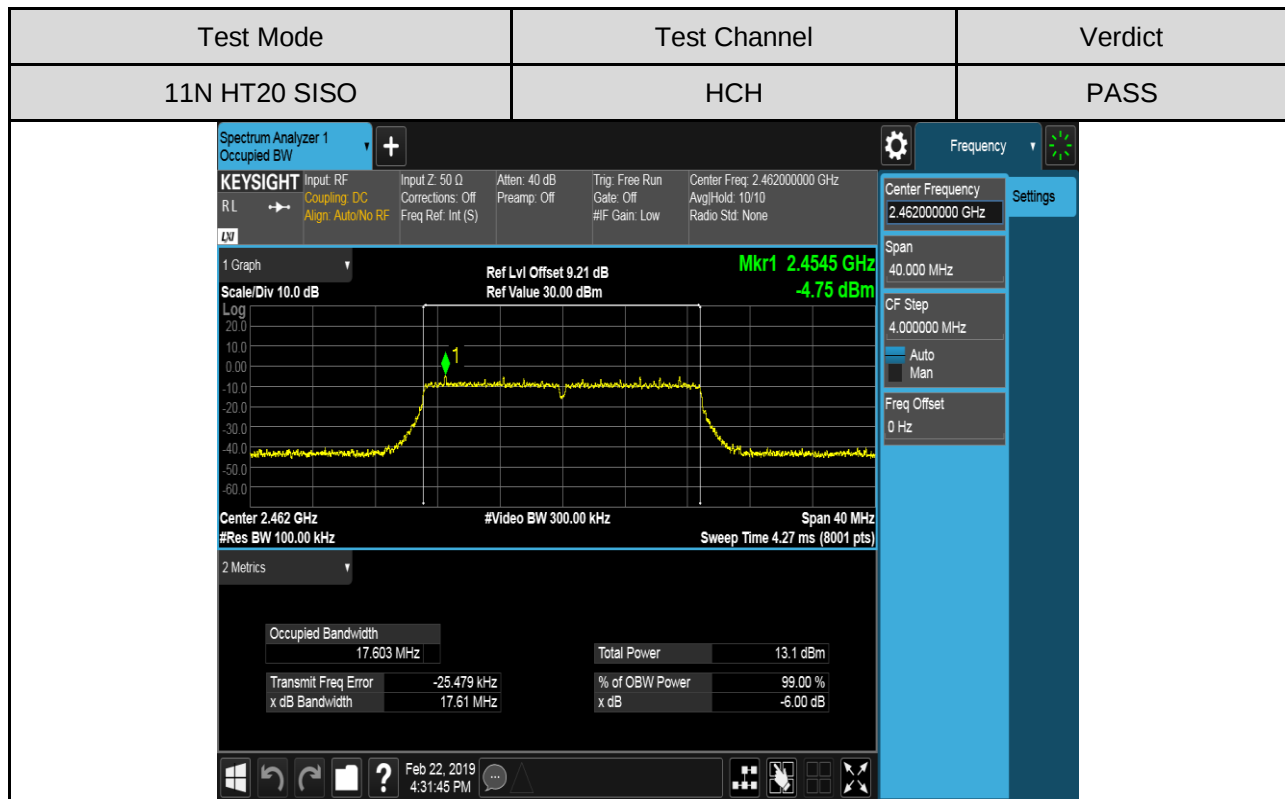

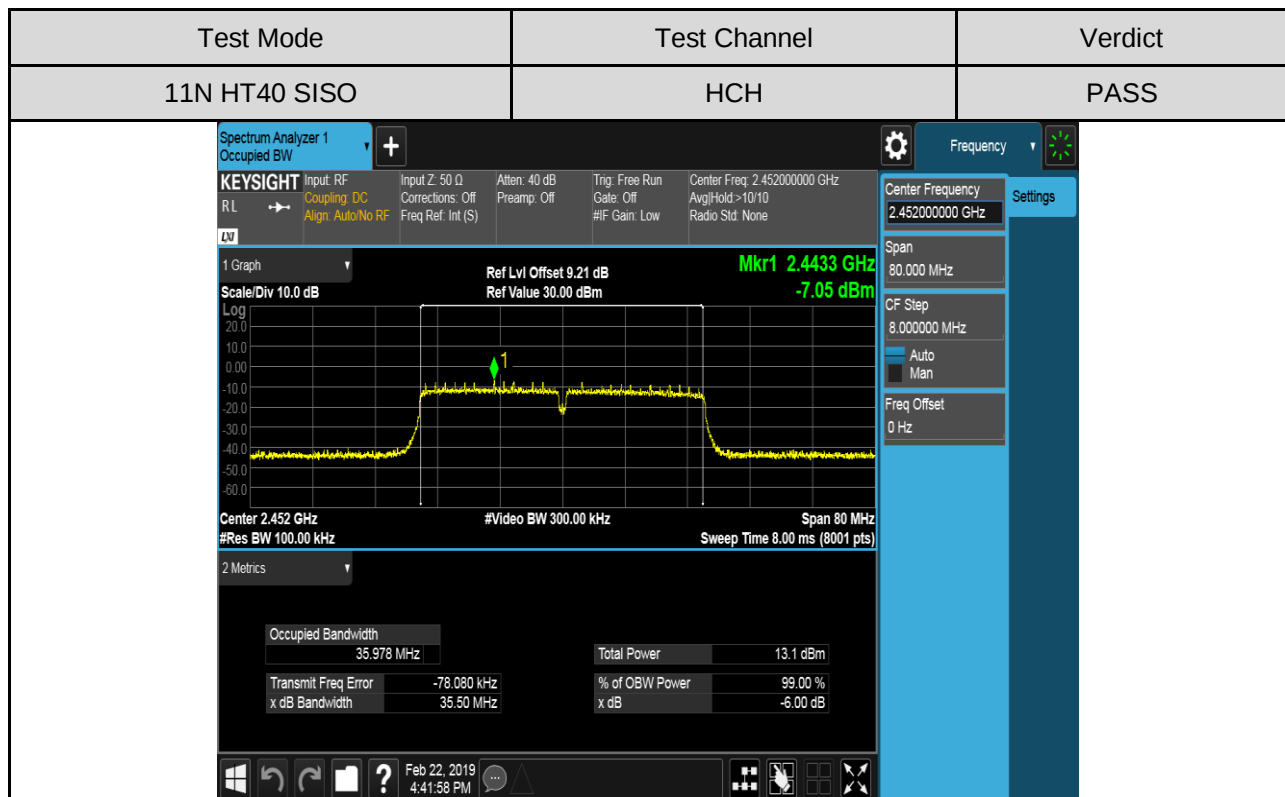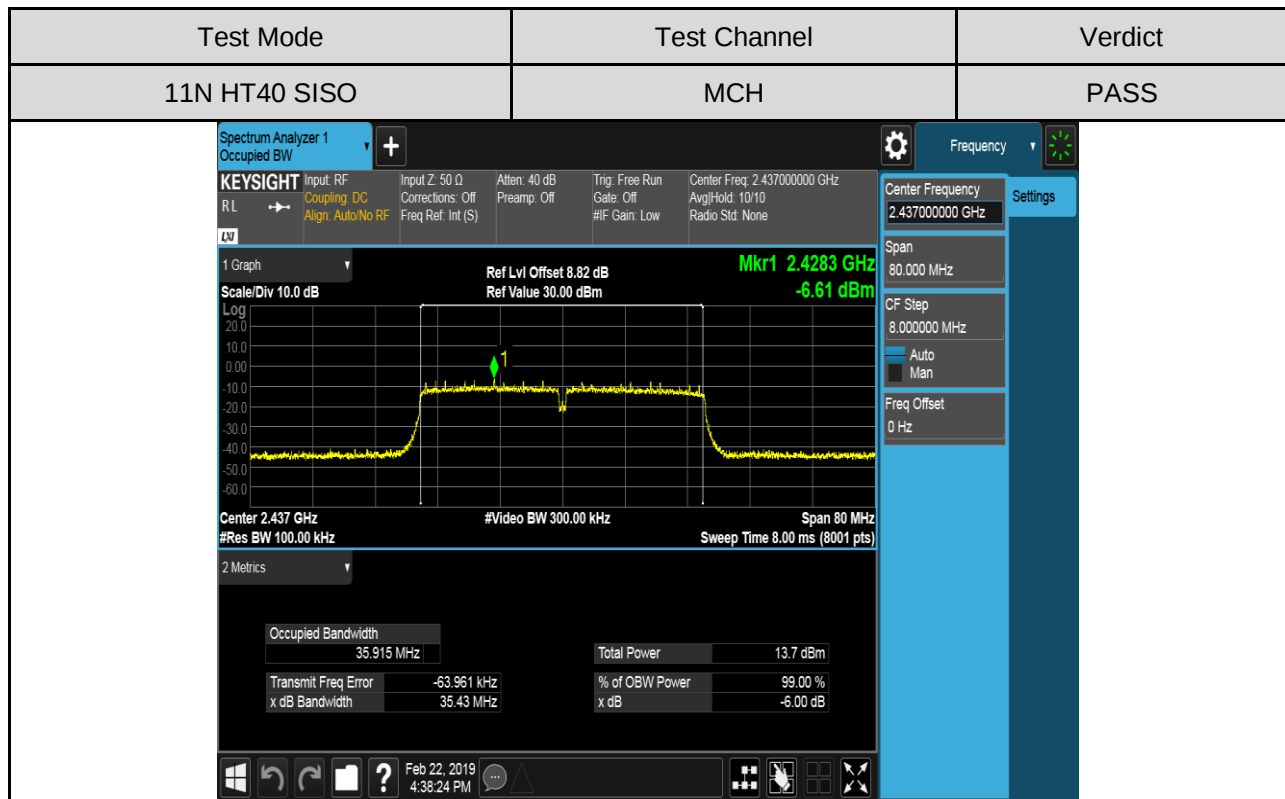



8.3. PEAK CONDUCTED OUTPUT POWER


LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Output Power	1 watt or 30dBm (See Note 1/2)	2400-2483.5
1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. 2. Limit=30dBm – (Directional gain -6) dBi Directional gain = $10\log [(10^{G1/20} + 10^{G2/20})^2 / N_{ANT}] = 0 < 6\text{dBi}$, where the N_{ANT} is the numbers of antenna. So, the power limit shall be still 1 watt or 30dBm			

TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.
Measure peak power each channel.
Peak Detector used for Peak result.
AVG Detector used for AVG result.

TEST SETUP

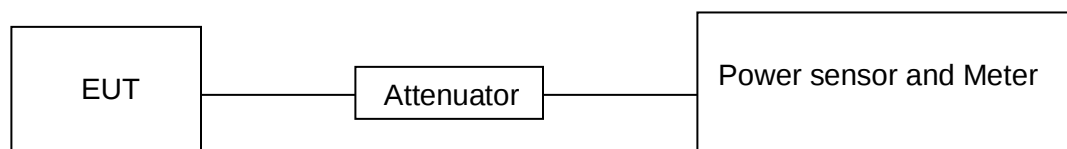

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.4V



RESULTS

1) Maximum Peak Conducted Output Power

Test Mode	Test Antenna	Test Channel	Maximum Peak Conducted Output Power(dBm)	Result
11B	Ant1	LCH	18.42	Pass
		MCH	19.28	Pass
		HCH	18.44	Pass
11G	Ant	LCH	15.18	Pass
		MCH	16.14	Pass
		HCH	15.35	Pass
11N HT20 SISO	Ant1	LCH	14.62	Pass
		MCH	15.57	Pass
		HCH	14.77	Pass
11N HT40 SISO	Ant1	LCH	13.43	Pass
		MCH	15.30	Pass
		HCH	14.85	Pass

2) Maximum Average Conducted Output Power

Test Mode	Test Antenna	Test Channel	Maximum Average Conducted Output Power(dBm)	Result
11B	Ant 1	LCH	14.92	Pass
		MCH	15.99	Pass
		HCH	15.2	Pass
11G	Ant 1	LCH	7.07	Pass
		MCH	8.01	Pass
		HCH	7.26	Pass
11N HT20 SISO	Ant 1	LCH	6.43	Pass
		MCH	7.43	Pass
		HCH	6.66	Pass
11N HT40 SISO	Ant 1	LCH	5.11	Pass
		MCH	7.07	Pass
		HCH	6.70	Pass



8.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm/3 kHz (See Note 1/2)	2400-2483.5
1. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. 2. Limit=8dBm – (Directional gain -6) dBi Directional gain = $10\log [(10^{G1/20}/20G_{ANT} + 10 \log (N_{ANT}) \text{ dBi, where } N_{ANT} \text{ is the number of outputs, } G_{ANT} \text{ is the Antenna gain.}$ Directional gain = $10\log [(10^{G1/20} + 10^{G2/20})^2/N_{ANT}] = 0 < 6\text{dBi, where the } N_{ANT} \text{ is the numbers of antenna. So, the power density limit shall be still 8 dBm in any 3KHz band.}$			

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP





TEST ENVIRONMENT



Temperature	25°C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.4V



RESULTS TABLE



Test Mode	Test Antenna	Test Channel	Maximum Peak power spectral density (dBm/100K)	Result
11B	Antenna 1	LCH	-2.628	Pass
		MCH	-1.385	Pass
		HCH	-2.749	Pass
11G	Antenna 1	LCH	-11.865	Pass
		MCH	-10.77	Pass
		HCH	-12.013	Pass
11N HT20 SISO	Antenna 1	LCH	-12.959	Pass
		MCH	-12.134	Pass
		HCH	-12.71	Pass
11N HT40 SISO	Antenna 1	LCH	-17.135	Pass
		MCH	-15.555	Pass
		HCH	-15.294	Pass







TEST GRAPHS

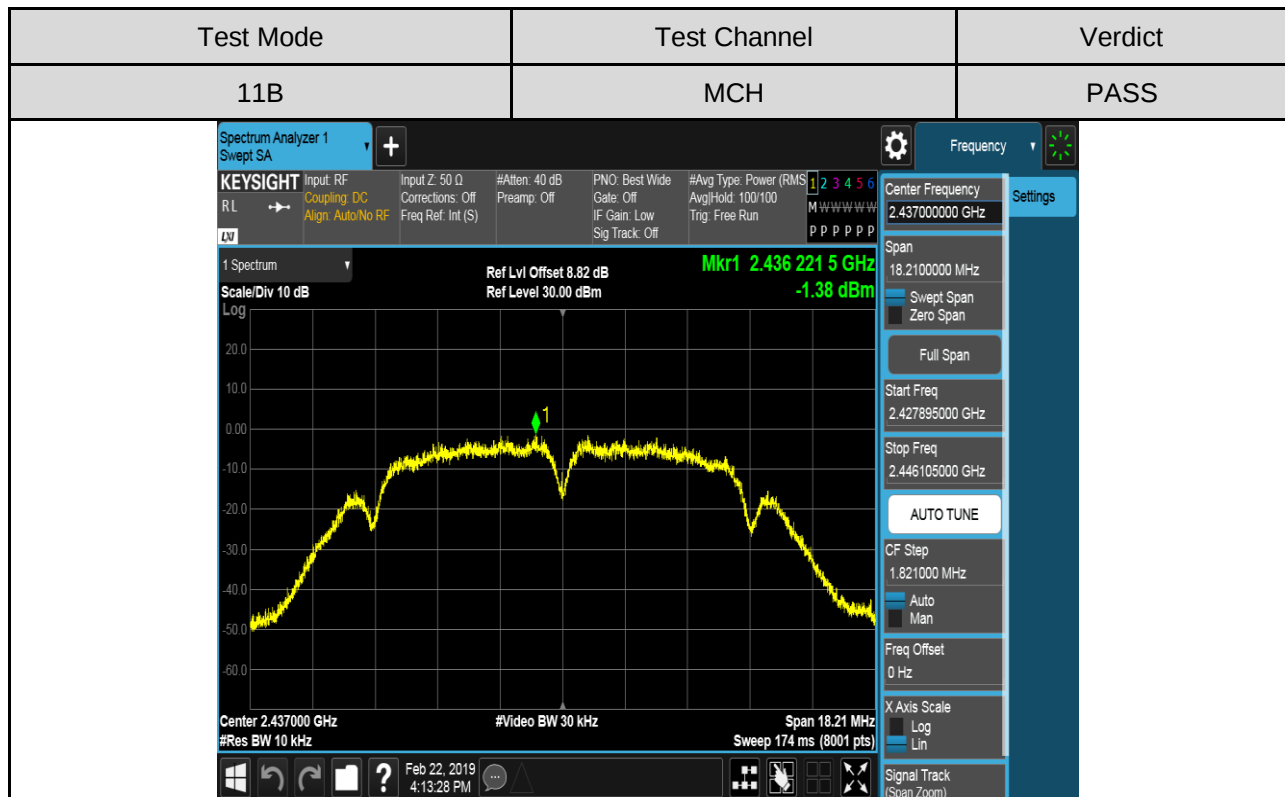
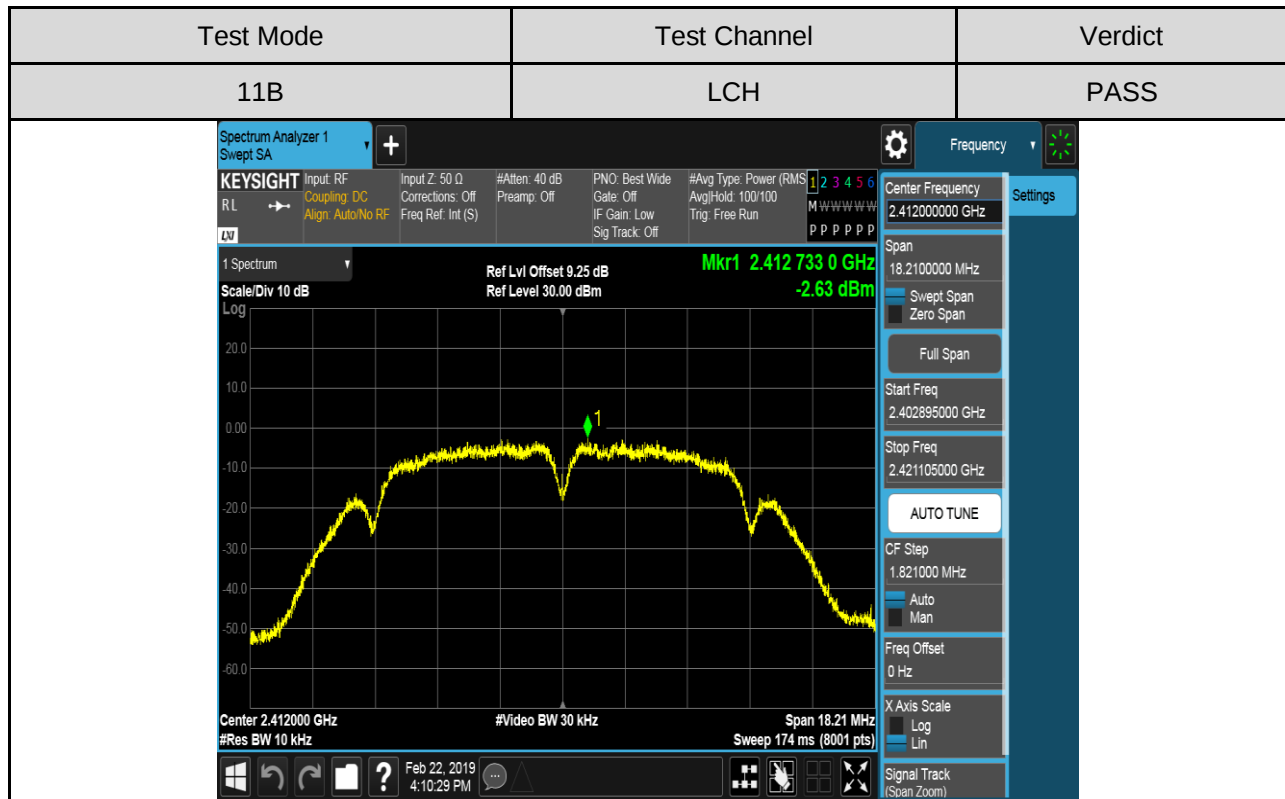


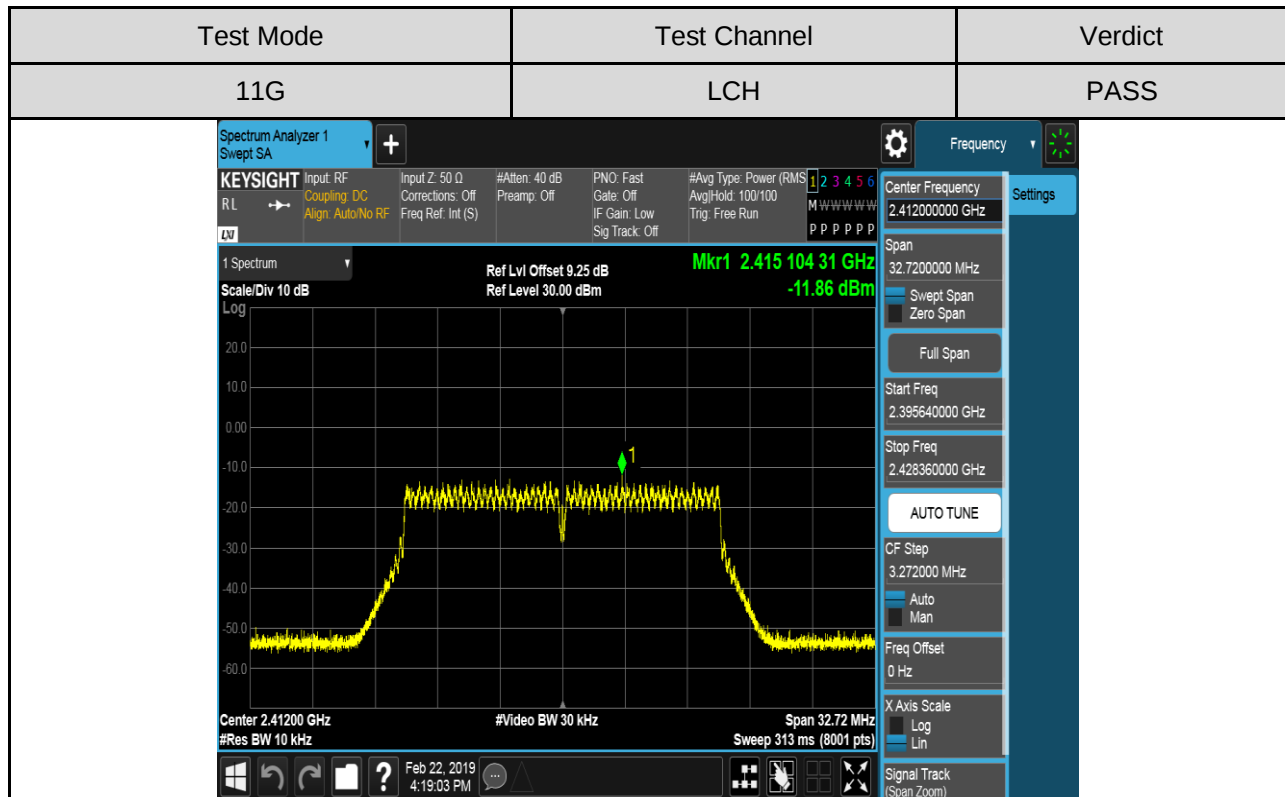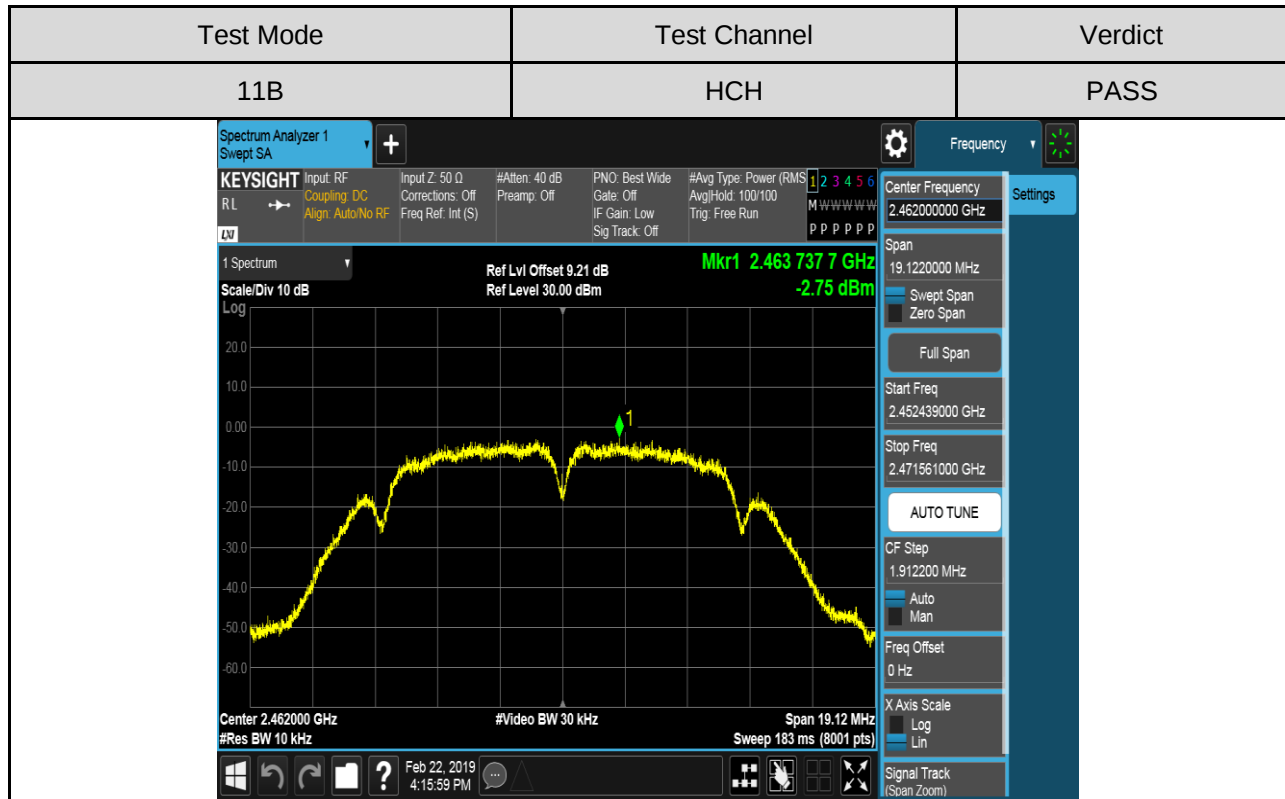

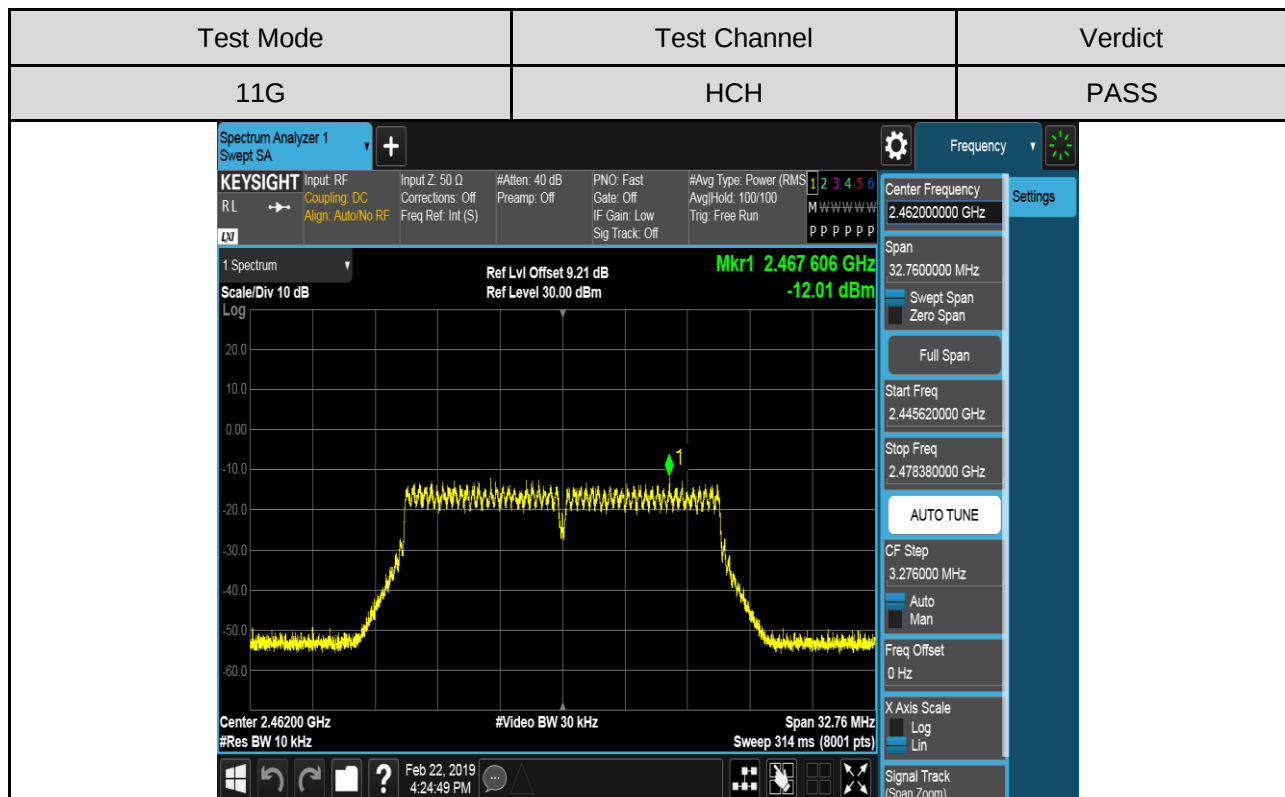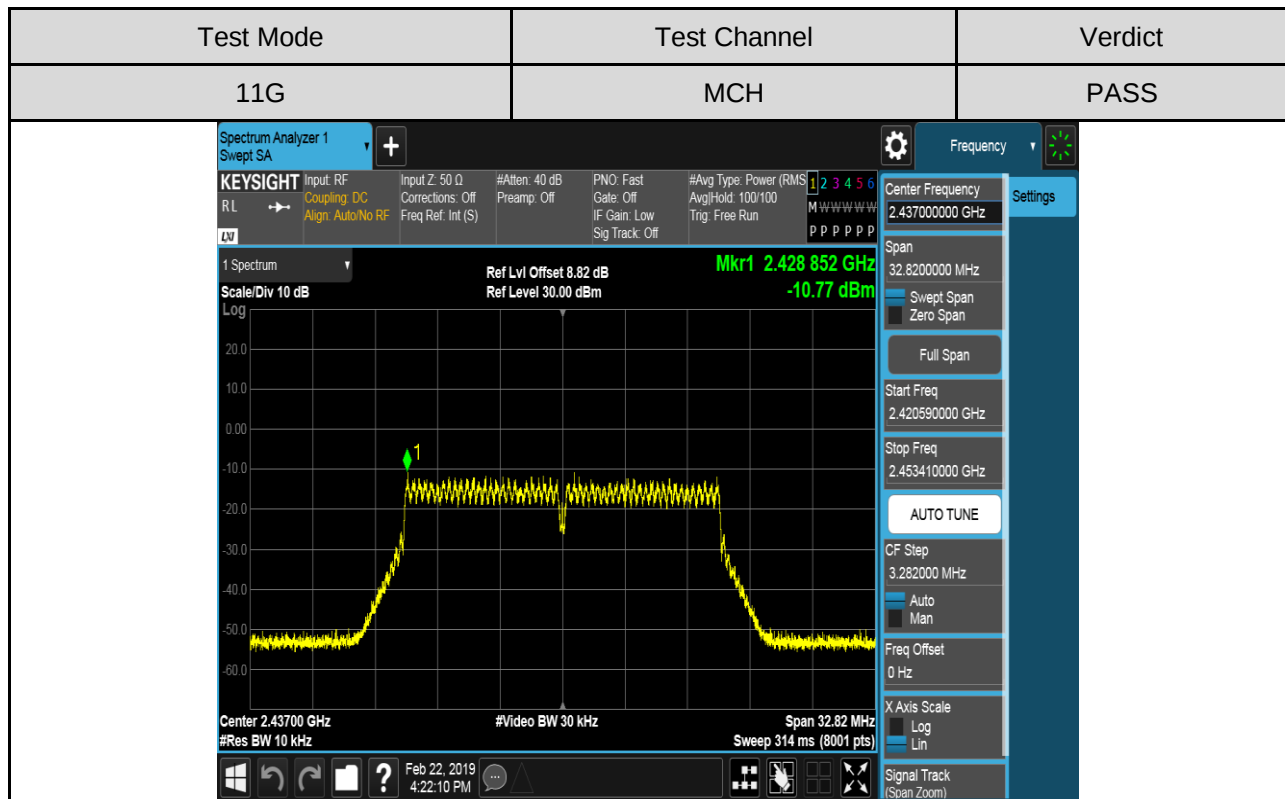

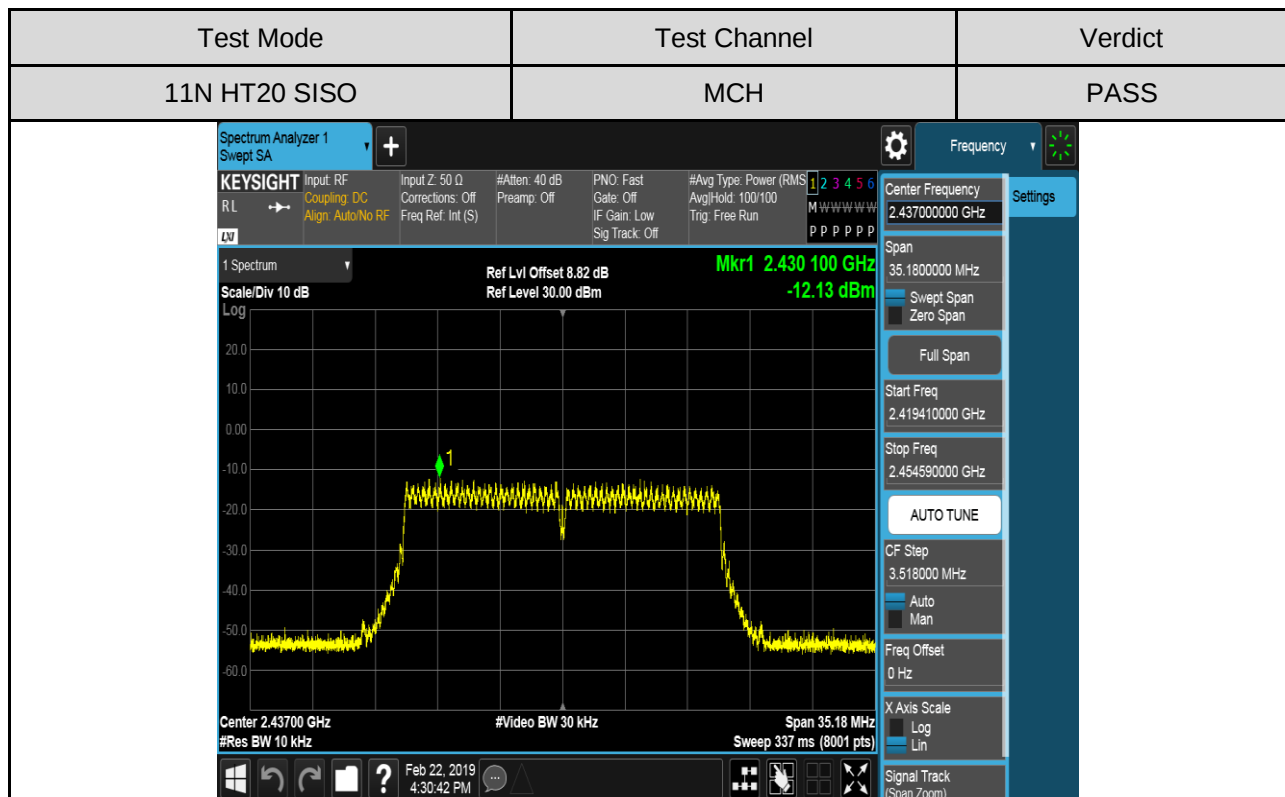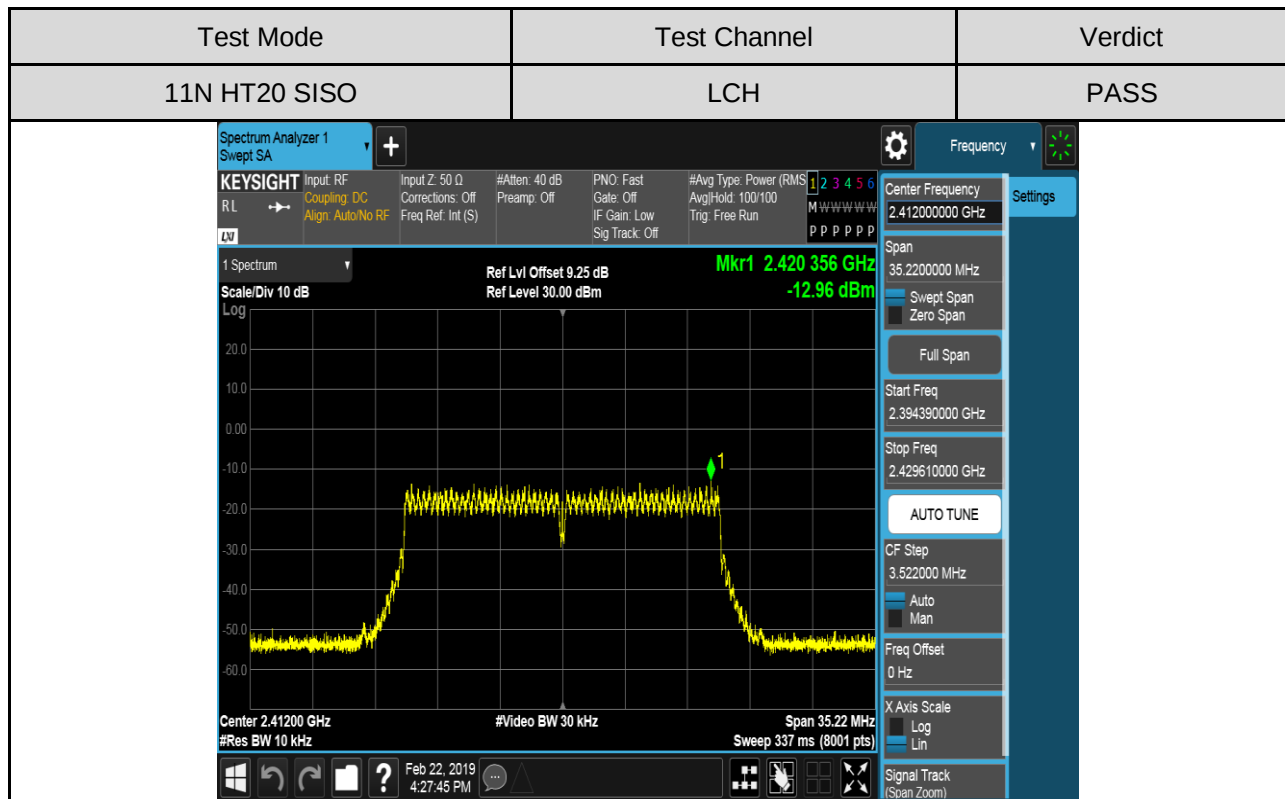

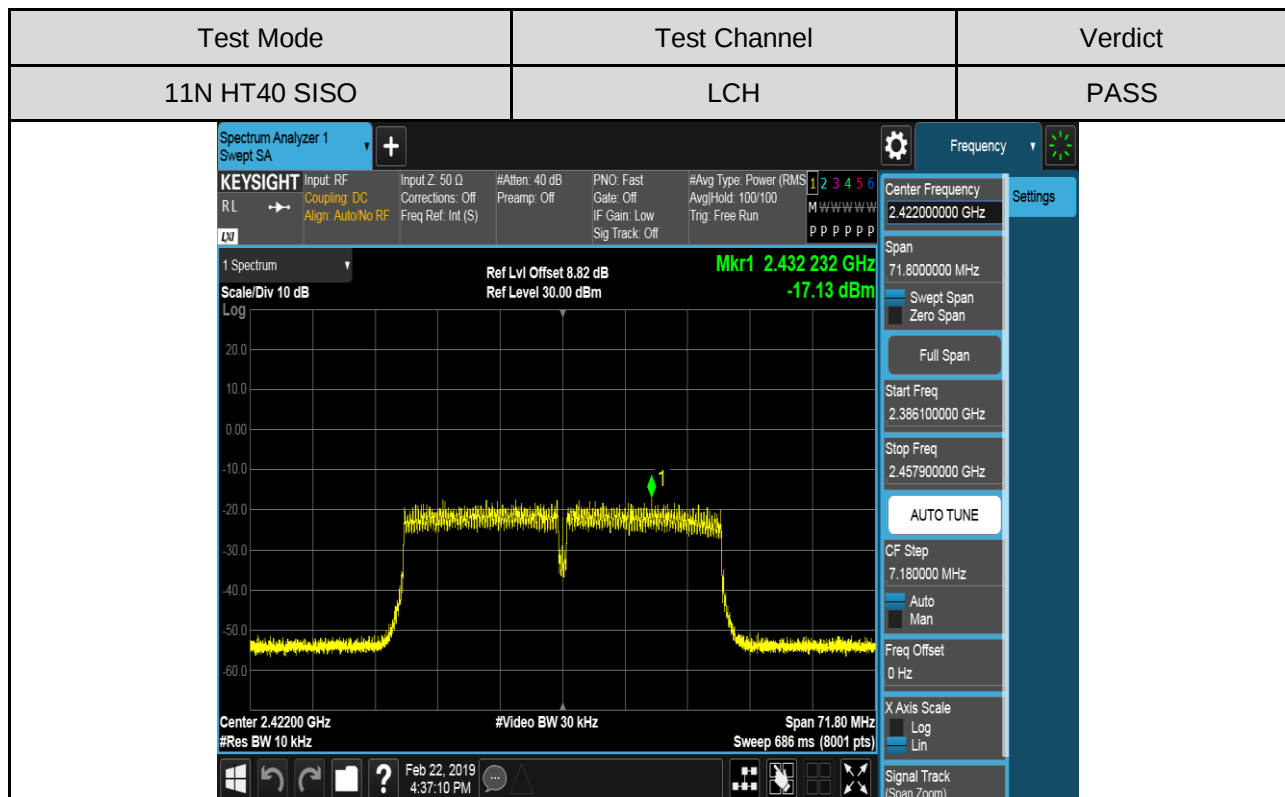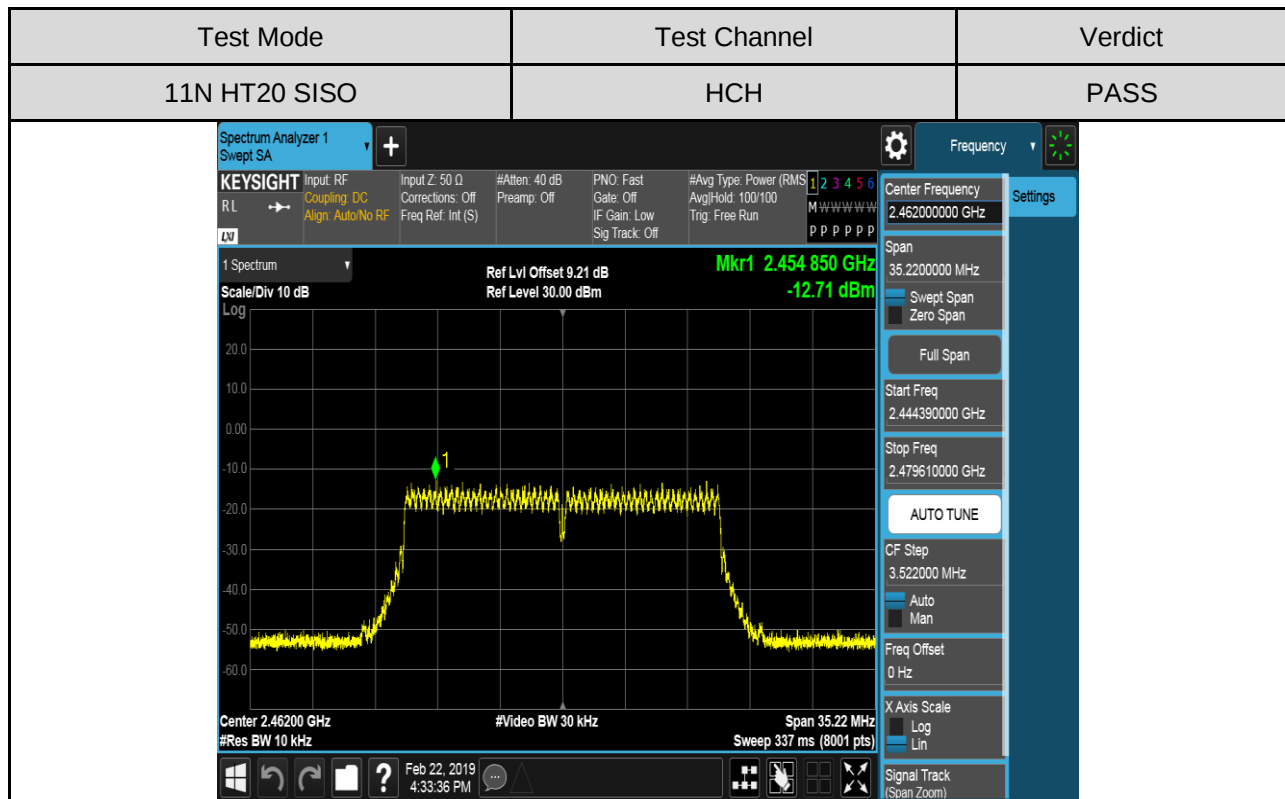

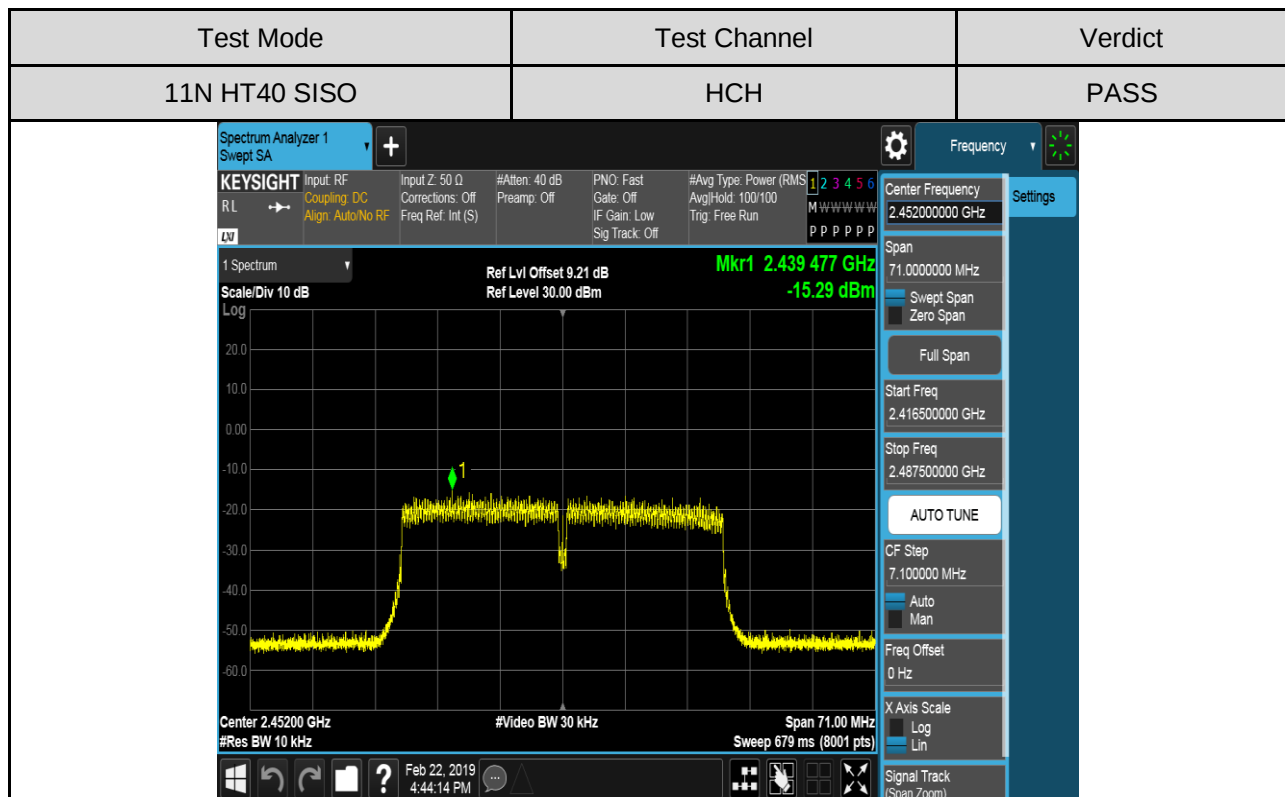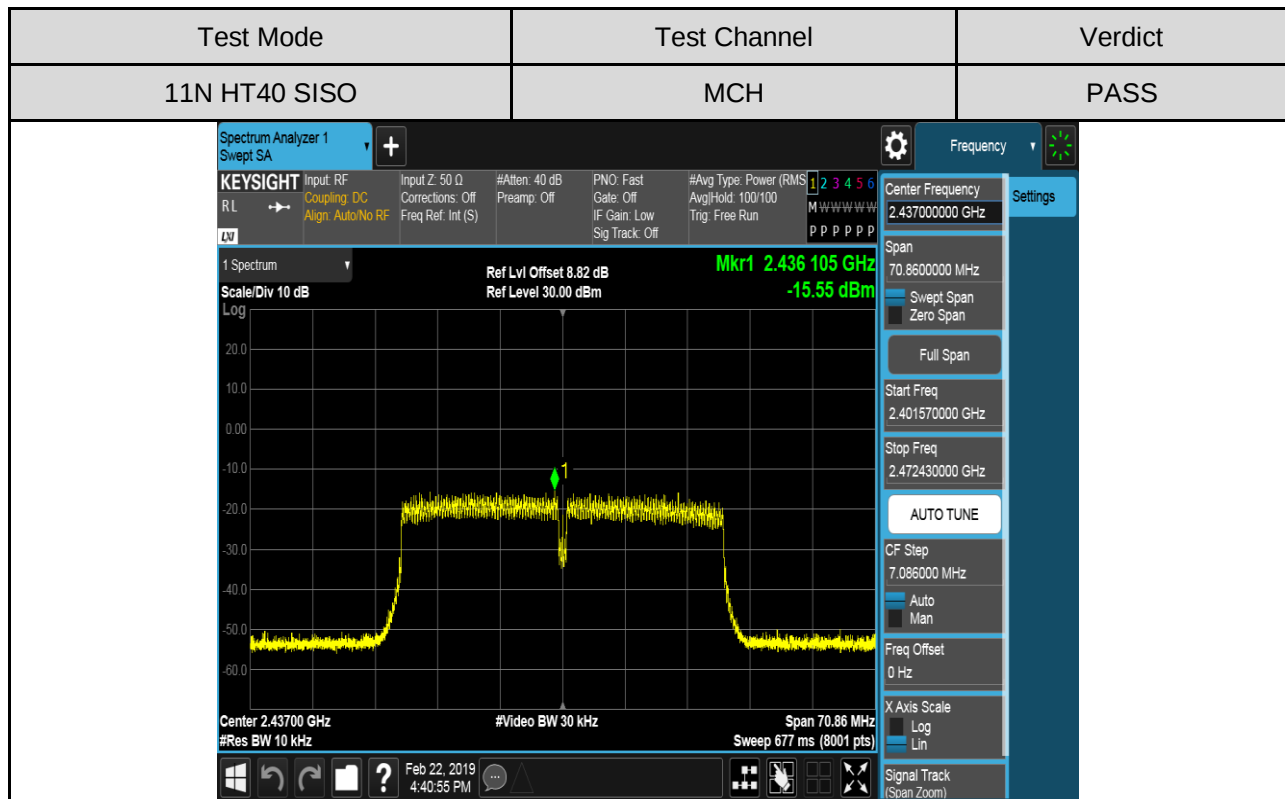



8.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 2		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.



TEST SETUP

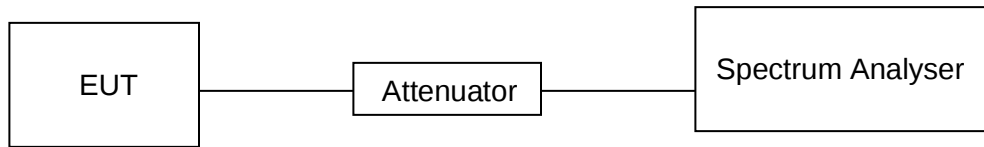

TEST ENVIRONMENT

Temperature	25°C	Relative Humidity	58 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 7.4V



Part I: CONDUCTED BANDEDGE



RESULTS TABLE



Test Mode	Test Antenna	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	Antenna 1	LCH	2.611	-40.229	-17.39	PASS
		HCH	2.527	-40.684	-17.47	PASS
11G	Antenna 1	LCH	0.284	-40.182	-19.72	PASS
		HCH	0.051	-40.962	-19.95	PASS
11N HT20 SISO	Antenna 1	LCH	-0.330	-40.242	-20.33	PASS
		HCH	-0.703	-41.435	-20.7	PASS
11N HT40 SISO	Antenna 1	LCH	-4.934	-41.359	-24.93	PASS
		HCH	-5.609	-40.629	-25.61	PASS





TEST GRAPHS

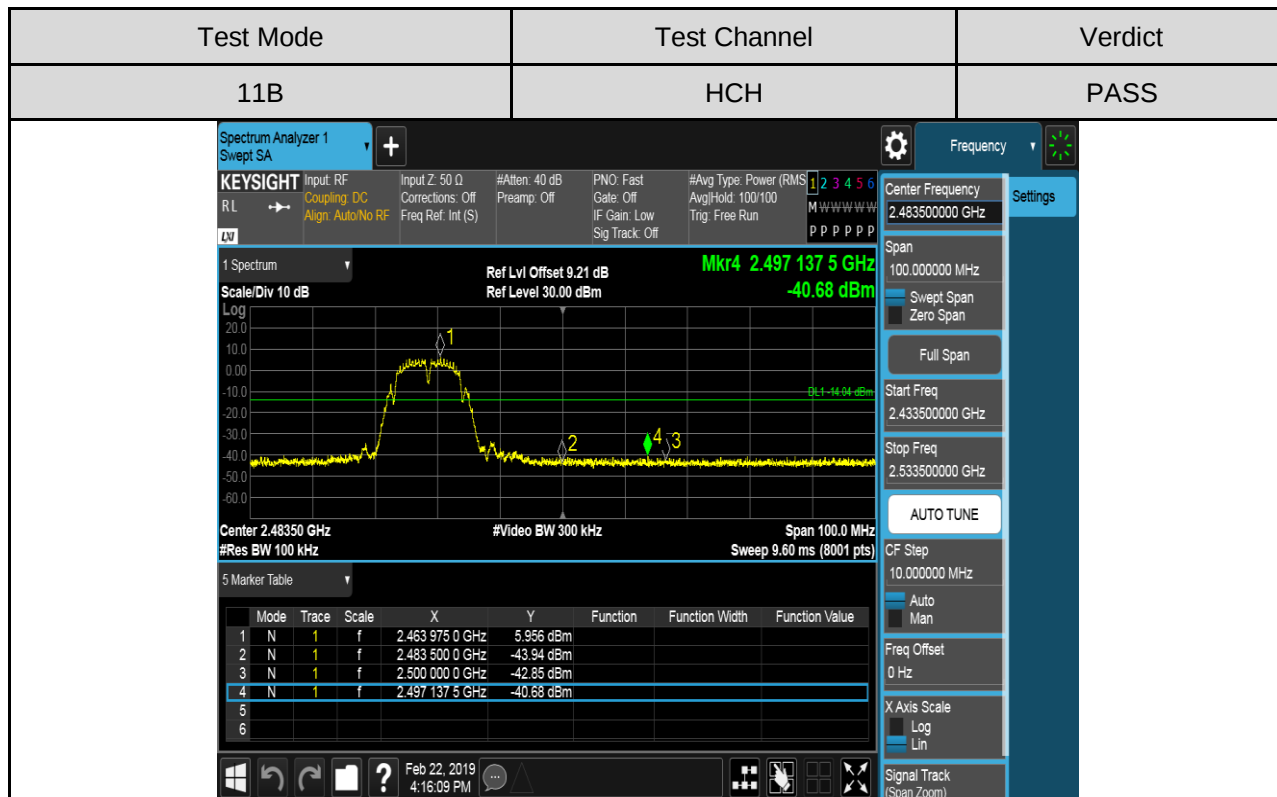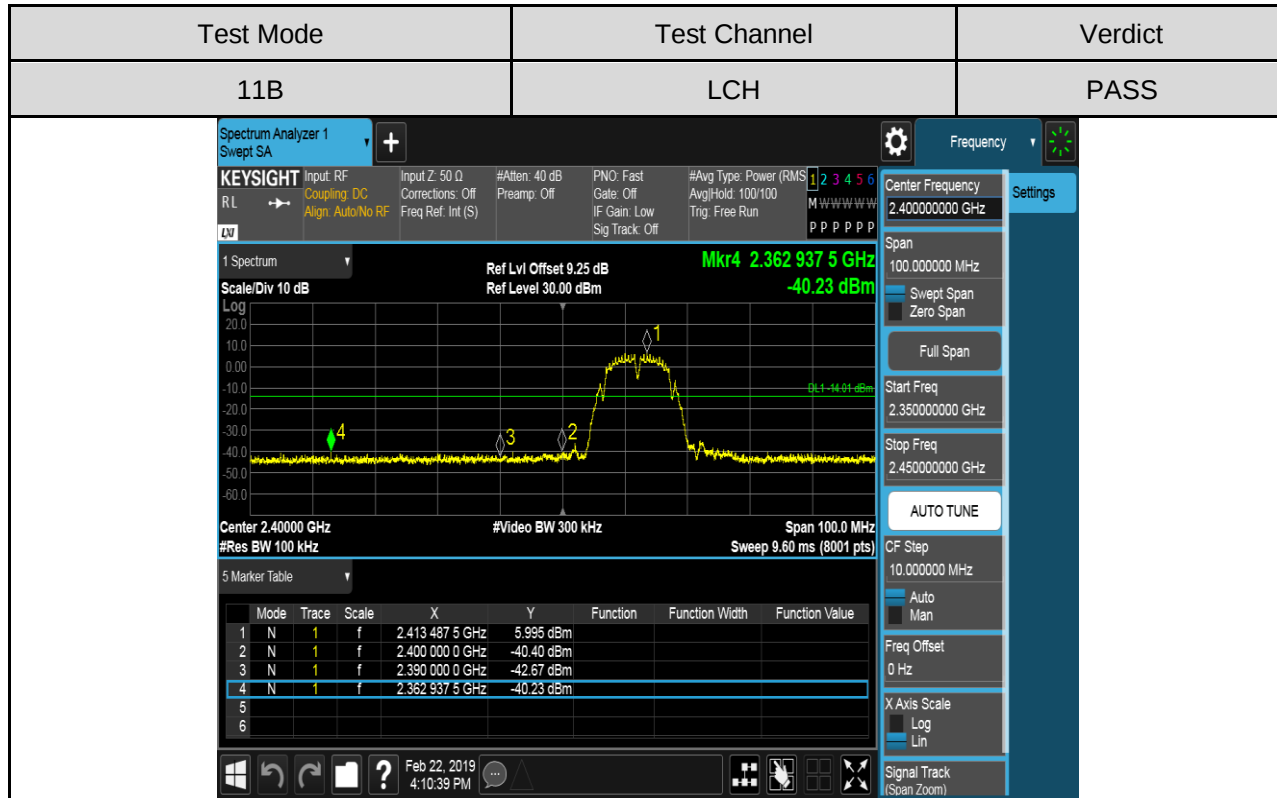

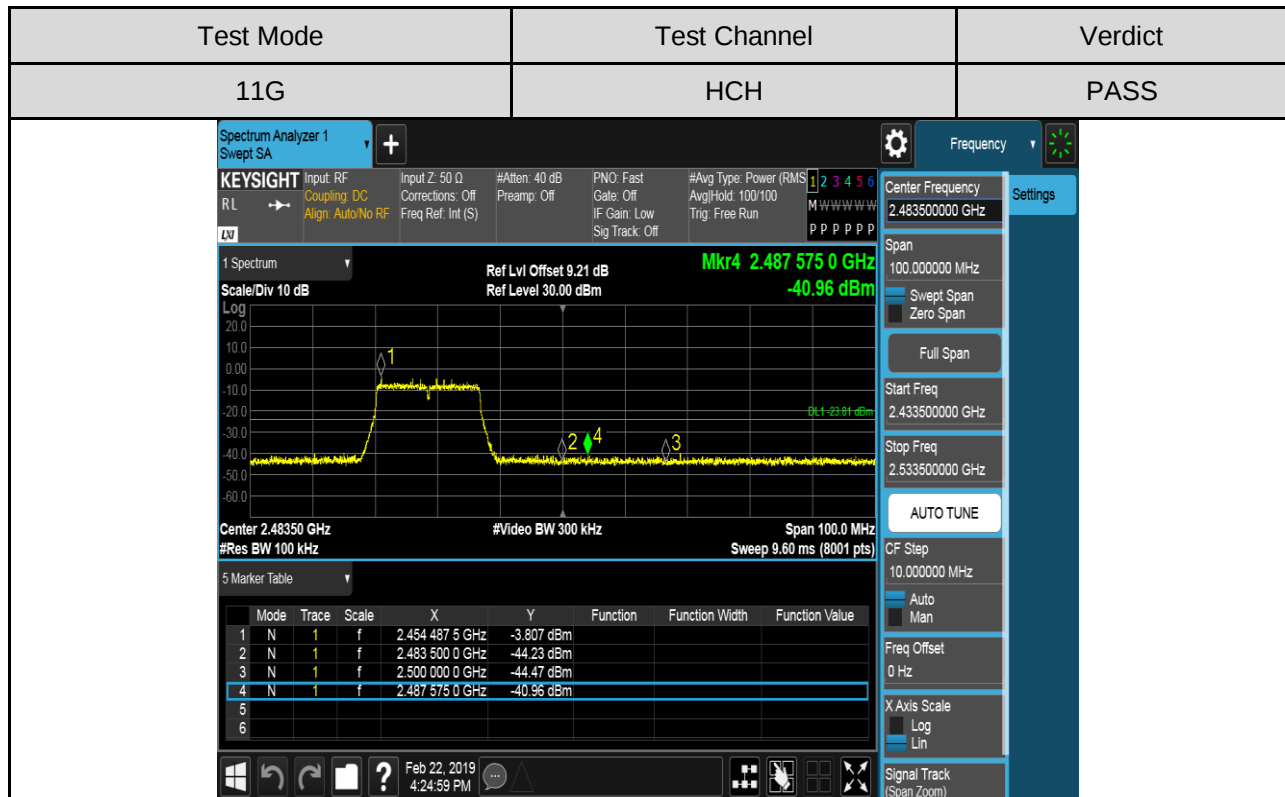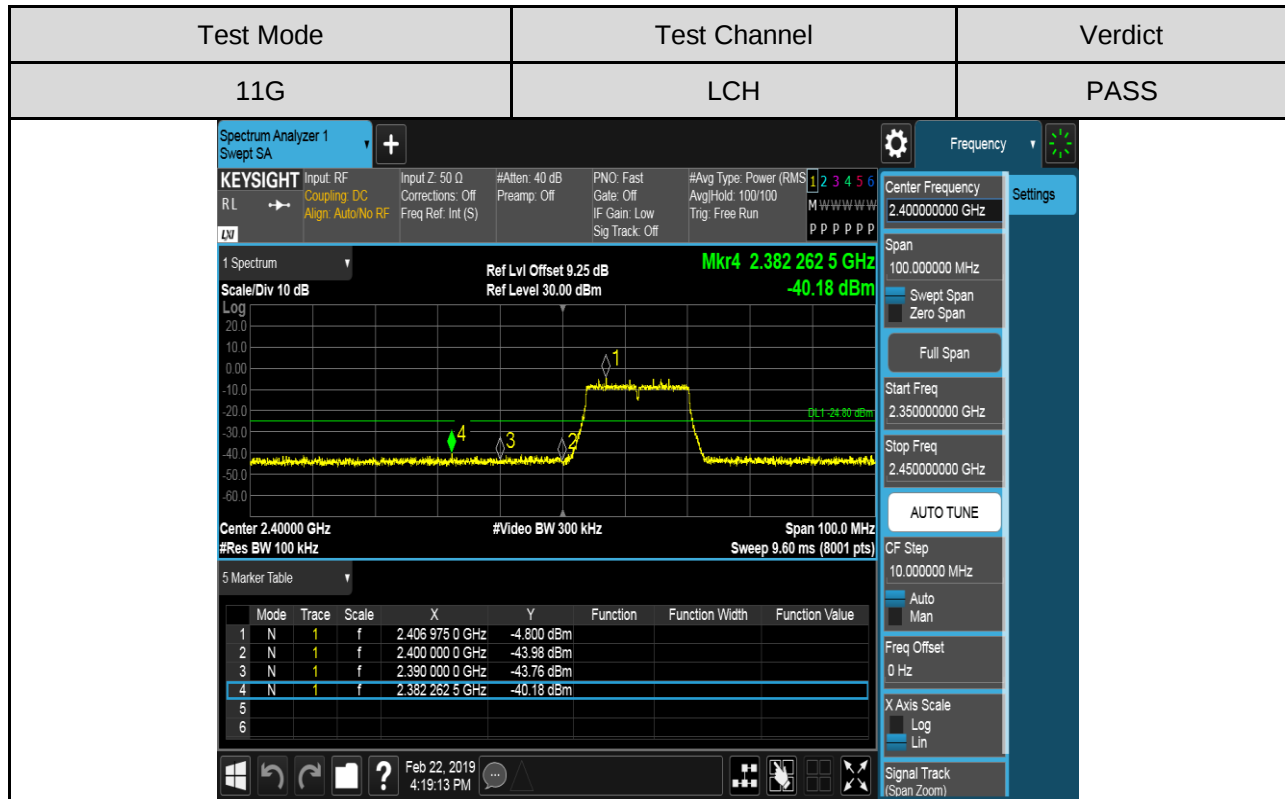

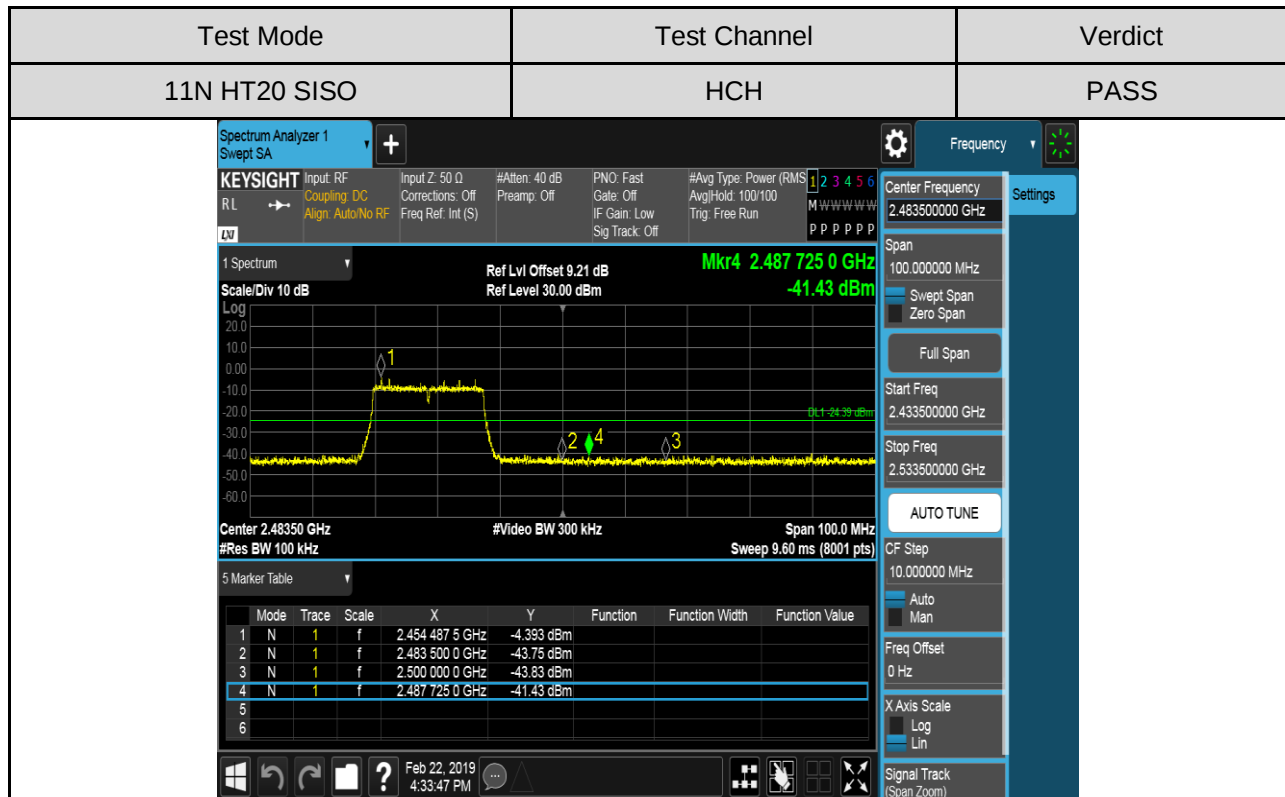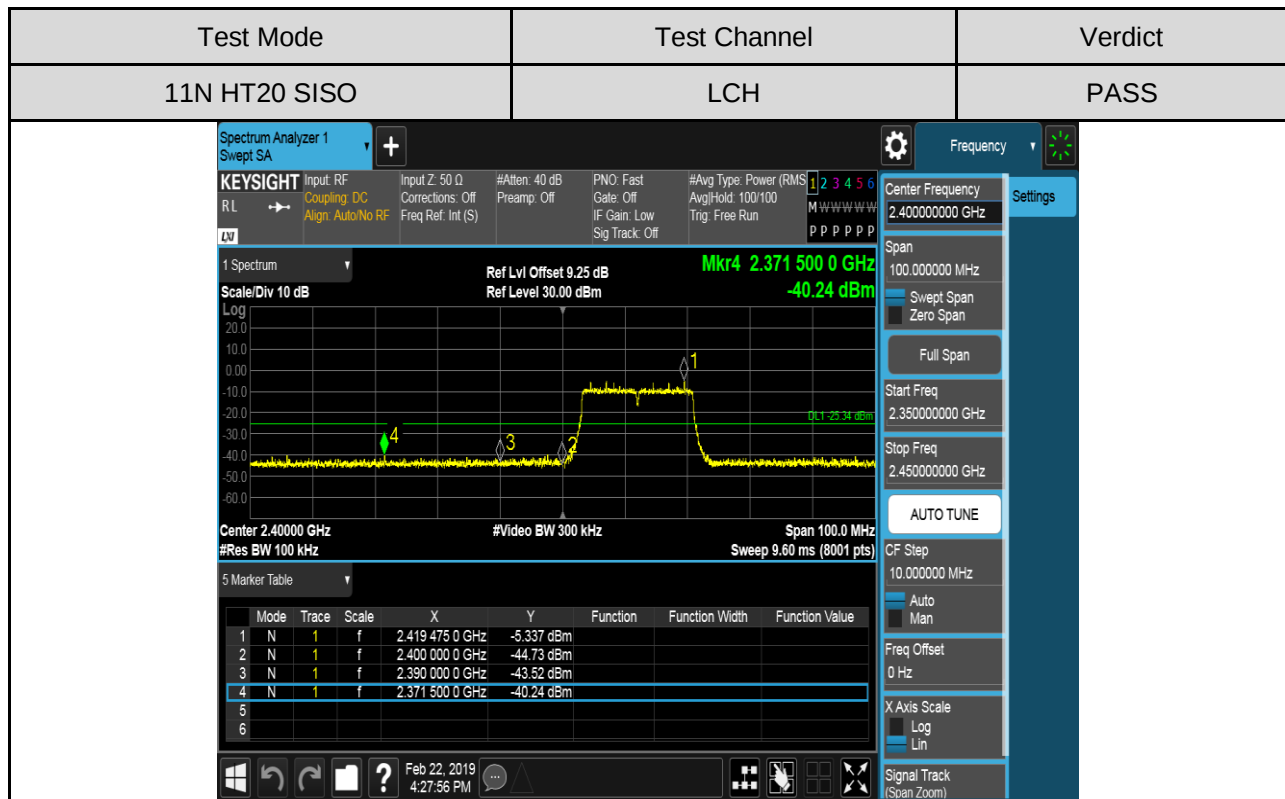

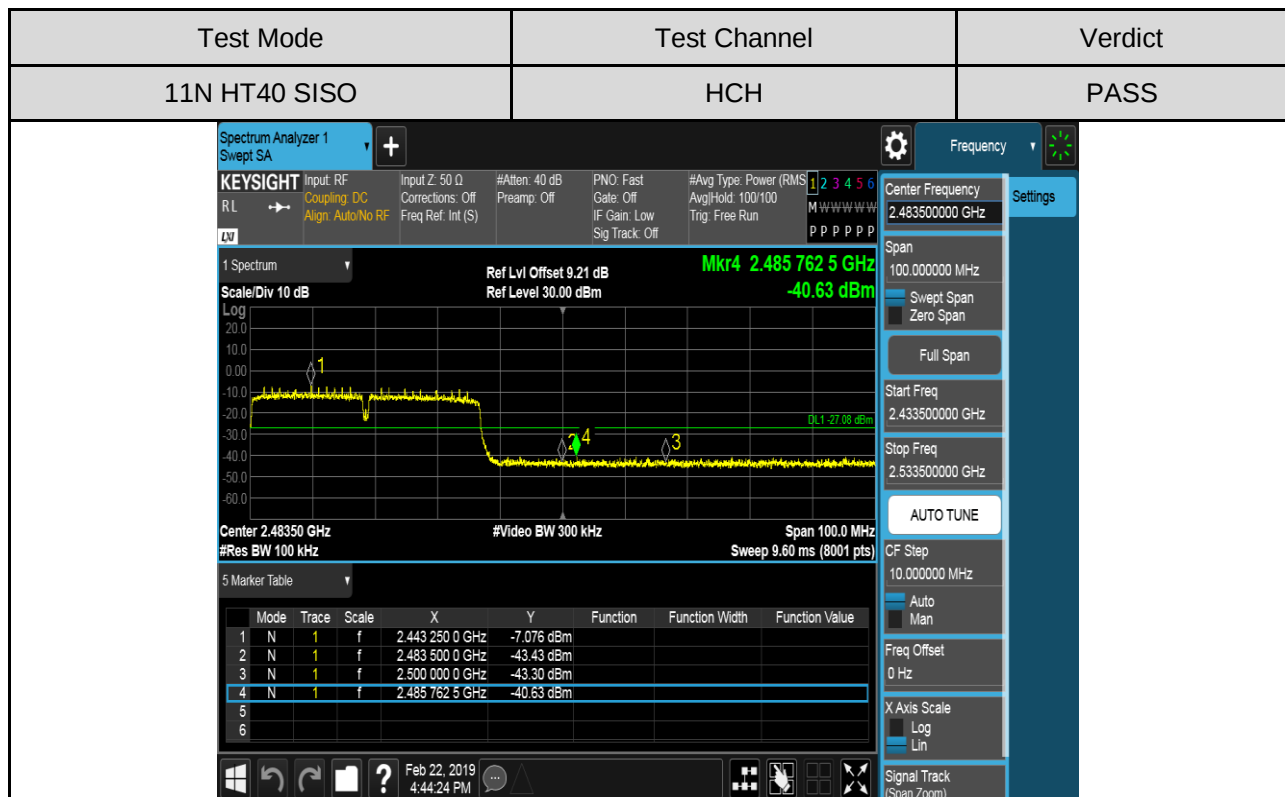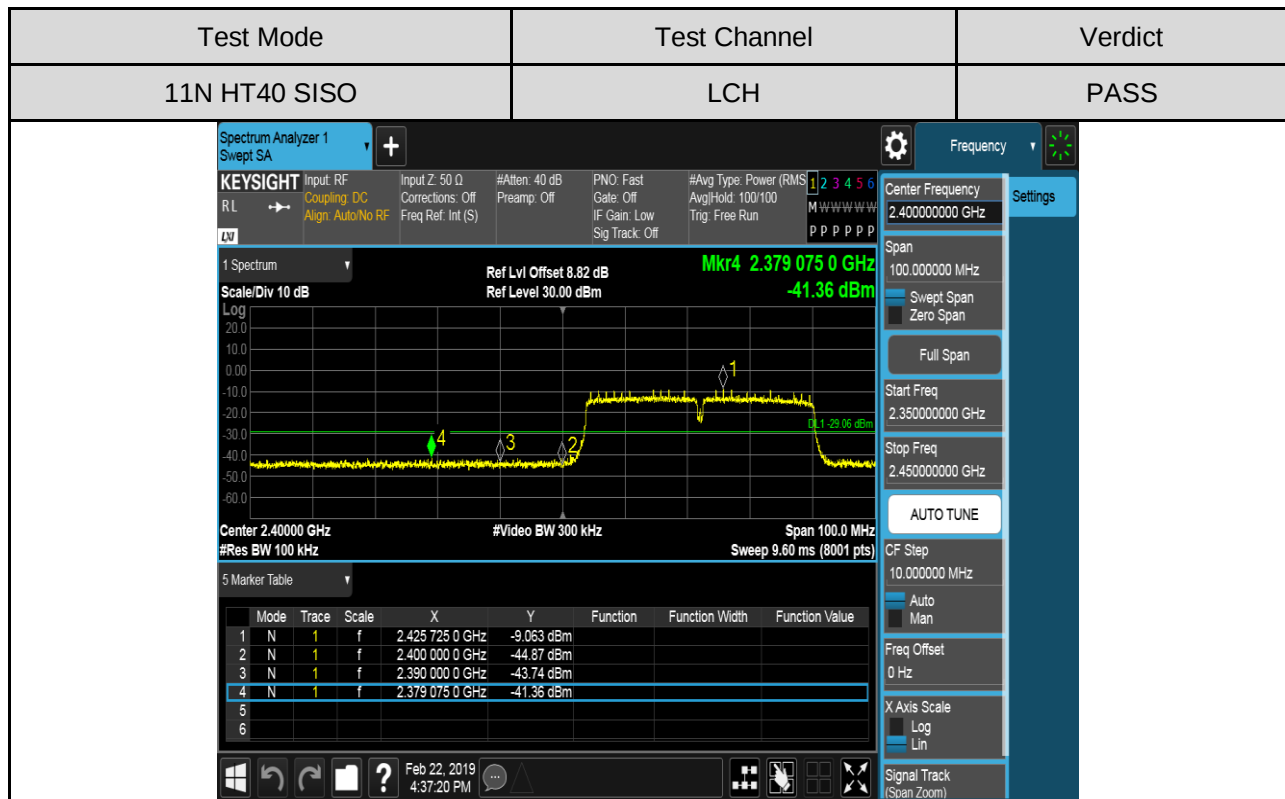



Part II: Conducted Spurious Emissions

TEST RESULT TABLE

Test Mode	Test Antenna	Channel	Pref(dBm)	Puw(dBm)	Verdict
11B	Antenna 1	LCH	6.19	<Limit	PASS
		MCH	7.11	<Limit	PASS
		HCH	5.97	<Limit	PASS
11G	Antenna 1	LCH	-4.74	<Limit	PASS
		MCH	-3.32	<Limit	PASS
		HCH	-3.90	<Limit	PASS
11N HT20 SISO	Antenna 1	LCH	-5.17	<Limit	PASS
		MCH	-3.85	<Limit	PASS
		HCH	-4.72	<Limit	PASS
11N HT40 SISO	Antenna 1	LCH	-9.04	<Limit	PASS
		MCH	-6.75	<Limit	PASS
		HCH	-7.24	<Limit	PASS




TEST GRAPHS



ANTENNA1

Test Mode	Channel	Verdict
11B	LCH	PASS

Pref test Plot

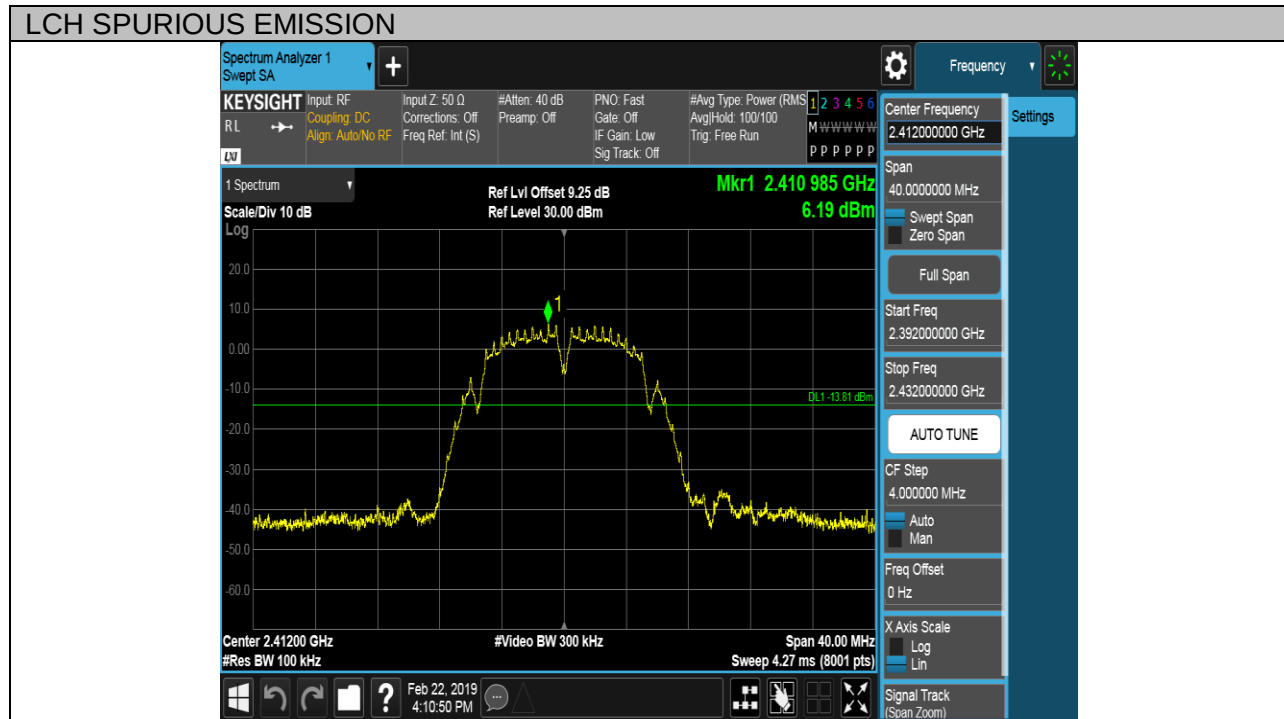

Puw test Plot

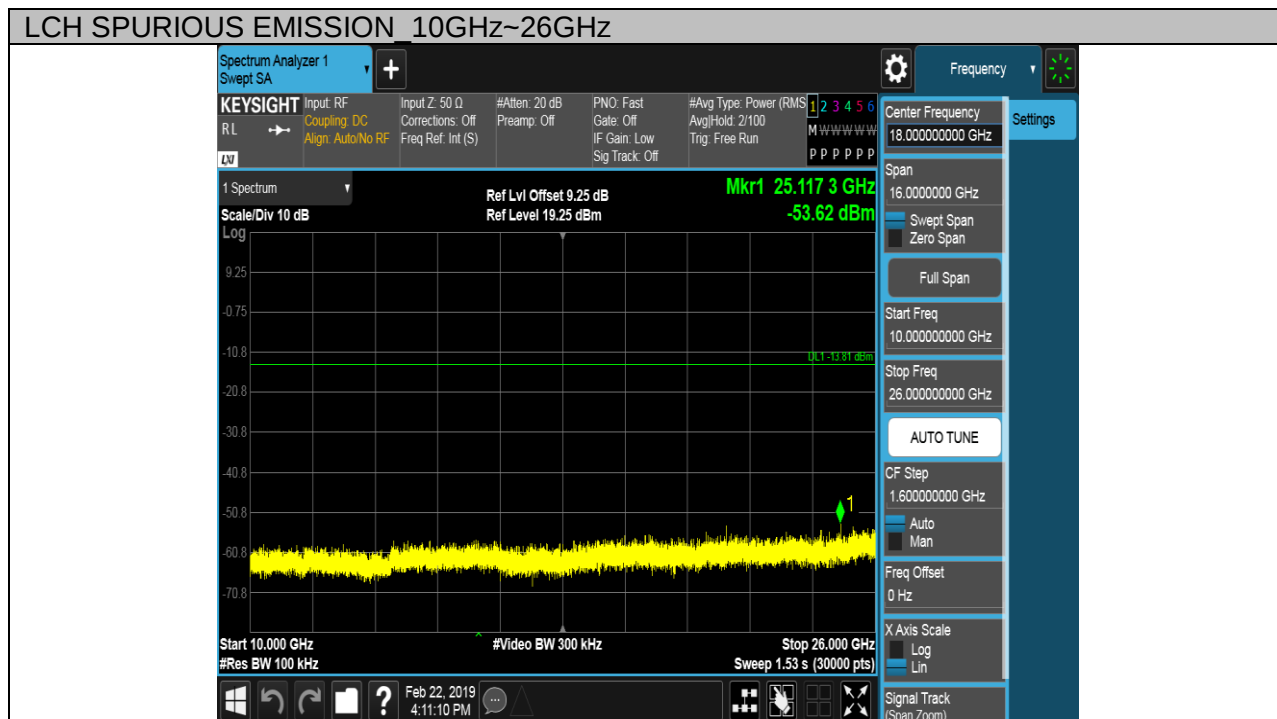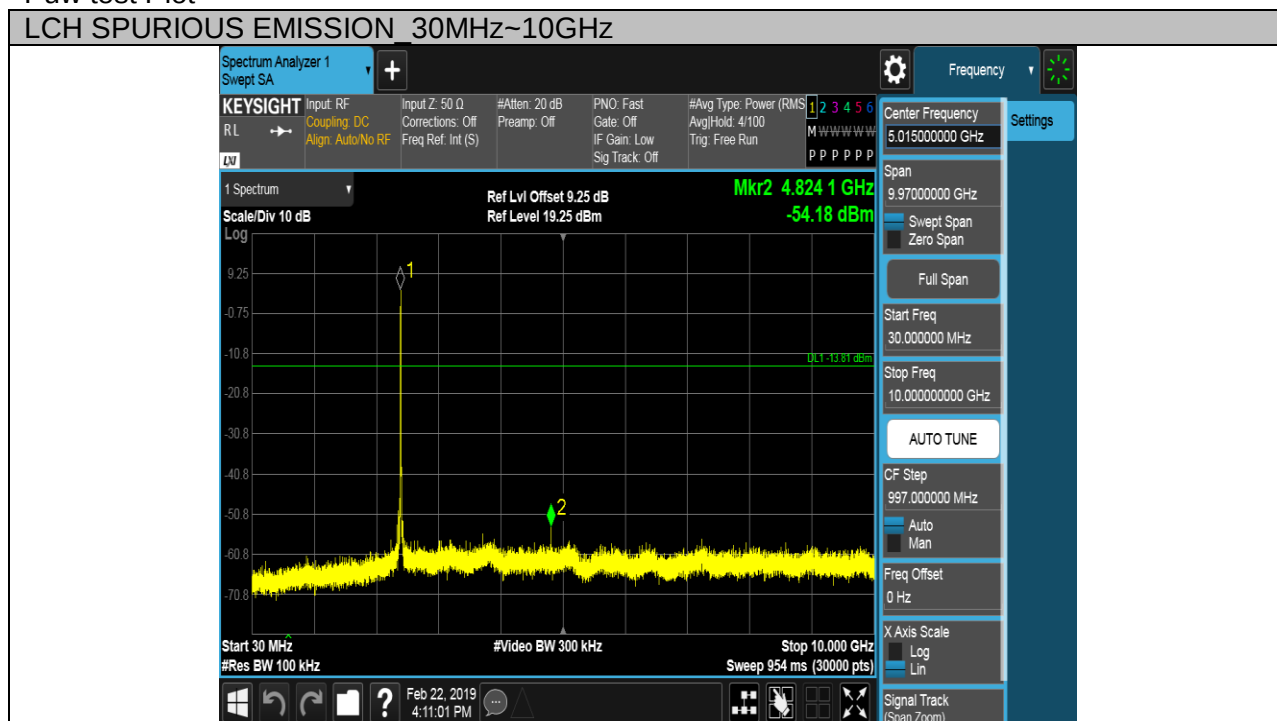





Test Mode	Channel	Verdict
11B	MCH	PASS

Pref test Plot






Puw test Plot

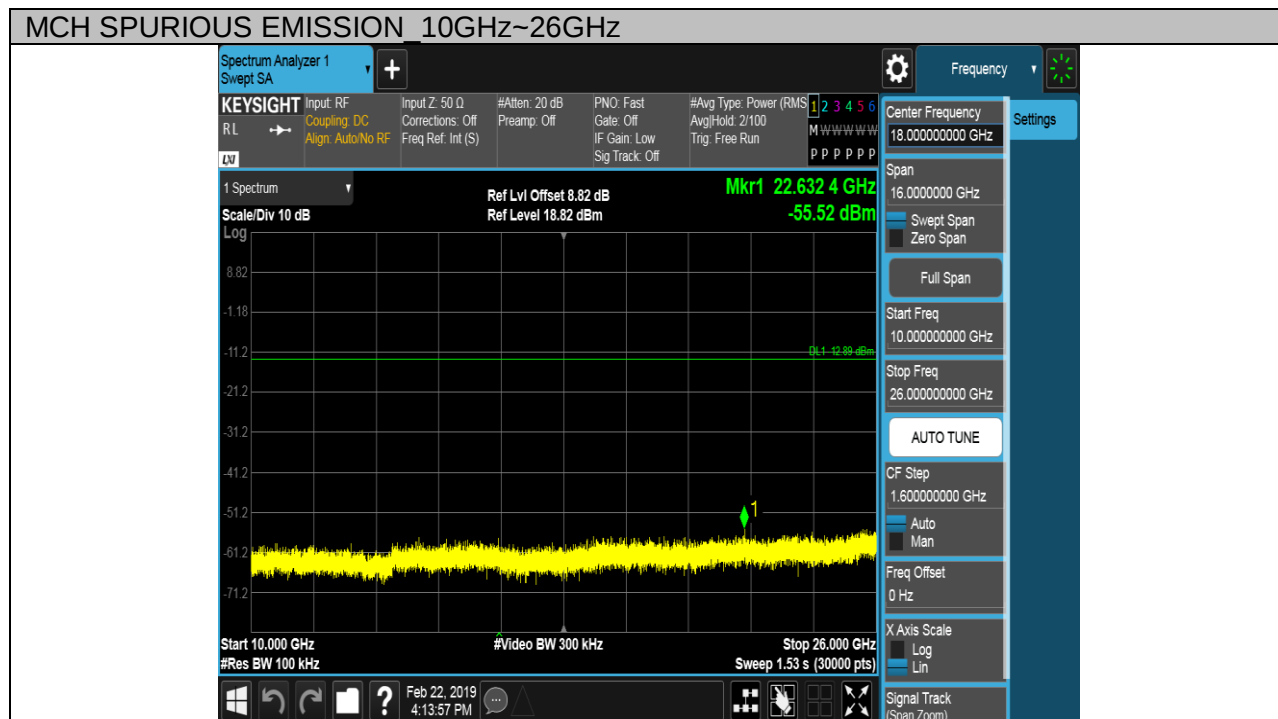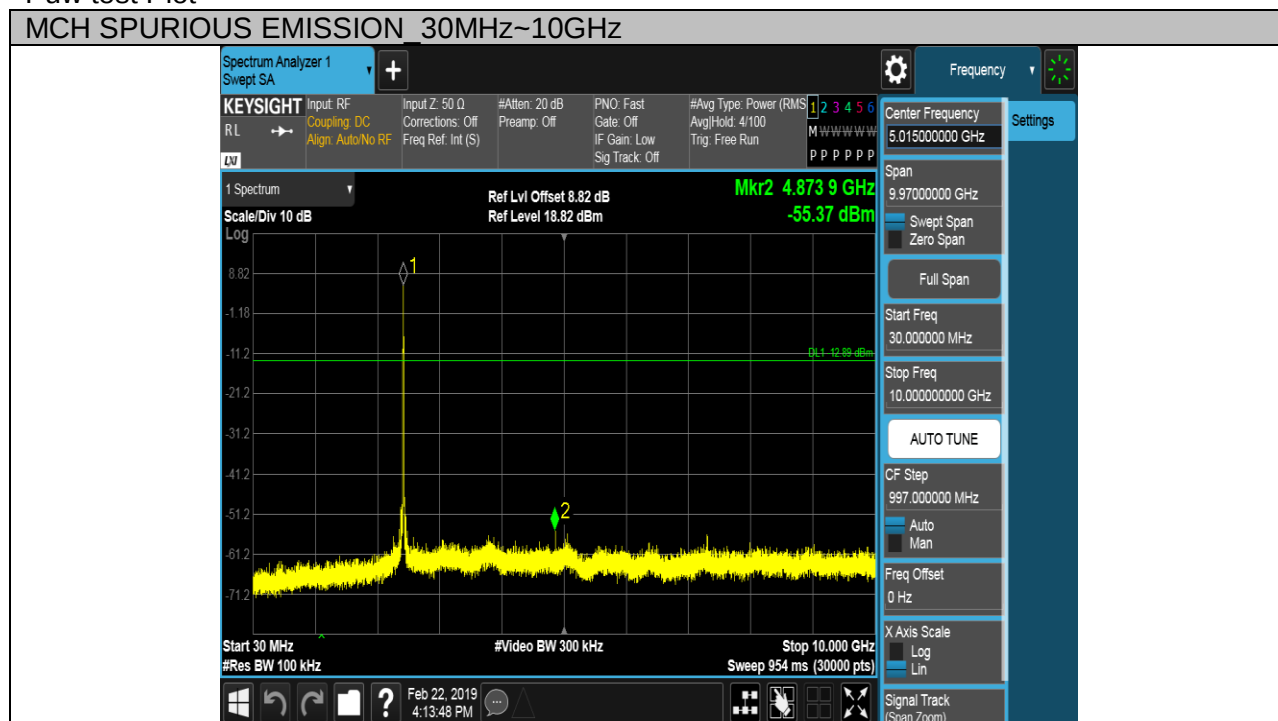





Test Mode	Channel	Verdict
11B	HCH	PASS

Pref test Plot

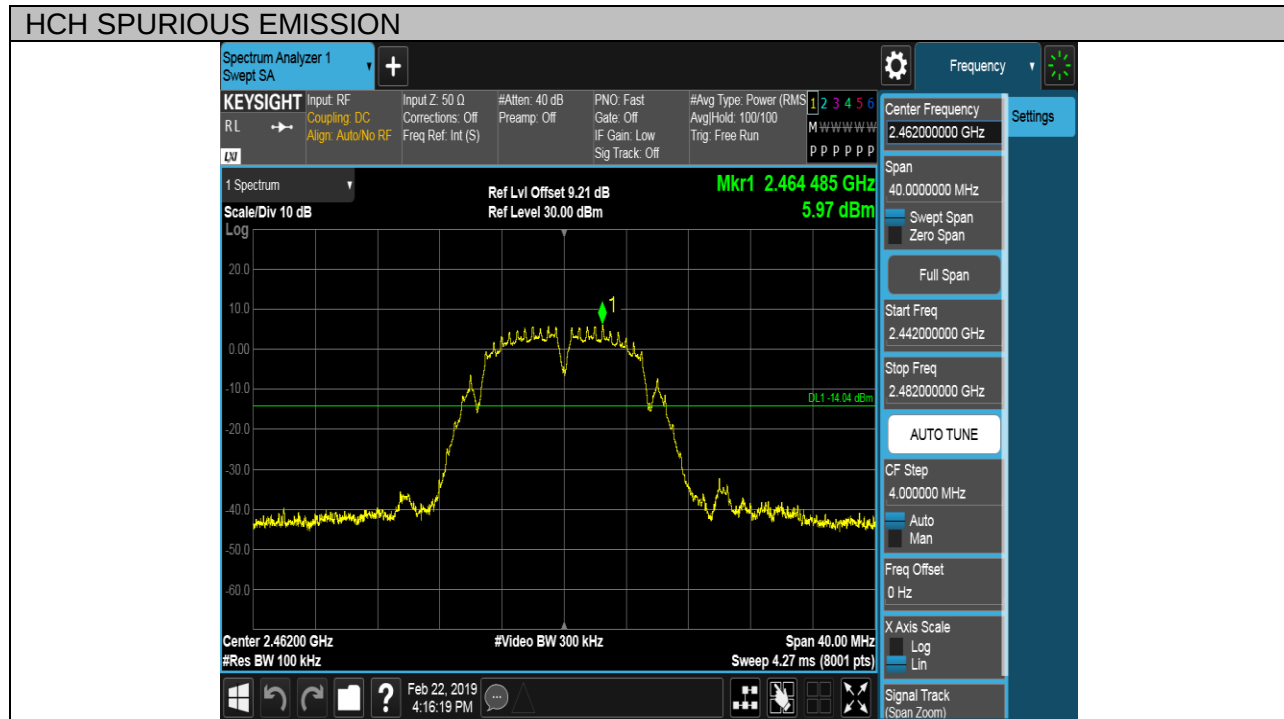

Puw test Plot

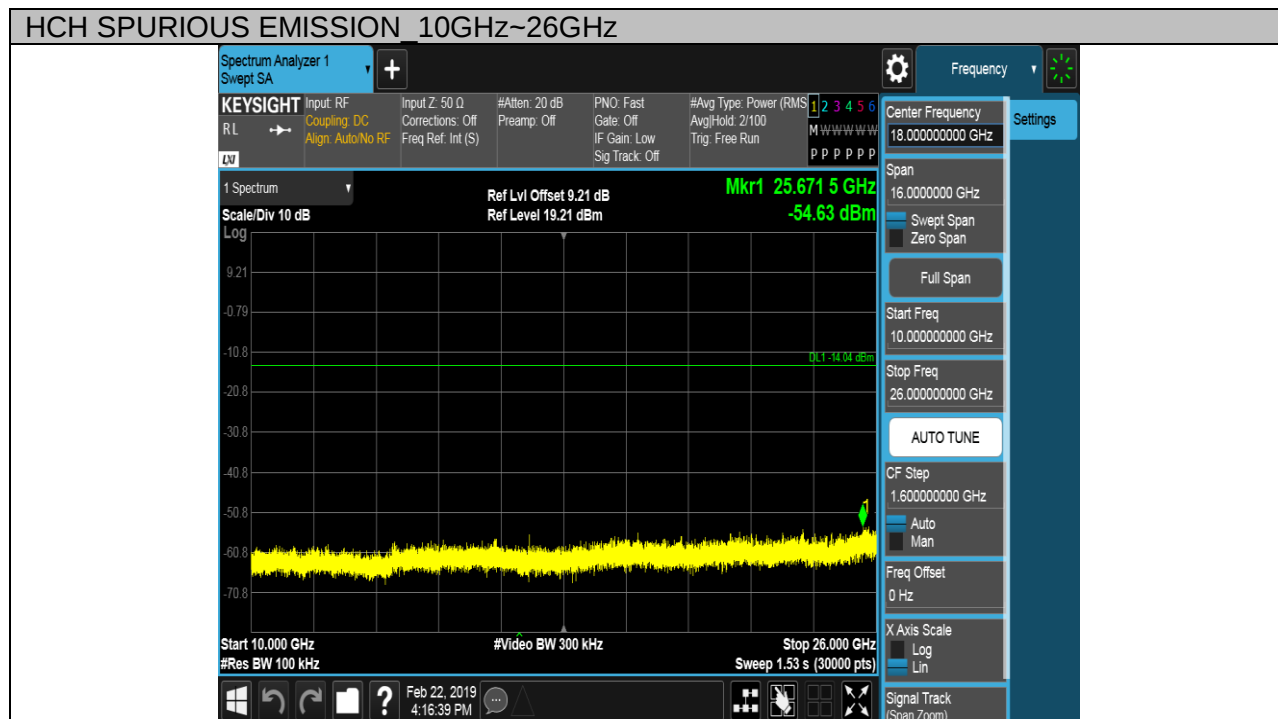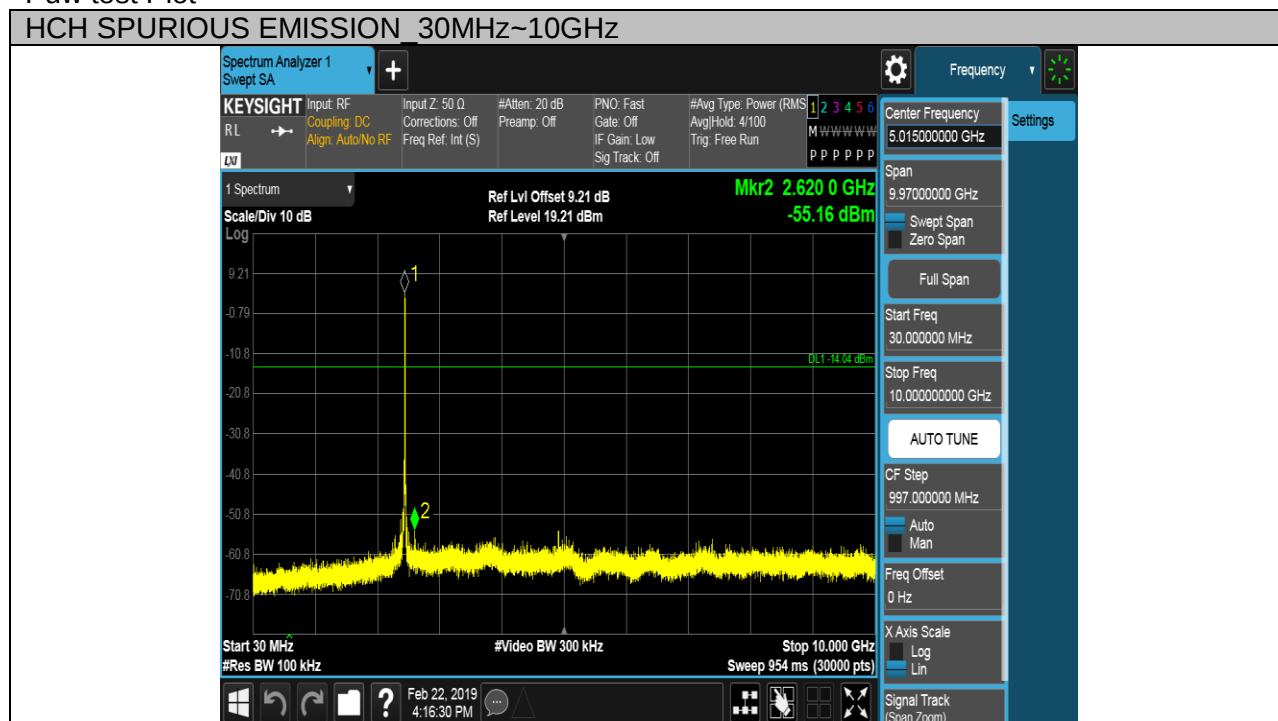



Test Mode	Channel	Verdict
11G	LCH	PASS

Pref test Plot

