

TEST REPORT

Application No.: SZCR2503001048TL
Applicant: GL Technologies (Hong Kong) Limited
Address of Applicant: Unit 601, Building 5W Hong Kong Science Park, Shatin, N.T., Hong Kong
Manufacturer: GL Technologies (Hong Kong) Limited
Address of Manufacturer: Unit 601, Building 5W, Hong Kong Science Park, Shatin, N.T., Hong Kong
Factory: Shenzhen Guanglian Zhitong Technology Co., LTD
Address of Factory: Room 305-306, Skyworth Digital Building, Shiyan Street, Baoan District, Shenzhen, China

Equipment Under Test (EUT):

EUT Name: Dual-band Wi-Fi 7 Travel Router
Model No.: GL-BE3600
Trade Mark: GL.iNET
FCC ID: 2AFIW-BE3600
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2025-03-19
Date of Test: 2025-03-27 to 2025-04-10
Date of Issue: 2025-04-14

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Keny Xu

Keny Xu
EMC Laboratory Manager



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Technical Services Co., Ltd.

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.ssgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 2 of 226

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2025-04-14		Original

Authorized for issue by:				
		Donjon Huang		
		Donjon Huang/Project Engineer		
		Eric Fu		
		Eric Fu/Reviewer		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

2 Test Summary

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Radiated Emissions (Below 1GHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions (Above 1GHz)		ANSI C63.10 (2013) Section 6.6	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)	Pass

Remark for report SZCR250300104803:

Model No.: GL-BE3600

This test report (Ref. No.: SZCR250300104803) is only valid with the original test report (Ref. No.: SZCR250100011903).

Compared with the original report, this report replaced chip QCN6422 with QCN6412. Apply for C2PC certification.

Therefore in this report Radiated Emissions (Below 1GHz), Radiated Emissions (Above 1GHz) and Radiated Emissions which fall in the restricted bands were fully retested on model GL-BE3600 and shown the data in this report, other test data please refer to the original report SZCR250100011903.



3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information	5
4.1 Details of E.U.T.	5
4.2 Measurement Uncertainty	6
4.3 Test Location	7
4.4 Test Facility	7
4.5 Deviation from Standards	7
4.6 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Matter Test Results	10
6.1 Radiated Emissions (Below 1GHz)	10
6.1.1 E.U.T. Operation	10
6.1.2 Test Mode Description	10
6.1.3 Test Setup Diagram	11
6.1.4 Measurement Procedure and Data	12
6.2 Radiated Emissions (Above 1GHz)	15
6.2.1 E.U.T. Operation	15
6.2.2 Test Mode Description	16
6.2.3 Test Setup Diagram	16
6.2.4 Measurement Procedure and Data	17
6.3 Radiated Emissions which fall in the restricted bands	66
6.3.1 E.U.T. Operation	66
6.3.2 Test Mode Description	67
6.3.3 Test Setup Diagram	67
6.3.4 Measurement Procedure and Data	68
7 Test Setup Photo	225
8 EUT Constructional Details (EUT Photos)	226



4 General Information

4.1 Details of E.U.T.

Power supply:	Powered by AC/DC adapter: Adapter Mode: TYPE-C30DIC Input: AC 100-240~50/60Hz 0.8A	
Cable(s):	Charging cable: 1m RJ45 cable: 1m	
WLAN Mode Supported:	802.11a:	20 MHz channel bandwidth
	802.11n:	20 MHz / 40 MHz channel bandwidth
	802.11ac:	20 MHz / 40 MHz / 80 MHz channel bandwidth
	802.11ax:	20 MHz / 40 MHz / 80 MHz/160MHz channel bandwidth
	802.11be:	20 MHz / 40 MHz / 80 MHz/160MHz channel bandwidth
Operation Frequency:	5150MHz to 5250MHz 5250MHz to 5350MHz 5470MHz to 5725MHz 5725MHz to 5850MHz	
Modulation Type:	802.11a:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11n:	OFDM (BPSK, QPSK, 16QAM, 64QAM)
	802.11ac:	OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
	802.11ax:	OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM)
	802.11be:	OFDMA (BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Channel Spacing:	20MHz:	802.11a/n(HT20)/ac(VHT20)/ax(HEW20)/ be(EHT20)
	40MHz:	802.11n(HT40)/ac(VHT40)/ax(HEW40)/ be(EHT40)
	80MHz:	802.11ac/ax/be(VHT80)/ax(HEW80)/ be(EHT80)
	160MHz:	802.11ax(HEW160)/ be(EHT160)
Antenna Type:	☐ External, ☒ Integrated	
Antenna Gain:	Ant1:3.42dBi; Ant2:3.47dBi;	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Smart System:	☒ SISO	802.11a/n/ac/ax/be
	☒ MIMO	TXBF: 802.11n/ac/ax/be: Tx & Rx
	☐ Diversity	802.11a: Tx & Rx
TPC Function:	☒ Support, ☐ Not Support	
DFS Function:	☒ Master	
	☐ Slave with radar detection	☐ Slave without radar detection
RF Cable:	4900MHz ~ 5250MHz(1.6dB)	5250MHz ~ 5350MHz(1.7dB)
	5470MHz ~ 5725MHz(1.8dB)	5725MHz ~ 5850MHz (2dB)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Remark: The information in this section is provided by the applicant or manufacturer, SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.

4.2 Measurement Uncertainty

Test Item	Measurement Uncertainty
Radiated Emissions (Below 1GHz)	$\pm 6.0\text{dB}$ for 3m; $\pm 5.0\text{dB}$ for 10m
Radiated Emissions (Above 1GHz)	$\pm 4.6\text{dB}$ (1-18GHz); $\pm 4.8\text{dB}$ (18-40GHz)
Radiated Emissions which fall in the restricted bands	$\pm 6.0\text{dB}$ (below 1GHz); $\pm 4.6\text{dB}$ (above 1GHz);
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 7 of 226

4.3 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

• VCCI (Member No. 1937)

The 3m Fully-anechoic chamber for above 1GHz, 10m Semi-anechoic chamber for below 1GHz, Shielded Room for Mains Port Conducted Interference Measurement and Telecommunication Port Conducted Interference Measurement of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen EMC laboratory have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-20026, R-14188, C-12383 and T-11153 respectively.

• FCC –Designation Number: CN1336

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1336. Test Firm Registration Number: 787754.

• Innovation, Science and Economic Development Canada

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0006.

IC#: 4620C.

4.5 Deviation from Standards

None

4.6 Abnormalities from Standard Conditions

None



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch EMC Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

5 Equipment List

Radiated Emissions (Below 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2023-11-20	2025-11-19
3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2023-06-19	2026-06-18
MXE EMI Receiver	Agilent Technologies	N9038A	SEM004-15	2024-08-14	2025-08-13
BiConiLog Antenna	ETS-LINDGREN	3142C	SEM003-01	2023-09-16	2025-09-15
Pre-Amplifier	Agilent Technologies	8447D	SEM005-01	2025-03-04	2026-03-03
Measurement Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM025-01	2024-07-06	2025-07-05

Radiated Emissions (Above 1GHz)					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 1G-18GHz	Tonscend	TAP01018050	SZ-WRG-M-051	2025-01-07	2026-01-06
Low Noise Amplifier 18G-40GHz	Tonscend	TAP18040048	SZ-WRG-M-052	2025-01-08	2026-01-07
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20
SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Signal & Spectrum Analyzer	Rohde & Schwarz	FSV	SZ-WRG-M-048	2025-01-07	2026-01-06
Low Noise Amplifier 30M-8GHz	Tonscend	TAP30M8G30	SZ-WRG-M-050	2025-01-07	2026-01-06
Double Ridge Horn Antenna 1GHz-18GHz	SCHWARZBECK	BBHA 9120 D	SZ-WRG-M-055	2023-12-21	2025-12-20



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch
 No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
 中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 9 of 226

SHF-EHF Horn 15GHz-40GHz	SCHWARZBECK	BBHA 9170	SZ-WRG-M-056	2023-12-25	2025-12-24
RSE Test Software	AUDIX	e3 V8.2014-6-27	N/A	N/A	N/A
Chamber	CRTSGSSAC966	N/A	SZ-WRG-C-063	2025-01-06	2028-01-05
Humidity and Temperature Indicator	deli	8838	SEM002-46	2024-07-24	2025-07-23

General used equipment

Equipment	Manufacturer	Model No.	Inventory No.	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	deli	8838	SEM002-32	2024-07-24	2025-07-23
Humidity/ Temperature Indicator	deli	8838	SEM002-33	2024-07-24	2025-07-23
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2025-03-03	2026-03-02



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

6 Radio Spectrum Matter Test Results

6.1 Radiated Emissions (Below 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

6.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.5 °C

Humidity: 46.8 % RH

Atmospheric Pressure: 1020 mbar


6.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Pre-scan	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and



	found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
--	---

6.1.3 Test Setup Diagram

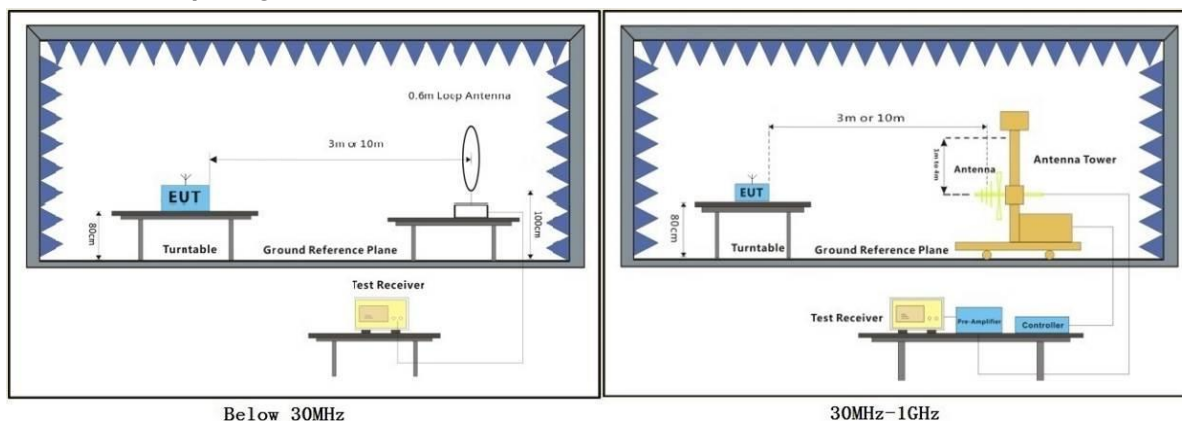

6.1.4 Measurement Procedure and Data


- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11a. Only the worst case is recorded in the report.
3. Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. The disturbance below 1GHz was very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Test Mode: 01; Polarity: Horizontal

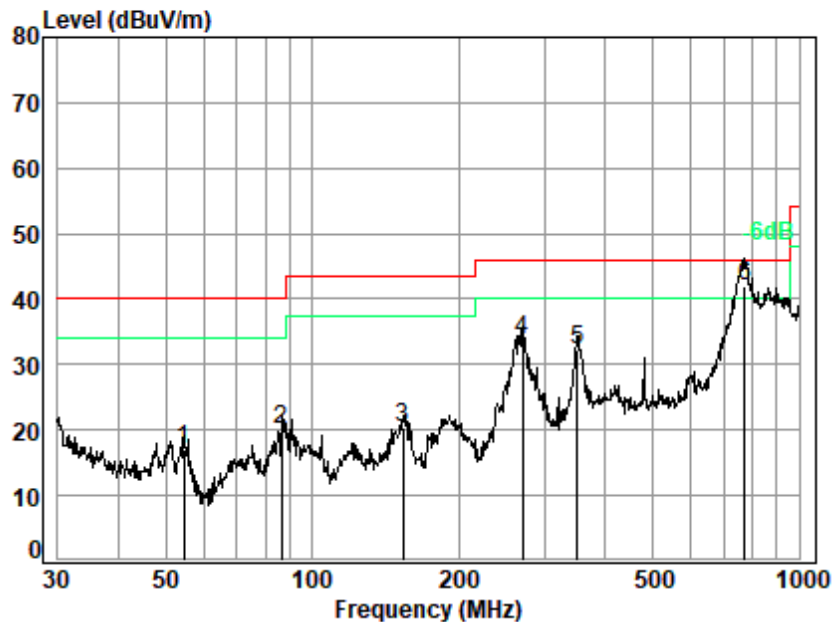


Site : chamber
Condition: 3m HORIZONTAL
Job No. : 01048TL
Test Mode: 01

		Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	54.452	12.05	0.90	27.72	31.82	17.05	40.00	-22.95	QP
2	86.503	11.24	1.14	27.63	35.39	20.14	40.00	-19.86	QP
3	153.739	13.43	1.56	27.36	32.73	20.36	43.50	-23.14	QP
4	270.375	17.10	2.09	26.87	41.53	33.85	46.00	-12.15	QP
5	350.477	19.94	2.41	26.96	36.97	32.36	46.00	-13.64	QP
6 q	774.158	26.84	3.78	27.54	39.03	42.11	46.00	-3.89	QP



Test Mode: 01; Polarity: Vertical

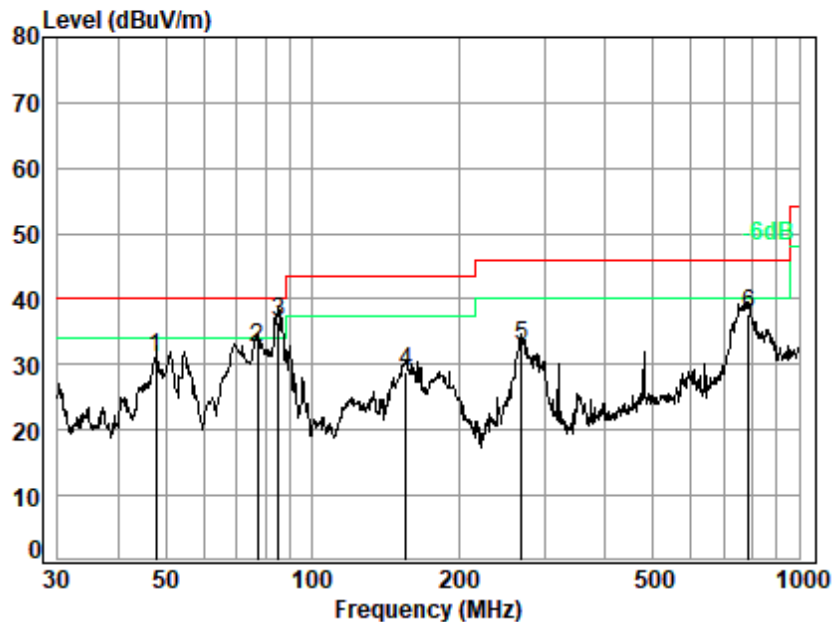

Site : chamber
Condition: 3m VERTICAL
Job No. : 01048TL
Test Mode: 01

	Ant	Cable	Preamp	Read		Limit	Over	
	Freq	Factor	Loss	Factor	Level	Level	Line	Limit Remark
	MHz	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB
1	47.826	13.36	0.84	27.74	44.51	30.97	40.00	-9.03 QP
2	77.051	10.39	1.07	27.66	48.78	32.58	40.00	-7.42 QP
3 q	85.298	11.07	1.13	27.63	52.03	36.60	40.00	-3.40 QP
4	155.910	13.58	1.57	27.36	40.97	28.76	43.50	-14.74 QP
5	269.428	17.10	2.08	26.88	40.41	32.71	46.00	-13.29 QP
6	787.851	27.15	3.82	27.51	34.23	37.69	46.00	-8.31 QP



6.2 Radiated Emissions (Above 1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C

Humidity: 50.9 % RH


Atmospheric Pressure: 1020 mbar



6.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.

6.2.3 Test Setup Diagram

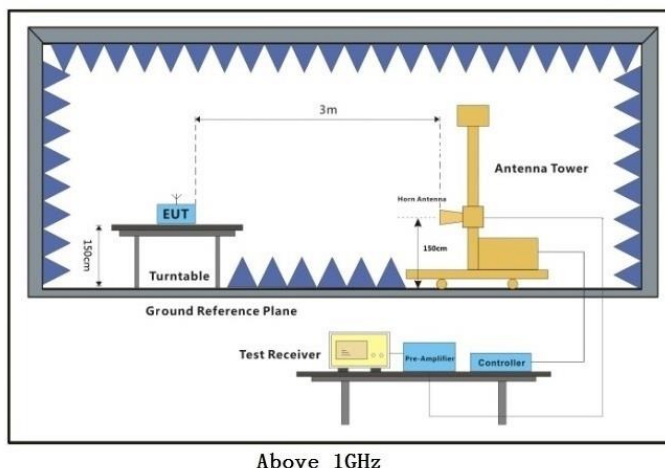

6.2.4 Measurement Procedure and Data


- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 18GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.
4. The disturbance above 18GHz were very low and the harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
5. For devices with multiple operating modes, measurements on the middle channel is used to determine the worst-case mode(s). Only the worst case mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum) is recorded in the test report.
6. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.
7. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

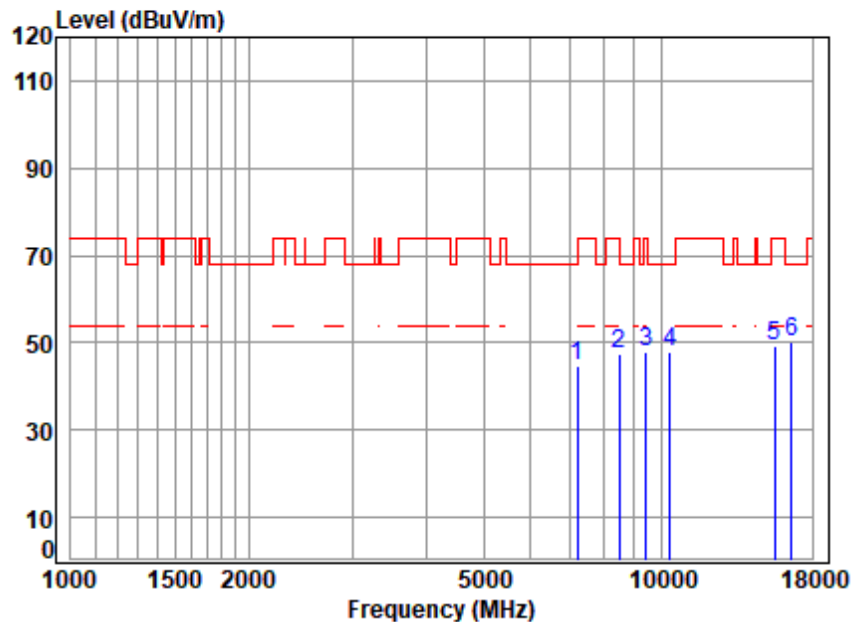

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7200.309	11.52	36.60	56.54	53.32	44.90	68.20	-23.30 peak
2	8489.882	12.24	38.32	55.46	52.27	47.37	74.00	-26.63 peak
3	9420.880	12.35	38.80	54.62	51.20	47.73	74.00	-26.27 peak
4	10360.000	13.60	39.00	53.88	49.03	47.75	68.20	-20.45 peak
5	15540.000	17.00	38.56	54.14	47.92	49.34	74.00	-24.66 peak
6	pp16600.640	17.65	39.20	54.18	47.72	50.39	68.20	-17.81 peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

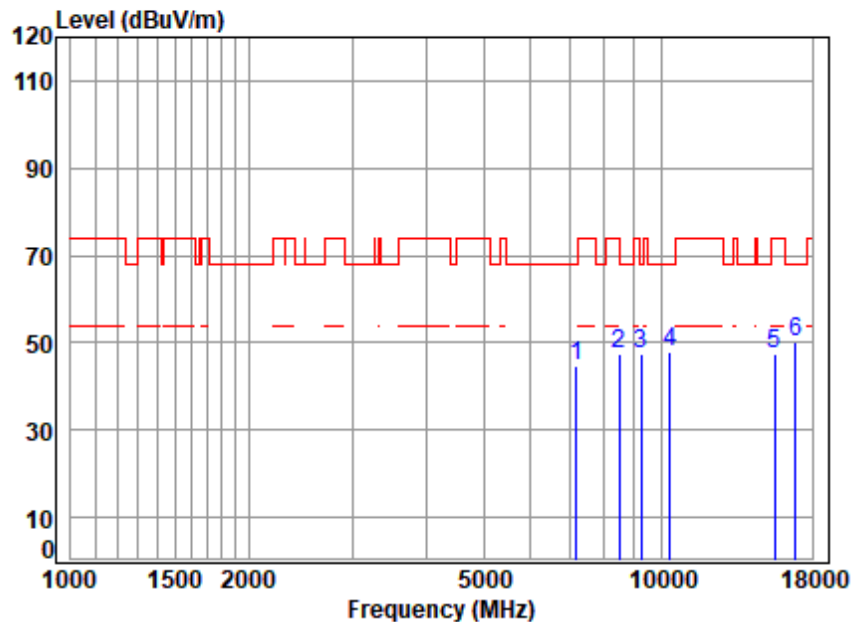

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5180 TX RSE

: 5G Wi-Fi 11a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7179.527	11.62	36.56	56.56	52.90	44.52	68.20	-23.68	peak
2	8489.882	12.24	38.32	55.46	52.23	47.33	74.00	-26.67	peak
3	9232.187	12.27	37.70	54.79	52.28	47.46	68.20	-20.74	peak
4	10360.000	13.60	39.00	53.88	49.03	47.75	68.20	-20.45	peak
5	15540.000	17.00	38.56	54.14	46.17	47.59	74.00	-26.41	peak
6	pp16891.040	18.12	39.60	54.27	46.77	50.22	68.20	-17.98	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

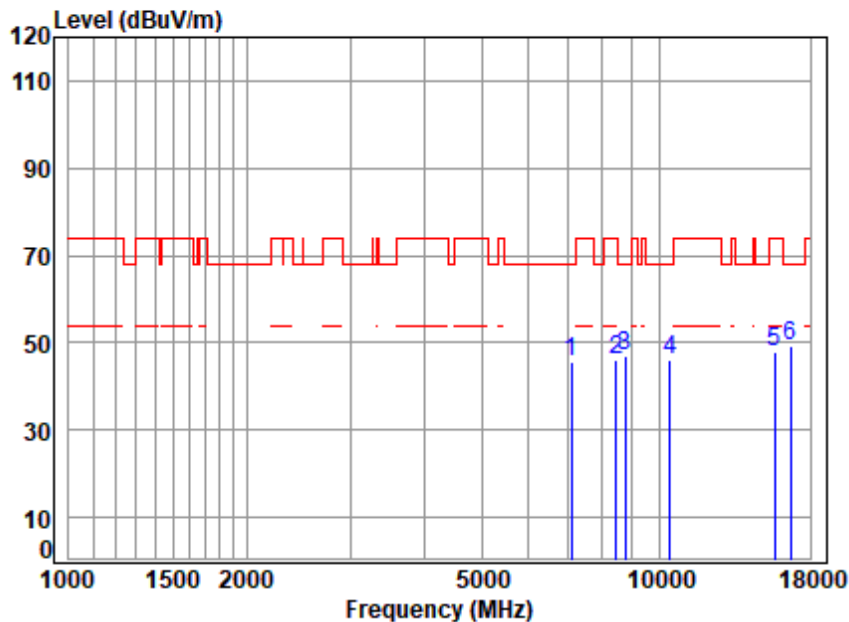

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5220 TX RSE

: 5G Wi-Fi 11a


	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7096.999	11.97	36.39	56.62	54.02	45.76	68.20 -22.44 peak
2	8465.379	12.07	38.37	55.48	51.04	46.00	74.00 -28.00 peak
3	8764.146	12.19	38.50	55.21	51.30	46.78	68.20 -21.42 peak
4	10440.000	13.63	39.04	53.84	47.37	46.20	68.20 -22.00 peak
5	15660.000	17.23	38.56	54.10	46.43	48.12	74.00 -25.88 peak
6	pp16696.880	17.59	39.39	54.21	46.52	49.29	68.20 -18.91 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

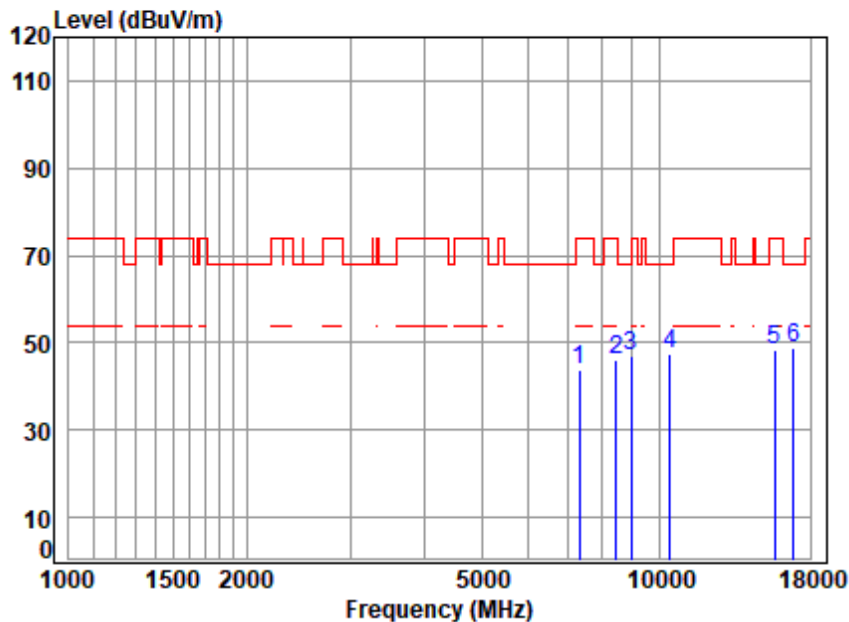

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5220 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7326.267	11.51	36.75	56.44	52.15	43.97	74.00 -30.03 peak
2	8440.945	11.91	38.44	55.50	51.13	45.98	74.00 -28.02 peak
3	8969.161	12.17	38.54	55.03	51.49	47.17	68.20 -21.03 peak
4	10440.000	13.63	39.04	53.84	48.52	47.35	68.20 -20.85 peak
5	15660.000	17.23	38.56	54.10	46.72	48.41	74.00 -25.59 peak
6	pp16891.040	18.12	39.60	54.27	45.55	49.00	68.20 -19.20 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

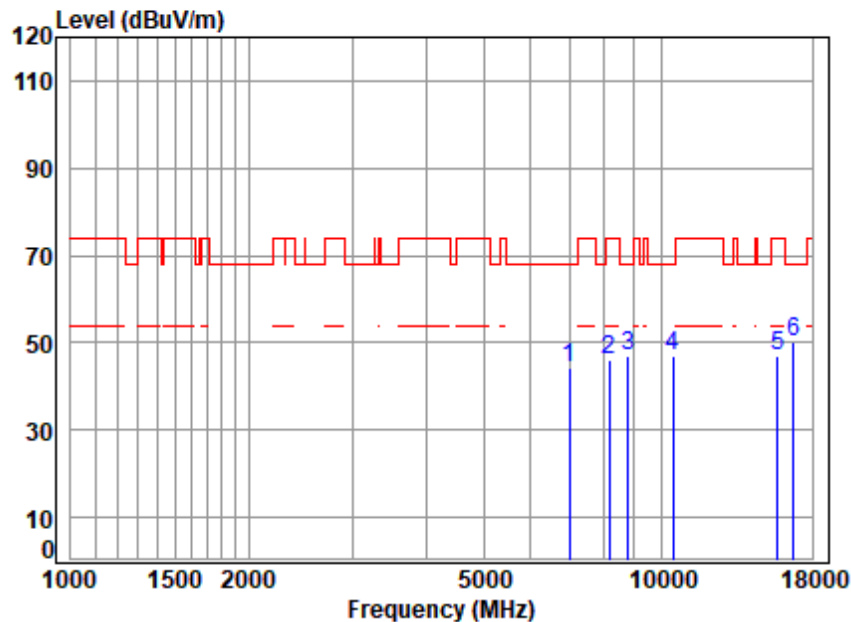

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6974.982	11.37	36.15	56.71	53.65	44.46	68.20	-23.74 peak
2	8176.795	11.54	37.95	55.74	52.50	46.25	74.00	-27.75 peak
3	8789.516	12.23	38.50	55.19	51.39	46.93	68.20	-21.27 peak
4	10480.000	13.64	39.08	53.81	48.03	46.94	68.20	-21.26 peak
5	15720.000	17.22	38.58	54.08	45.18	46.90	74.00	-27.10 peak
6	pp16745.210	17.53	39.49	54.22	47.19	49.99	68.20	-18.21 peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

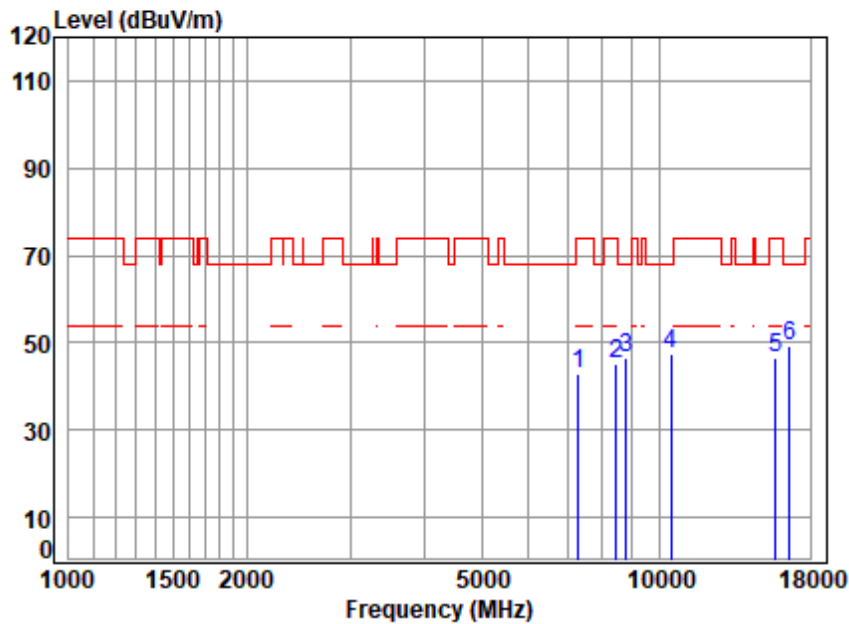

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5240 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	51.16	42.92	74.00	-31.08 peak
2	8465.379	12.07	38.37	55.48	50.25	45.21	74.00	-28.79 peak
3	8789.516	12.23	38.50	55.19	50.80	46.34	68.20	-21.86 peak
4	10480.000	13.64	39.08	53.81	48.35	47.26	68.20	-20.94 peak
5	15720.000	17.22	38.58	54.08	44.73	46.45	74.00	-27.55 peak
6	pp16600.640	17.65	39.20	54.18	46.71	49.38	68.20	-18.82 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

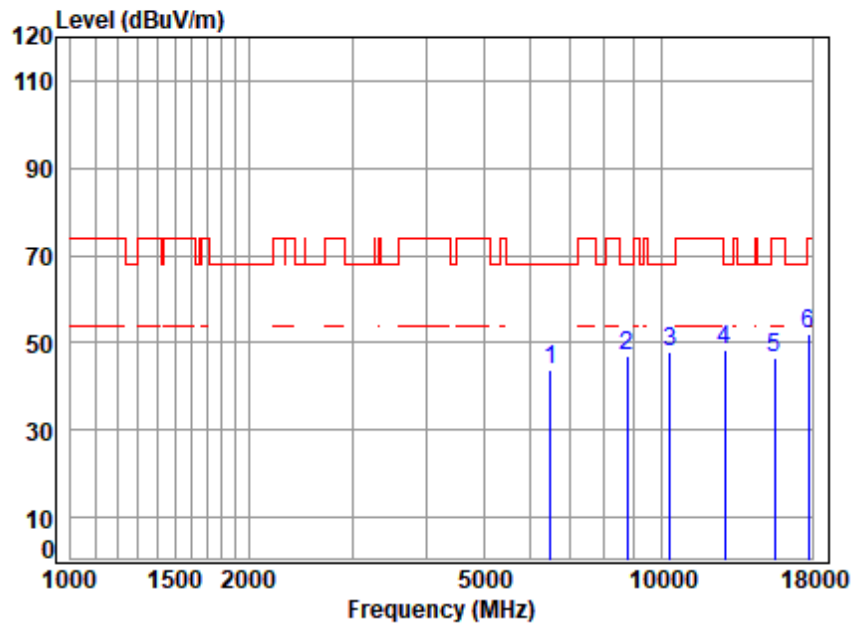

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5180 TX RSE

: 5G Wi-Fi 11ax20


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6488.754	11.86	34.88	56.80	53.93	43.87	68.20	-24.33 Peak
2	8738.852	12.15	38.52	55.24	51.68	47.11	68.20	-21.09 peak
3	10360.000	13.60	39.00	53.88	49.41	48.13	68.20	-20.07 peak
4	pp12798.240	15.42	40.30	54.36	47.10	48.46	68.20	-19.74 Peak
5	15540.000	17.00	38.56	54.14	44.94	46.36	74.00	-27.64 peak
6	17741.740	18.87	42.09	54.45	45.38	51.89	74.00	-22.11 Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

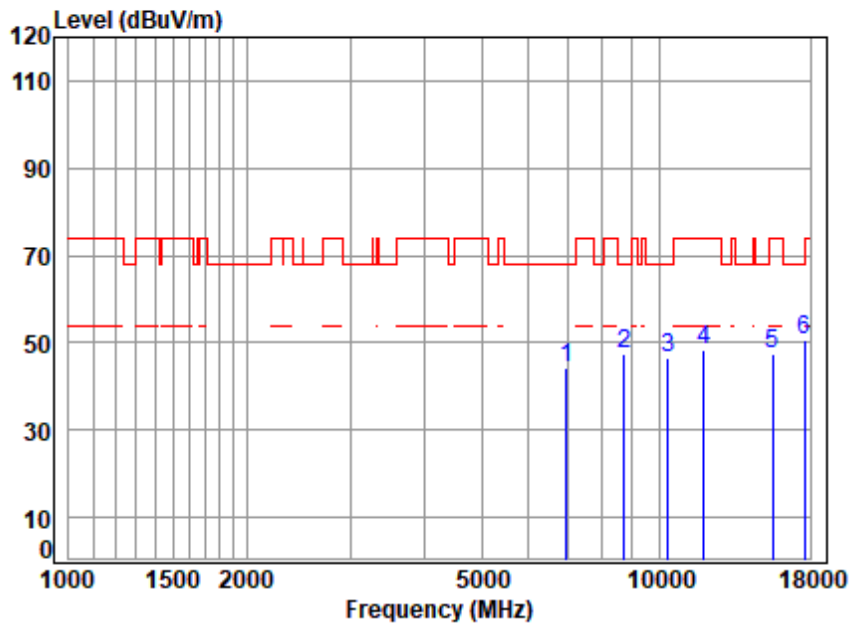

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5180 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.71	53.30	44.07	68.20	-24.13 Peak
2	8713.630	12.11	38.57	55.26	52.25	47.67	68.20	-20.53 peak
3	10360.000	13.60	39.00	53.88	47.86	46.58	68.20	-21.62 peak
4	11906.070	14.89	39.71	53.77	47.67	48.50	74.00	-25.50 Peak
5	15540.000	17.00	38.56	54.14	45.88	47.30	74.00	-26.70 peak
6	pp17588.560	19.64	40.37	54.42	45.21	50.80	68.20	-17.40 Peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

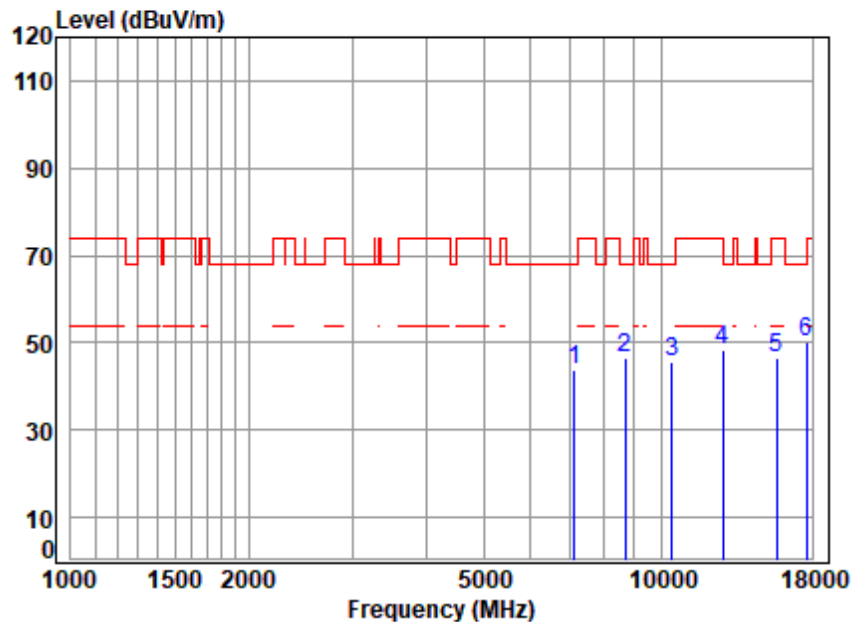

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5220 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7138.144	11.81	36.48	56.59	52.29	43.99	68.20 -24.21 Peak
2	8688.480	12.08	38.55	55.28	51.15	46.50	68.20 -21.70 peak
3	10440.000	13.63	39.04	53.84	46.99	45.82	68.20 -22.38 peak
4	12687.750	15.49	40.19	54.28	46.90	48.30	74.00 -25.70 Peak
5	15660.000	17.23	38.56	54.10	44.86	46.55	74.00 -27.45 peak
6	pp17588.560	19.64	40.37	54.42	44.79	50.38	68.20 -17.82 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 27 of 226

Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

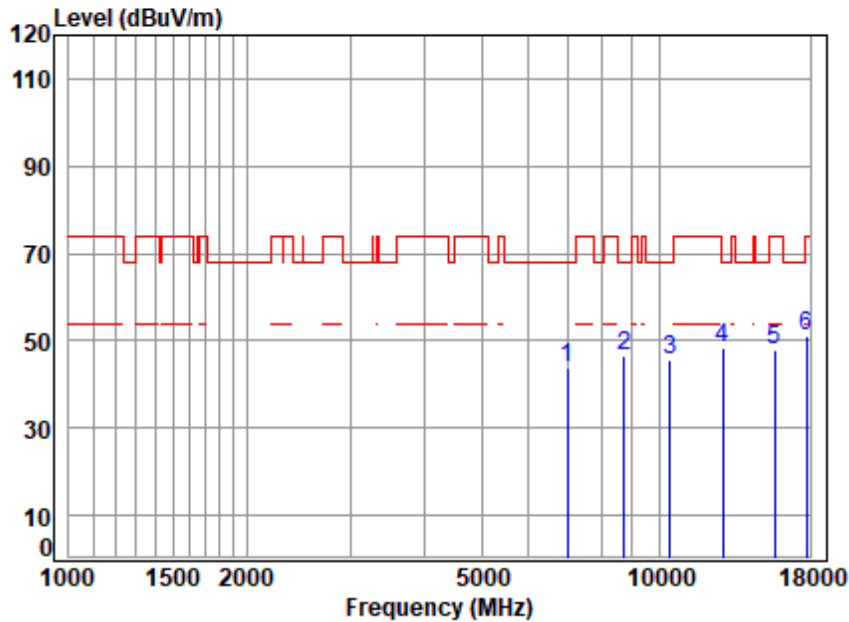

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5220 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.70	53.07	43.93	68.20	-24.27 Peak
2	8713.630	12.11	38.57	55.26	50.89	46.31	68.20	-21.89 peak
3	10440.000	13.63	39.04	53.84	46.74	45.57	68.20	-22.63 peak
4	pp12798.240	15.42	40.30	54.36	46.83	48.19	68.20	-20.01 Peak
5	15660.000	17.23	38.56	54.10	46.09	47.78	74.00	-26.22 peak
6	17741.740	18.87	42.09	54.45	44.42	50.93	74.00	-23.07 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

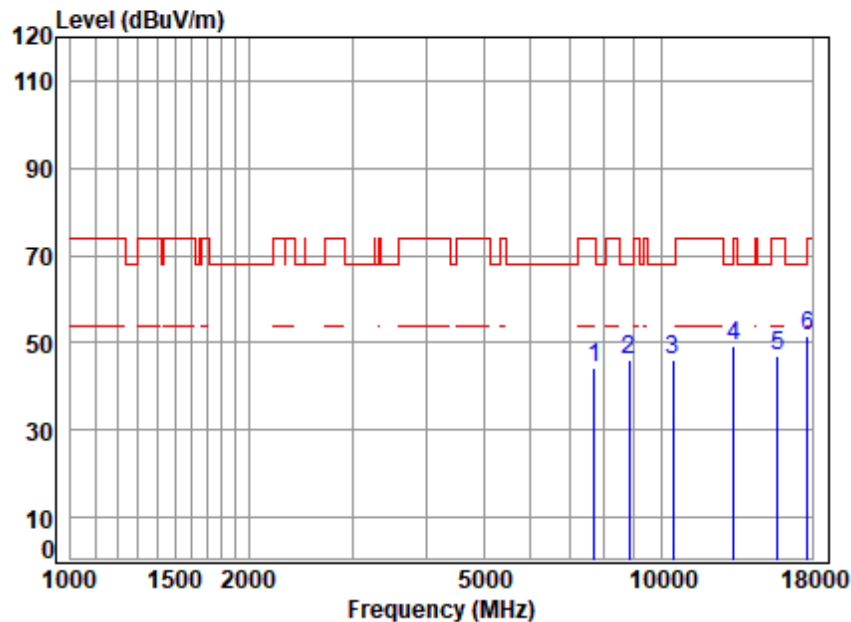

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5240 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7695.244	11.43	36.90	56.14	52.23	44.42	74.00	-29.58 Peak
2	8814.957	12.25	38.50	55.17	50.73	46.31	68.20	-21.89 peak
3	10480.000	13.64	39.08	53.81	47.25	46.16	68.20	-22.04 peak
4	13288.280	16.44	40.29	54.47	47.24	49.50	74.00	-24.50 Peak
5	15720.000	17.22	38.58	54.08	45.34	47.06	74.00	-26.94 peak
6	pp17690.530	19.16	41.66	54.44	45.35	51.73	68.20	-16.47 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

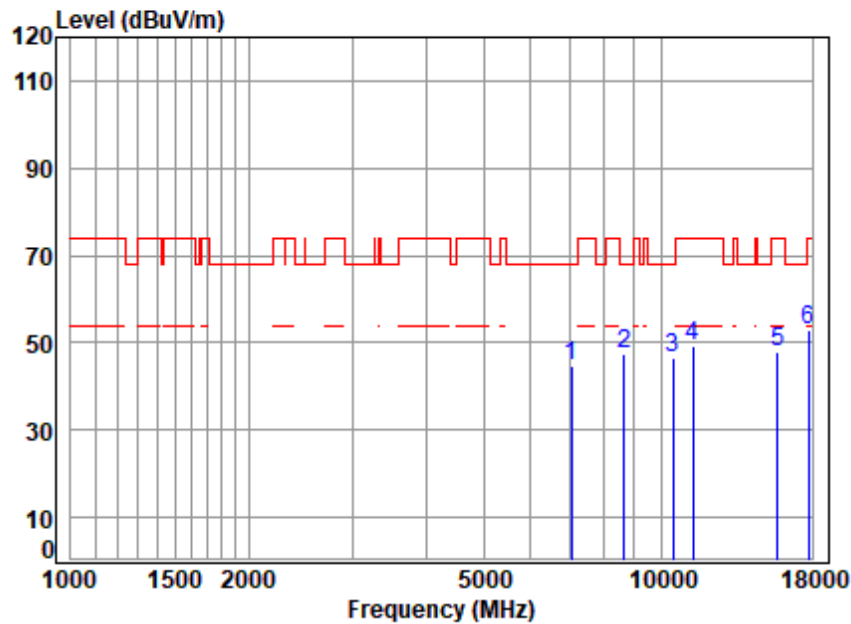

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5240 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 7056.092	11.72	36.31	56.66	53.22	44.59	68.20	-23.61	Peak
2 pp 8663.404	12.04	38.45	55.30	52.16	47.35	68.20	-20.85	peak
3 10480.000	13.64	39.08	53.81	47.50	46.41	68.20	-21.79	peak
4 11302.480	14.63	39.70	53.59	48.41	49.15	74.00	-24.85	Peak
5 15720.000	17.22	38.58	54.08	46.41	48.13	74.00	-25.87	peak
6 17741.740	18.87	42.09	54.45	46.40	52.91	74.00	-21.09	Peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

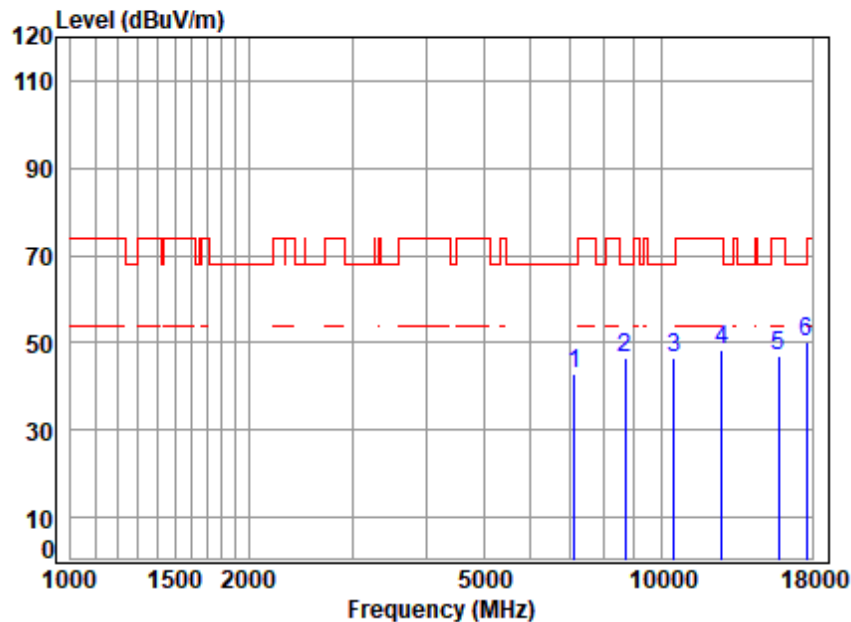

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5260 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7117.542	11.91	36.44	56.61	51.33	43.07	68.20 -25.13 Peak
2	8688.480	12.08	38.55	55.28	50.98	46.33	68.20 -21.87 peak
3	10520.000	13.63	39.14	53.79	47.35	46.33	68.20 -21.87 peak
4	12651.130	15.23	40.15	54.26	47.18	48.30	74.00 -25.70 Peak
5	15780.000	17.08	38.52	54.07	45.29	46.82	74.00 -27.18 peak
6	pp17639.470	19.52	40.89	54.43	44.30	50.28	68.20 -17.92 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

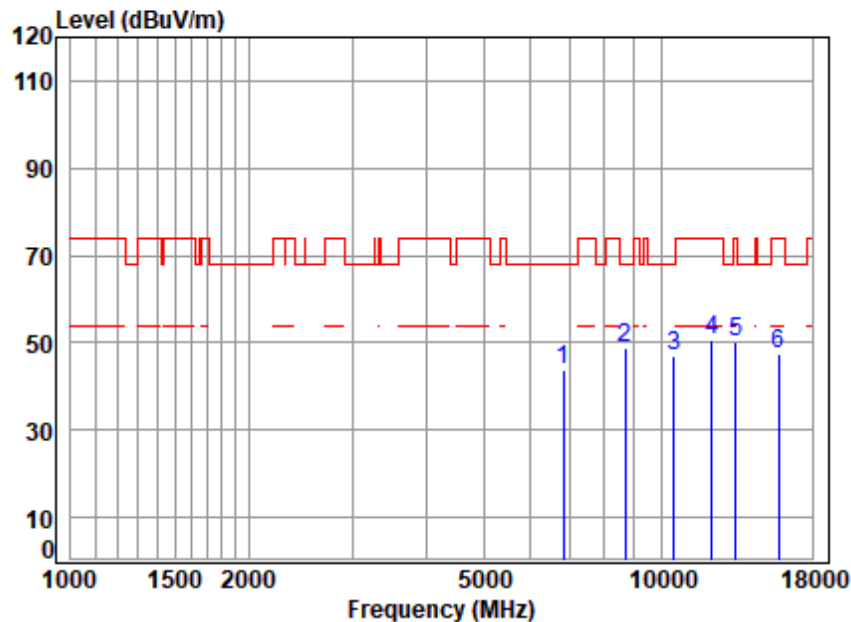

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5260 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 6835.278	11.37	35.97	56.73	53.19	43.80	68.20	-24.40	Peak
2 pp 8688.480	12.08	38.55	55.28	53.38	48.73	68.20	-19.47	peak
3 10520.000	13.63	39.14	53.79	48.09	47.07	68.20	-21.13	peak
4 12184.580	14.55	39.87	53.93	49.98	50.47	74.00	-23.53	Peak
5 13365.320	16.13	40.30	54.46	48.38	50.35	74.00	-23.65	Peak
6 15780.000	17.08	38.52	54.07	46.09	47.62	74.00	-26.38	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

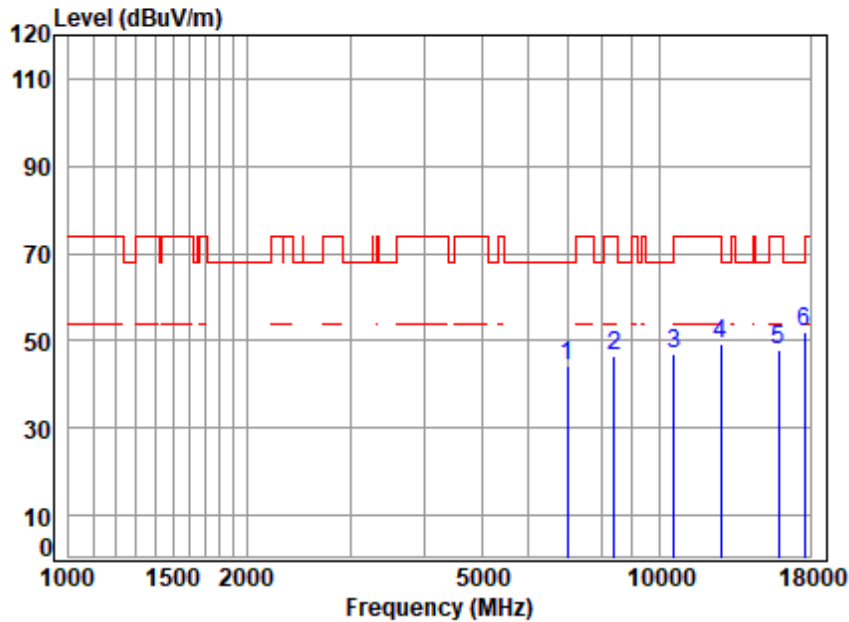

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5300 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6974.982	11.37	36.15	56.71	53.49	44.30	68.20	-23.90 Peak
2	8392.292	11.64	38.62	55.55	51.93	46.64	74.00	-27.36 peak
3	10600.000	13.59	39.30	53.74	47.79	46.94	68.20	-21.26 peak
4	12687.750	15.49	40.19	54.28	47.79	49.19	74.00	-24.81 Peak
5	15900.000	17.28	38.70	54.03	45.84	47.79	74.00	-26.21 peak
6	pp17639.470	19.52	40.89	54.43	46.11	52.09	68.20	-16.11 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

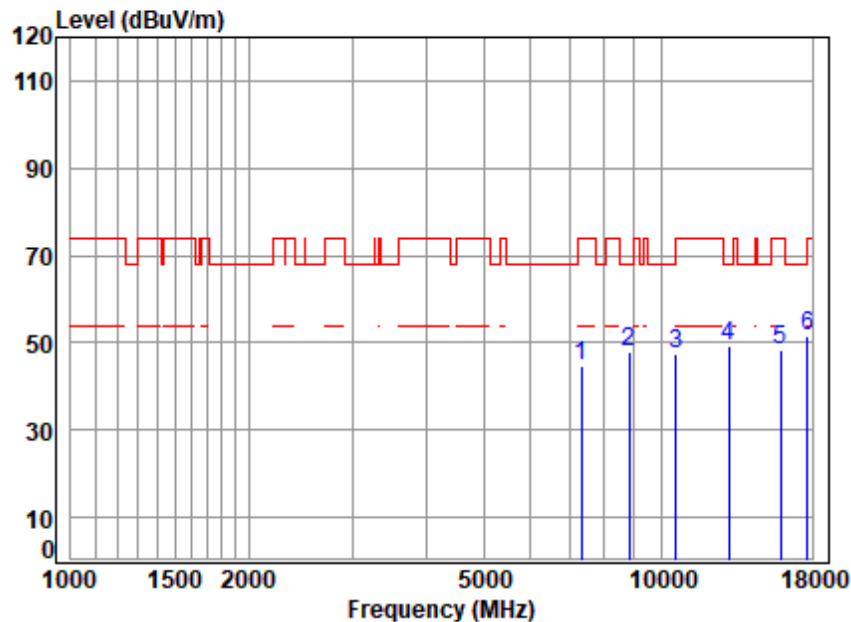

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5300 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7326.267	11.51	36.75	56.44	53.00	44.82	74.00 -29.18 Peak
2	8814.957	12.25	38.50	55.17	52.20	47.78	68.20 -20.42 peak
3	10600.000	13.59	39.30	53.74	48.11	47.26	68.20 -20.94 peak
4	13022.130	15.82	40.30	54.50	47.88	49.50	68.20 -18.70 Peak
5	15900.000	17.28	38.70	54.03	46.53	48.48	74.00 -25.52 peak
6	pp17690.530	19.16	41.66	54.44	45.38	51.76	68.20 -16.44 Peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

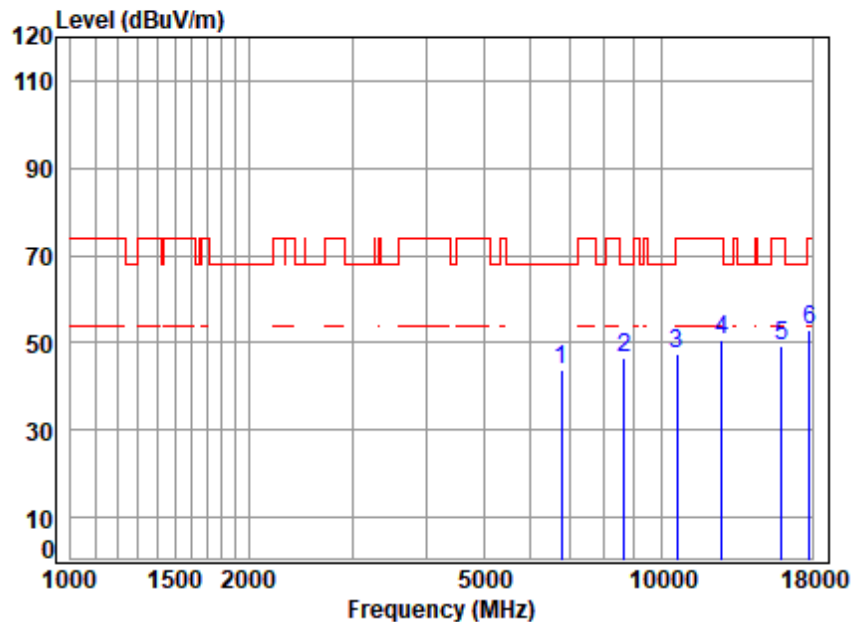

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5320 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6776.265	11.38	35.81	56.74	53.55	44.00	68.20	-24.20 Peak
2	8663.404	12.04	38.45	55.30	51.53	46.72	68.20	-21.48 peak
3	10640.000	13.77	39.34	53.72	48.27	47.66	74.00	-26.34 peak
4	12651.130	15.23	40.15	54.26	49.37	50.49	74.00	-23.51 Peak
5	15960.000	17.20	38.64	54.01	47.26	49.09	74.00	-24.91 peak
6	pp17793.090	18.61	42.45	54.46	46.36	52.96	74.00	-21.04 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

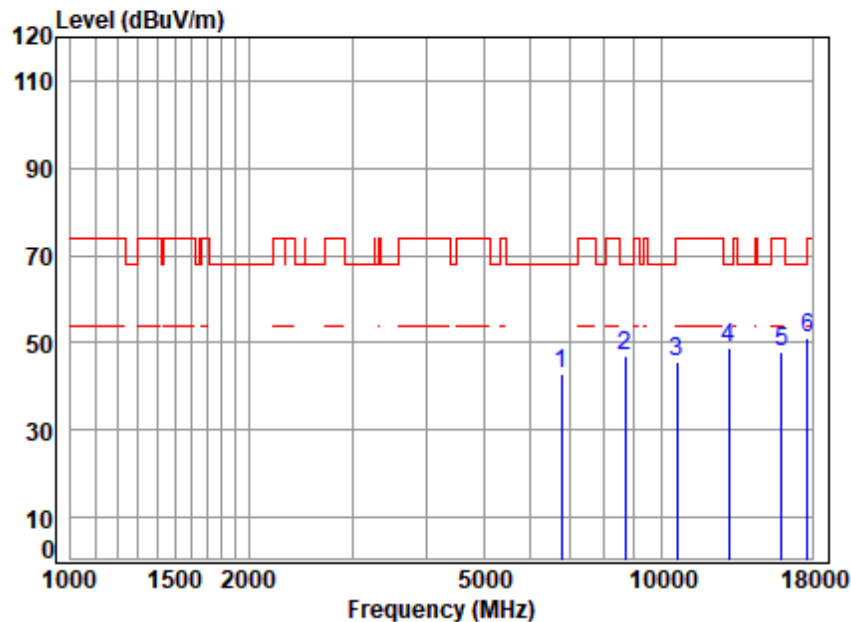

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5320 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6776.265	11.38	35.81	56.74	52.62	43.07	68.20 -25.13 Peak
2	8688.480	12.08	38.55	55.28	51.49	46.84	68.20 -21.36 peak
3	10640.000	13.77	39.34	53.72	46.15	45.54	74.00 -28.46 peak
4	12984.540	15.88	40.32	54.49	47.08	48.79	68.20 -19.41 Peak
5	15960.000	17.20	38.64	54.01	45.98	47.81	74.00 -26.19 peak
6	pp17690.530	19.16	41.66	54.44	44.64	51.02	68.20 -17.18 Peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

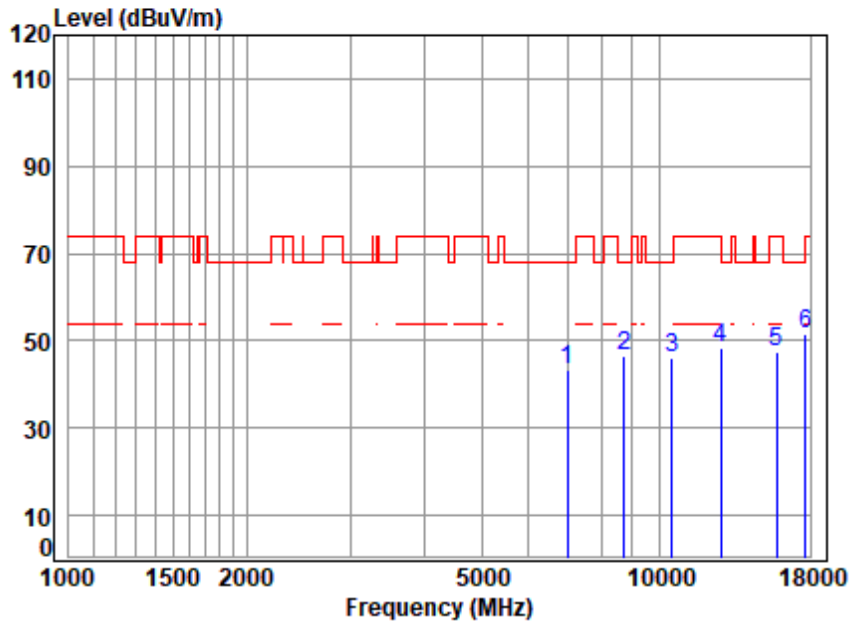

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5260 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.70	52.52	43.38	68.20	-24.82 Peak
2	8713.630	12.11	38.57	55.26	50.98	46.40	68.20	-21.80 peak
3	10520.000	13.63	39.14	53.79	46.96	45.94	68.20	-22.26 peak
4	12724.470	15.53	40.22	54.31	47.12	48.56	68.20	-19.64 Peak
5	15780.000	17.08	38.52	54.07	45.89	47.42	74.00	-26.58 peak
6	pp17690.530	19.16	41.66	54.44	44.99	51.37	68.20	-16.83 Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

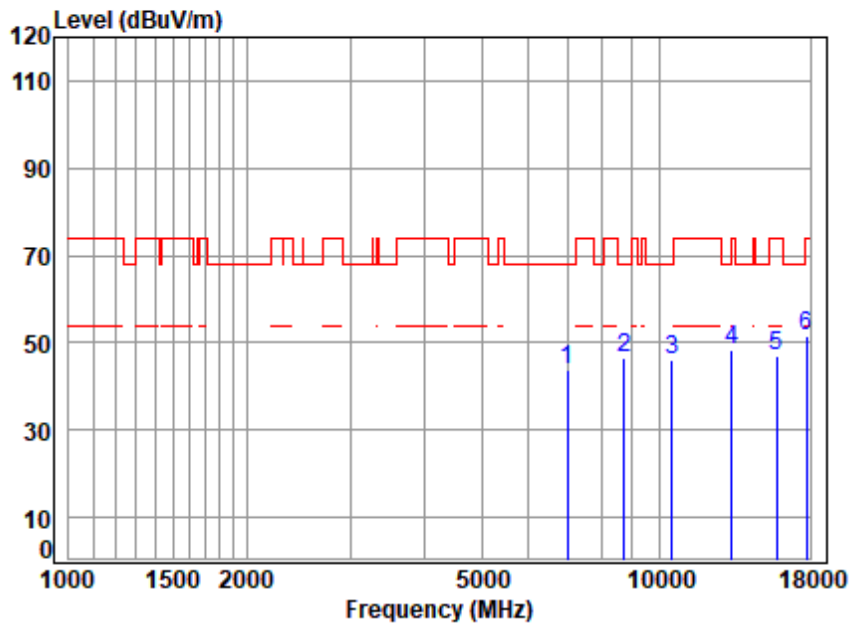

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5260 TX RSE

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6974.982	11.37	36.15	56.71	53.02	43.83	68.20	-24.37	Peak
2	pp 8713.630	12.11	38.57	55.26	51.05	46.47	68.20	-21.73	peak
3	10520.000	13.63	39.14	53.79	47.28	46.26	68.20	-21.94	peak
4	13288.280	16.44	40.29	54.47	46.16	48.42	74.00	-25.58	Peak
5	15780.000	17.08	38.52	54.07	45.35	46.88	74.00	-27.12	peak
6	17741.740	18.87	42.09	54.45	44.92	51.43	74.00	-22.57	Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 38 of 226

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

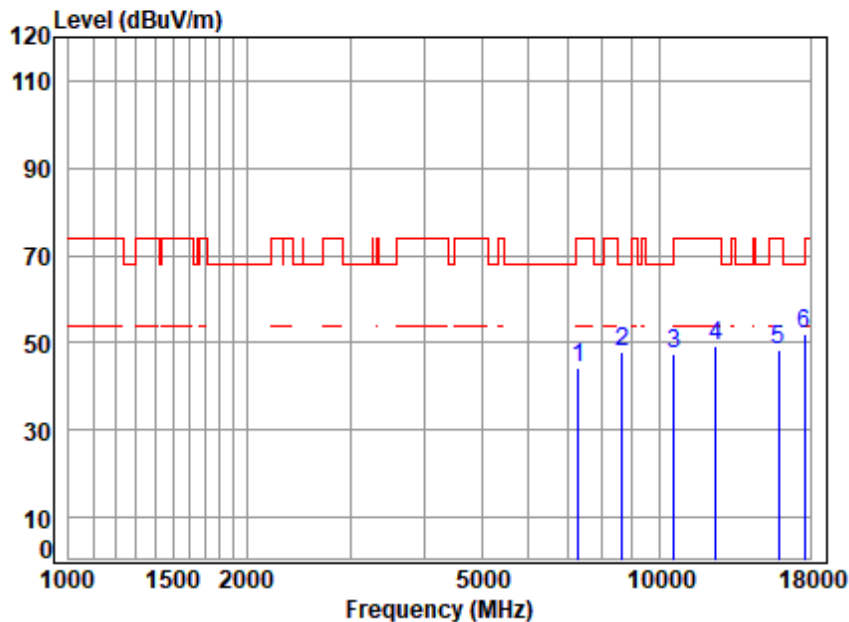

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5300 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7284.038	11.51	36.67	56.47	52.45	44.16	74.00	-29.84 Peak
2	8663.404	12.04	38.45	55.30	52.76	47.95	68.20	-20.25 peak
3	10600.000	13.59	39.30	53.74	48.33	47.48	68.20	-20.72 peak
4	12469.610	15.43	39.90	54.13	47.99	49.19	74.00	-24.81 Peak
5	15900.000	17.28	38.70	54.03	46.62	48.57	74.00	-25.43 peak
6	pp17639.470	19.52	40.89	54.43	45.91	51.89	68.20	-16.31 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

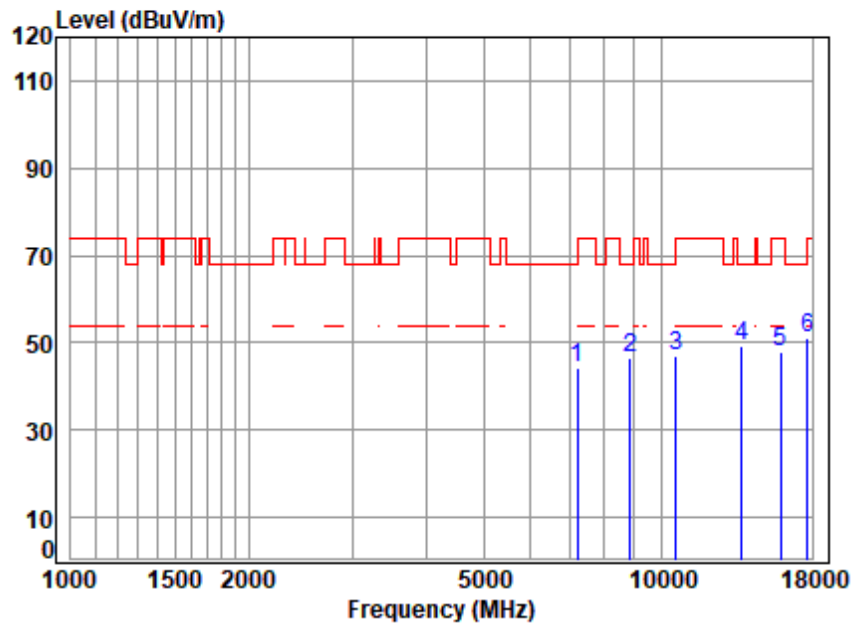

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5300 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7221.150	11.52	36.60	56.52	52.66	44.26	68.20	-23.94 Peak
2	8840.473	12.24	38.50	55.14	50.75	46.35	68.20	-21.85 peak
3	10600.000	13.59	39.30	53.74	47.78	46.93	68.20	-21.27 peak
4	13677.970	16.27	40.00	54.43	47.41	49.25	68.20	-18.95 Peak
5	15900.000	17.28	38.70	54.03	45.87	47.82	74.00	-26.18 peak
6	pp17690.530	19.16	41.66	54.44	44.68	51.06	68.20	-17.14 Peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 40 of 226

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

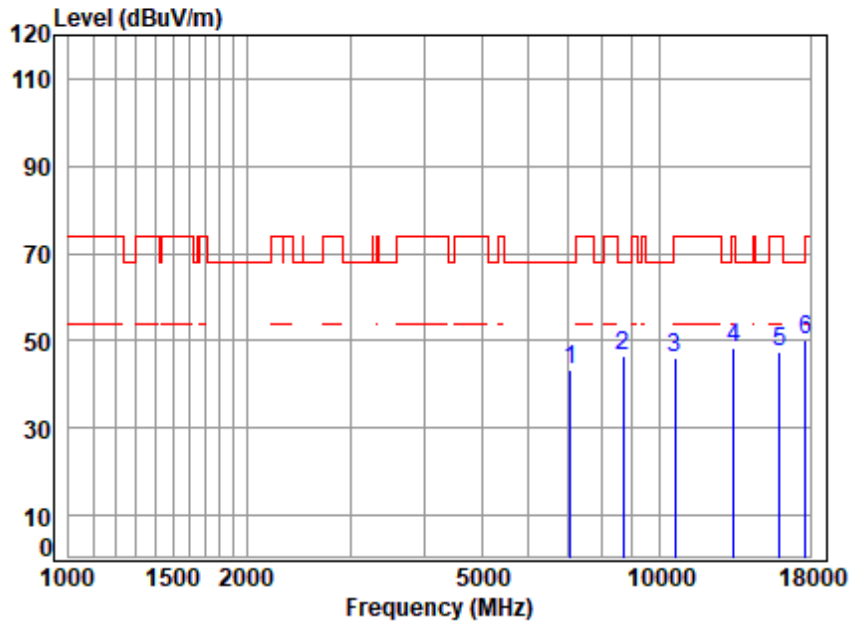

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7076.516	11.84	36.35	56.64	51.97	43.52	68.20 -24.68 Peak
2	8688.480	12.08	38.55	55.28	51.18	46.53	68.20 -21.67 peak
3	10640.000	13.77	39.34	53.72	46.67	46.06	74.00 -27.94 peak
4	13365.320	16.13	40.30	54.46	46.26	48.23	74.00 -25.77 Peak
5	15960.000	17.20	38.64	54.01	45.60	47.43	74.00 -26.57 peak
6	pp17690.530	19.16	41.66	54.44	43.81	50.19	68.20 -18.01 Peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

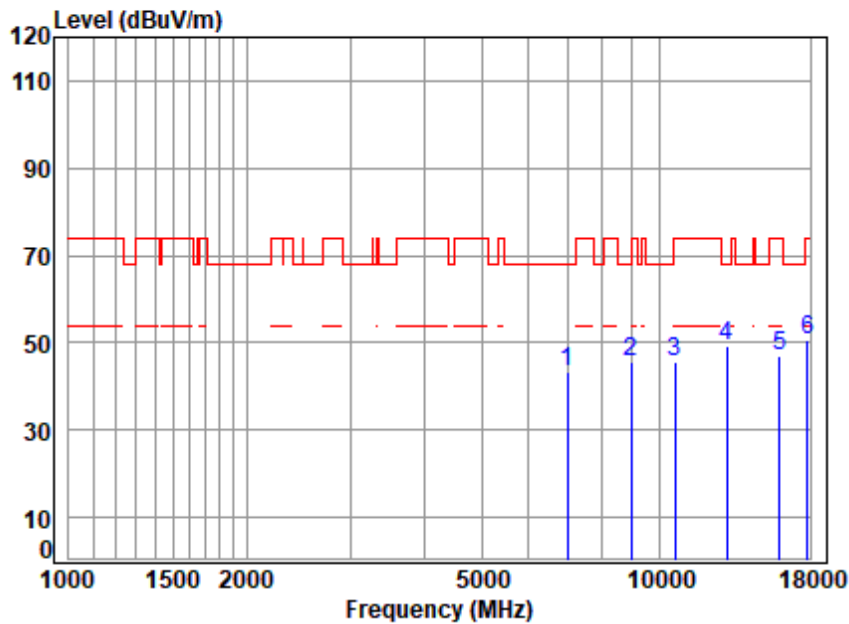

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5320 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6995.172	11.37	36.19	56.70	52.31	43.17	68.20	-25.03 Peak
2	8943.274	12.19	38.51	55.05	50.07	45.72	68.20	-22.48 peak
3	10640.000	13.77	39.34	53.72	46.14	45.53	74.00	-28.47 peak
4	pp13022.130	15.82	40.30	54.50	47.78	49.40	68.20	-18.80 Peak
5	15960.000	17.20	38.64	54.01	45.34	47.17	74.00	-26.83 peak
6	17793.090	18.61	42.45	54.46	43.82	50.42	74.00	-23.58 Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

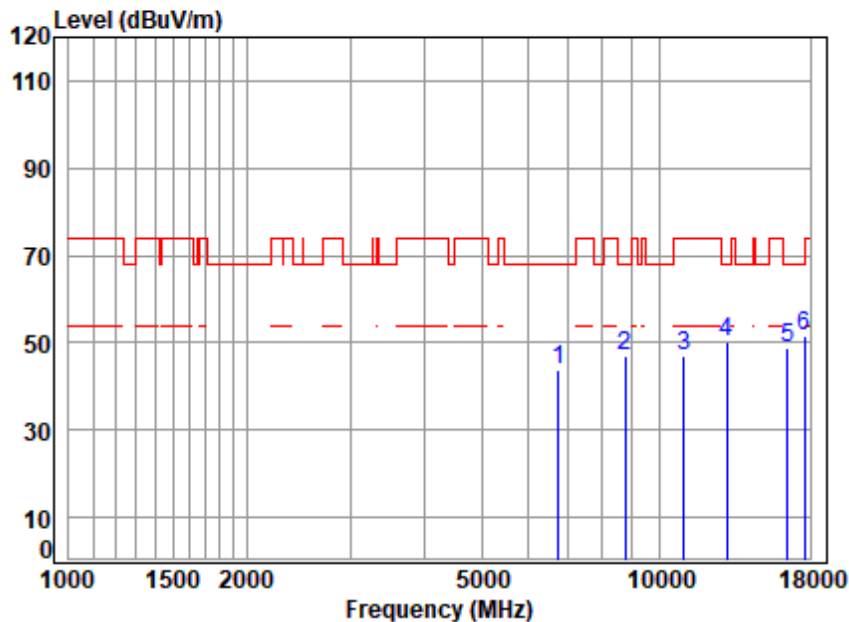

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6756.708	11.39	35.73	56.75	53.62	43.99	68.20	-24.21 Peak
2	8764.146	12.19	38.50	55.21	51.37	46.85	68.20	-21.35 peak
3	11000.000	14.17	39.40	53.50	46.93	47.00	74.00	-27.00 peak
4	13022.130	15.82	40.30	54.50	48.44	50.06	68.20	-18.14 Peak
5	16500.000	17.74	38.90	54.15	46.20	48.69	68.20	-19.51 peak
6	pp17639.470	19.52	40.89	54.43	45.37	51.35	68.20	-16.85 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

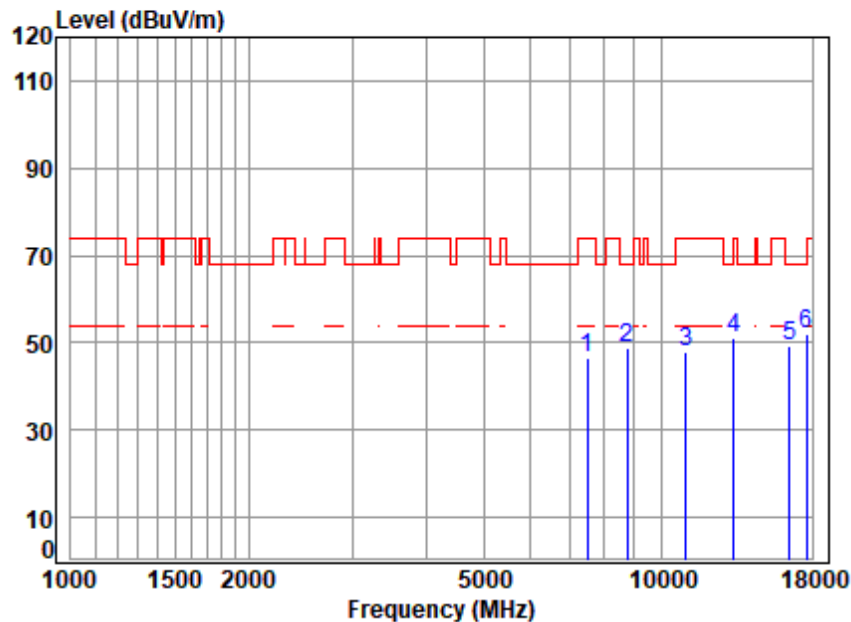

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5500 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7497.646	11.24	36.80	56.30	54.84	46.58	74.00	-27.42 Peak
2	8764.146	12.19	38.50	55.21	53.23	48.71	68.20	-19.49 peak
3	11000.000	14.17	39.40	53.50	48.06	48.13	74.00	-25.87 peak
4	13249.930	16.10	40.25	54.48	49.10	50.97	68.20	-17.23 Peak
5	16500.000	17.74	38.90	54.15	46.83	49.32	68.20	-18.88 peak
6	pp17639.470	19.52	40.89	54.43	45.81	51.79	68.20	-16.41 Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

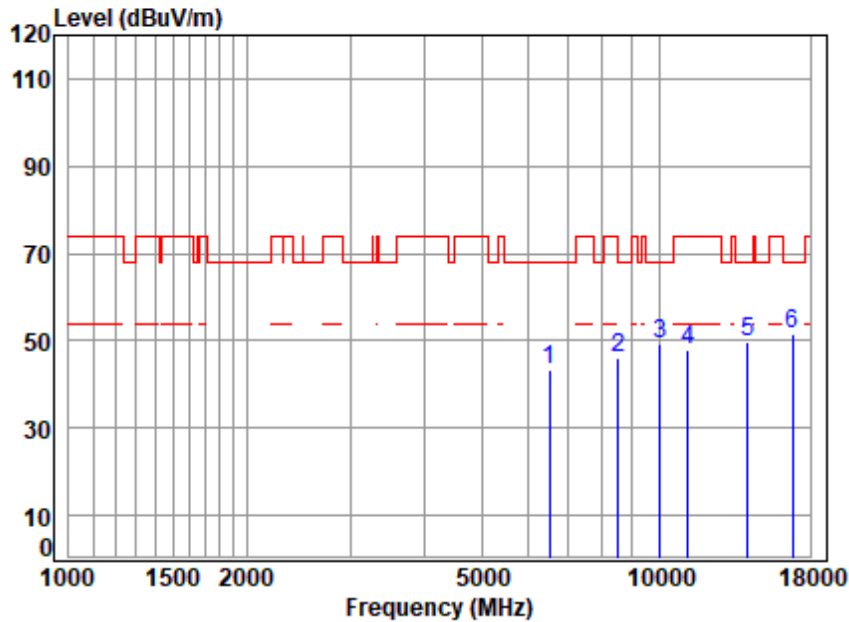

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5600 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6507.536	11.66	34.92	56.80	53.68	43.46	68.20	-24.74 Peak
2	8514.456	12.26	38.30	55.44	51.18	46.30	68.20	-21.90 peak
3	10010.420	13.04	38.92	54.09	51.54	49.41	68.20	-18.79 Peak
4	11200.000	14.76	39.60	53.56	47.12	47.92	74.00	-26.08 peak
5	14119.830	16.45	39.88	54.39	47.77	49.71	68.20	-18.49 Peak
6	pp16800.000	17.46	39.60	54.24	48.55	51.37	68.20	-16.83 peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

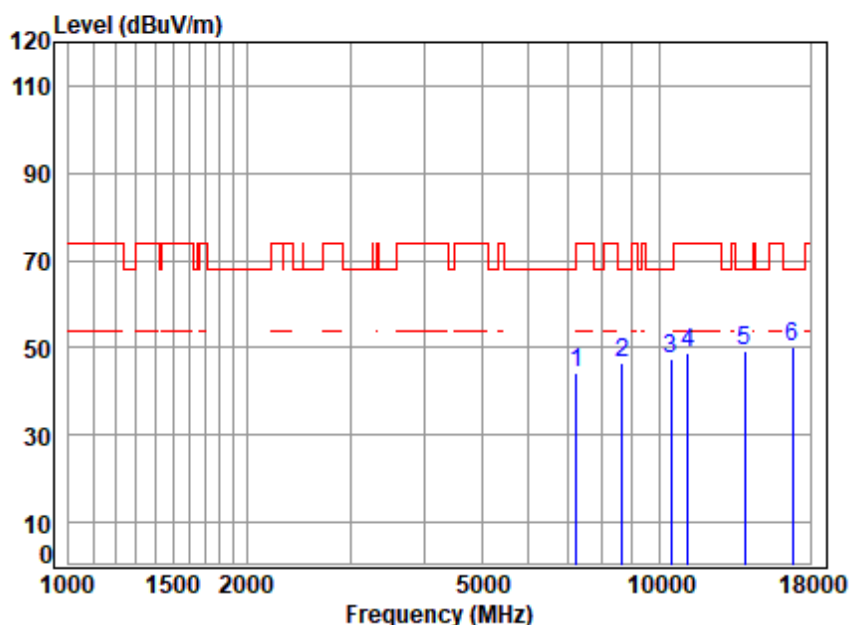

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5600 TX RSE

: 5G Wi-Fi 11a


	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7242.052	11.52	36.60	56.51	52.83	44.44	68.20 -23.76 Peak
2	8663.404	12.04	38.45	55.30	51.34	46.53	68.20 -21.67 peak
3	10484.230	13.64	39.08	53.81	48.44	47.35	68.20 -20.85 Peak
4	11200.000	14.76	39.60	53.56	47.94	48.74	74.00 -25.26 peak
5	13957.530	16.24	39.90	54.40	47.56	49.30	68.20 -18.90 Peak
6	pp16800.000	17.46	39.60	54.24	47.23	50.05	68.20 -18.15 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

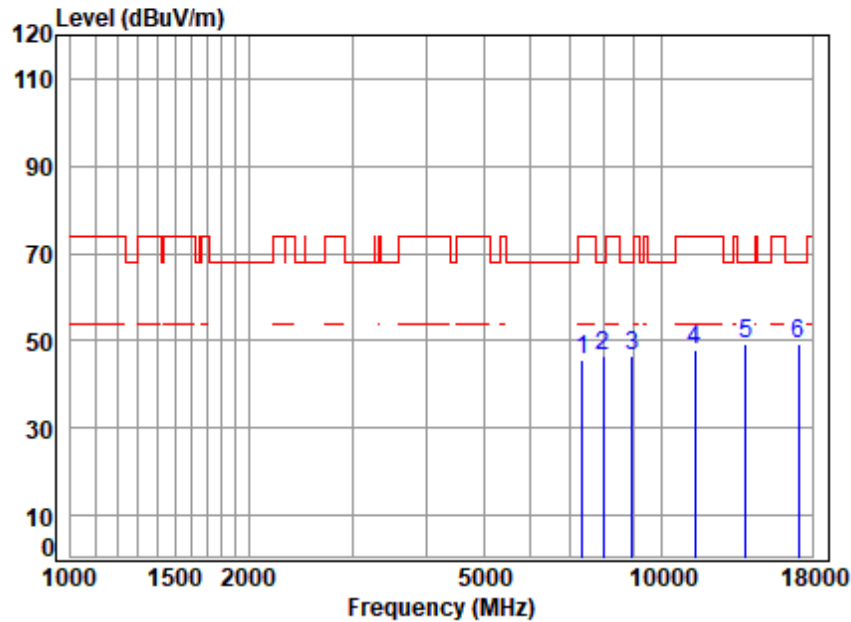

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5700 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7347.474	11.51	36.79	56.42	53.64	45.52	74.00	-28.48 Peak
2	7989.893	11.56	37.78	55.91	53.04	46.47	68.20	-21.73 Peak
3	8917.462	12.21	38.57	55.07	50.87	46.58	68.20	-21.62 peak
4	11400.000	14.21	39.70	53.62	47.48	47.77	74.00	-26.23 peak
5	13917.240	16.03	39.90	54.41	47.65	49.17	68.20	-19.03 Peak
6	pp17100.000	18.47	39.80	54.32	45.23	49.18	68.20	-19.02 peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

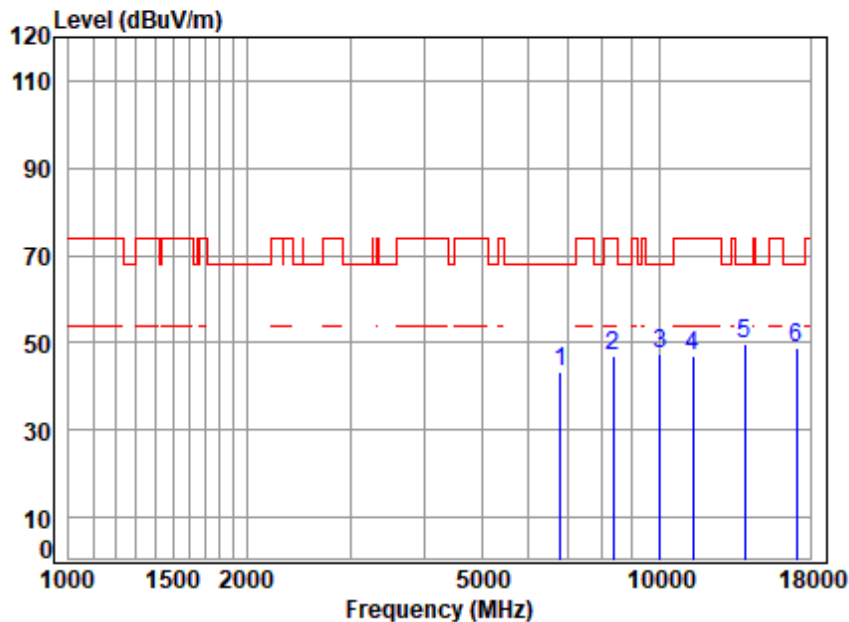

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5700 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6795.879	11.37	35.88	56.74	52.98	43.49	68.20	-24.71 Peak
2	8343.918	11.70	38.60	55.59	52.24	46.95	74.00	-27.05 peak
3	10010.420	13.04	38.92	54.09	49.41	47.28	68.20	-20.92 Peak
4	11400.000	14.21	39.70	53.62	46.88	47.17	74.00	-26.83 peak
5	pp13957.530	16.24	39.90	54.40	47.82	49.56	68.20	-18.64 Peak
6	17100.000	18.47	39.80	54.32	44.87	48.82	68.20	-19.38 peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

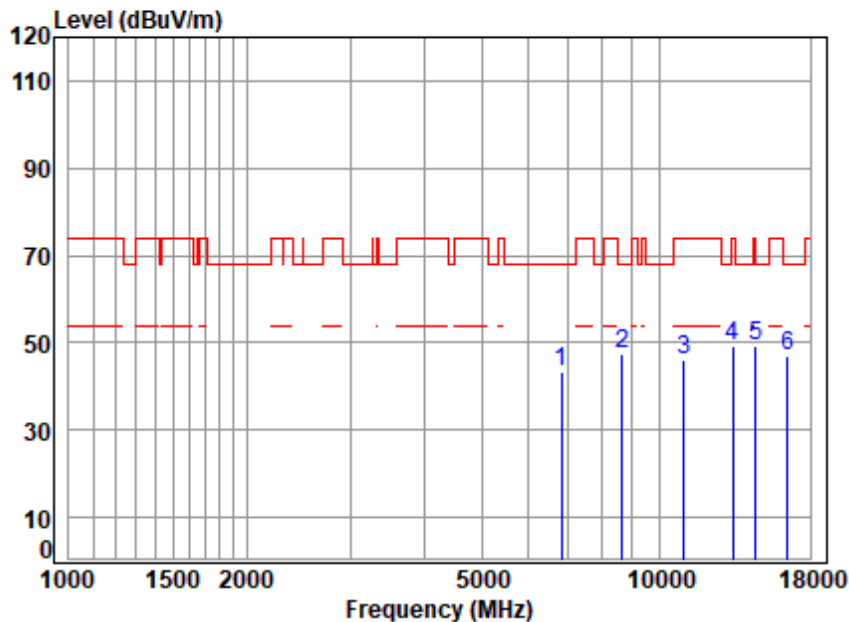

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 6815.551	11.37	35.93	56.74	52.87	43.43	68.20	-24.77 Peak
2 8638.399	12.01	38.42	55.33	52.20	47.30	68.20	-20.90 peak
3 11000.000	14.17	39.40	53.50	46.06	46.13	74.00	-27.87 peak
4 13326.750	16.37	40.30	54.47	47.13	49.33	74.00	-24.67 Peak
5 pp14533.910	16.79	39.43	54.35	47.34	49.21	68.20	-18.99 Peak
6 16500.000	17.74	38.90	54.15	44.59	47.08	68.20	-21.12 peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

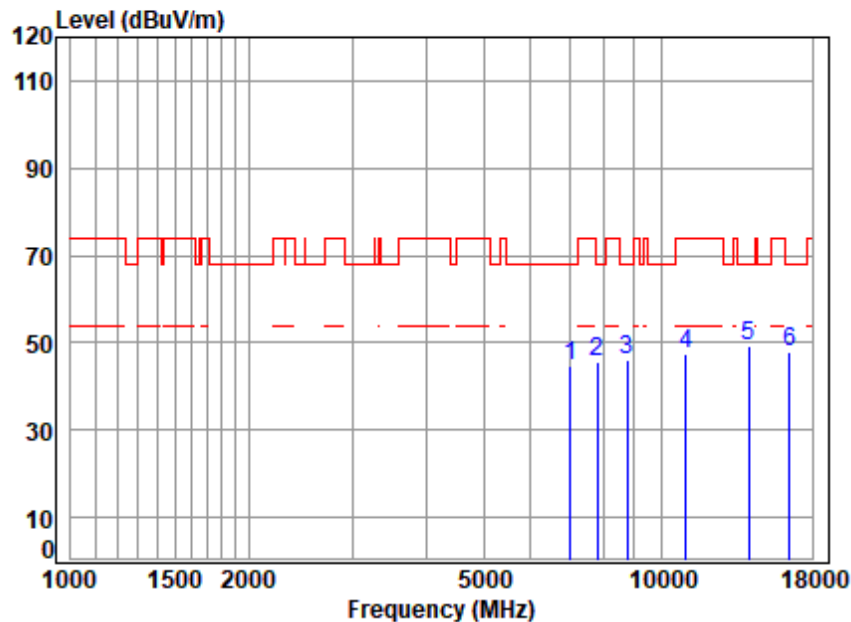

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5500 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7015.420	11.47	36.23	56.69	53.86	44.87	68.20	-23.33 Peak
2	7784.729	11.33	37.14	56.07	53.28	45.68	68.20	-22.52 Peak
3	8764.146	12.19	38.50	55.21	50.83	46.31	68.20	-21.89 peak
4	11000.000	14.17	39.40	53.50	47.48	47.55	74.00	-26.45 peak
5	pp14038.450	16.51	39.90	54.40	47.37	49.38	68.20	-18.82 Peak
6	16500.000	17.74	38.90	54.15	45.44	47.93	68.20	-20.27 peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

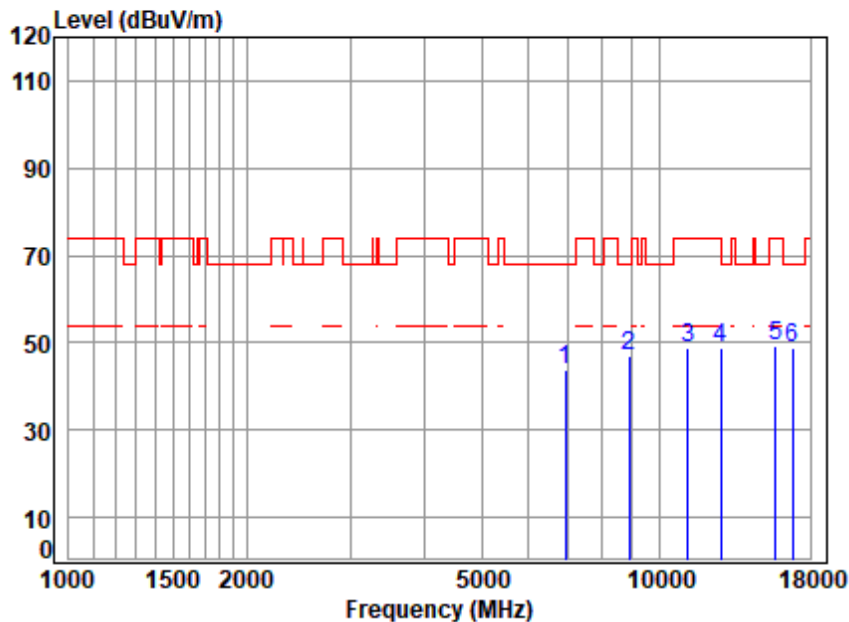

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5600 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6934.778	11.37	36.13	56.71	53.19	43.98	68.20	-24.22 Peak
2	8891.725	12.22	38.58	55.10	51.16	46.86	68.20	-21.34 peak
3	11200.000	14.76	39.60	53.56	48.01	48.81	74.00	-25.19 peak
4	12687.750	15.49	40.19	54.28	47.51	48.91	74.00	-25.09 Peak
5	15713.560	17.24	38.59	54.09	47.40	49.14	74.00	-24.86 Peak
6	pp16800.000	17.46	39.60	54.24	46.11	48.93	68.20	-19.27 peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

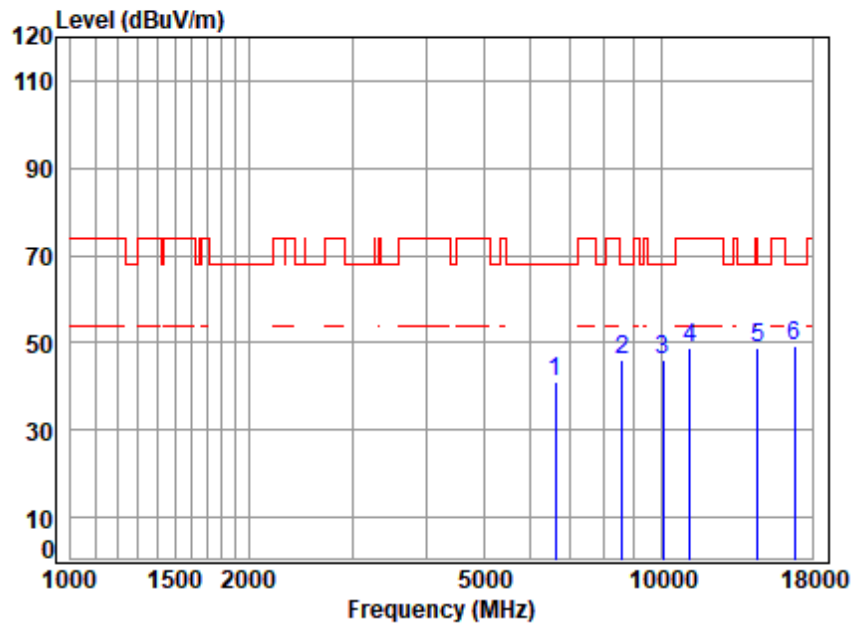

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5600 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6621.375	11.56	35.33	56.78	50.91	41.02	68.20	-27.18 Peak
2	8588.607	12.00	38.45	55.37	51.10	46.18	68.20	-22.02 peak
3	10068.450	13.19	39.04	54.06	47.87	46.04	68.20	-22.16 Peak
4	11200.000	14.76	39.60	53.56	47.92	48.72	74.00	-25.28 peak
5	14533.910	16.79	39.43	54.35	47.09	48.96	68.20	-19.24 Peak
6	pp16800.000	17.46	39.60	54.24	46.46	49.28	68.20	-18.92 peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

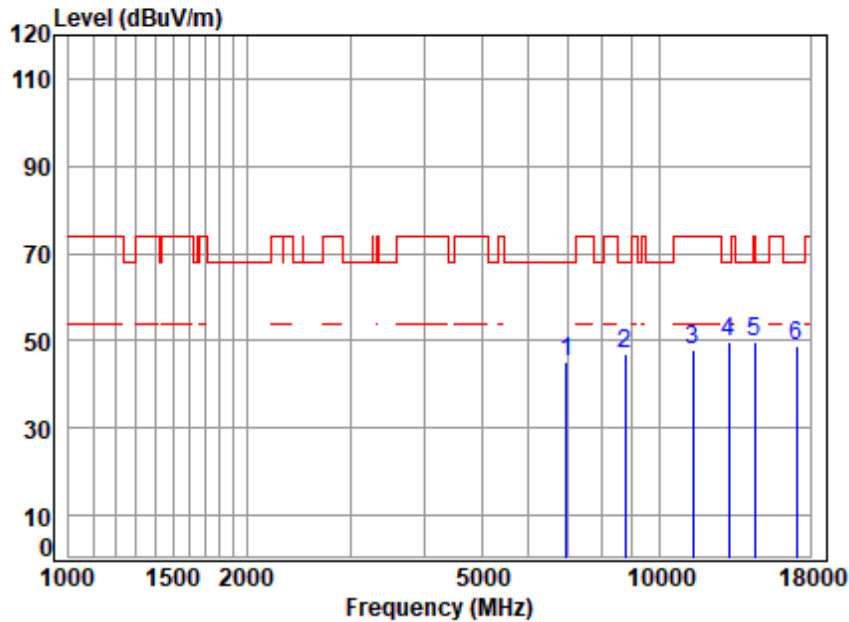

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5700 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6954.852	11.37	36.11	56.71	54.53	45.30	68.20	-22.90 Peak
2	8764.146	12.19	38.50	55.21	51.33	46.81	68.20	-21.39 peak
3	11400.000	14.21	39.70	53.62	47.50	47.79	74.00	-26.21 peak
4	pp13097.620	15.58	40.30	54.49	48.16	49.55	68.20	-18.65 Peak
5	14491.960	17.07	39.51	54.35	47.63	49.86	74.00	-24.14 Peak
6	17100.000	18.47	39.80	54.32	44.89	48.84	68.20	-19.36 peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

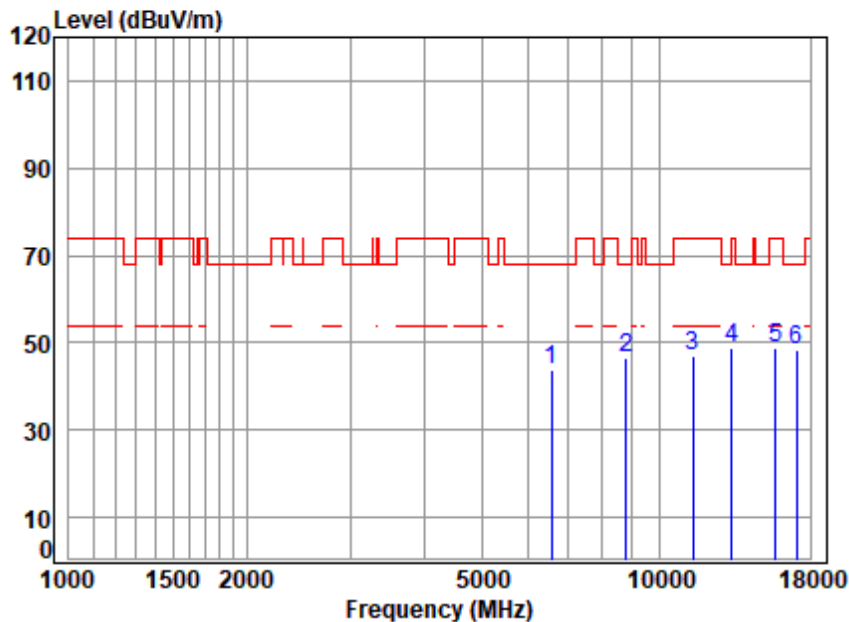

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5700 TX RSE

: 5G Wi-Fi 11ax20


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6564.209	11.63	35.06	56.79	53.76	43.66	68.20	-24.54 Peak
2	8789.516	12.23	38.50	55.19	51.18	46.72	68.20	-21.48 peak
3	11400.000	14.21	39.70	53.62	46.57	46.86	74.00	-27.14 peak
4	13288.280	16.44	40.29	54.47	46.69	48.95	74.00	-25.05 Peak
5	15713.560	17.24	38.59	54.09	46.87	48.61	74.00	-25.39 Peak
6	pp17100.000	18.47	39.80	54.32	44.28	48.23	68.20	-19.97 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

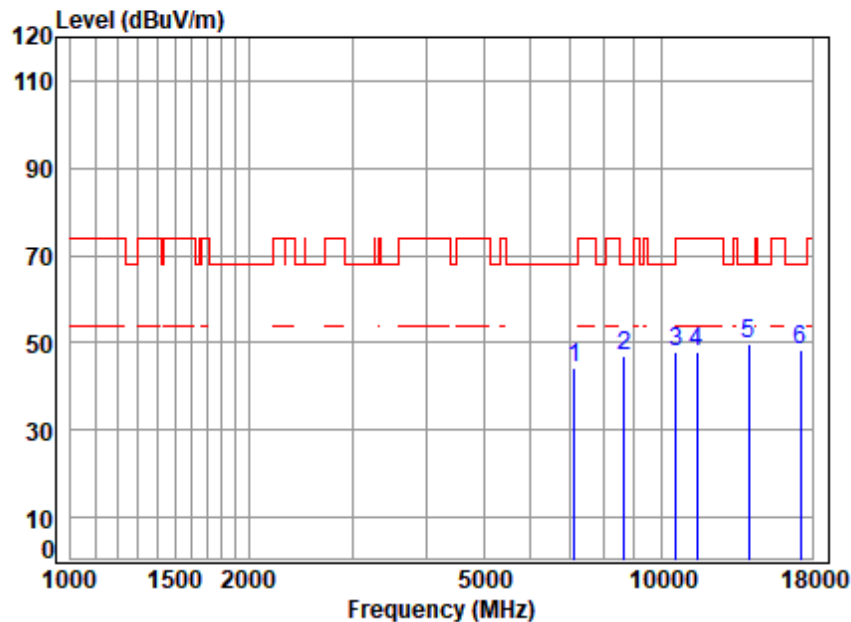

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5745 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	7117.542	11.91	36.44	56.61	52.70	44.44	68.20 -23.76 Peak
2	8663.404	12.04	38.45	55.30	51.93	47.12	68.20 -21.08 peak
3	10575.540	13.60	39.25	53.75	48.74	47.84	68.20 -20.36 Peak
4	11490.000	14.97	39.61	53.65	47.09	48.02	74.00 -25.98 peak
5	pp14038.450	16.51	39.90	54.40	47.59	49.60	68.20 -18.60 Peak
6	17235.000	17.83	40.01	54.35	44.70	48.19	68.20 -20.01 peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

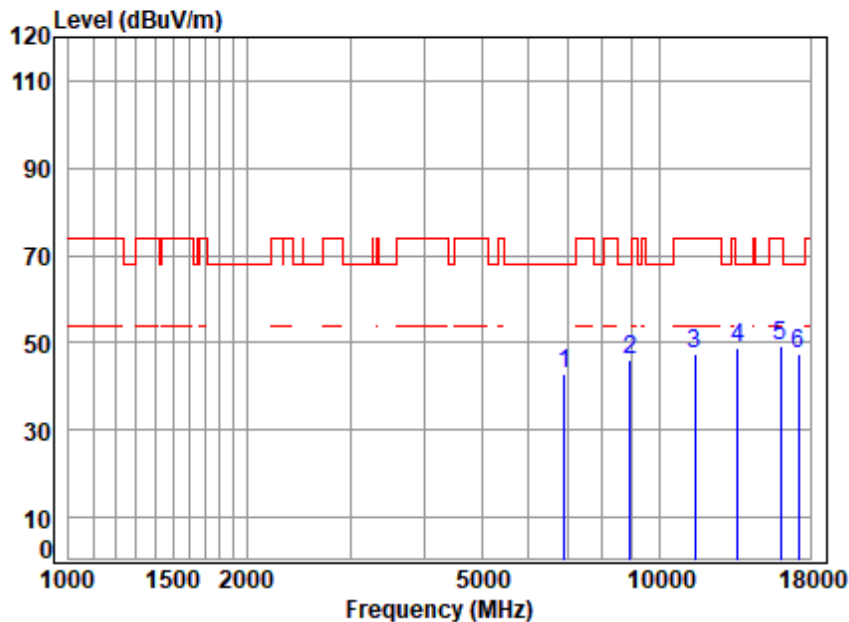

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5745 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6894.806	11.37	36.18	56.72	52.16	42.99	68.20	-25.21 Peak
2	8917.462	12.21	38.57	55.07	50.19	45.90	68.20	-22.30 Peak
3	11490.000	14.97	39.61	53.65	46.64	47.57	74.00	-26.43 peak
4	pp13599.130	15.76	40.00	54.44	47.58	48.90	68.20	-19.30 Peak
5	16034.730	17.12	38.57	54.01	47.67	49.35	74.00	-24.65 Peak
6	17235.000	17.83	40.01	54.35	44.12	47.61	68.20	-20.59 peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

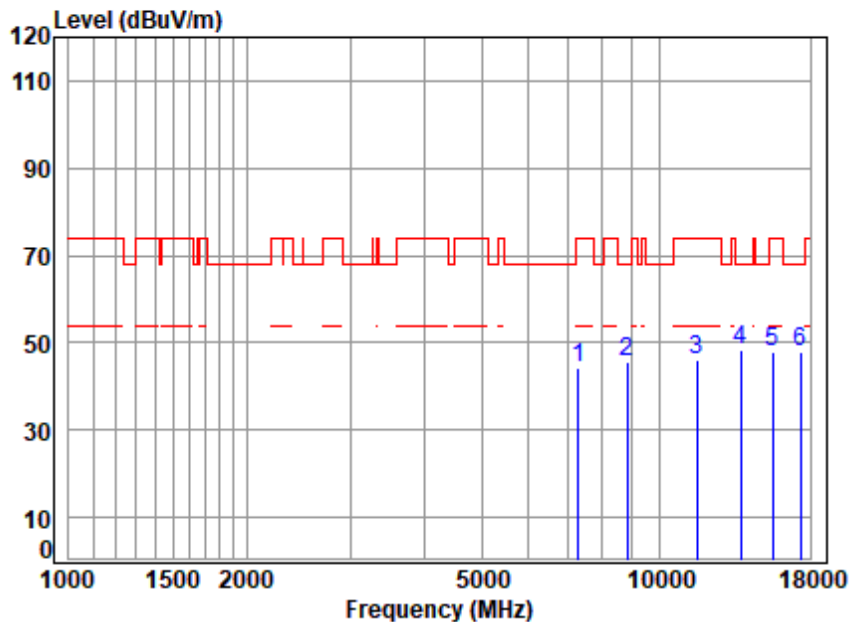

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5785 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7305.122	11.51	36.71	56.46	52.52	44.28	74.00	-29.72 Peak
2	8814.957	12.25	38.50	55.17	49.90	45.48	68.20	-22.72 peak
3	11570.000	14.78	39.60	53.67	45.28	45.99	74.00	-28.01 peak
4	pp13717.560	16.33	39.98	54.43	46.29	48.17	68.20	-20.03 Peak
5	15577.900	17.11	38.52	54.13	46.50	48.00	74.00	-26.00 Peak
6	17355.000	18.00	40.31	54.37	43.95	47.89	68.20	-20.31 peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:middle

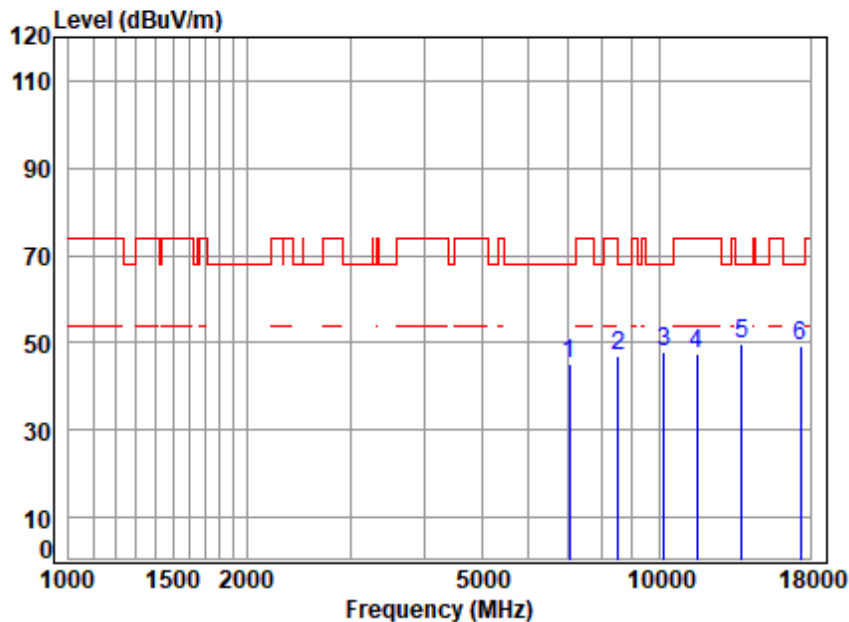

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5785 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7056.092	11.72	36.31	56.66	53.84	45.21	68.20	-22.99 Peak
2	8514.456	12.26	38.30	55.44	51.95	47.07	68.20	-21.13 peak
3	10185.530	13.12	39.10	53.99	49.47	47.70	68.20	-20.50 Peak
4	11570.000	14.78	39.60	53.67	46.69	47.40	74.00	-26.60 peak
5	pp13797.090	15.97	39.90	54.42	48.09	49.54	68.20	-18.66 Peak
6	17355.000	18.00	40.31	54.37	45.39	49.33	68.20	-18.87 peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

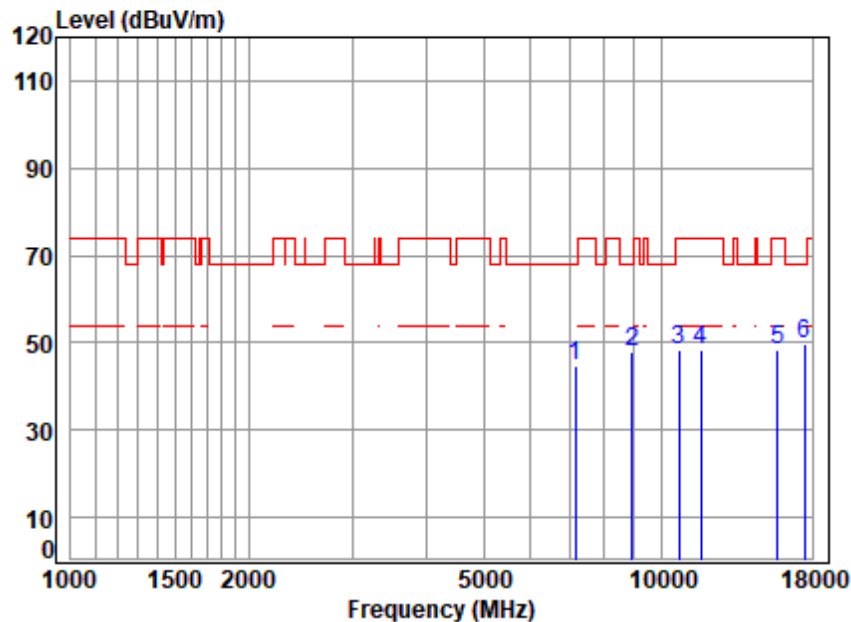

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5825 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7158.806	11.71	36.52	56.57	53.01	44.67	68.20	-23.53 Peak
2	8917.462	12.21	38.57	55.07	52.14	47.85	68.20	-20.35 peak
3	10729.480	13.93	39.37	53.66	48.68	48.32	74.00	-25.68 Peak
4	11650.000	14.69	39.55	53.69	47.81	48.36	74.00	-25.64 peak
5	15759.050	17.13	38.54	54.07	46.68	48.28	74.00	-25.72 Peak
6	pp17475.000	18.35	40.78	54.40	45.16	49.89	68.20	-18.31 peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

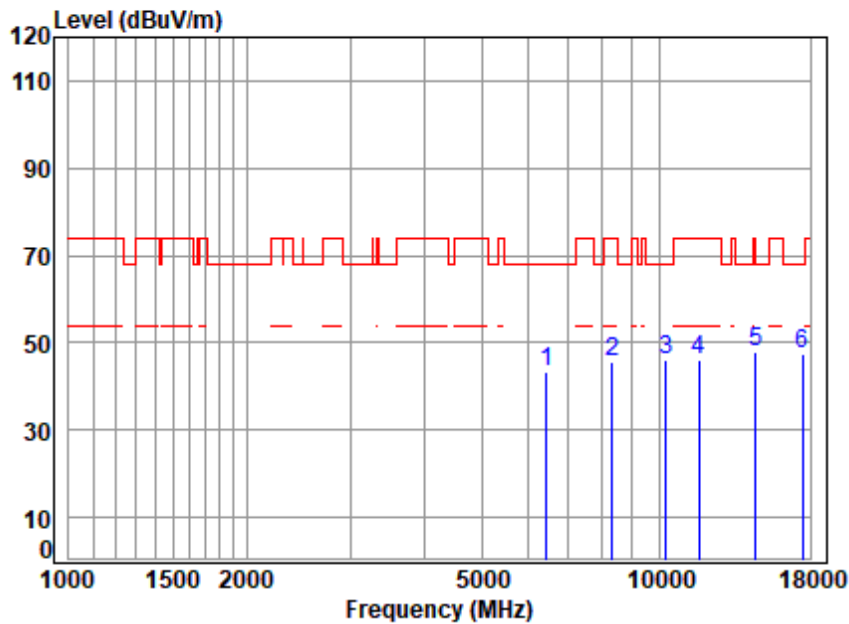

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5825 TX RSE

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	6451.353	12.48	34.80	56.81	52.80	43.27	68.20 -24.93 Peak
2	8319.836	11.73	38.22	55.61	51.31	45.65	74.00 -28.35 peak
3	10274.240	13.45	39.03	53.94	47.70	46.24	68.20 -21.96 Peak
4	11650.000	14.69	39.55	53.69	45.38	45.93	74.00 -28.07 peak
5	pp14533.910	16.79	39.43	54.35	46.10	47.97	68.20 -20.23 Peak
6	17475.000	18.35	40.78	54.40	42.81	47.54	68.20 -20.66 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 60 of 226

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

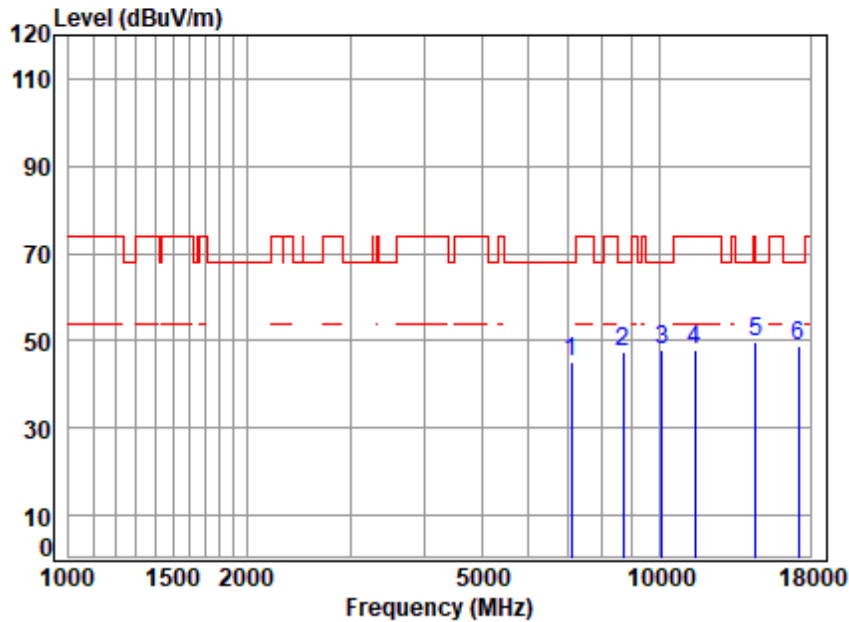

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5745 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7096.999	11.97	36.39	56.62	53.40	45.14	68.20	-23.06 Peak
2	8688.480	12.08	38.55	55.28	52.15	47.50	68.20	-20.70 peak
3	10097.600	13.26	39.10	54.04	49.51	47.83	68.20	-20.37 Peak
4	11490.000	14.97	39.61	53.65	46.75	47.68	74.00	-26.32 peak
5	pp14533.910	16.79	39.43	54.35	47.82	49.69	68.20	-18.51 Peak
6	17235.000	17.83	40.01	54.35	45.47	48.96	68.20	-19.24 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

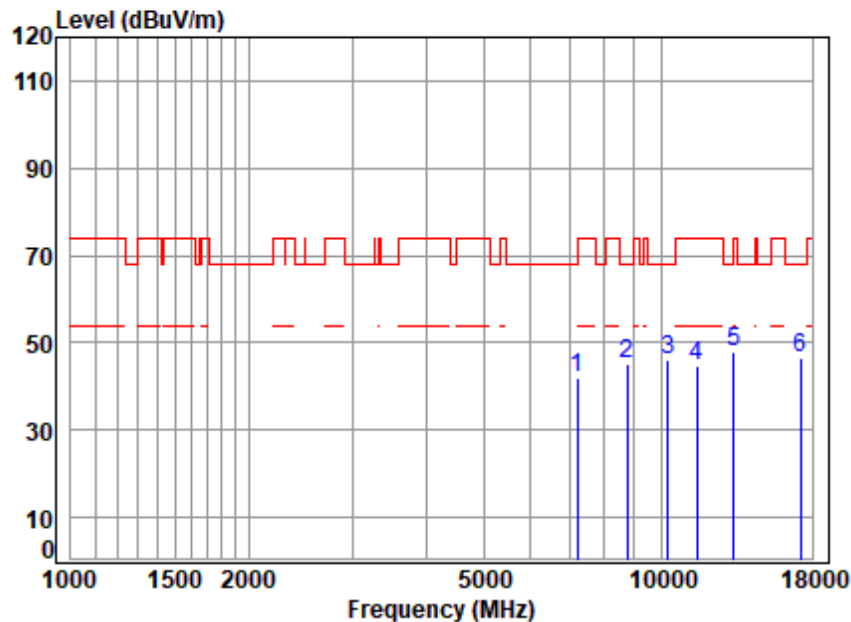

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5745 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7200.309	11.52	36.60	56.54	50.35	41.93	68.20	-26.27 Peak
2	8738.852	12.15	38.52	55.24	49.82	45.25	68.20	-22.95 Peak
3	10274.240	13.45	39.03	53.94	47.53	46.07	68.20	-22.13 Peak
4	11490.000	14.97	39.61	53.65	43.72	44.65	74.00	-29.35 peak
5	13288.280	16.44	40.29	54.47	45.51	47.77	74.00	-26.23 Peak
6	pp17235.000	17.83	40.01	54.35	42.92	46.41	68.20	-21.79 peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

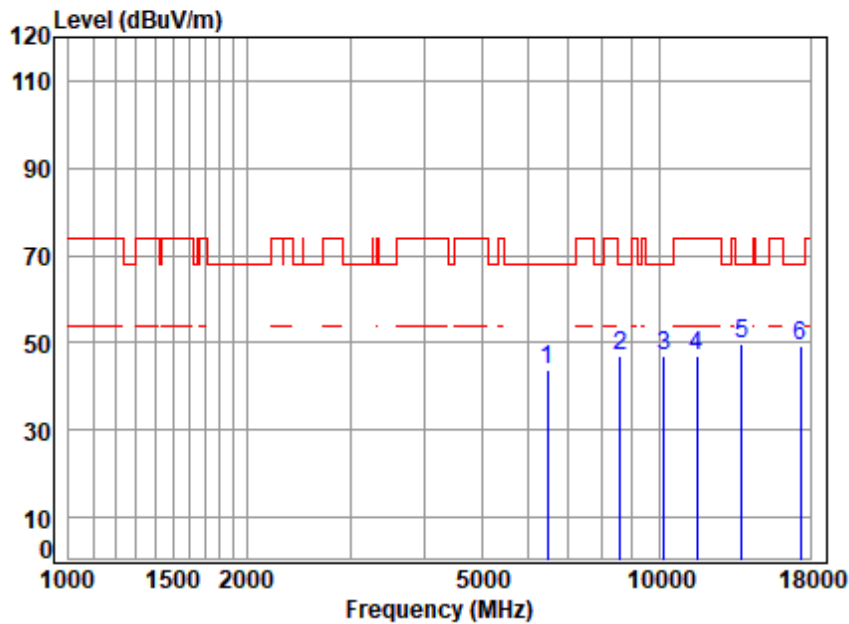

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5785 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6470.026	12.17	34.84	56.81	53.57	43.77	68.20	-24.43 Peak
2	8588.607	12.00	38.45	55.37	51.81	46.89	68.20	-21.31 peak
3	10185.530	13.12	39.10	53.99	48.71	46.94	68.20	-21.26 Peak
4	11570.000	14.78	39.60	53.67	46.40	47.11	74.00	-26.89 peak
5	pp13797.090	15.97	39.90	54.42	48.19	49.64	68.20	-18.56 Peak
6	17355.000	18.00	40.31	54.37	45.53	49.47	68.20	-18.73 peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:middle

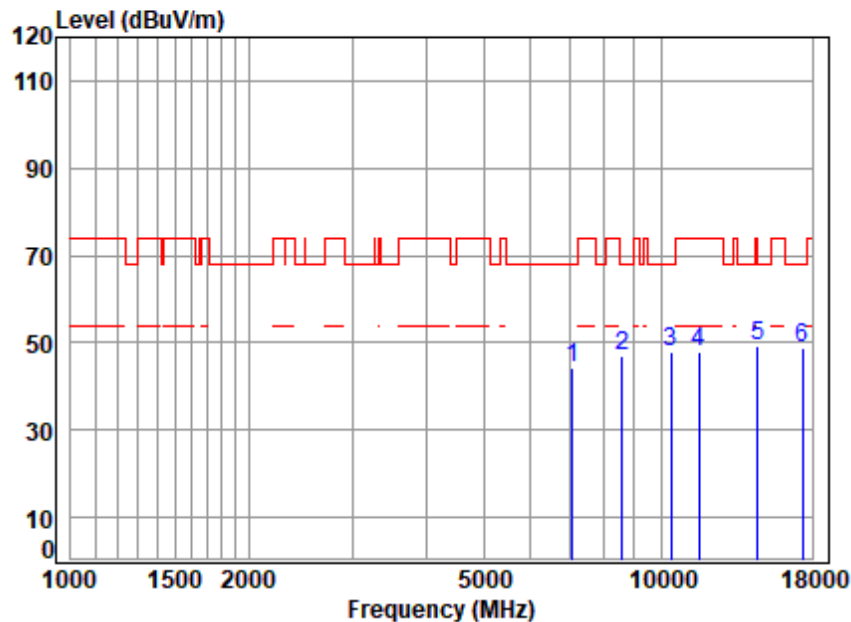

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5785 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	7076.516	11.84	36.35	56.64	52.56	44.11	68.20	-24.09 Peak
2	8588.607	12.00	38.45	55.37	52.05	47.13	68.20	-21.07 Peak
3	10393.710	13.62	39.00	53.86	49.21	47.97	68.20	-20.23 Peak
4	11570.000	14.78	39.60	53.67	47.33	48.04	74.00	-25.96 peak
5	pp14533.910	16.79	39.43	54.35	47.55	49.42	68.20	-18.78 Peak
6	17355.000	18.00	40.31	54.37	44.81	48.75	68.20	-19.45 peak




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 64 of 226

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

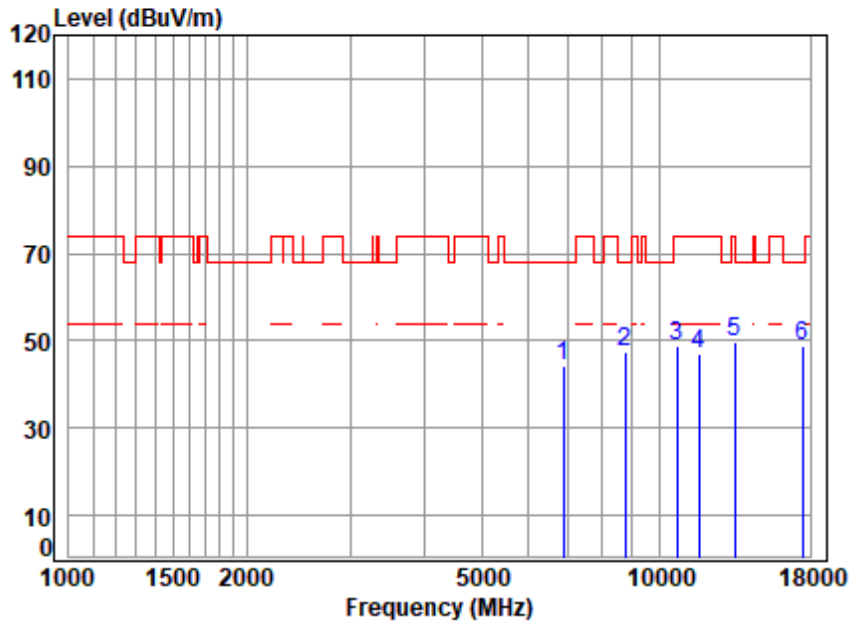

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5825 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6874.906	11.37	36.10	56.73	53.47	44.21	68.20	-23.99 Peak
2	8764.146	12.19	38.50	55.21	51.95	47.43	68.20	-20.77 peak
3	10698.510	14.03	39.40	53.68	49.02	48.77	74.00	-25.23 Peak
4	11650.000	14.69	39.55	53.69	46.53	47.08	74.00	-26.92 peak
5	pp13442.810	15.87	40.21	54.46	48.28	49.90	68.20	-18.30 Peak
6	17475.000	18.35	40.78	54.40	44.03	48.76	68.20	-19.44 peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

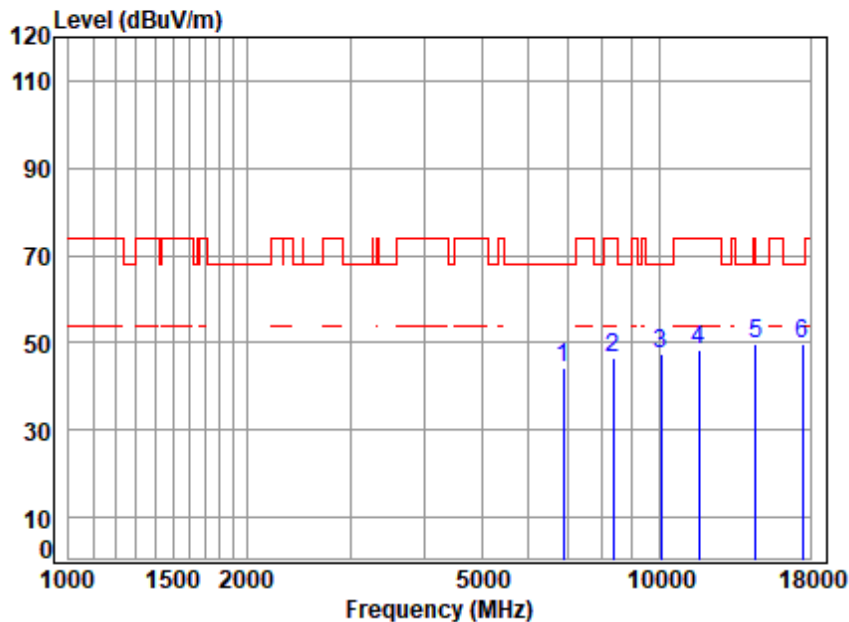

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5825 TX RSE

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	6874.906	11.37	36.10	56.73	53.47	44.21	68.20	-23.99 Peak
2	8368.069	11.67	38.66	55.57	51.99	46.75	74.00	-27.25 Peak
3	10068.450	13.19	39.04	54.06	49.50	47.67	68.20	-20.53 Peak
4	11650.000	14.69	39.55	53.69	47.90	48.45	74.00	-25.55 peak
5	pp14533.910	16.79	39.43	54.35	48.07	49.94	68.20	-18.26 Peak
6	17475.000	18.35	40.78	54.40	45.09	49.82	68.20	-18.38 peak



6.3 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & Subpart E 15.407(b)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.3.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C

Humidity: 49.8 % RH


Atmospheric Pressure: 1020 mbar



6.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	02	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	03	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax/be 20/40/80, Only the data of worst case is recorded in the report.

6.3.3 Test Setup Diagram

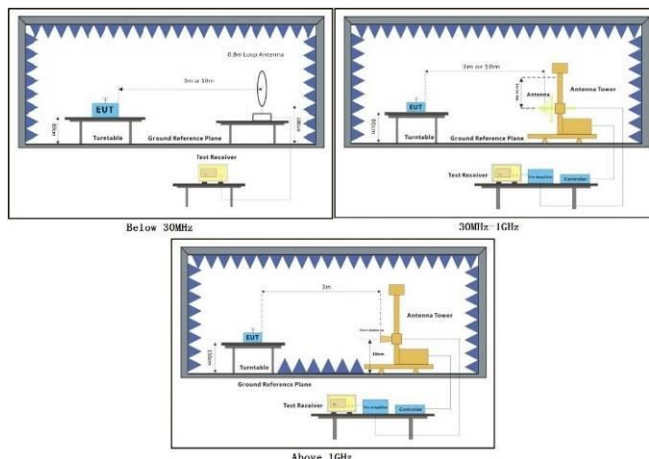

6.3.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for Peak detection (PK) and Average detection (AV) at frequency above 1GHz.

Remark 3. For fundamental and harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

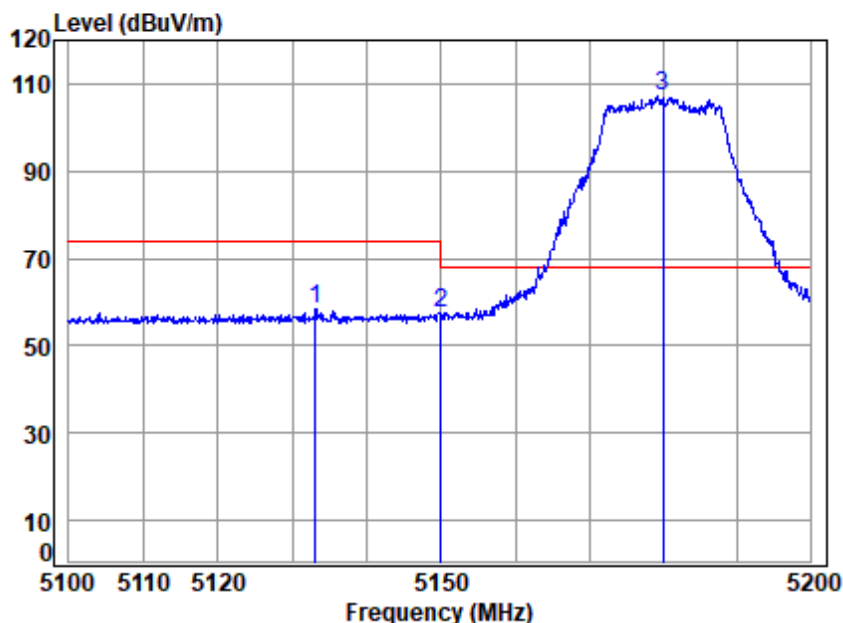

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5133.084	10.08	32.37	30.85	46.74	58.34	74.00	-15.66 peak
2	5149.980	10.14	32.40	30.84	45.83	57.53	74.00	-16.47 peak
3	pp 5180.000	10.25	32.46	30.83	95.27	107.15	68.20	38.95 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

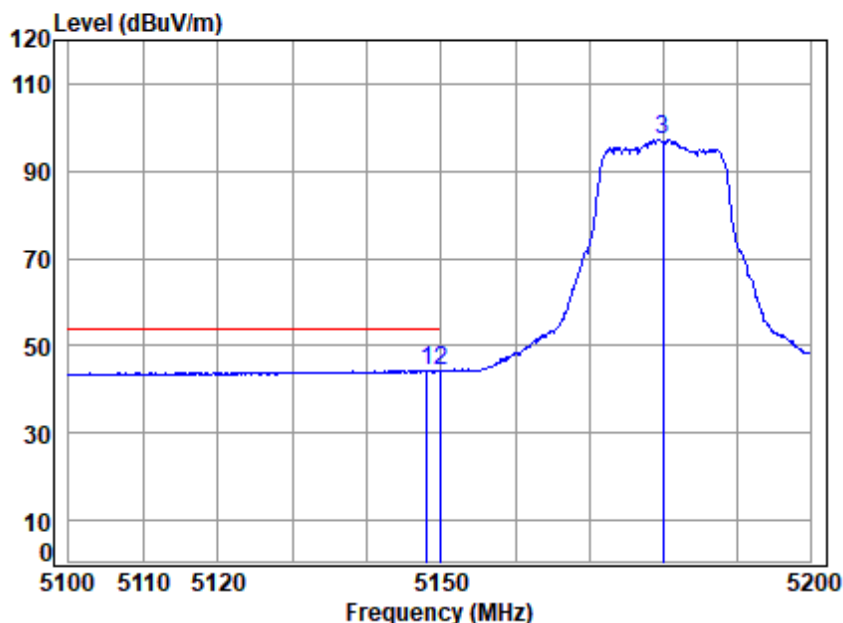

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11a


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5148.058	10.13	32.40	30.84	32.77	44.46	54.00	-9.54	Average
2	5149.980	10.14	32.40	30.84	32.66	44.36	54.00	-9.64	Average
3	5180.000	10.25	32.46	30.83	85.43	97.31	-----	-----	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

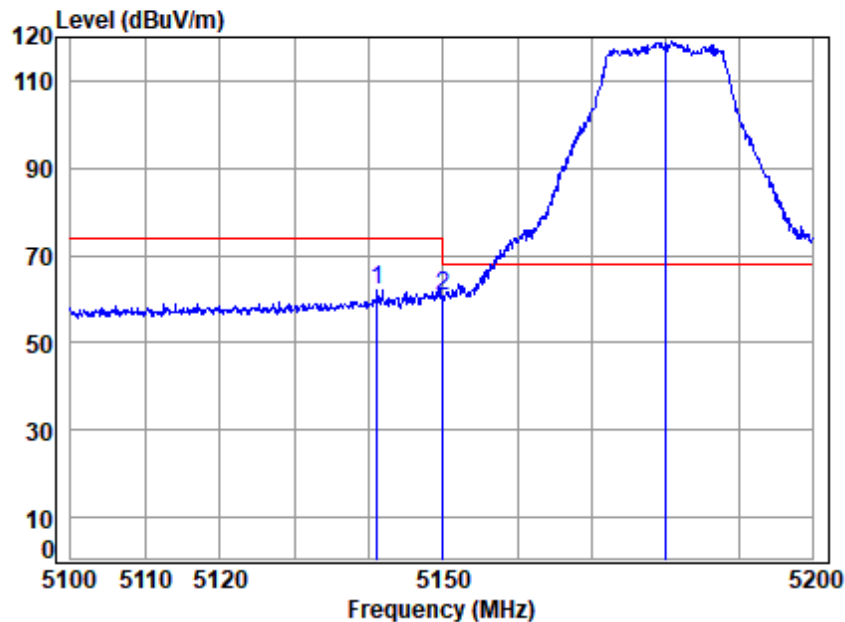

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5141.165	10.11	32.38	30.84	50.28	61.93	74.00	-12.07 Peak
2 5149.980	10.14	32.40	30.84	48.96	60.66	74.00	-13.34 Peak
3 pp 5180.000	10.25	32.46	30.83	107.13	119.01	68.20	50.81 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

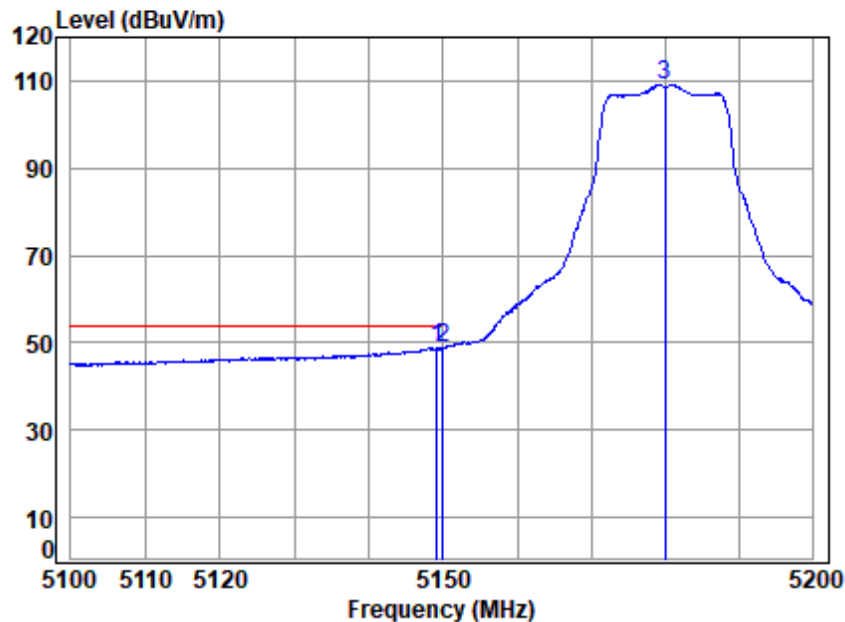

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.157	10.14	32.40	30.84	37.23	48.93	54.00	-5.07	Average
2 pp	5149.980	10.14	32.40	30.84	37.25	48.95	54.00	-5.05	Average
3	5180.000	10.25	32.46	30.83	97.38	109.26	-----	-----	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

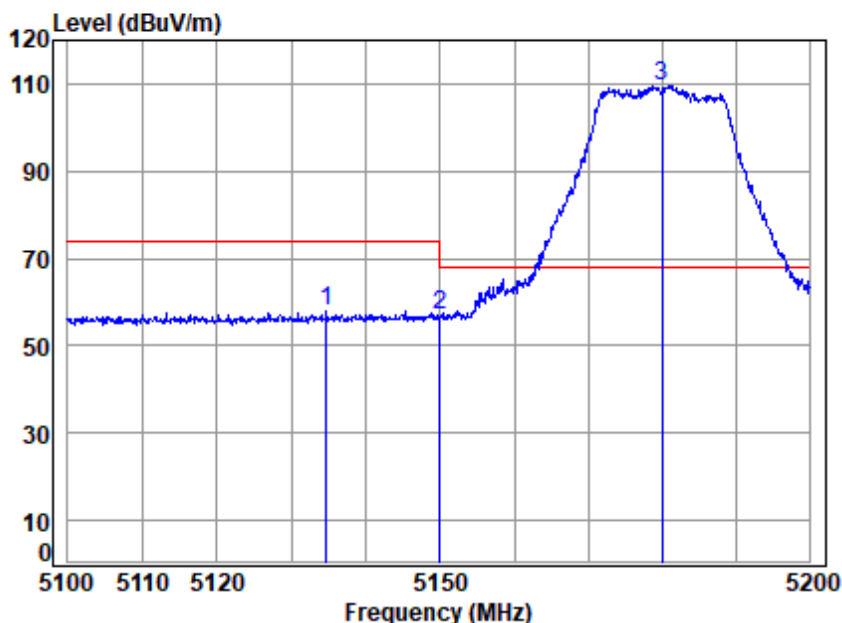

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5134.680	10.08	32.37	30.85	46.22	57.82	74.00	-16.18 peak
2	5149.980	10.14	32.40	30.84	45.21	56.91	74.00	-17.09 peak
3	pp 5180.000	10.25	32.46	30.83	97.66	109.54	68.20	41.34 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

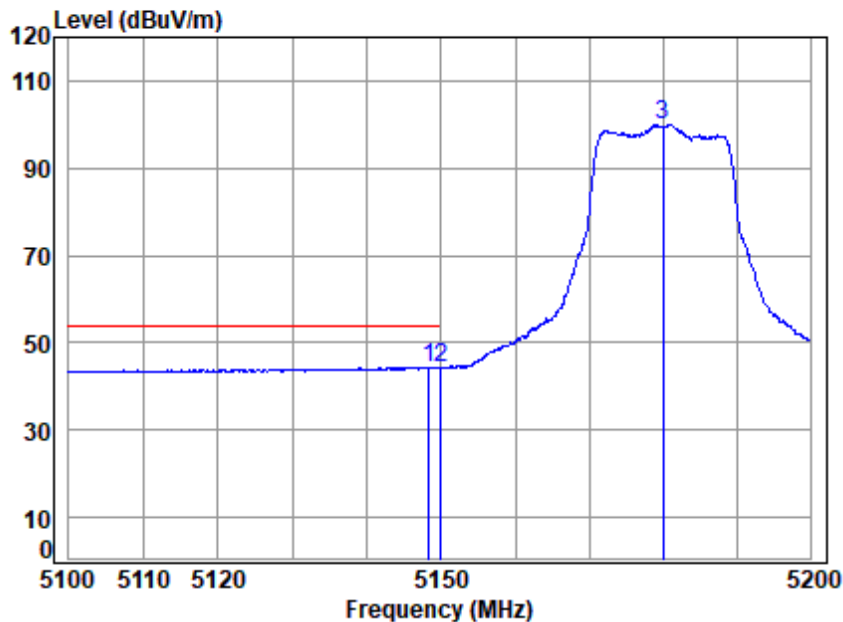

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5148.357	10.13	32.40	30.84	32.78	44.47	54.00	-9.53	Average
2	5149.980	10.14	32.40	30.84	32.69	44.39	54.00	-9.61	Average
3	5180.000	10.25	32.46	30.83	88.21	100.09	-----	-----	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

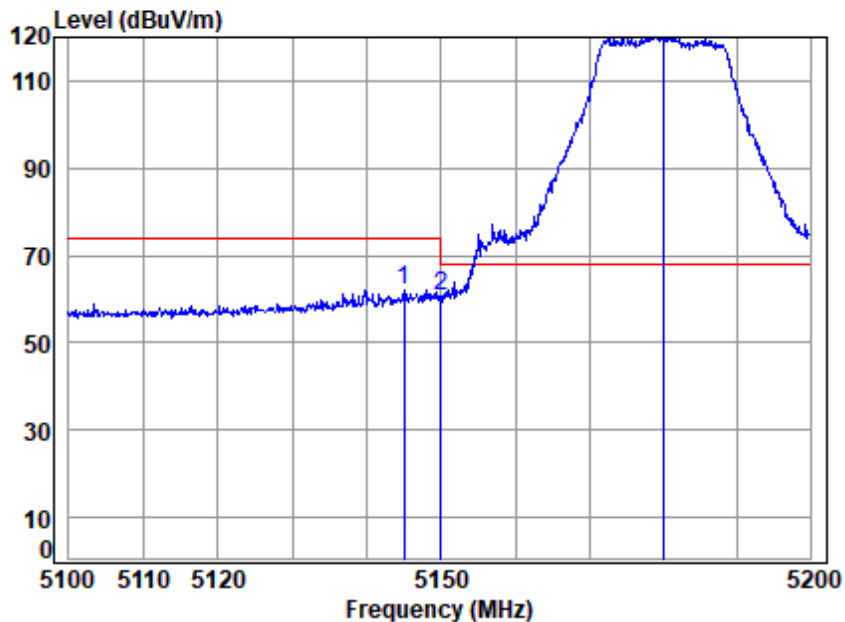

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.959	10.12	32.39	30.84	50.39	62.06	74.00	-11.94 Peak
2	5149.980	10.14	32.40	30.84	49.17	60.87	74.00	-13.13 Peak
3	pp 5180.000	10.25	32.46	30.83	109.12	121.00	68.20	52.80 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

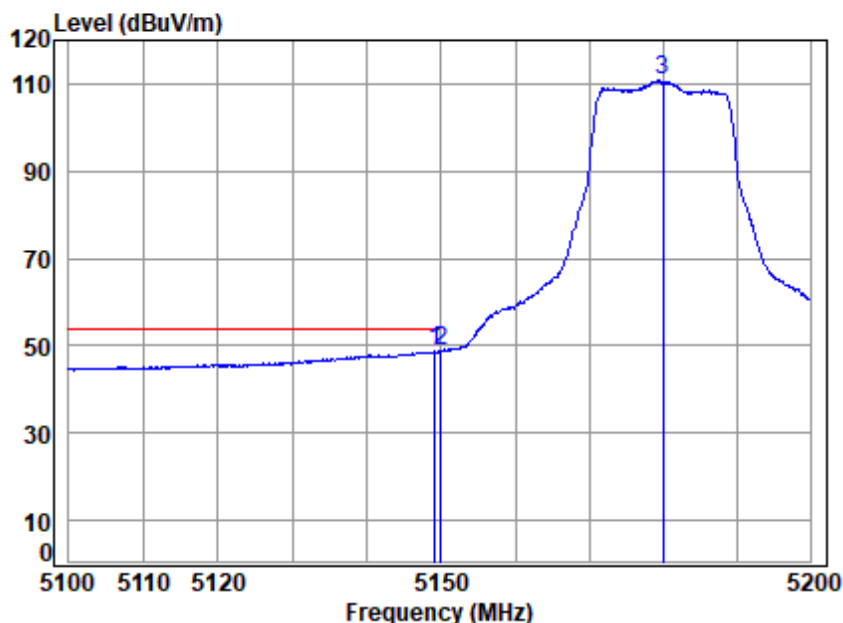

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.157	10.14	32.40	30.84	36.95	48.65	54.00	-5.35	Average
2 pp	5149.980	10.14	32.40	30.84	37.16	48.86	54.00	-5.14	Average
3	5180.000	10.25	32.46	30.83	98.91	110.79	-----	-----	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

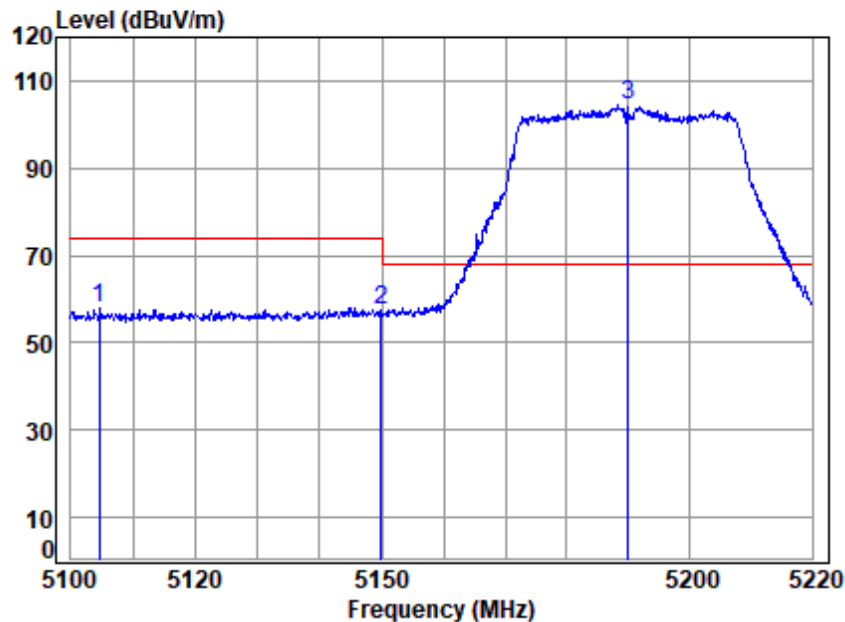

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5190 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5104.628	9.97	32.31	30.86	46.66	58.08	74.00	-15.92	peak
2	5149.980	10.14	32.40	30.84	45.60	57.30	74.00	-16.70	peak
3	5190.000	10.29	32.48	30.82	92.36	104.31	68.20	36.11	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

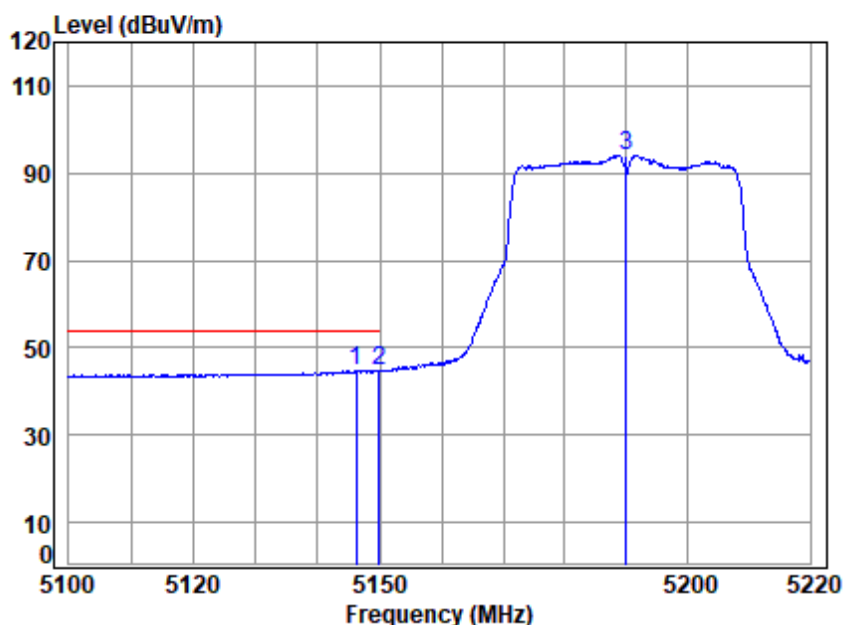

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5190 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.229	10.13	32.39	30.84	33.00	44.68	54.00	-9.32 Average
2	pp 5149.980	10.14	32.40	30.84	33.06	44.76	54.00	-9.24 Average
3	5190.000	10.29	32.48	30.82	82.05	94.00	-----	----- Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

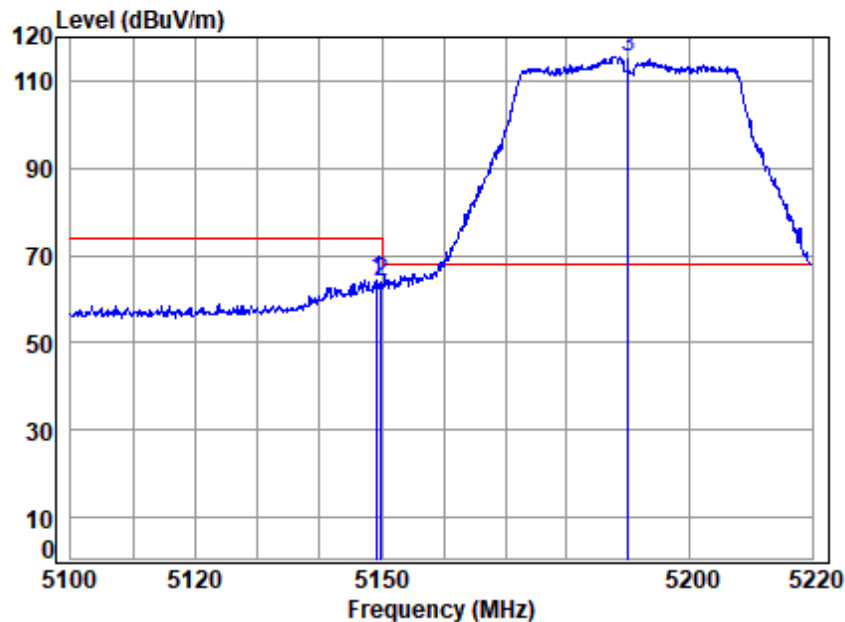

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5190 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.222	10.14	32.40	30.84	52.81	64.51	74.00	-9.49 Peak
2	5149.980	10.14	32.40	30.84	52.10	63.80	74.00	-10.20 Peak
3	pp 5190.000	10.29	32.48	30.82	103.54	115.49	68.20	47.29 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

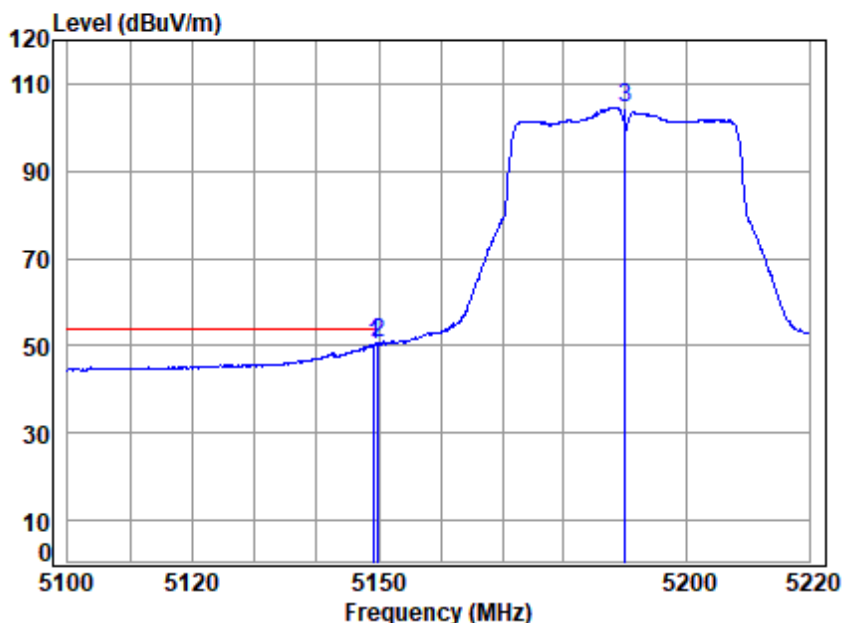

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5190 Band edge
: 5G Wi-Fi 11n40


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5149.222	10.14	32.40	30.84	38.67	50.37	54.00	-3.63 Average
2 pp	5149.980	10.14	32.40	30.84	38.97	50.67	54.00	-3.33 Average
3	5190.000	10.29	32.48	30.82	92.62	104.57	-----	----- Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

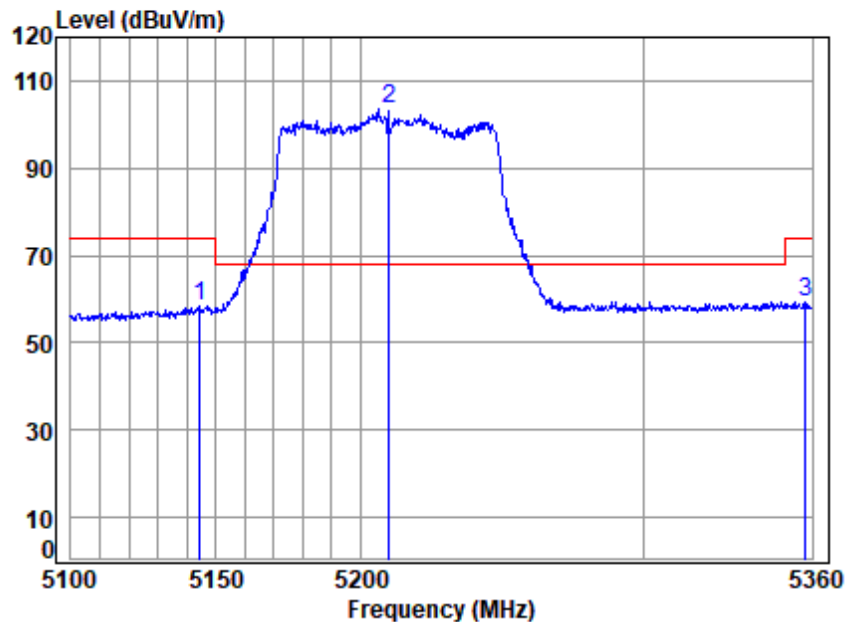

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5210 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.316	10.12	32.39	30.84	46.58	58.25	74.00	-15.75	peak
2 pp	5210.000	10.32	32.52	30.82	91.36	103.38	68.20	35.18	peak
3	5357.602	10.48	32.80	30.76	46.71	59.23	74.00	-14.77	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

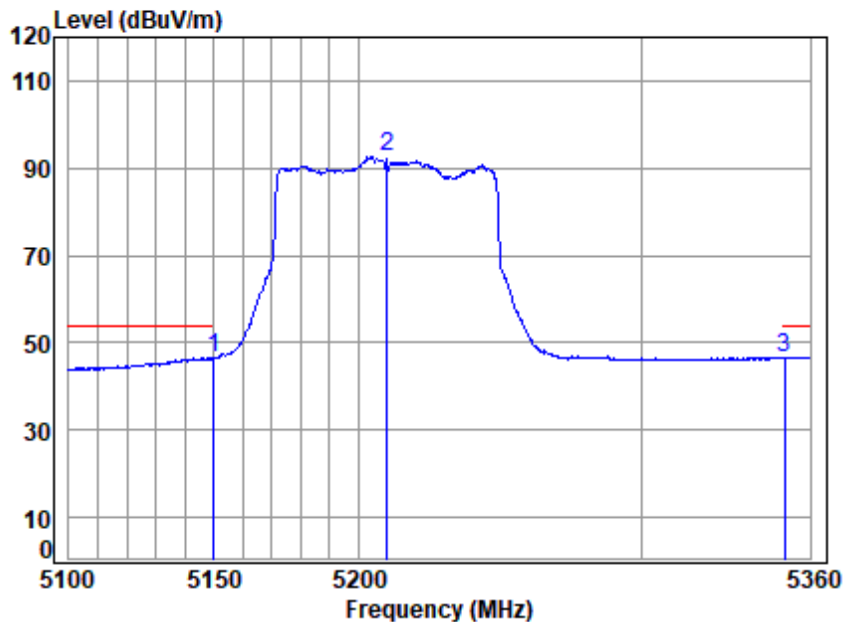

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5149.947	10.14	32.40	30.84	34.95	46.65	54.00	-7.35	Average
2	5210.000	10.32	32.52	30.82	80.39	92.41	-----	-----	Average
3	5350.680	10.45	32.80	30.76	34.12	46.61	54.00	-7.39	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

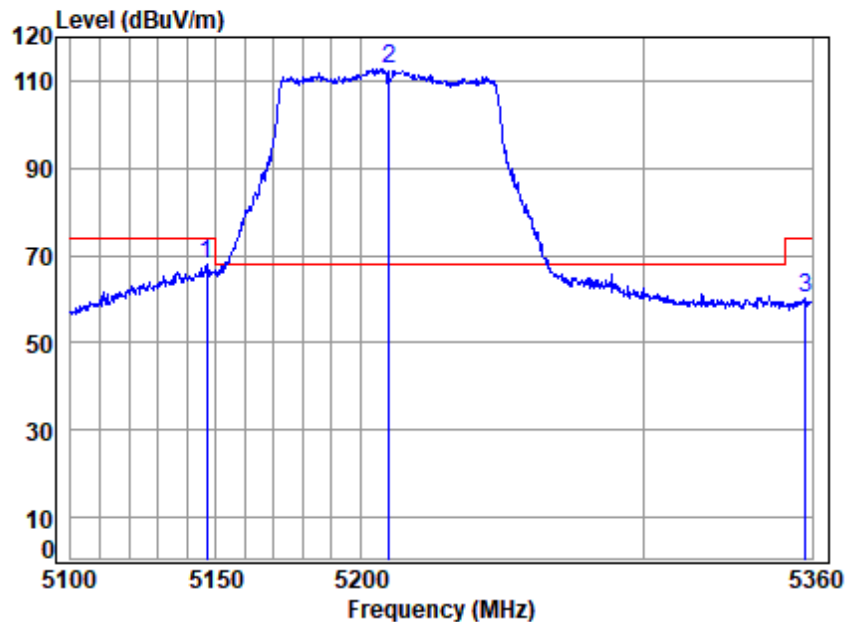

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.619	10.13	32.39	30.84	56.12	67.80	74.00	-6.20	Peak
2 pp	5210.000	10.32	32.52	30.82	100.79	112.81	68.20	44.61	Peak
3	5357.602	10.48	32.80	30.76	47.63	60.15	74.00	-13.85	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

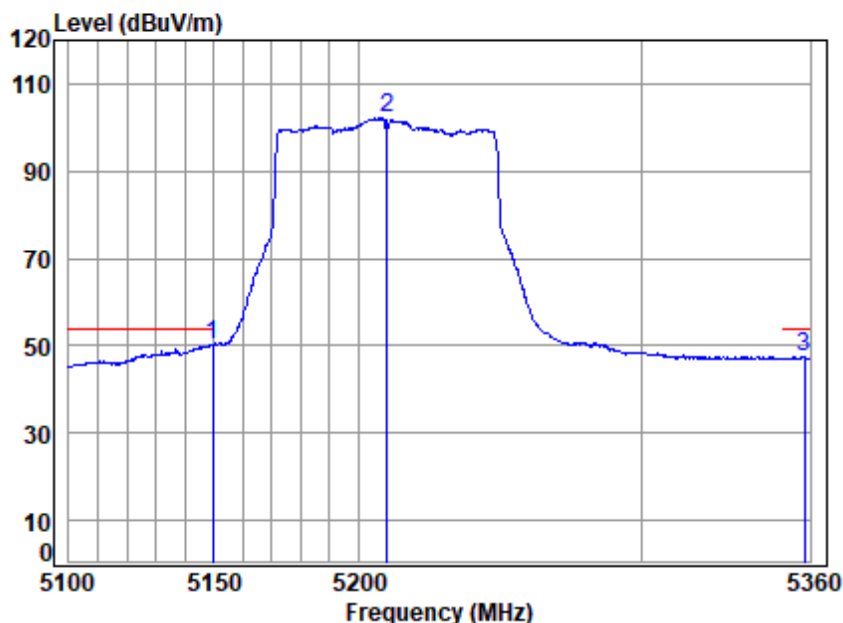

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5210 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5149.435	10.14	32.40	30.84	38.67	50.37	54.00	-3.63	Average
2	5210.000	10.33	32.52	30.82	90.02	102.05	-----	-----	Average
3	5358.135	10.48	32.80	30.76	34.86	47.38	54.00	-6.62	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

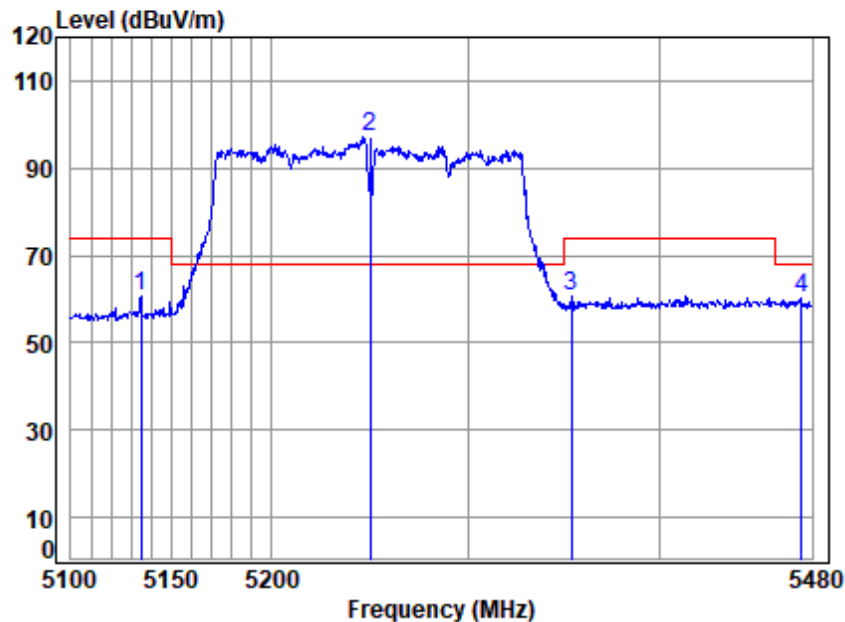

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5250 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5134.938	10.08	32.37	30.85	49.23	60.83	74.00	-13.17	peak
2 pp	5250.000	10.31	32.60	30.80	84.96	97.07	68.20	28.87	peak
3	5353.492	10.46	32.80	30.76	48.13	60.63	74.00	-13.37	peak
4	5474.489	10.59	32.90	30.71	47.45	60.23	68.20	-7.97	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

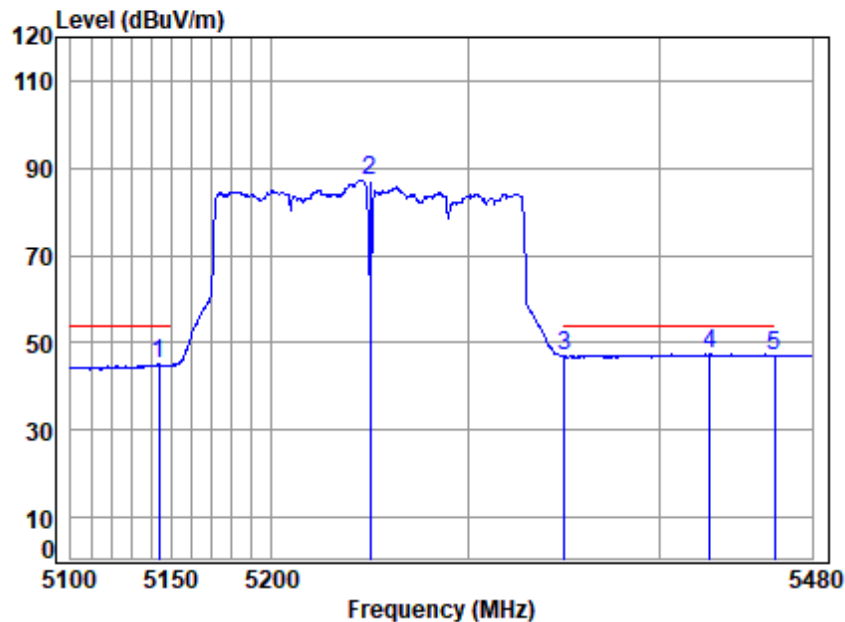

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5250 Band edge

: 5G Wi-Fi 11ac160

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5143.802	10.12	32.39	30.84	33.53	45.20	54.00	-8.80 Average
2 5250.000	10.31	32.60	30.80	75.22	87.33	-----	----- Average
3 5350.118	10.45	32.80	30.76	34.38	46.87	54.00	-7.13 Average
4 pp 5425.922	10.61	32.85	30.73	34.58	47.31	54.00	-6.69 Average
5 5459.929	10.60	32.90	30.72	34.27	47.05	54.00	-6.95 Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

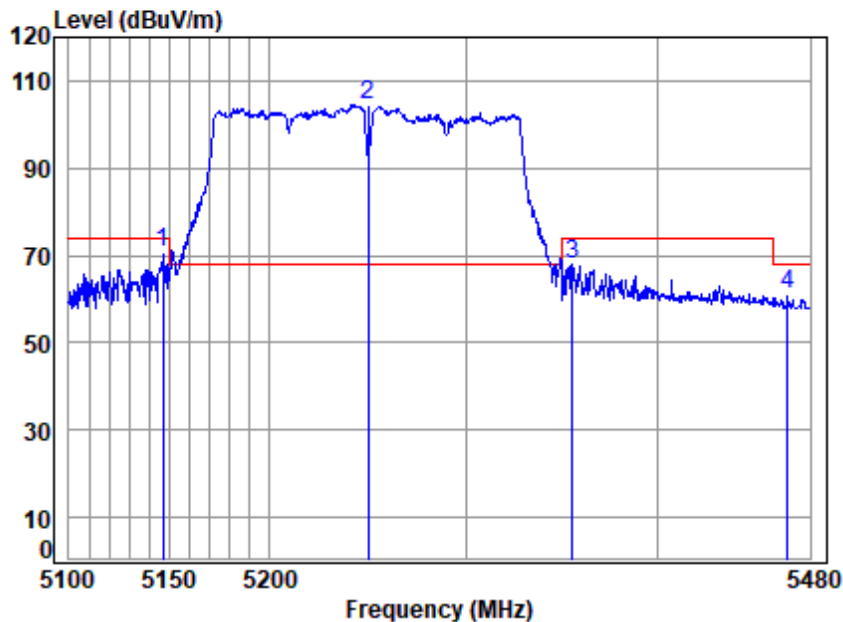

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5250 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.760	10.13	32.39	30.84	59.04	70.72	74.00	-3.28	peak
2 pp	5250.000	10.31	32.60	30.80	92.27	104.38	68.20	36.18	peak
3	5355.417	10.47	32.80	30.76	55.43	67.94	74.00	-6.06	peak
4	5467.805	10.59	32.90	30.71	48.50	61.28	68.20	-6.92	peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

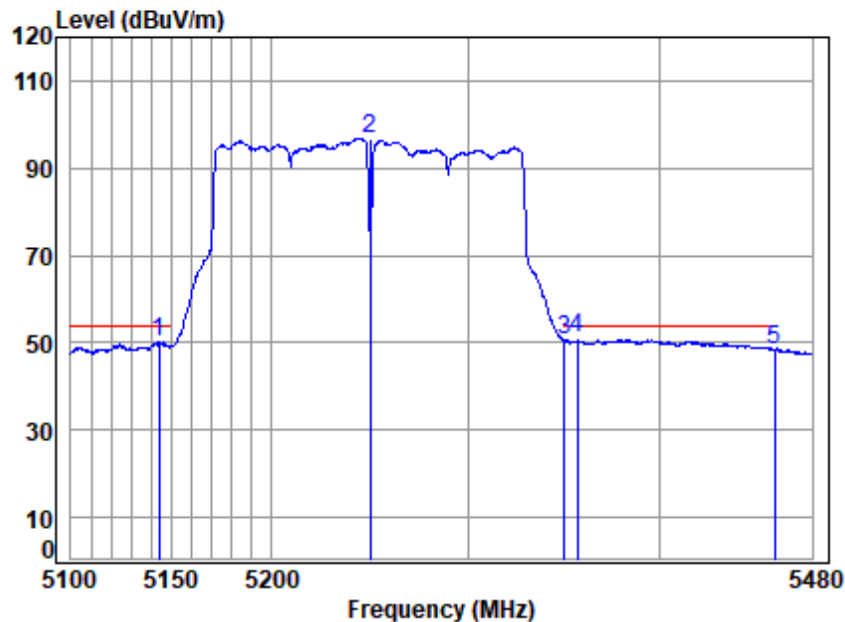

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5250 Band edge
: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.802	10.12	32.39	30.84	38.65	50.32	54.00	-3.68	Average
2	5250.000	10.31	32.60	30.80	84.80	96.91	-----	-----	Average
3	5350.118	10.45	32.80	30.76	38.17	50.66	54.00	-3.34	Average
4 pp	5356.956	10.47	32.80	30.76	38.41	50.92	54.00	-3.08	Average
5	5459.929	10.60	32.90	30.72	35.61	48.39	54.00	-5.61	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

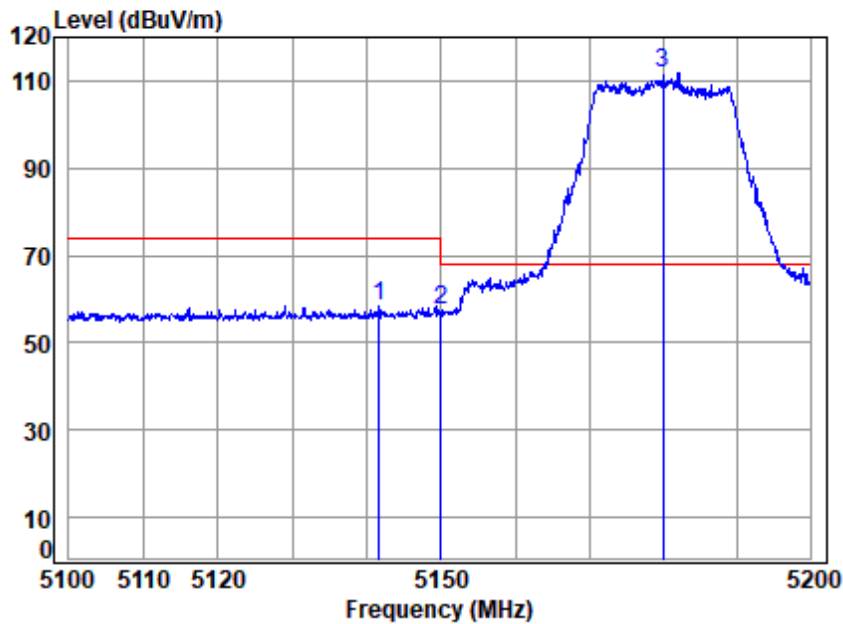

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.664	10.11	32.38	30.84	46.78	58.43	74.00	-15.57 peak
2	5149.980	10.14	32.40	30.84	45.78	57.48	74.00	-16.52 peak
3	pp 5180.000	10.25	32.46	30.83	99.77	111.65	68.20	43.45 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

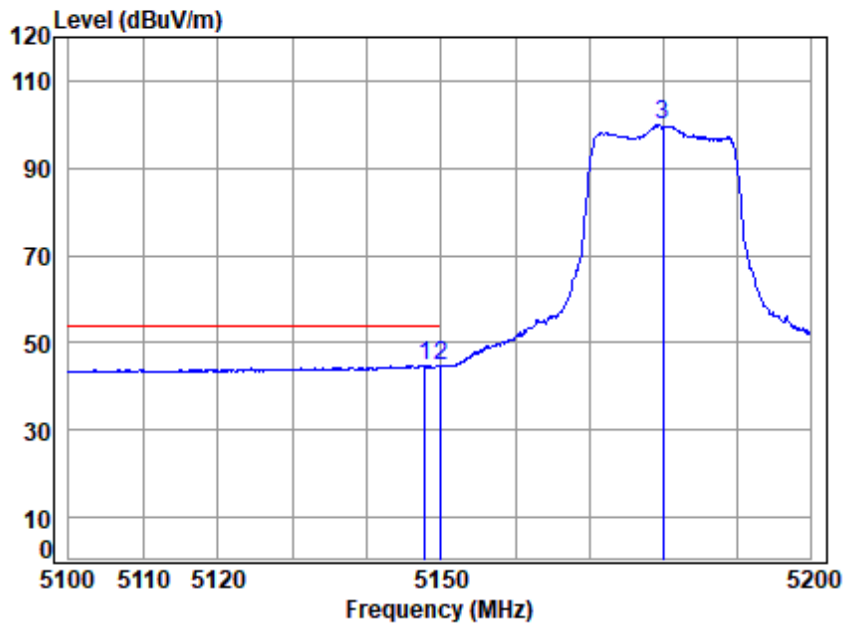

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5147.857	10.13	32.40	30.84	33.01	44.70	54.00	-9.30	Average
2 pp	5149.980	10.14	32.40	30.84	33.03	44.73	54.00	-9.27	Average
3	5180.000	10.25	32.46	30.83	88.06	99.94	-----	-----	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

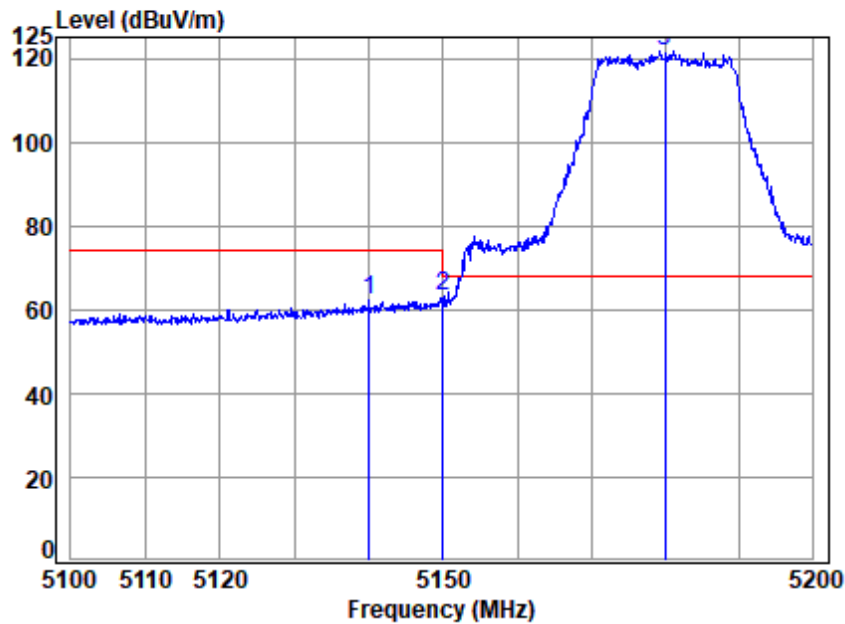

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.066	10.10	32.38	30.84	50.61	62.25	74.00	-11.75	Peak
2	5149.980	10.14	32.40	30.84	51.43	63.13	74.00	-10.87	Peak
3 pp	5180.000	10.25	32.46	30.83	110.01	121.89	68.20	53.69	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

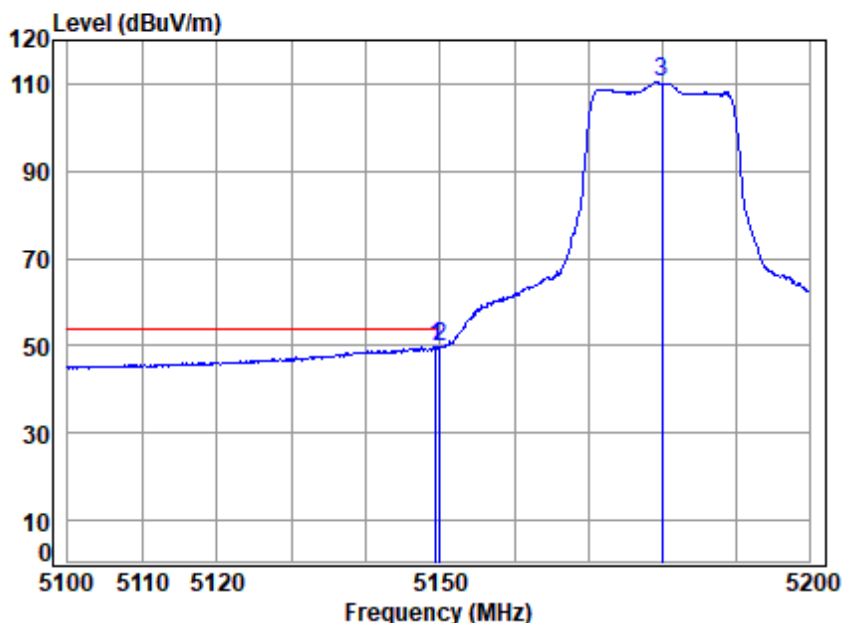

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5180 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.458	10.14	32.40	30.84	38.05	49.75	54.00	-4.25	Average
2 pp	5149.980	10.14	32.40	30.84	38.20	49.90	54.00	-4.10	Average
3	5180.000	10.25	32.46	30.83	98.76	110.64	-----	-----	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

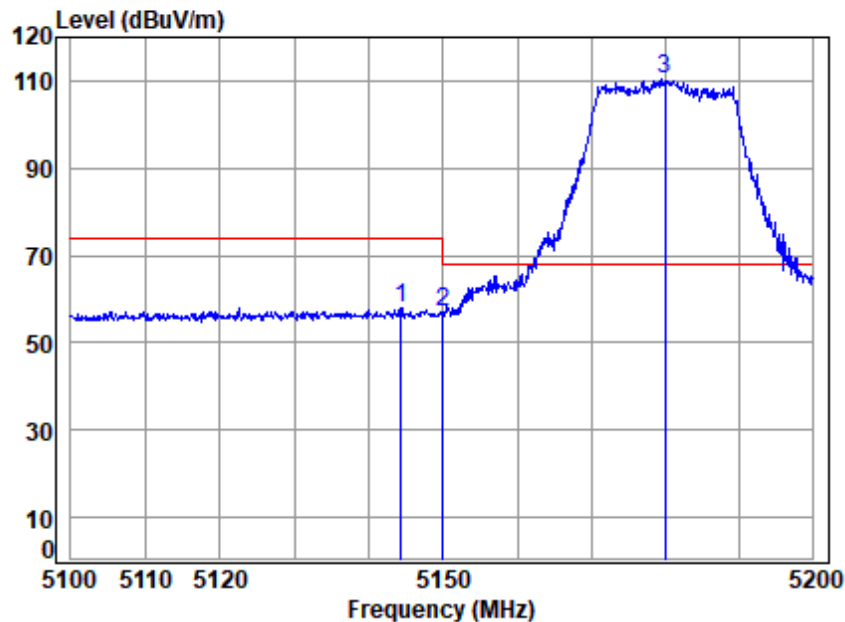

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5180 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5144.360	10.12	32.39	30.84	46.42	58.09	74.00	-15.91	peak
2	5149.980	10.14	32.40	30.84	45.53	57.23	74.00	-16.77	peak
3	pp 5180.000	10.25	32.46	30.83	98.34	110.22	68.20	42.02	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

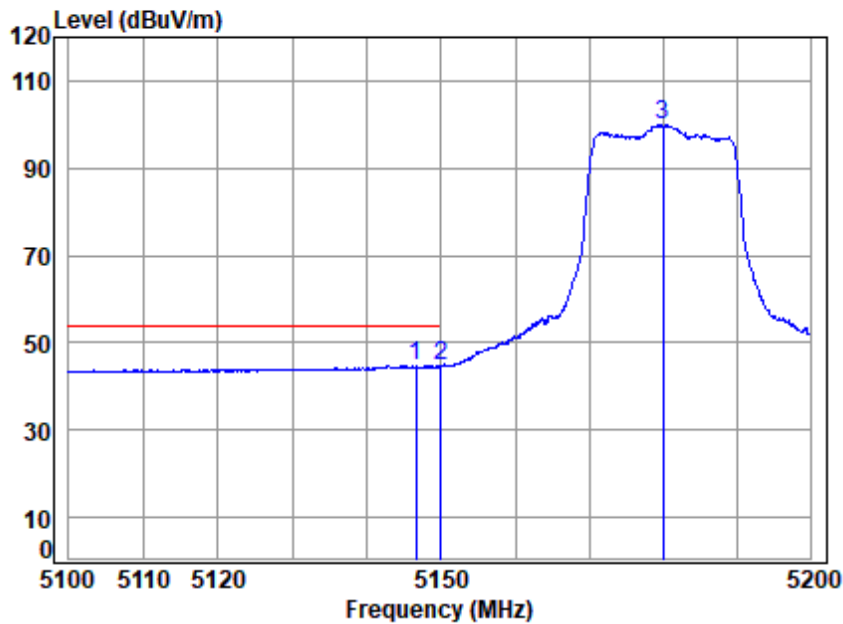

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5180 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5146.558	10.13	32.39	30.84	33.08	44.76	54.00	-9.24	Average
2	5149.980	10.14	32.40	30.84	32.92	44.62	54.00	-9.38	Average
3	5180.000	10.25	32.46	30.83	87.94	99.82	-----	-----	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

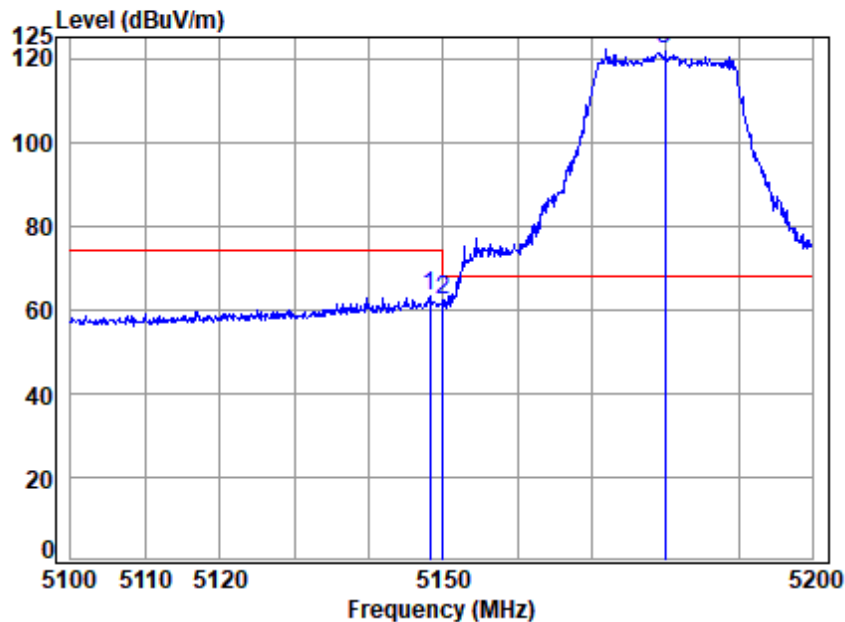

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5180 Band edge
: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.257	10.13	32.40	30.84	51.45	63.14	74.00	-10.86	Peak
2	5149.980	10.14	32.40	30.84	50.47	62.17	74.00	-11.83	Peak
3 pp	5180.000	10.25	32.46	30.83	110.27	122.15	68.20	53.95	Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

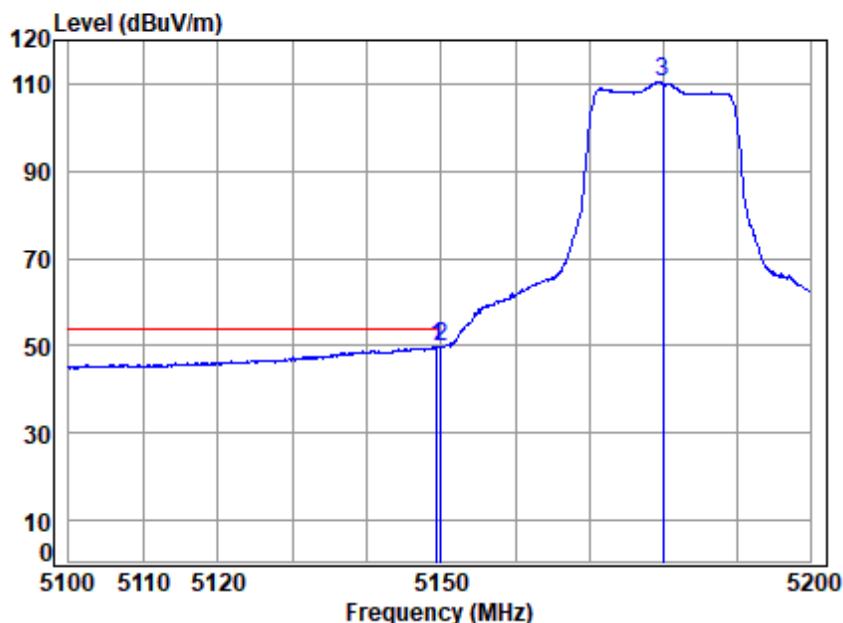

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5180 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.357	10.14	32.40	30.84	38.20	49.90	54.00	-4.10	Average
2 pp	5149.980	10.14	32.40	30.84	38.24	49.94	54.00	-4.06	Average
3	5180.000	10.25	32.46	30.83	98.66	110.54	-----	-----	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

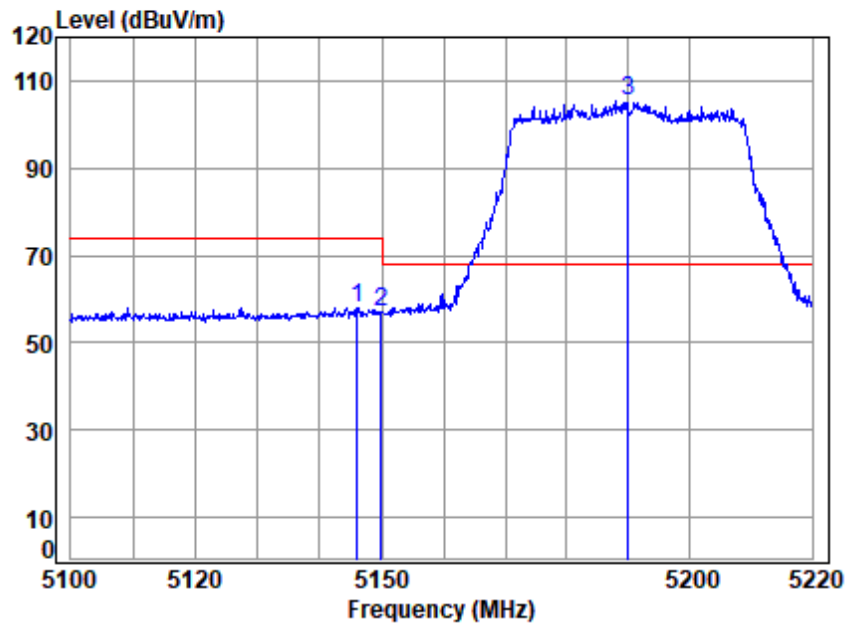

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5190 Band edge
: 5G Wi-Fi 11be40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.990	10.12	32.39	30.84	46.37	58.04	74.00	-15.96 peak
2	5149.980	10.14	32.40	30.84	45.44	57.14	74.00	-16.86 peak
3	pp 5190.000	10.29	32.48	30.82	93.62	105.57	68.20	37.37 peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

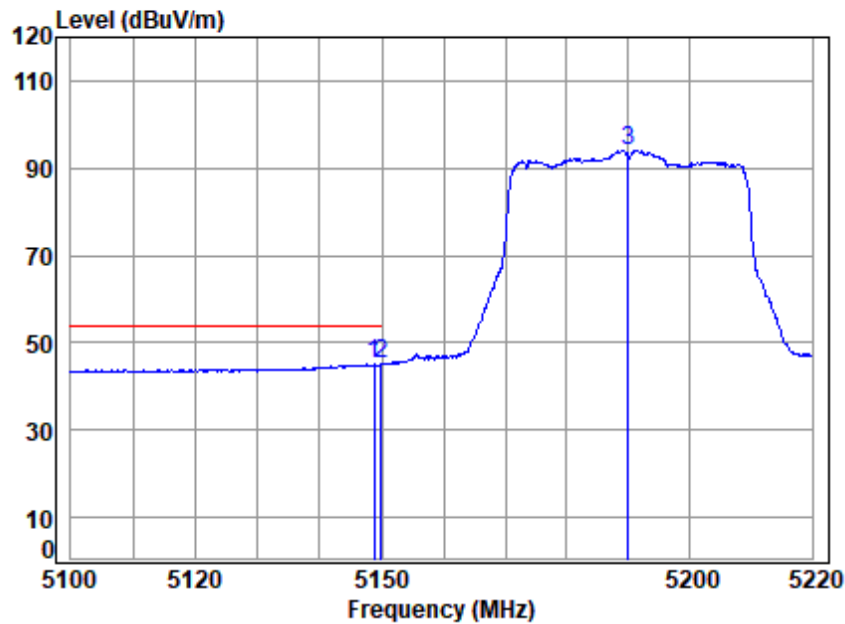

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5190 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5148.743	10.14	32.40	30.84	33.49	45.19	54.00	-8.81	Average
2 5149.980	10.14	32.40	30.84	33.33	45.03	54.00	-8.97	Average
3 5190.000	10.29	32.48	30.82	82.22	94.17	-----	-----	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

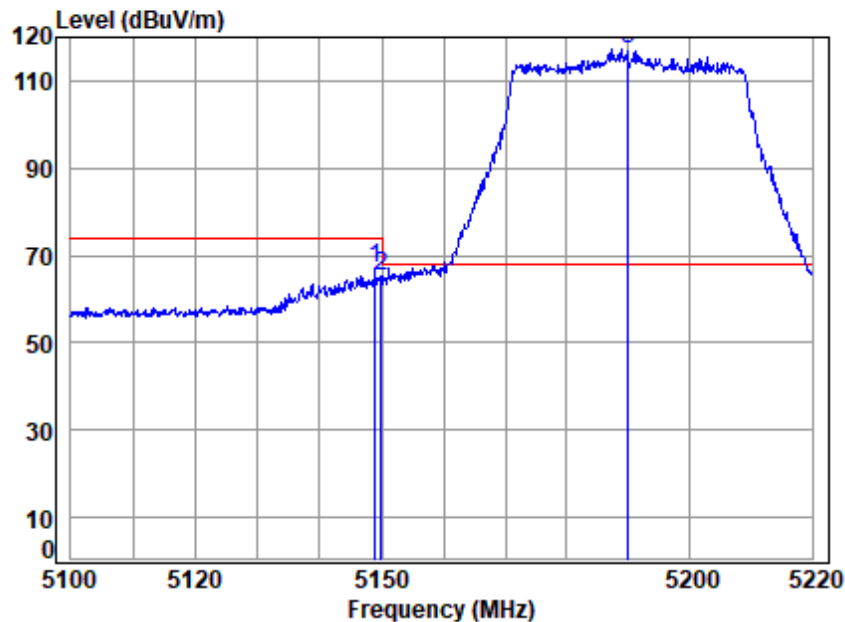

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5190 Band edge

: 5G Wi-Fi 11be40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.982	10.14	32.40	30.84	55.38	67.08	74.00	-6.92 Peak
2	5149.980	10.14	32.40	30.84	53.53	65.23	74.00	-8.77 Peak
3	pp 5190.000	10.29	32.48	30.82	105.54	117.49	68.20	49.29 Peak



Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

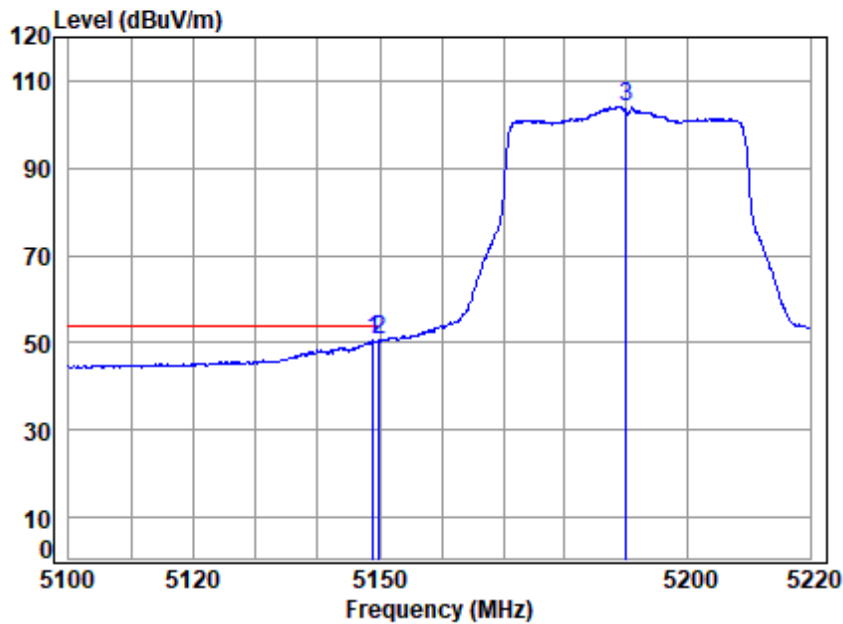

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5190 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5148.982	10.14	32.40	30.84	39.02	50.72	54.00	-3.28	Average
2	5149.980	10.14	32.40	30.84	38.83	50.53	54.00	-3.47	Average
3	5190.000	10.29	32.48	30.82	92.23	104.18	-----	-----	Average




SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 101 of 226

Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

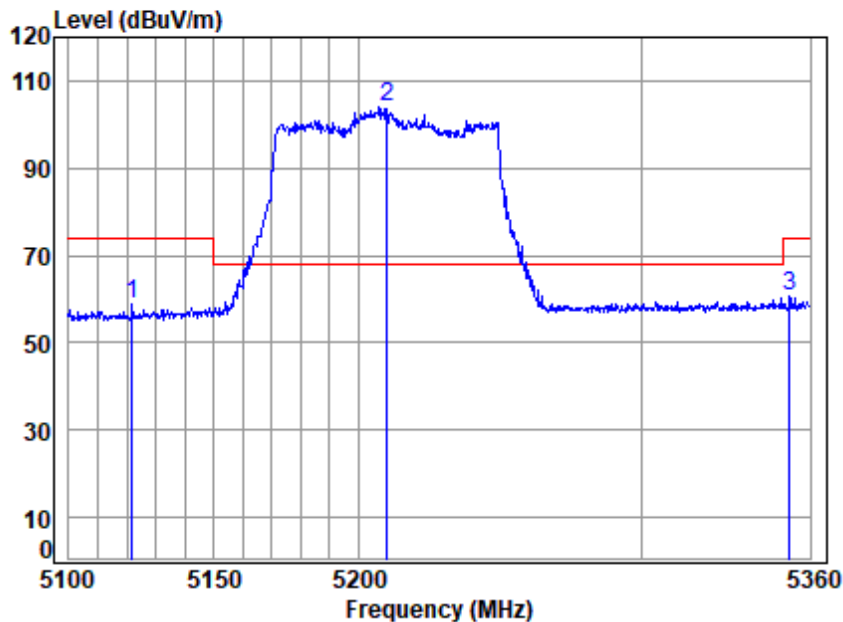

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5210 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5121.855	10.03	32.34	30.85	47.31	58.83	74.00	-15.17	peak
2 pp	5210.000	10.32	32.52	30.82	91.87	103.89	68.20	35.69	peak
3	5352.542	10.46	32.80	30.76	47.97	60.47	74.00	-13.53	peak




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

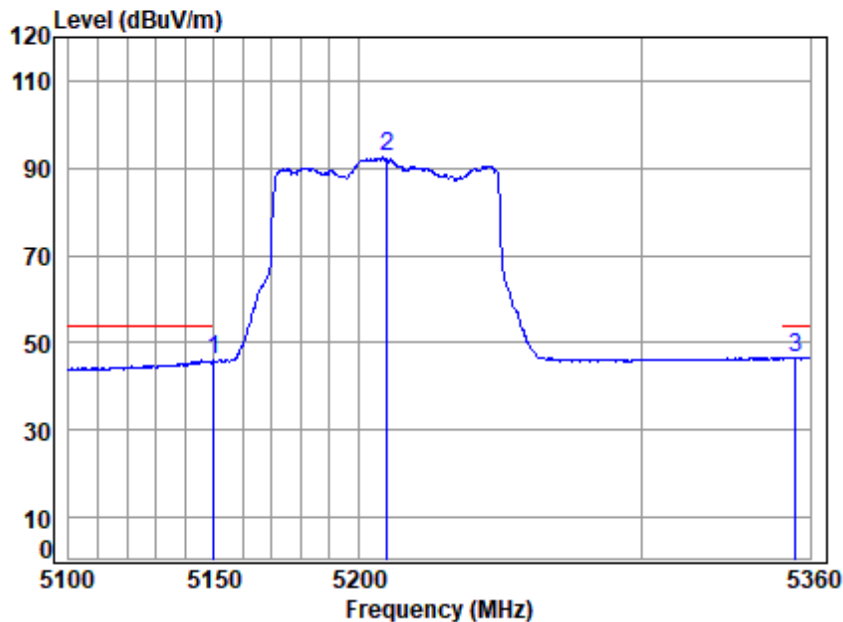

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5210 Band edge

: 5G Wi-Fi 11be80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5149.947	10.14	32.40	30.84	34.23	45.93	54.00	-8.07	Average
2	5210.000	10.32	32.52	30.82	80.40	92.42	54.00	38.42	Average
3 pp	5354.672	10.47	32.80	30.76	34.08	46.59	54.00	-7.41	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

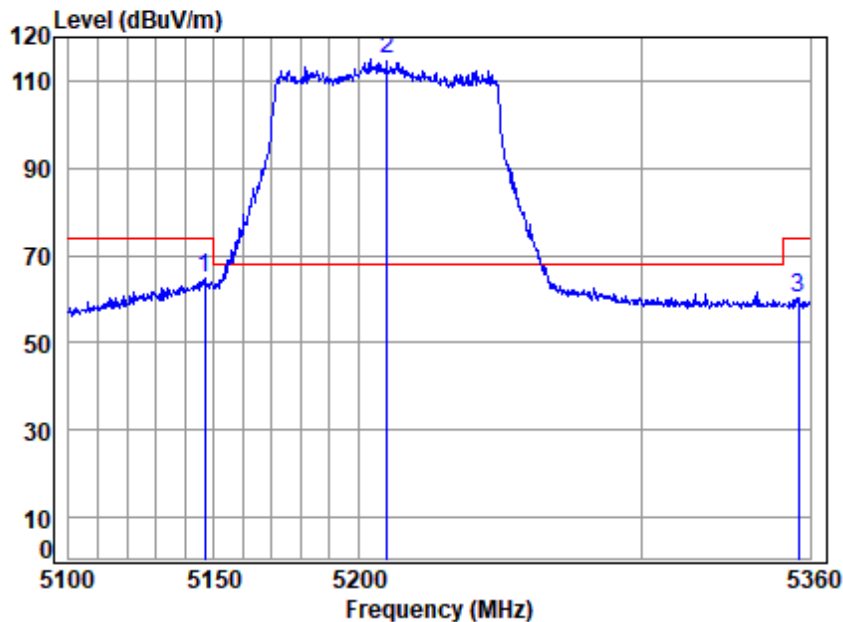

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5210 Band edge
: 5G Wi-Fi 11be80


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5146.619	10.13	32.39	30.84	53.07	64.75	74.00	-9.25	Peak
2 pp	5210.000	10.32	32.52	30.82	102.82	114.84	68.20	46.64	Peak
3	5356.004	10.47	32.80	30.76	47.92	60.43	74.00	-13.57	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

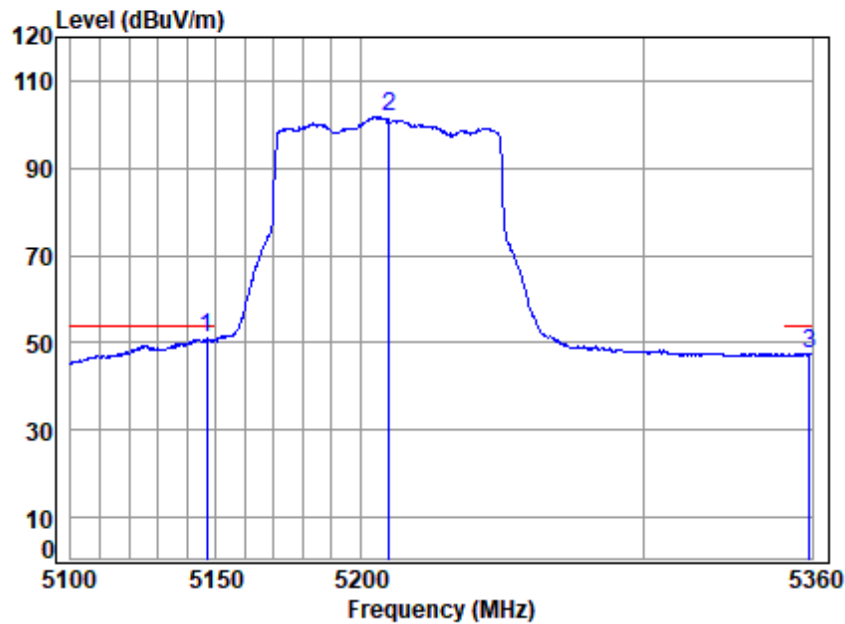

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5210 Band edge
: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5146.619	10.13	32.39	30.84	39.23	50.91	54.00	-3.09	Average
2	5210.000	10.32	32.52	30.82	89.65	101.67	-----	-----	Average
3	5358.934	10.48	32.80	30.76	34.82	47.34	54.00	-6.66	Average



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

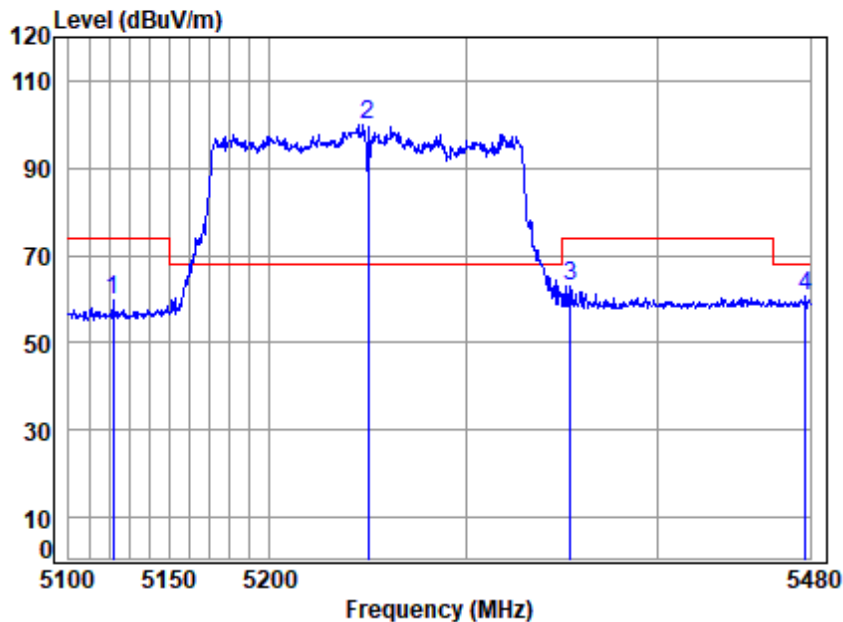

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5250 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5122.038	10.03	32.34	30.85	48.11	59.63	74.00	-14.37	peak
2 pp	5250.000	10.31	32.60	30.80	88.01	100.12	68.20	31.92	peak
3	5354.262	10.46	32.80	30.76	50.61	63.11	74.00	-10.89	peak
4	5477.638	10.59	32.90	30.71	47.85	60.63	68.20	-7.57	peak



Test Mode: 01; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

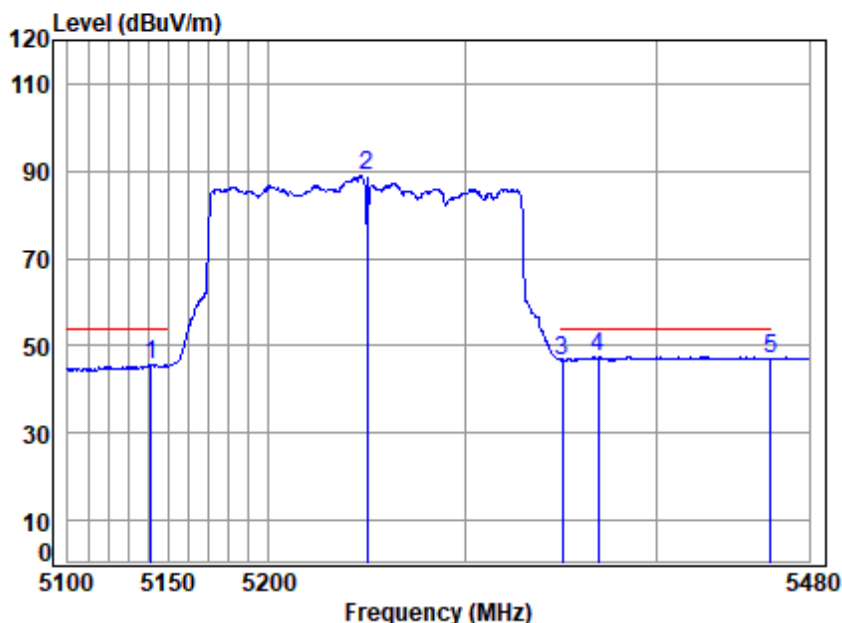

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5250 Band edge
: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5141.584	10.11	32.38	30.84	34.14	45.79	54.00	-8.21	Average
2	5250.000	10.31	32.60	30.80	76.86	88.97	-----	-----	Average
3	5350.416	10.45	32.80	30.76	34.18	46.67	54.00	-7.33	Average
4 pp	5369.290	10.52	32.80	30.75	34.93	47.50	54.00	-6.50	Average
5	5459.560	10.60	32.90	30.72	34.21	46.99	54.00	-7.01	Average



Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

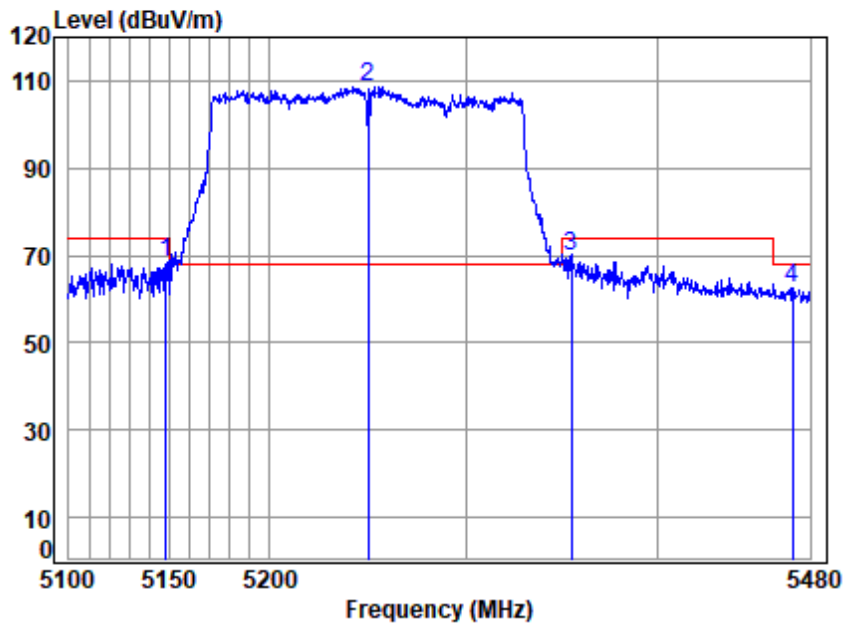

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5250 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.239	10.13	32.40	30.84	56.70	68.39	74.00	-5.61	Peak
2 pp	5250.000	10.30	32.61	30.80	96.67	108.78	68.20	40.58	Peak
3	5354.646	10.47	32.80	30.76	57.43	69.94	74.00	-4.06	Peak
4	5470.950	10.59	32.90	30.71	49.72	62.50	68.20	-5.70	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 01; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

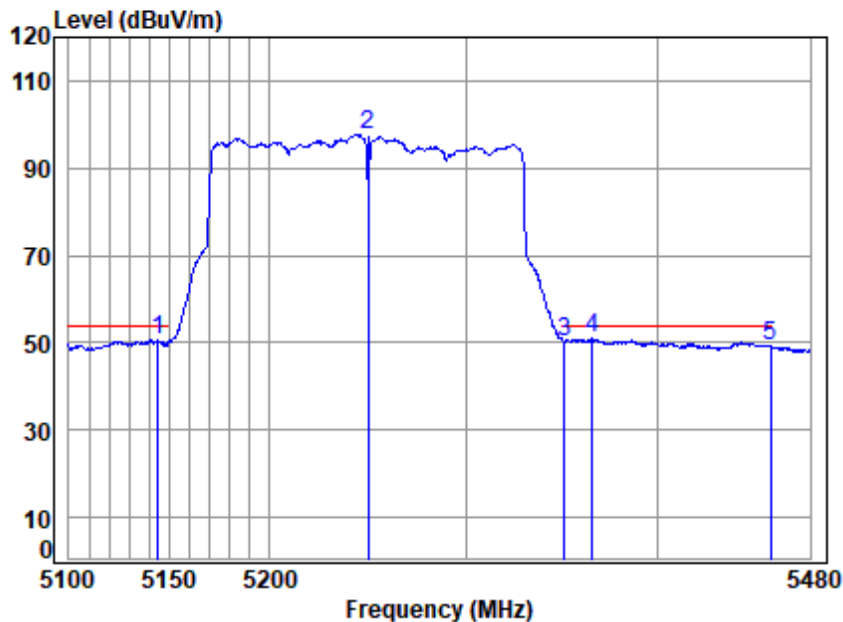

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5250 Band edge

: 5G Wi-Fi 11be160

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5144.541	10.12	32.39	30.84	38.95	50.62	54.00	-3.38	Average
2 5250.000	10.31	32.59	30.80	85.47	97.57	-----	-----	Average
3 5350.800	10.45	32.80	30.76	37.89	50.38	54.00	-3.62	Average
4 pp 5365.432	10.50	32.80	30.75	38.37	50.92	54.00	-3.08	Average
5 5459.167	10.60	32.90	30.72	36.33	49.11	54.00	-4.89	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

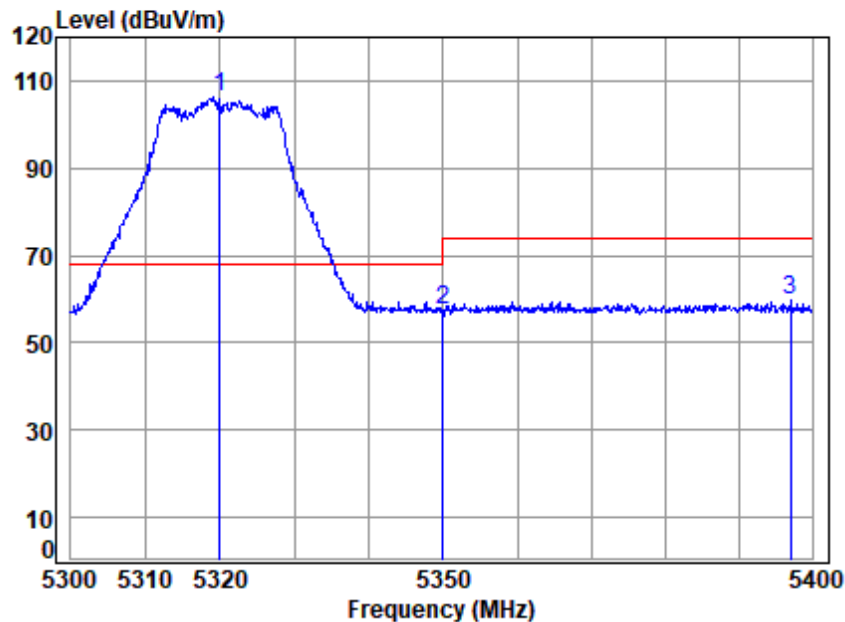

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	93.87	106.19	68.20	37.99	peak
2	5350.020	10.45	32.80	30.76	45.03	57.52	74.00	-16.48	peak
3	5397.074	10.61	32.80	30.74	47.07	59.74	74.00	-14.26	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

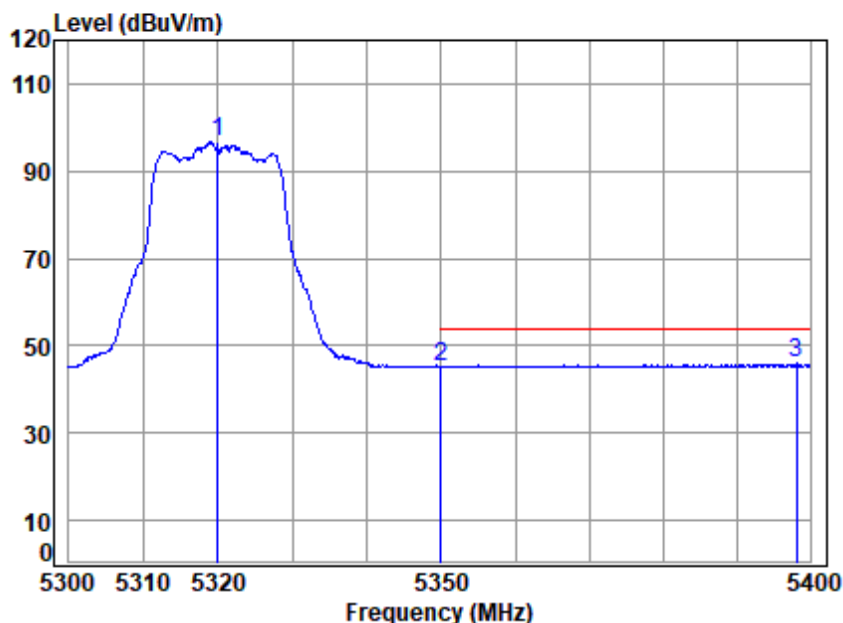

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	84.28	96.60	-----	-----	Average
2	5350.020	10.45	32.80	30.76	32.69	45.18	54.00	-8.82	Average
3 pp	5398.184	10.61	32.80	30.74	33.20	45.87	54.00	-8.13	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

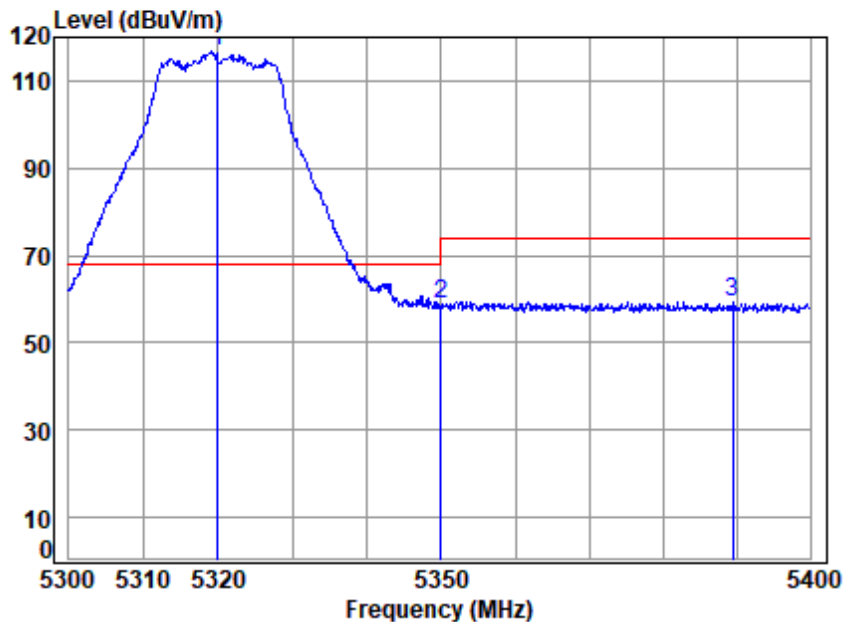

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	104.29	116.61	68.20	48.41	Peak
2	5350.020	10.45	32.80	30.76	46.45	58.94	74.00	-15.06	Peak
3	5389.513	10.58	32.80	30.74	46.87	59.51	74.00	-14.49	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

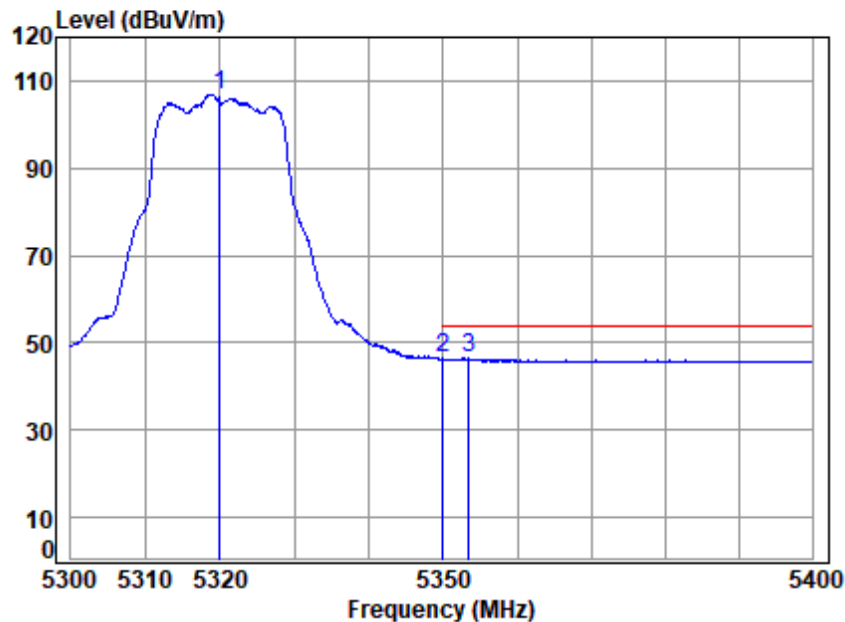

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	94.58	106.90	-----	-----	Average
2	5350.020	10.45	32.80	30.76	33.93	46.42	54.00	-7.58	Average
3	pp 5353.468	10.46	32.80	30.76	34.07	46.57	54.00	-7.43	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

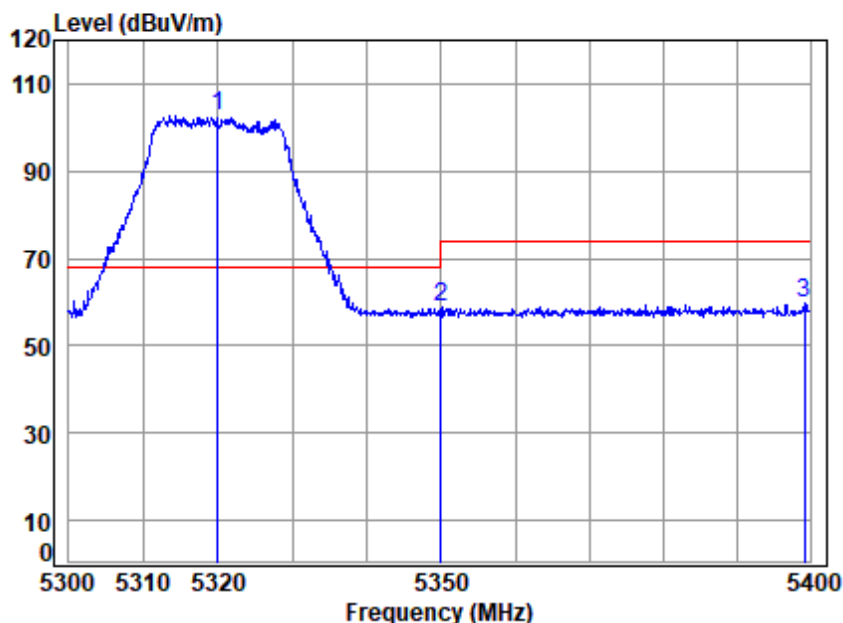

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	90.31	102.63	68.20	34.43	peak
2	5350.020	10.45	32.80	30.76	46.25	58.74	74.00	-15.26	peak
3	5399.192	10.62	32.80	30.74	47.06	59.74	74.00	-14.26	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

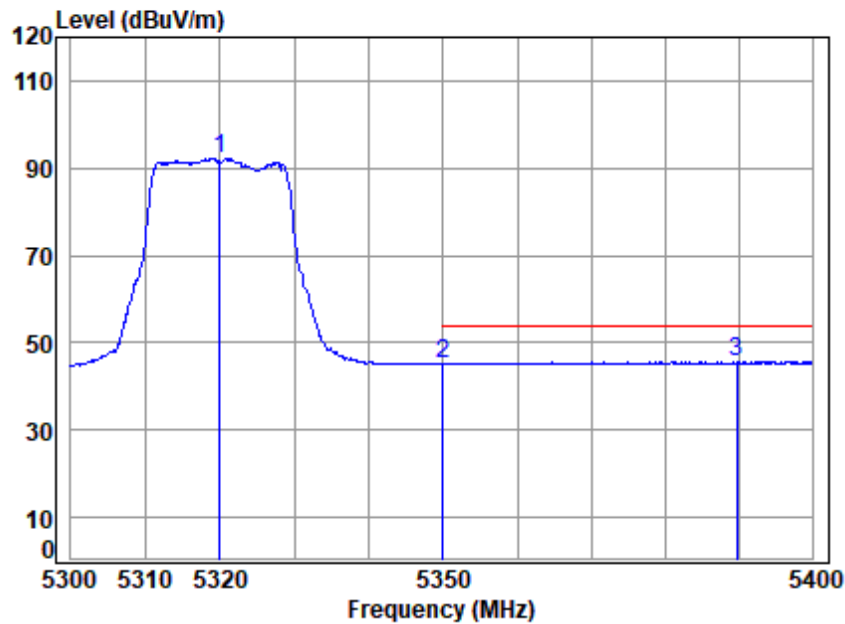

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11n20


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	10.35	32.74	30.77	80.04	92.36	-----	-----	Average
2 5350.020	10.45	32.80	30.76	32.67	45.16	54.00	-8.84	Average
3 pp 5389.815	10.59	32.80	30.74	33.03	45.68	54.00	-8.32	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

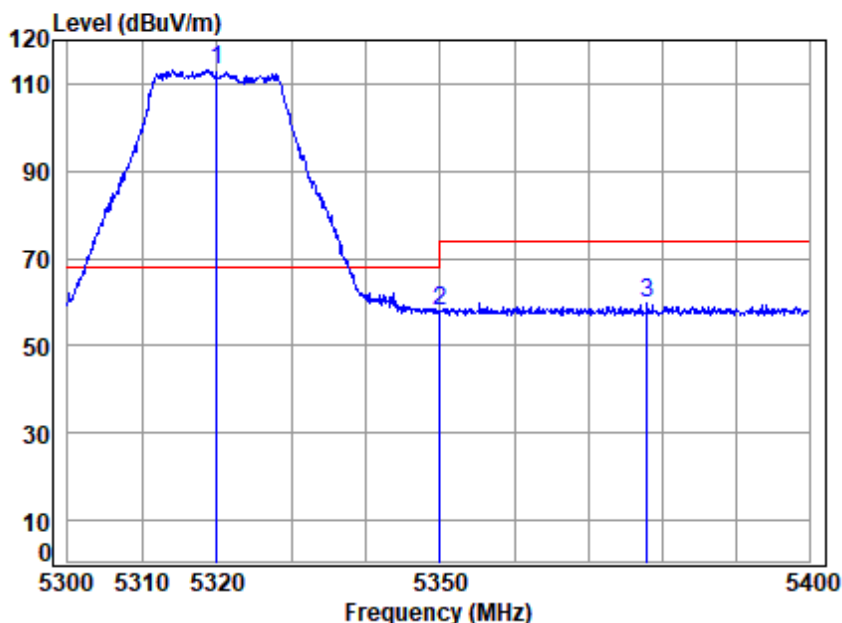

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11n20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	100.94	113.26	68.20	45.06	Peak
2	5350.020	10.45	32.80	30.76	45.67	58.16	74.00	-15.84	Peak
3	5377.940	10.54	32.80	30.75	47.37	59.96	74.00	-14.04	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

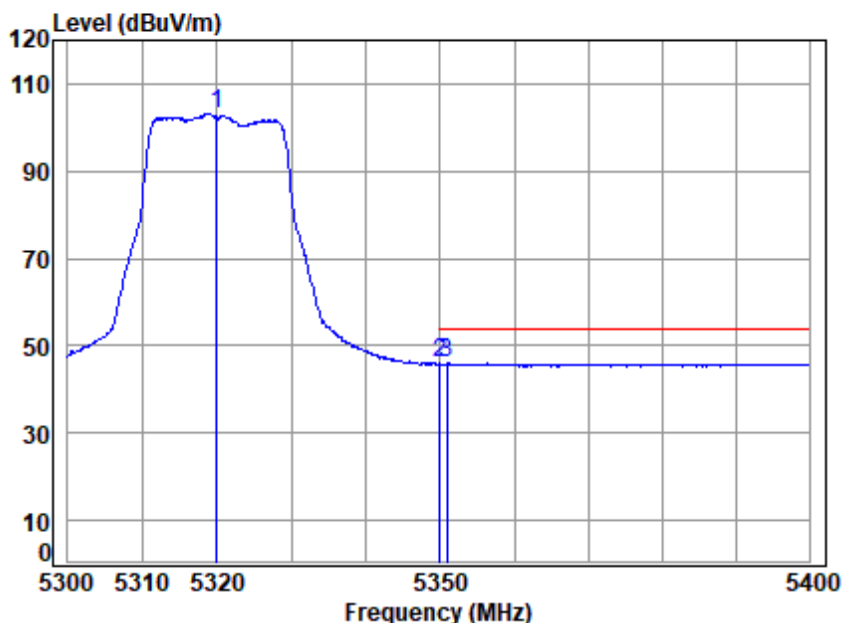

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	90.87	103.19	-----	-----	Average
2	5350.020	10.45	32.80	30.76	33.37	45.86	54.00	-8.14	Average
3 pp	5350.966	10.45	32.80	30.76	33.44	45.93	54.00	-8.07	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

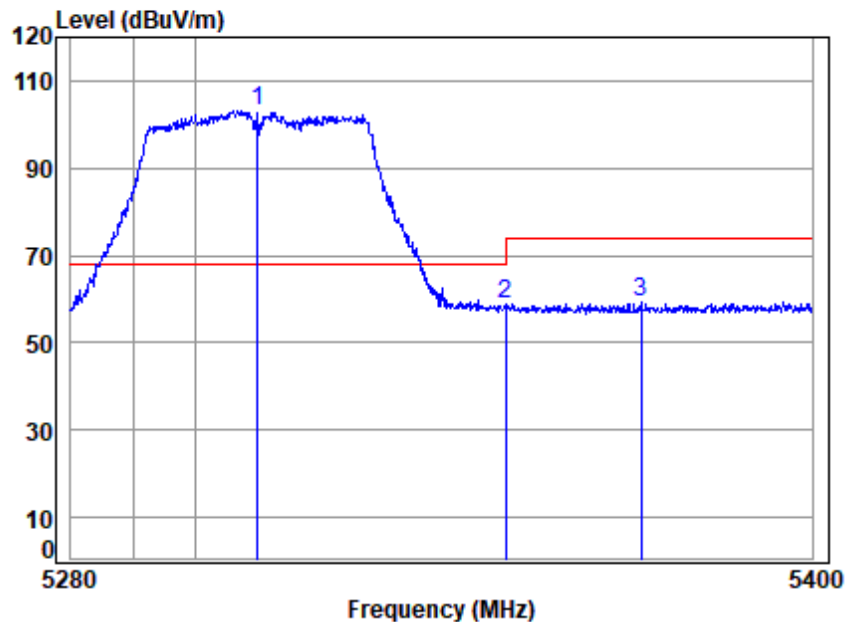

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5310 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	90.78	103.03	68.20	34.83	peak
2	5350.020	10.45	32.80	30.76	46.32	58.81	74.00	-15.19	peak
3	5372.040	10.52	32.80	30.75	46.90	59.47	74.00	-14.53	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

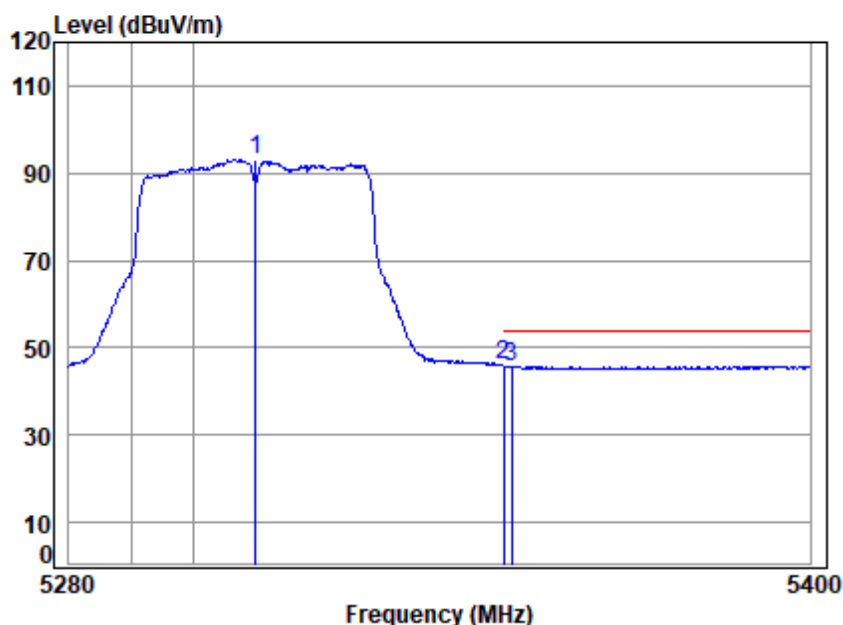

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5310 Band edge

: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.78	80.90	93.15	-----	-----	Average
2 pp	5350.020	10.45	32.80	30.76	33.55	46.04	54.00	-7.96	Average
3	5351.315	10.45	32.80	30.76	33.29	45.78	54.00	-8.22	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

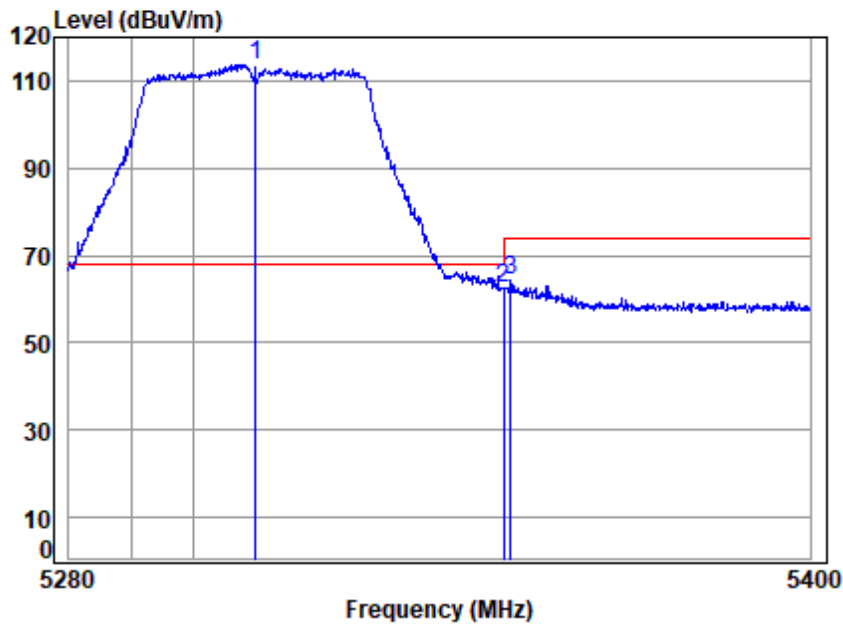

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5310 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	101.52	113.77	68.20	45.57	Peak
2	5350.020	10.45	32.80	30.76	50.16	62.65	74.00	-11.35	Peak
3	5351.195	10.45	32.80	30.76	51.79	64.28	74.00	-9.72	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

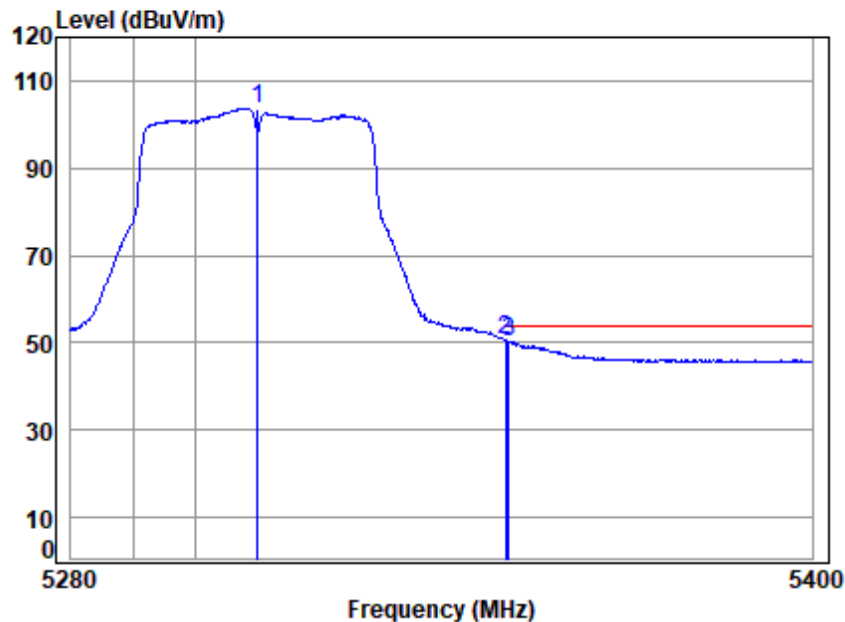

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5310 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.78	91.46	103.71	-----	-----	Average
2 pp	5350.020	10.45	32.80	30.76	38.34	50.83	54.00	-3.17	Average
3	5350.594	10.45	32.80	30.76	37.83	50.32	54.00	-3.68	Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

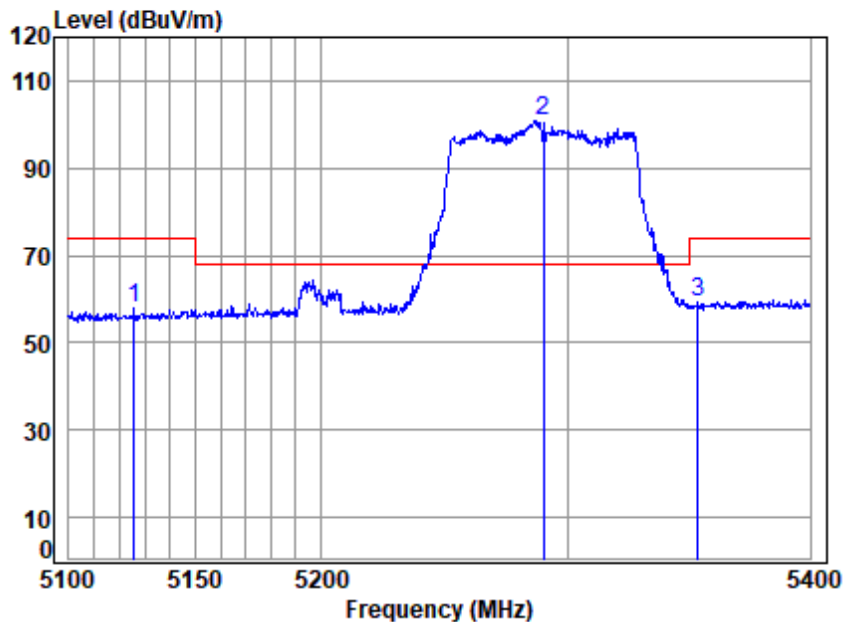

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5125.717	10.05	32.35	30.85	46.20	57.75	74.00	-16.25	peak
2 pp	5290.000	10.28	32.68	30.78	88.65	100.83	68.20	32.63	peak
3	5353.594	10.46	32.80	30.76	46.89	59.39	74.00	-14.61	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

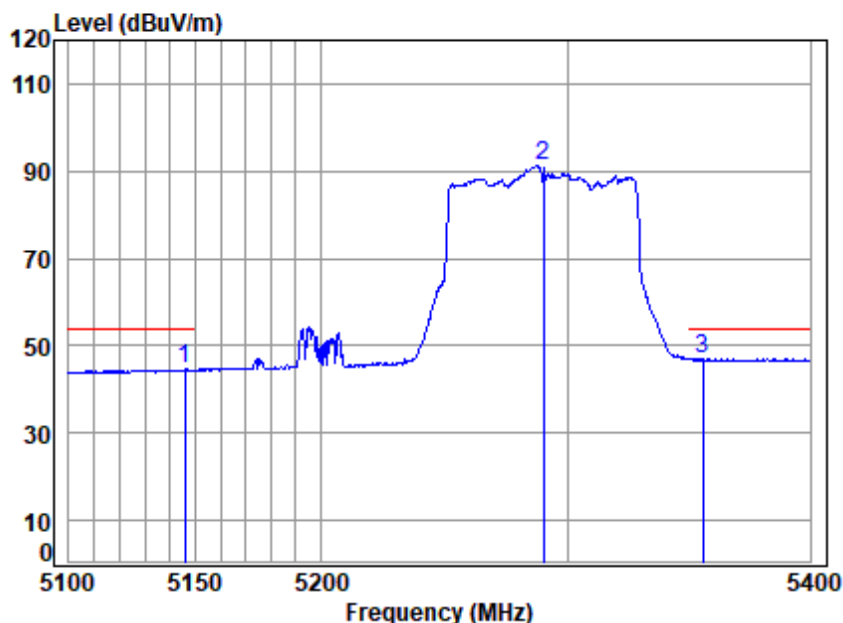

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5290 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5145.973	10.12	32.39	30.84	32.87	44.54	54.00	-9.46	Average
2	5290.000	10.28	32.68	30.78	79.05	91.23	-----	-----	Average
3 pp	5355.430	10.47	32.80	30.76	34.42	46.93	54.00	-7.07	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

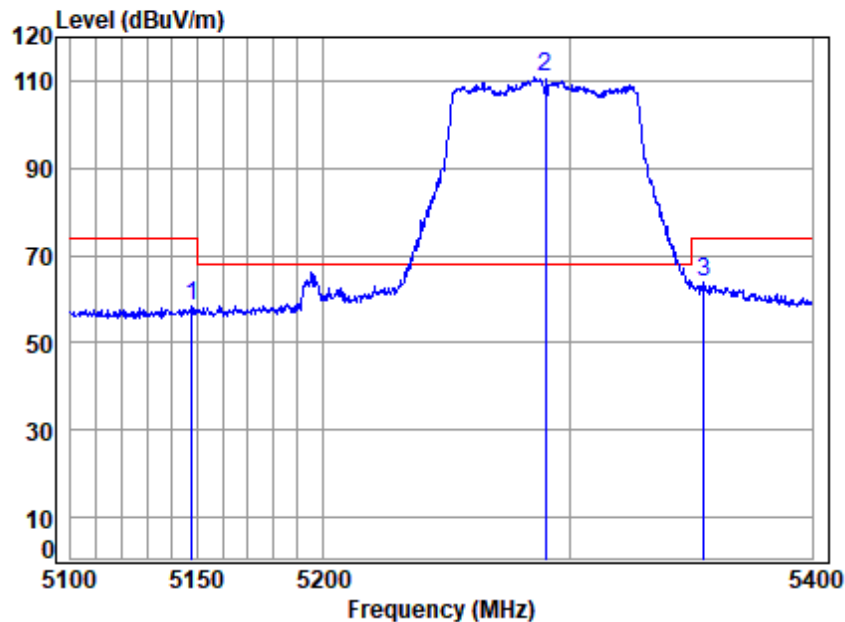

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5290 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5148.032	10.13	32.40	30.84	46.52	58.21	74.00	-15.79	Peak
2 pp	5290.000	10.28	32.68	30.78	98.56	110.74	68.20	42.54	Peak
3	5355.124	10.47	32.80	30.76	51.46	63.97	74.00	-10.03	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

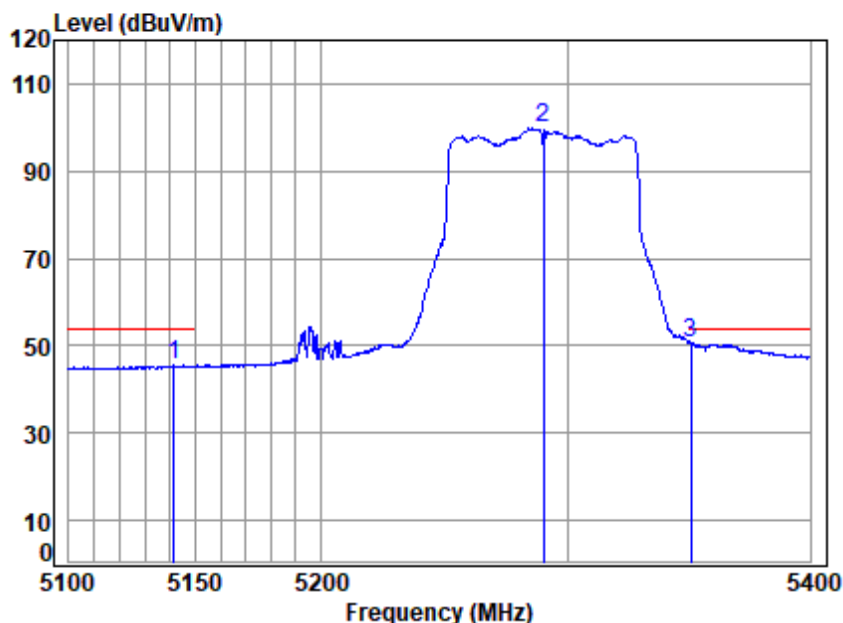

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5290 Band edge

: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5141.563	10.11	32.38	30.84	33.77	45.42	54.00	-8.58 Average
2 5290.000	10.28	32.68	30.78	87.54	99.72	-----	----- Average
3 pp 5350.535	10.45	32.80	30.76	38.33	50.82	54.00	-3.18 Average



Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

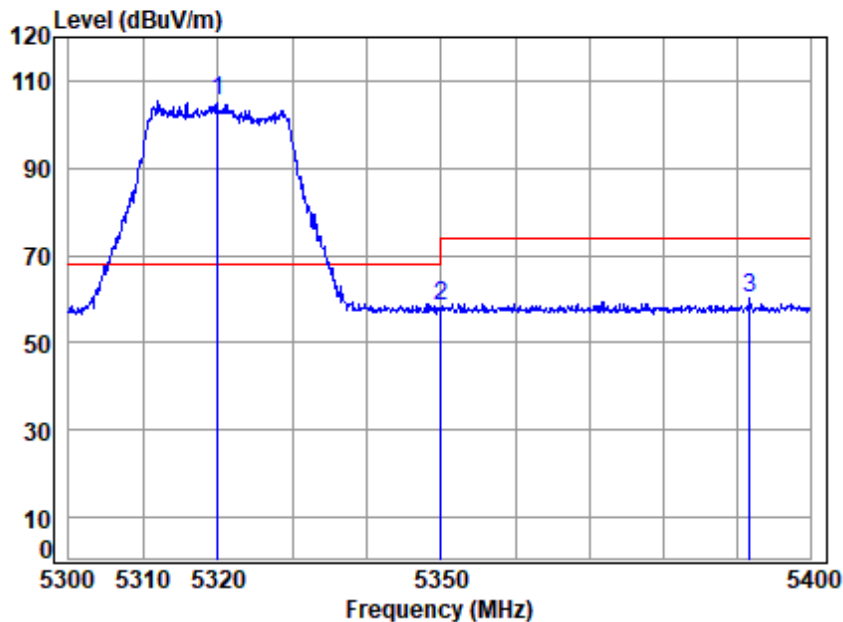

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	93.18	105.50	68.20	37.30	peak
2	5350.020	10.45	32.80	30.76	45.78	58.27	74.00	-15.73	peak
3	5391.830	10.59	32.80	30.74	47.57	60.22	74.00	-13.78	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

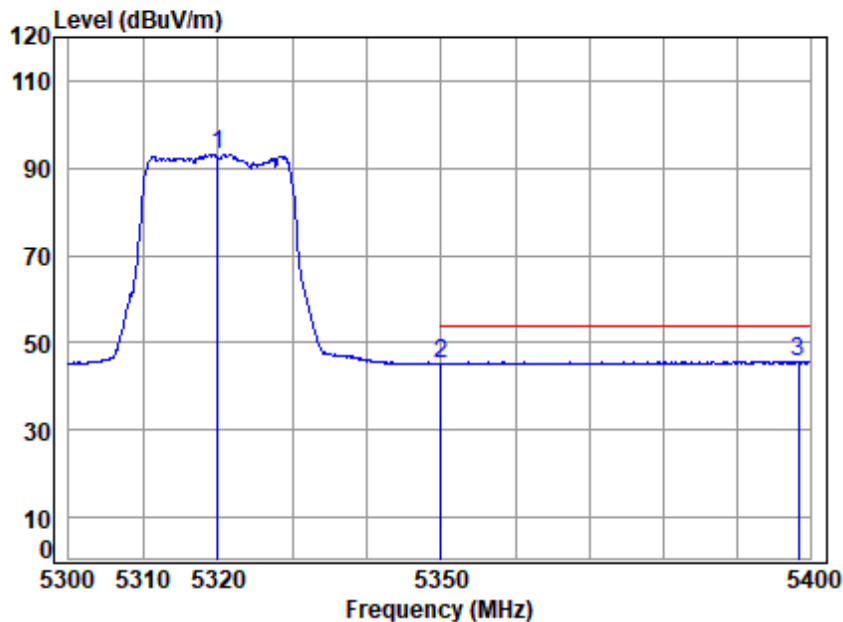

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	10.35	32.74	30.77	80.82	93.14	-----	-----	Average
2 5350.020	10.45	32.80	30.76	32.71	45.20	54.00	-8.80	Average
3 pp 5398.486	10.61	32.80	30.74	32.96	45.63	54.00	-8.37	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

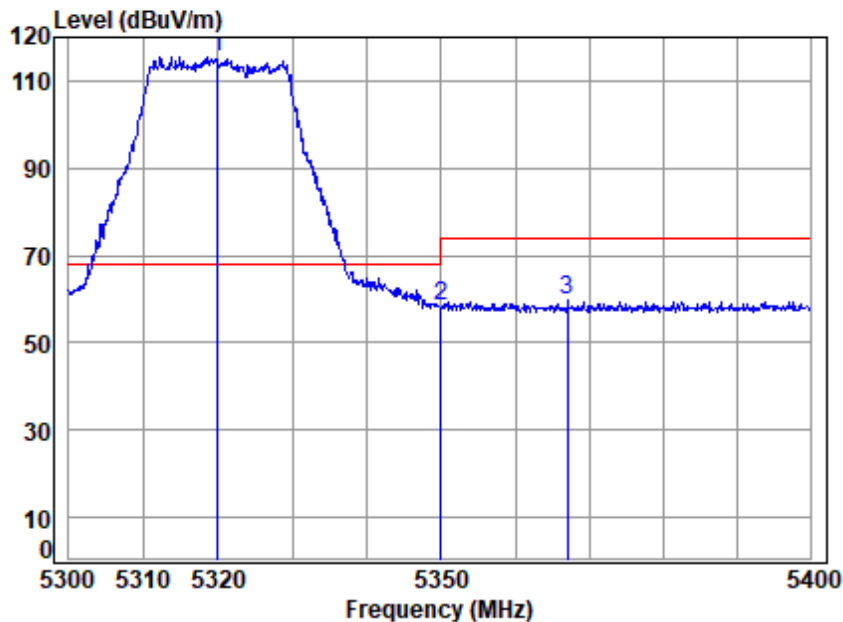

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	103.19	115.51	68.20	47.31	Peak
2	5350.020	10.45	32.80	30.76	45.82	58.31	74.00	-15.69	Peak
3	5367.094	10.51	32.80	30.75	47.25	59.81	74.00	-14.19	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

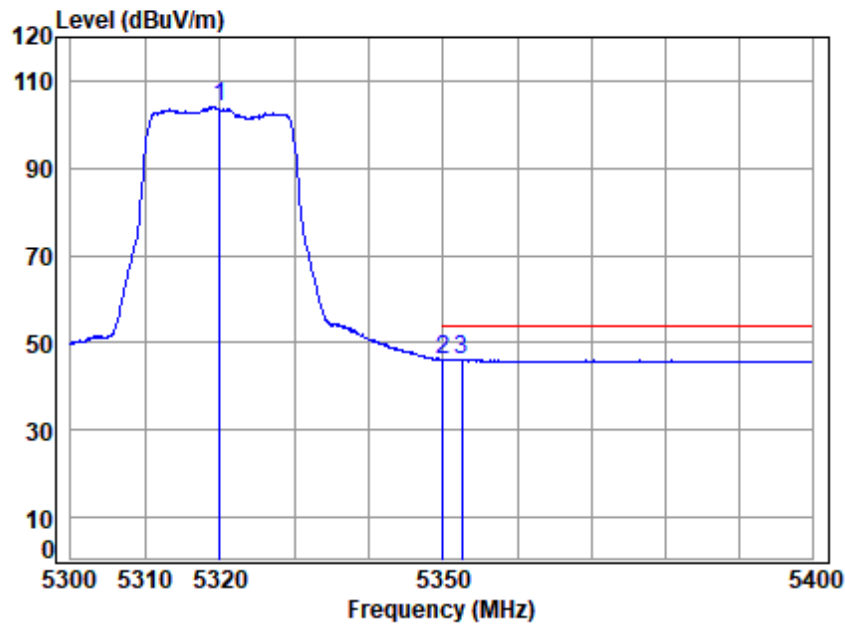

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5320.000	10.35	32.74	30.77	91.70	104.02	-----	-----	Average
2 5350.020	10.45	32.80	30.76	33.71	46.20	54.00	-7.80	Average
3 pp 5352.567	10.46	32.80	30.76	33.73	46.23	54.00	-7.77	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

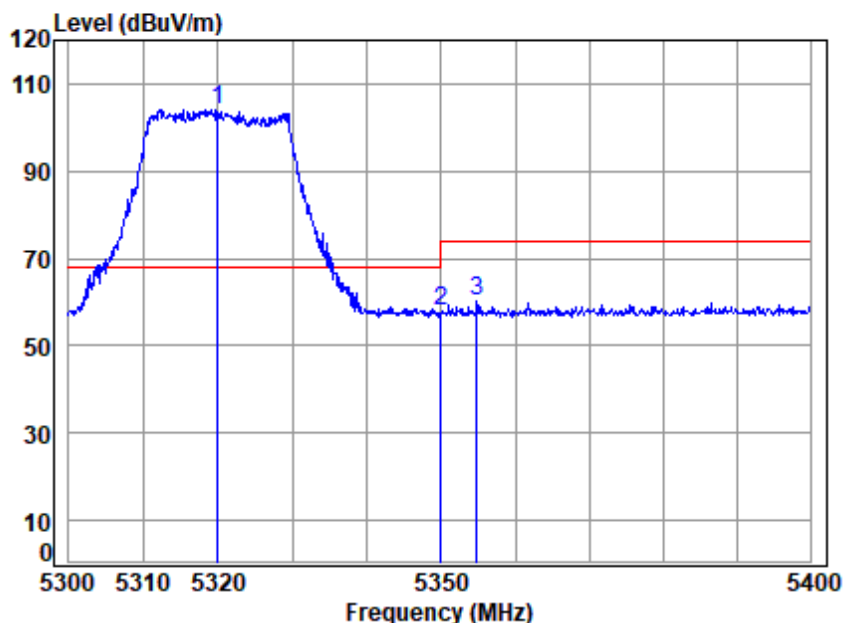

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	91.75	104.07	68.20	35.87	peak
2	5350.020	10.45	32.80	30.76	45.59	58.08	74.00	-15.92	peak
3	5354.869	10.47	32.80	30.76	47.64	60.15	74.00	-13.85	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com


SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

SZEMC-TRF-01 Rev. A/1

Report No.: SZCR250300104803

Page: 130 of 226

Test Mode: 02; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

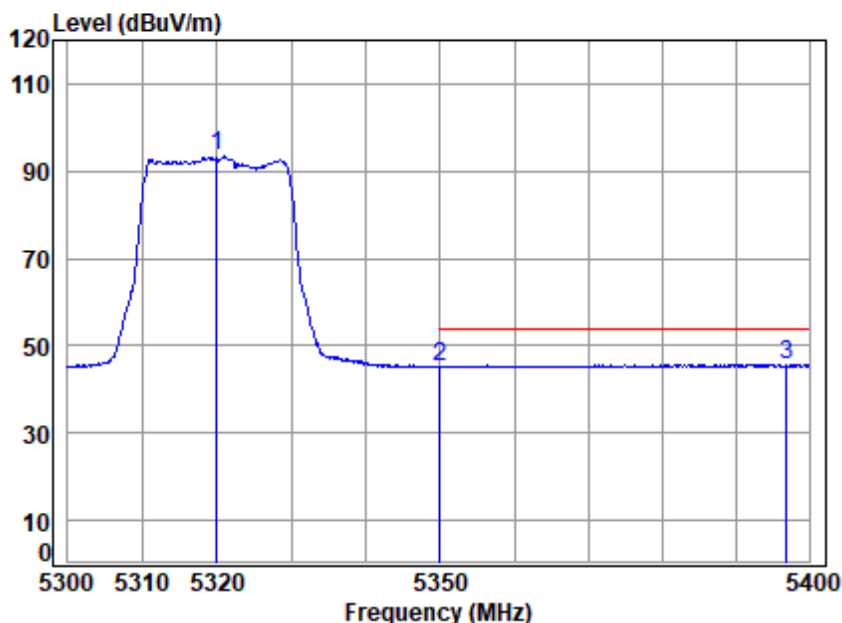

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5320 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	81.05	93.37	-----	-----	Average
2	5350.020	10.45	32.80	30.76	32.68	45.17	54.00	-8.83	Average
3 pp	5396.872	10.61	32.80	30.74	33.02	45.69	54.00	-8.31	Average




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

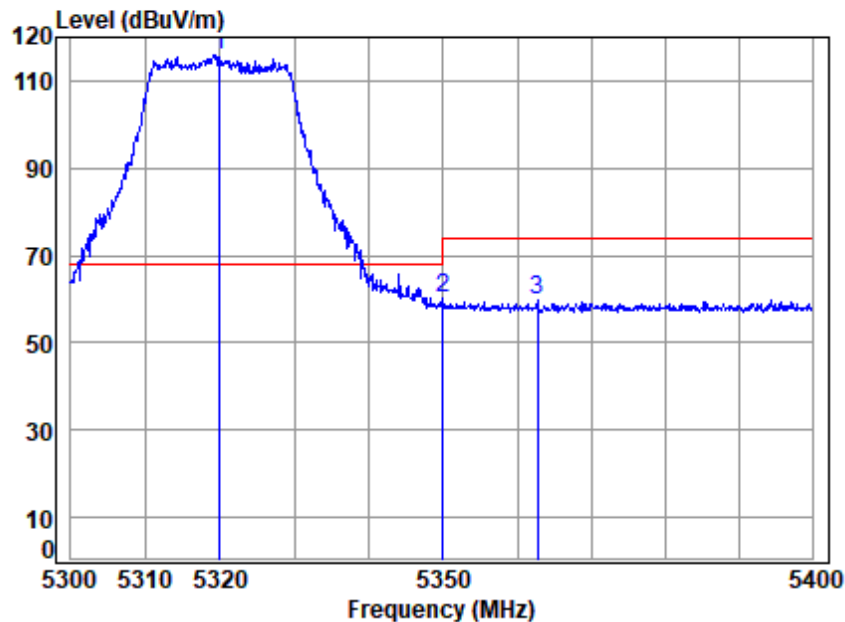

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5320.000	10.35	32.74	30.77	103.49	115.81	68.20	47.61	Peak
2	5350.020	10.45	32.80	30.76	47.61	60.10	74.00	-13.90	Peak
3	5362.682	10.49	32.80	30.75	47.36	59.90	74.00	-14.10	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编:518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

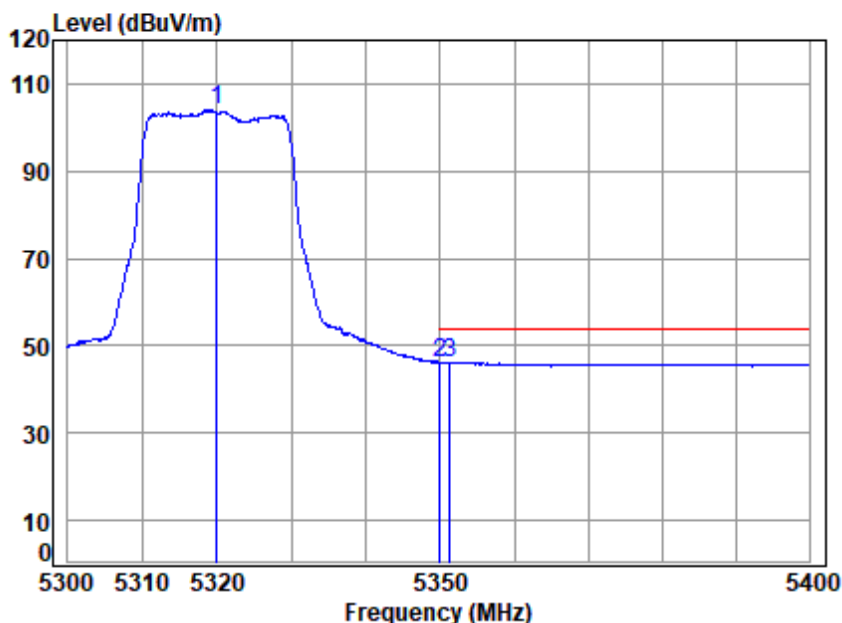

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5320 Band edge
: 5G Wi-Fi 11be20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5320.000	10.35	32.74	30.77	91.76	104.08	-----	-----	Average
2	5350.020	10.45	32.80	30.76	33.72	46.21	54.00	-7.79	Average
3 pp	5351.367	10.45	32.80	30.76	33.77	46.26	54.00	-7.74	Average



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 02; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

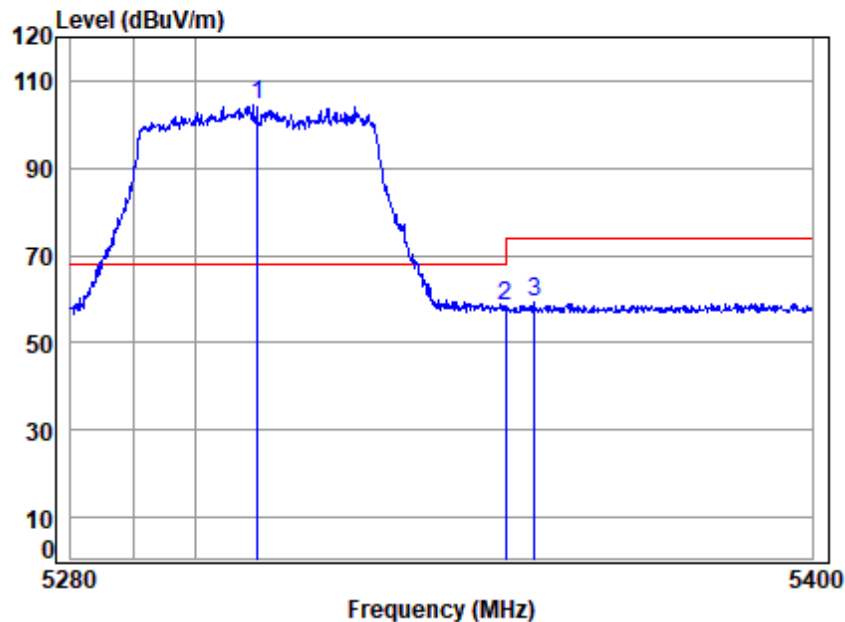

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5310 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	92.38	104.63	68.20	36.43	peak
2	5350.020	10.45	32.80	30.76	46.03	58.52	74.00	-15.48	peak
3	5354.804	10.47	32.80	30.76	46.70	59.21	74.00	-14.79	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

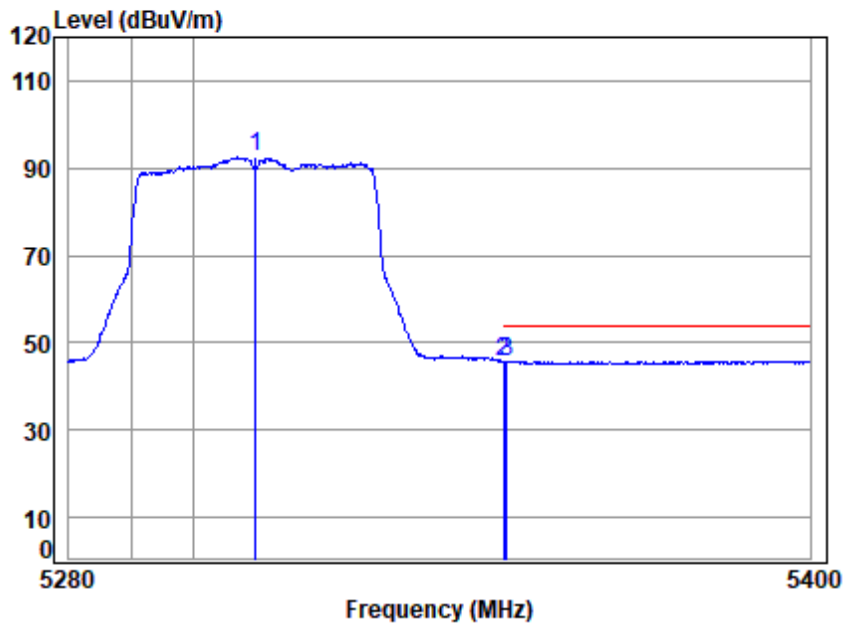

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5310 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.78	80.17	92.42	-----	-----	Average
2 pp	5350.020	10.45	32.80	30.76	33.36	45.85	54.00	-8.15	Average
3	5350.594	10.45	32.80	30.76	33.31	45.80	54.00	-8.20	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

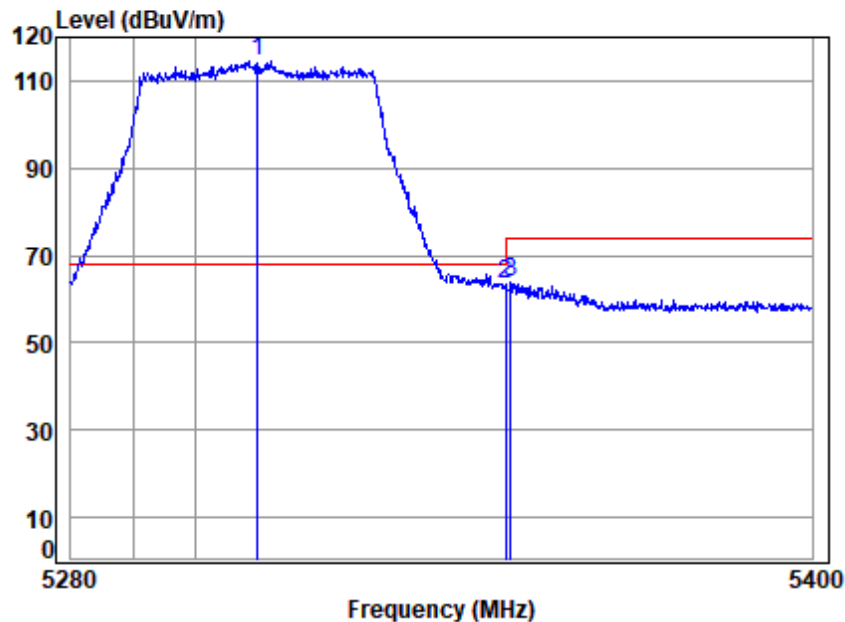

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5310 Band edge
: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5310.000	10.31	32.72	30.78	102.15	114.40	68.20	46.20	Peak
2	5350.020	10.45	32.80	30.76	51.12	63.61	74.00	-10.39	Peak
3	5350.834	10.45	32.80	30.76	51.23	63.72	74.00	-10.28	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

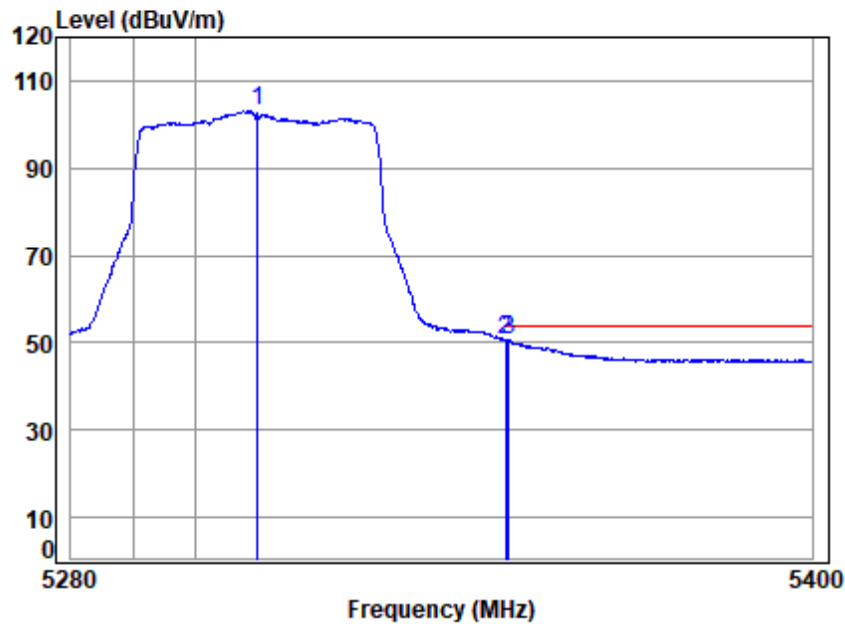

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5310 Band edge
: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5310.000	10.31	32.72	30.78	90.76	103.01	-----	-----	Average
2 pp	5350.020	10.45	32.80	30.76	38.25	50.74	54.00	-3.26	Average
3	5350.594	10.45	32.80	30.76	37.98	50.47	54.00	-3.53	Average



Test Mode: 02; Polarity: Horizontal; Modulation: 802.11be(Full RU0); Bandwidth: 80MHz; Channel: middle

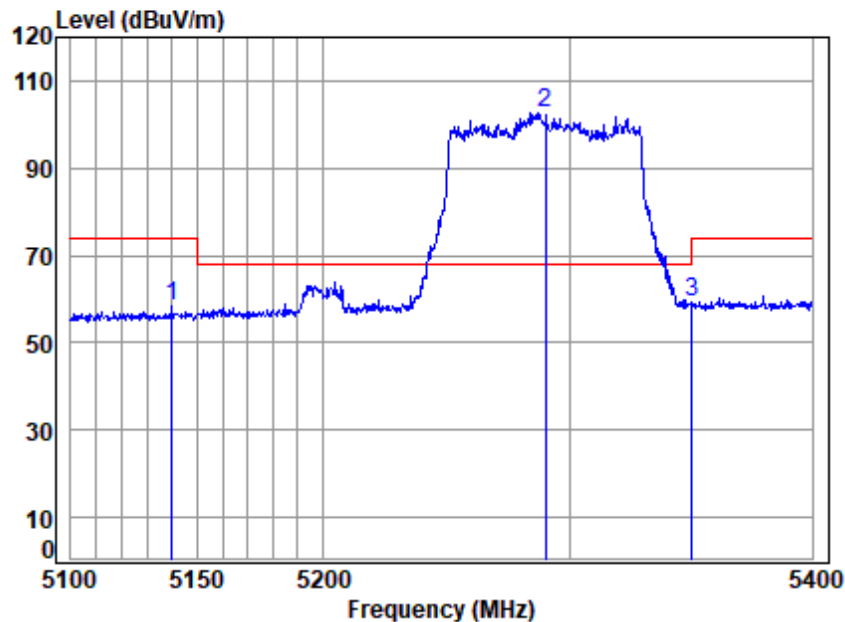

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5290 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5140.093	10.10	32.38	30.84	46.65	58.29	74.00	-15.71	peak
2 pp	5290.000	10.28	32.68	30.78	90.53	102.71	68.20	34.51	peak
3	5350.229	10.45	32.80	30.76	46.94	59.43	74.00	-14.57	peak



Test Mode: 02; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

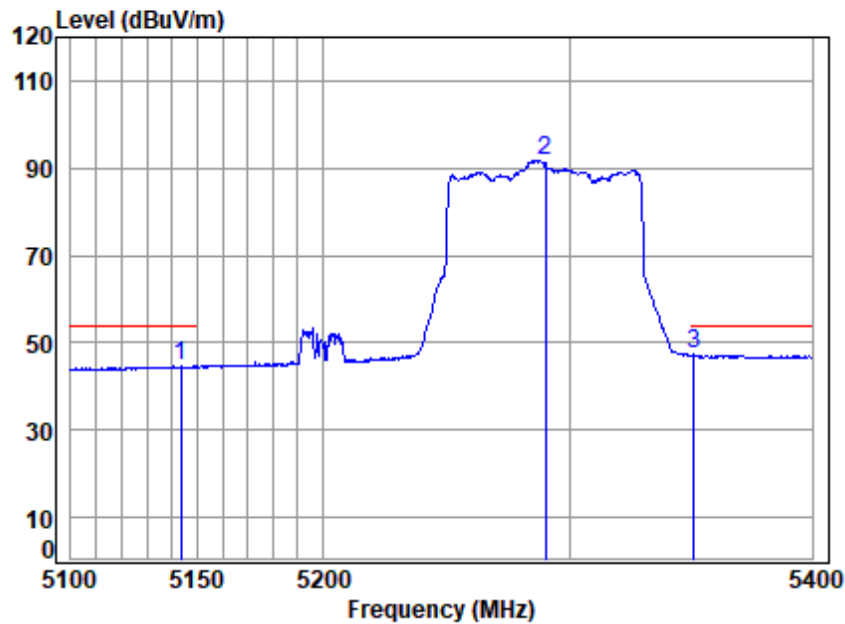

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5290 Band edge

: 5G Wi-Fi 11be80

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5143.620	10.12	32.39	30.84	32.87	44.54	54.00	-9.46	Average
2	5290.000	10.28	32.68	30.78	79.62	91.80	-----	-----	Average
3 pp	5351.146	10.45	32.80	30.76	34.74	47.23	54.00	-6.77	Average



Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

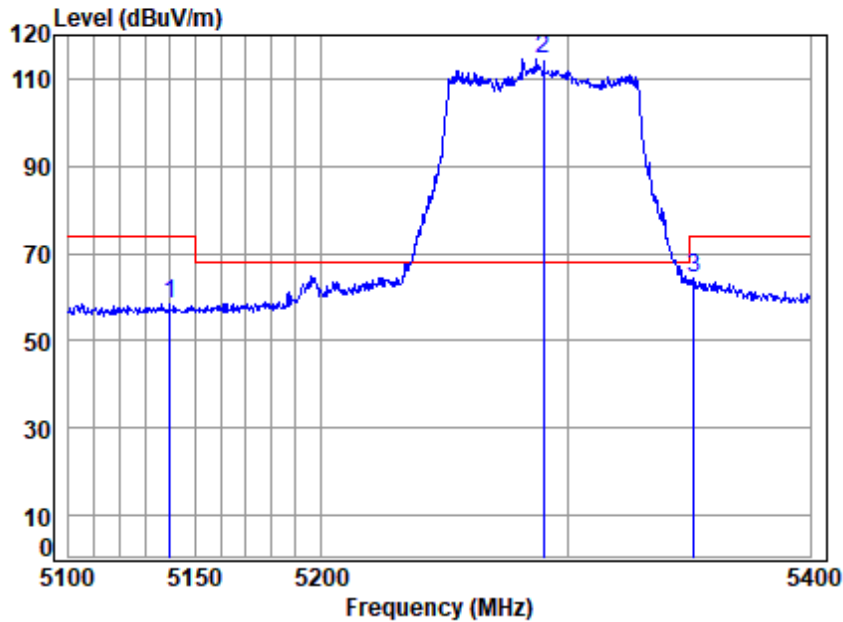

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5290 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5139.800	10.10	32.38	30.84	46.96	58.60	74.00	-15.40	Peak
2 pp	5290.000	10.28	32.68	30.78	102.19	114.37	68.20	46.17	Peak
3	5351.758	10.46	32.80	30.76	51.80	64.30	74.00	-9.70	Peak



Test Mode: 02; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

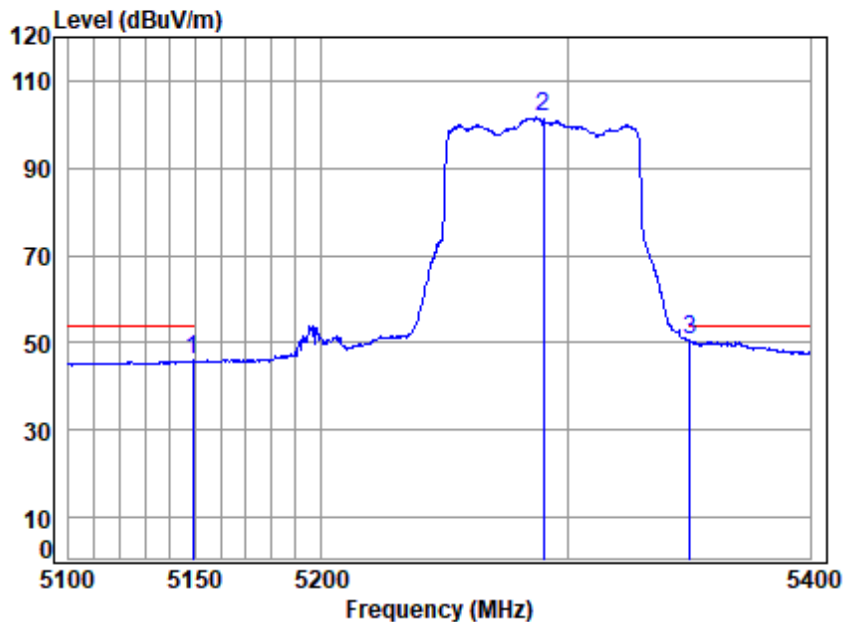

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5290 Band edge
: 5G Wi-Fi 11be80

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5148.915	10.14	32.40	30.84	34.17	45.87	54.00	-8.13	Average
2 5290.000	10.28	32.68	30.78	89.44	101.62	-----	-----	Average
3 pp 5350.229	10.45	32.80	30.76	38.24	50.73	54.00	-3.27	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

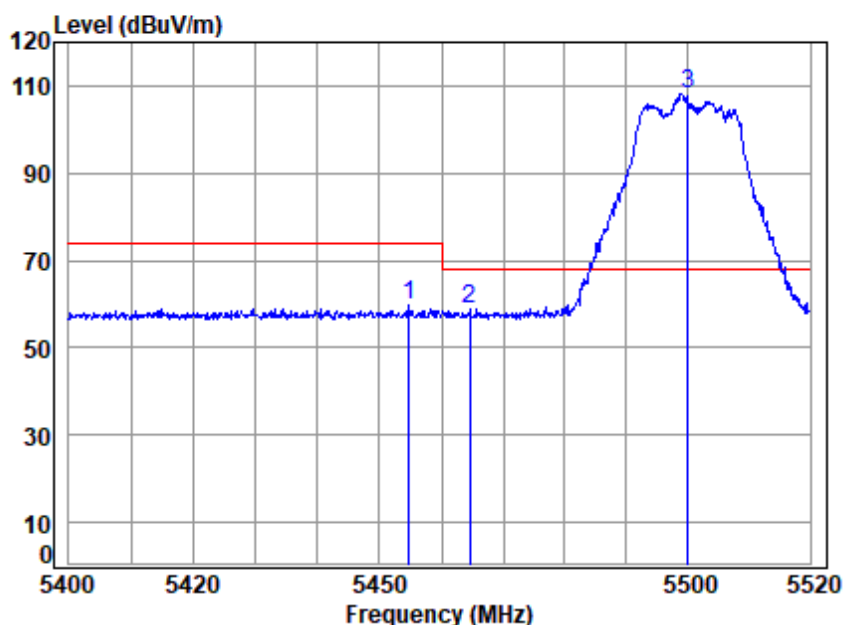

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
5454.752	10.60	32.90	30.72	46.92	59.70	74.00	-14.30	peak
5464.592	10.59	32.90	30.71	46.00	58.78	68.20	-9.42	peak
5500.000	10.58	32.90	30.70	95.34	108.12	68.20	39.92	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

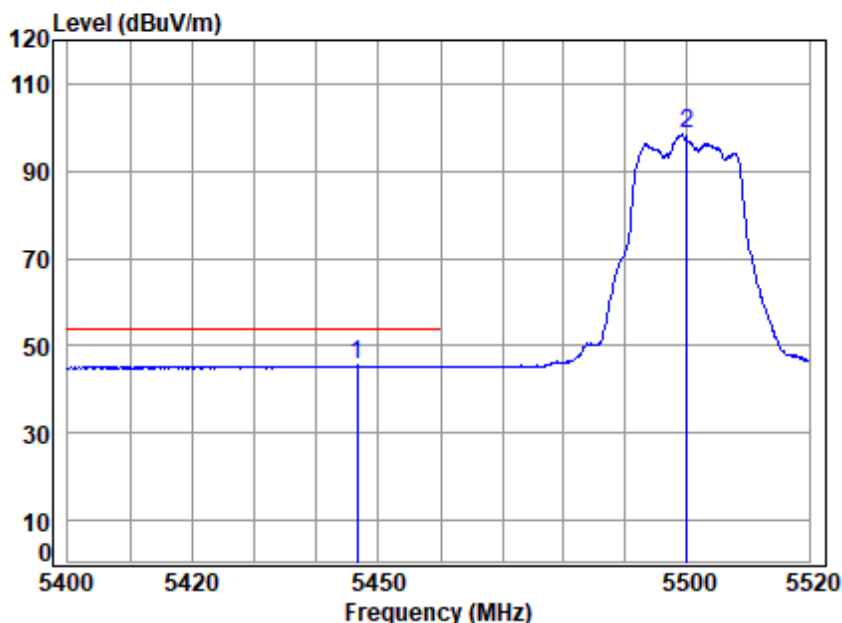

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
Freq		Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz		dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5446.486	10.60	32.89	30.72	32.66	45.43	54.00	-8.57	Average
2	5500.000	10.58	32.90	30.70	85.57	98.35	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

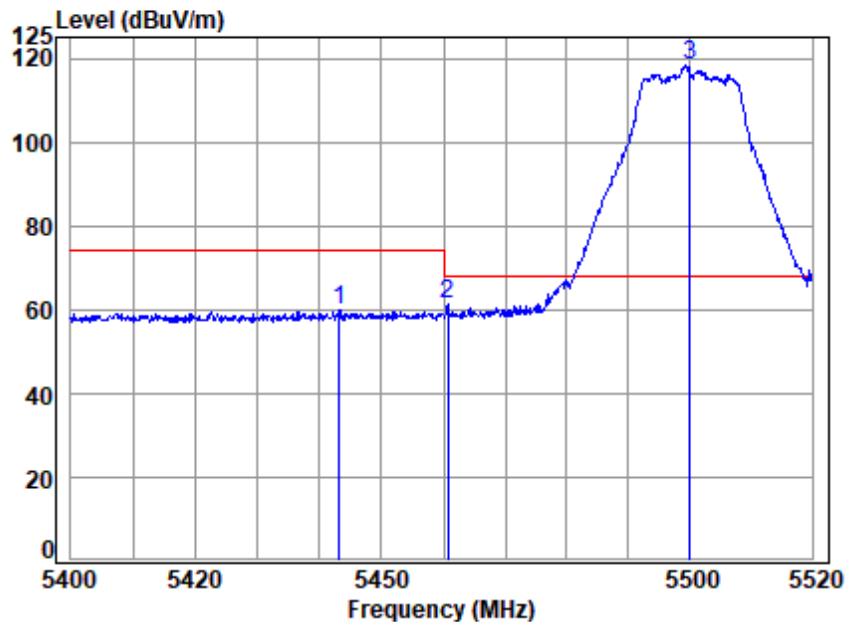

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5443.136	10.60	32.89	30.72	47.06	59.83	74.00	-14.17 Peak
2	5460.750	10.60	32.90	30.72	48.54	61.32	68.20	-6.88 peak
3	pp 5500.000	10.58	32.90	30.70	105.40	118.18	68.20	49.98 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

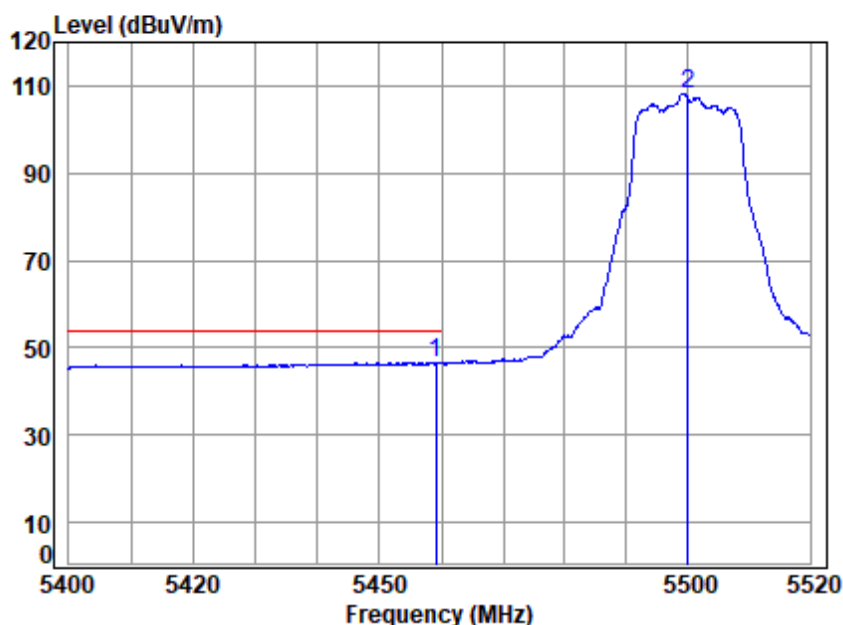

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.070	10.60	32.90	30.72	33.93	46.71	54.00	-7.29	Average
2	5500.000	10.58	32.90	30.70	95.39	108.17	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

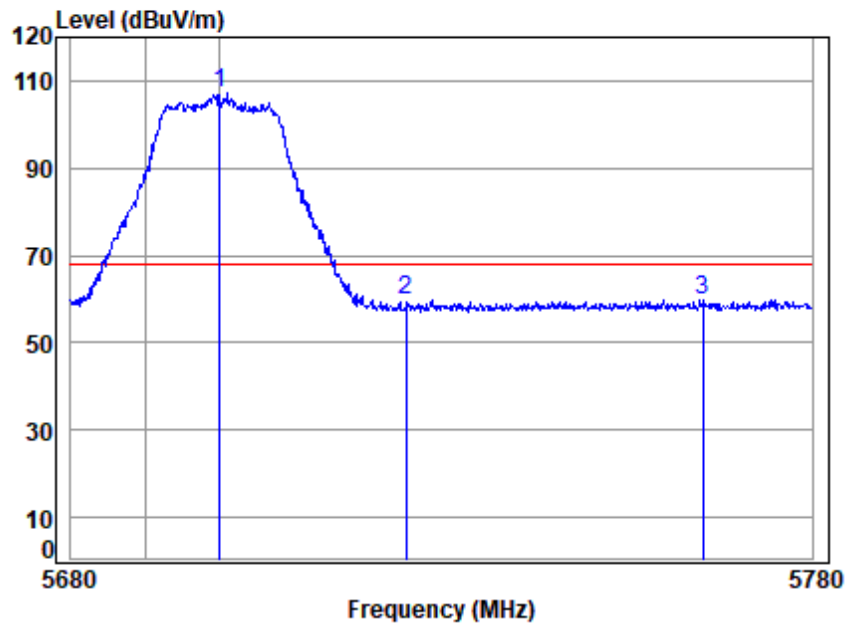

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5700 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	94.02	107.16	68.20	38.96	peak
2	5725.000	10.68	33.25	30.61	46.58	59.90	68.20	-8.30	peak
3	5765.190	10.86	33.33	30.59	46.36	59.96	68.20	-8.24	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

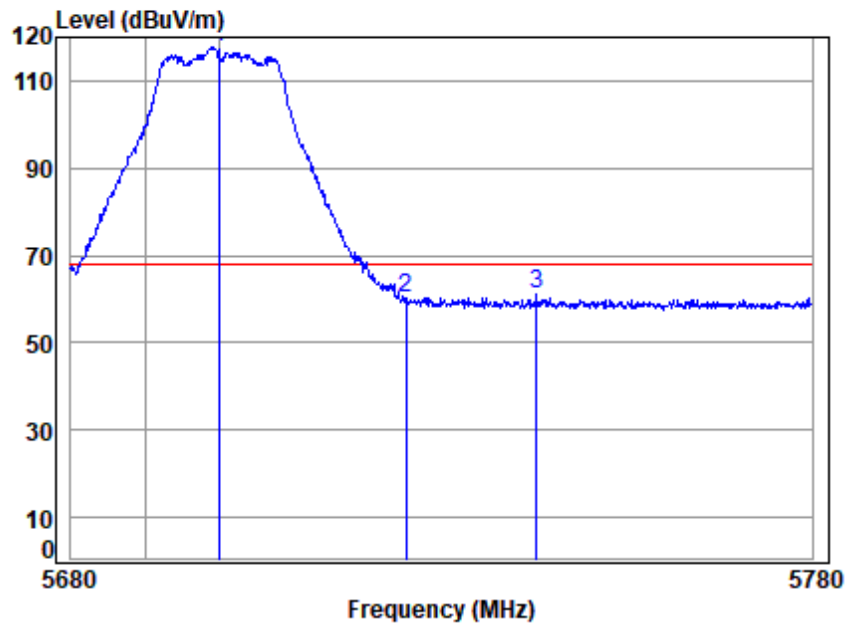

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5700 Band edge
: 5G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	104.55	117.69	68.20	49.49	Peak
2	5725.000	10.68	33.25	30.61	47.05	60.37	68.20	-7.83	Peak
3	5742.596	10.76	33.29	30.60	47.85	61.30	68.20	-6.90	Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

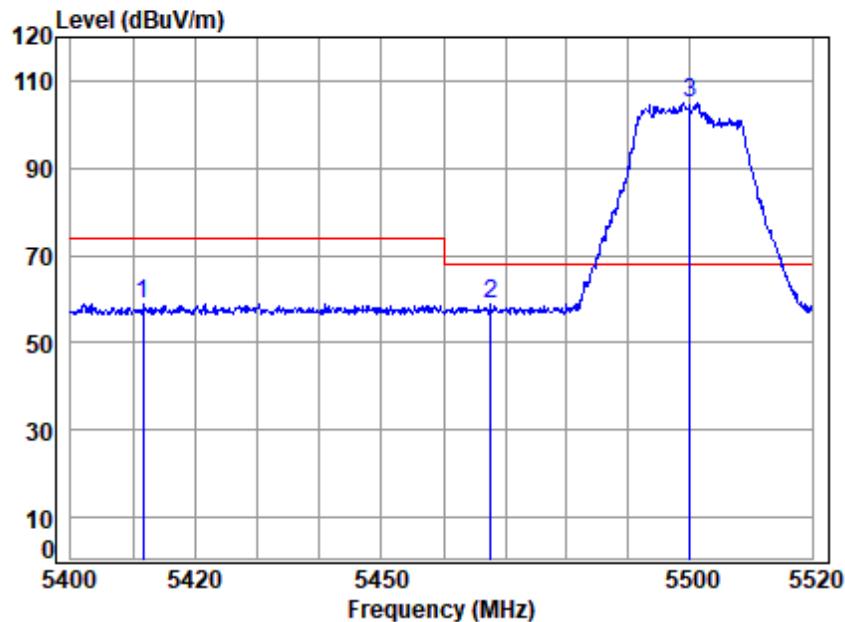

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5411.644	10.62	32.82	30.74	46.30	59.00	74.00	-15.00 peak
2	5467.716	10.59	32.90	30.71	45.91	58.69	68.20	-9.51 peak
3	pp 5500.000	10.58	32.90	30.70	92.35	105.13	68.20	36.93 peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

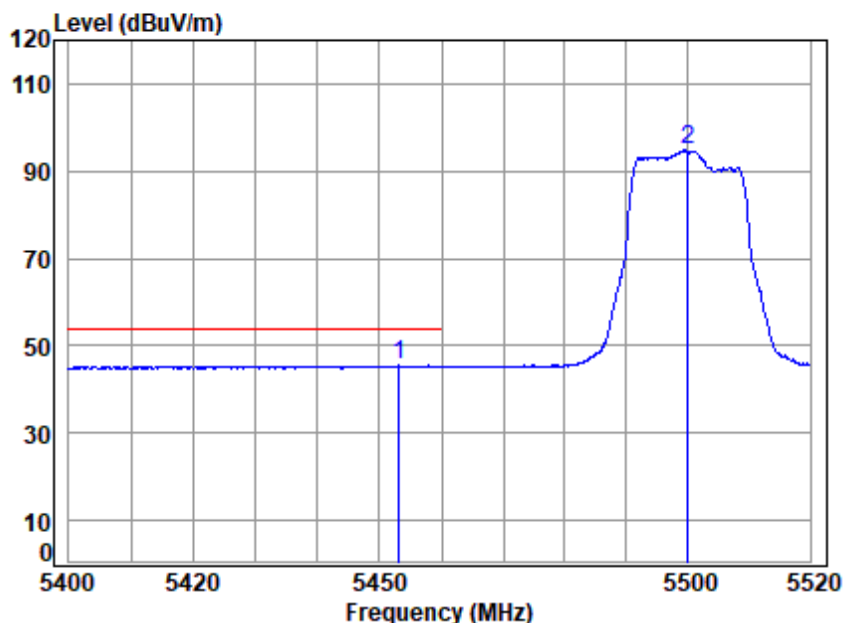

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5453.074	10.60	32.90	30.72	32.74	45.52	54.00	-8.48	Average
2	5500.000	10.58	32.90	30.70	81.91	94.69	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

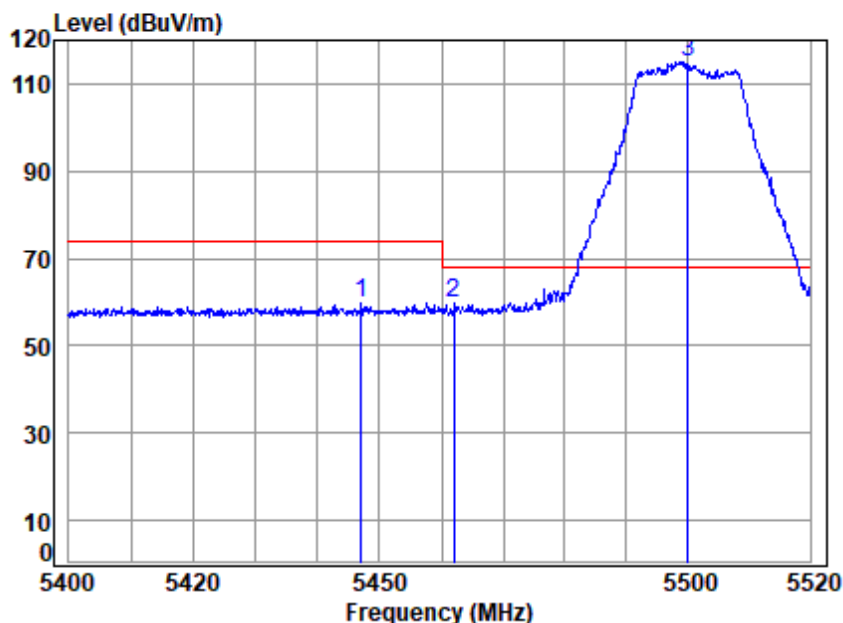

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11n20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5447.085	10.60	32.89	30.72	46.84	59.61	74.00	-14.39 Peak
2	5462.071	10.60	32.90	30.72	46.77	59.55	68.20	-8.65 peak
3	pp 5500.000	10.58	32.90	30.70	102.23	115.01	68.20	46.81 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

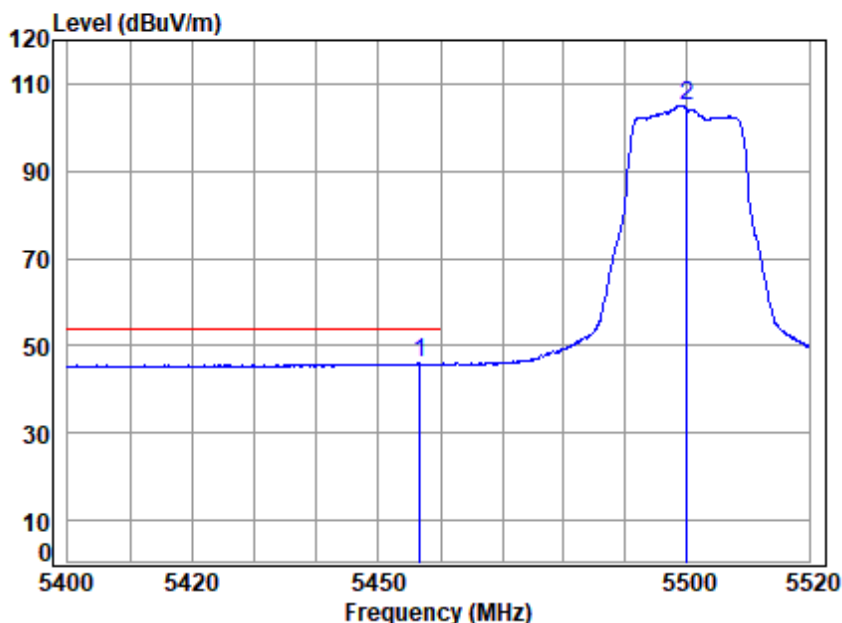

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5456.671	10.60	32.90	30.72	33.17	45.95	54.00	-8.05	Average
2	5500.000	10.58	32.90	30.70	92.17	104.95	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

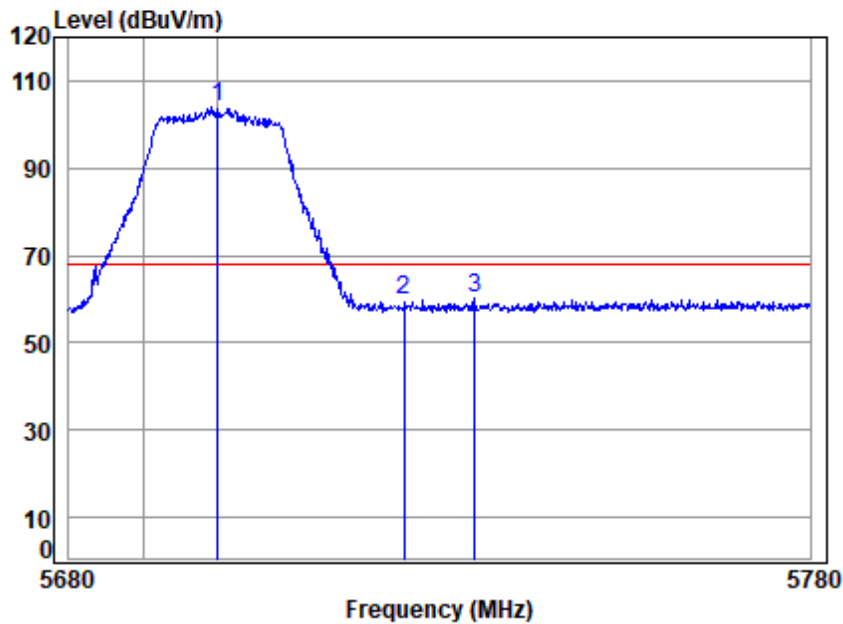

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5700 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	90.76	103.90	68.20	35.70	peak
2	5725.000	10.68	33.25	30.61	46.25	59.57	68.20	-8.63	peak
3	5734.584	10.72	33.27	30.61	46.70	60.08	68.20	-8.12	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

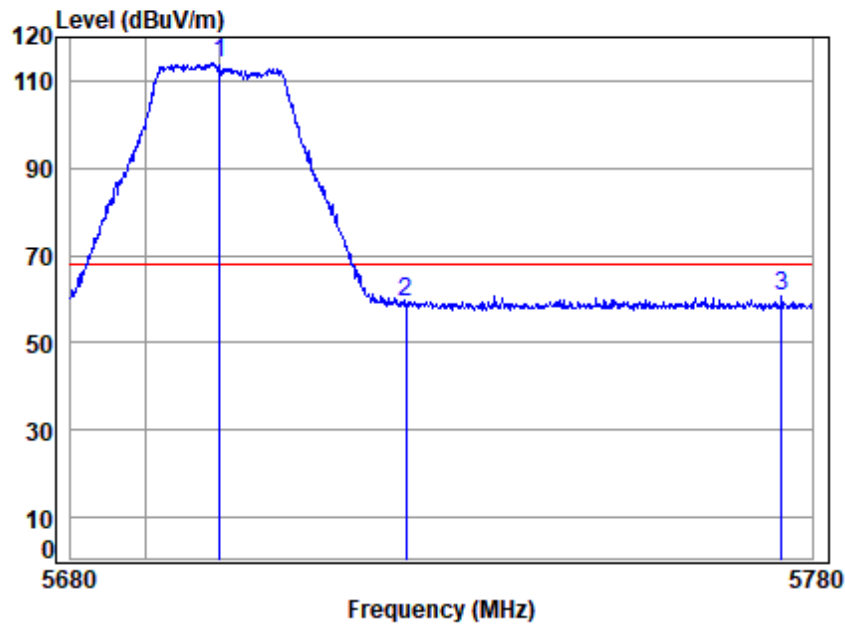

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5700 Band edge
: 5G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	100.74	113.88	68.20	45.68	Peak
2	5725.000	10.68	33.25	30.61	46.17	59.49	68.20	-8.71	Peak
3	5775.866	10.91	33.35	30.59	47.10	60.77	68.20	-7.43	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

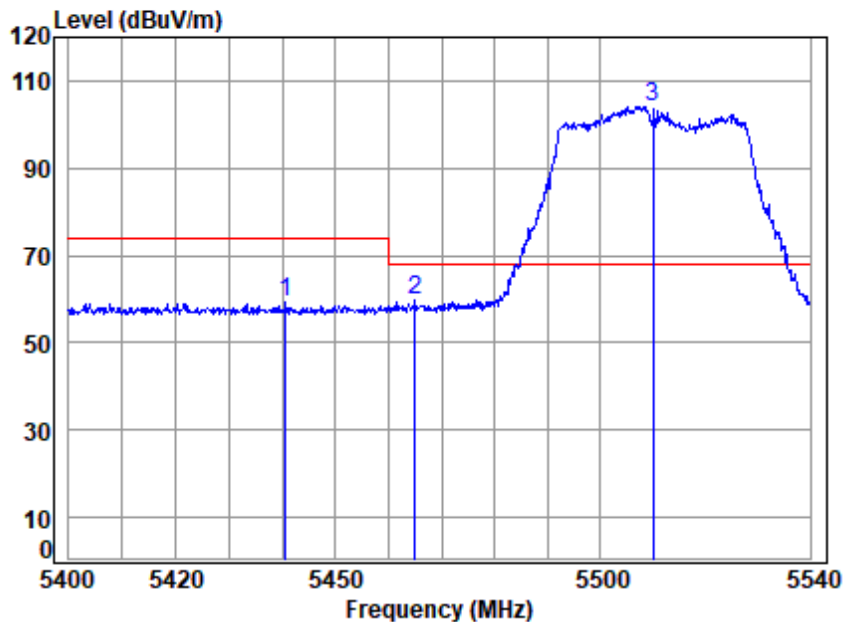

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5510 Band edge
: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
5440.649	10.60	32.88	30.72	46.57	59.33	74.00	-14.67	peak
5464.934	10.59	32.90	30.71	46.84	59.62	68.20	-8.58	peak
5510.000	10.56	32.90	30.70	91.37	104.13	68.20	35.93	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

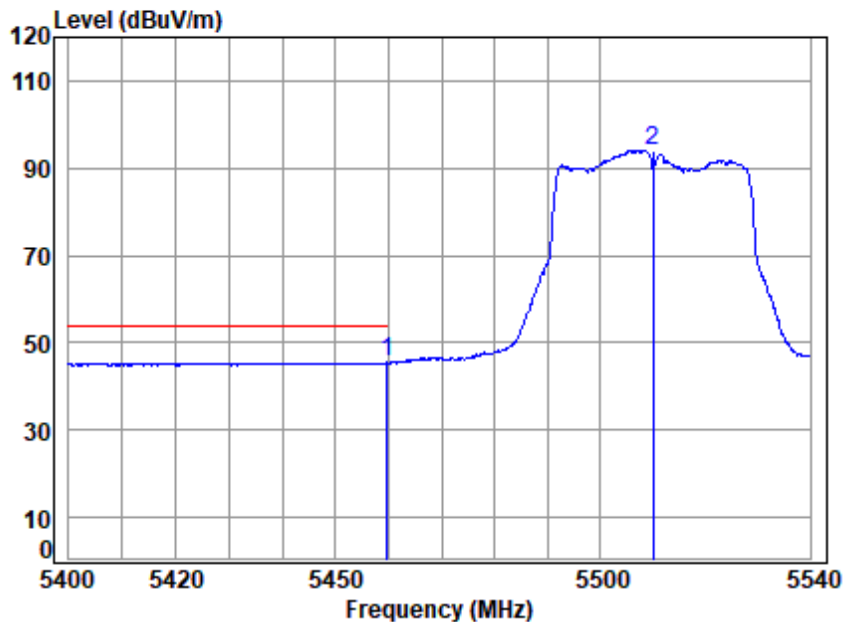

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5510 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5459.761	10.60	32.90	30.72	32.63	45.41	54.00	-8.59	Average
2 5510.000	10.56	32.90	30.70	81.45	94.21	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

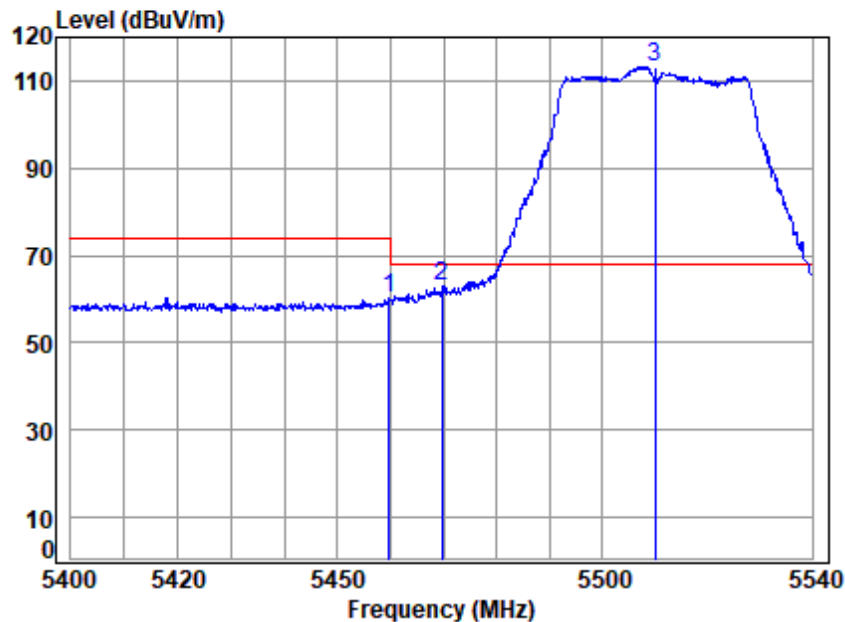

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5510 Band edge
: 5G Wi-Fi 11n40

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.622	10.60	32.90	30.72	47.53	60.31	74.00 -13.69 Peak
2	5469.692	10.59	32.90	30.71	50.18	62.96	68.20 -5.24 Peak
3	pp 5510.000	10.57	32.90	30.70	100.58	113.35	68.20 45.15 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

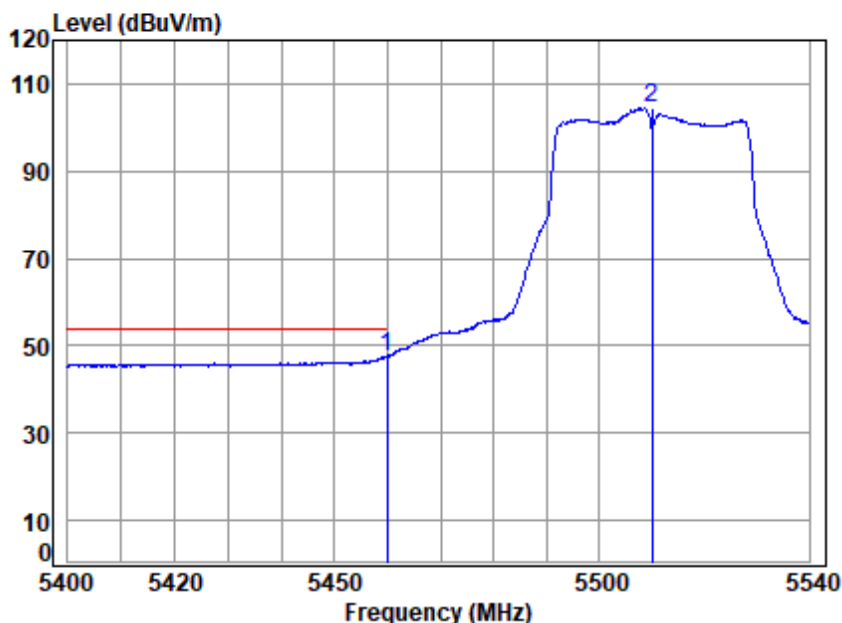

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5510 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5459.901	10.60	32.90	30.72	34.75	47.53	54.00	-6.47	Average
2 5510.000	10.56	32.90	30.70	91.68	104.44	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

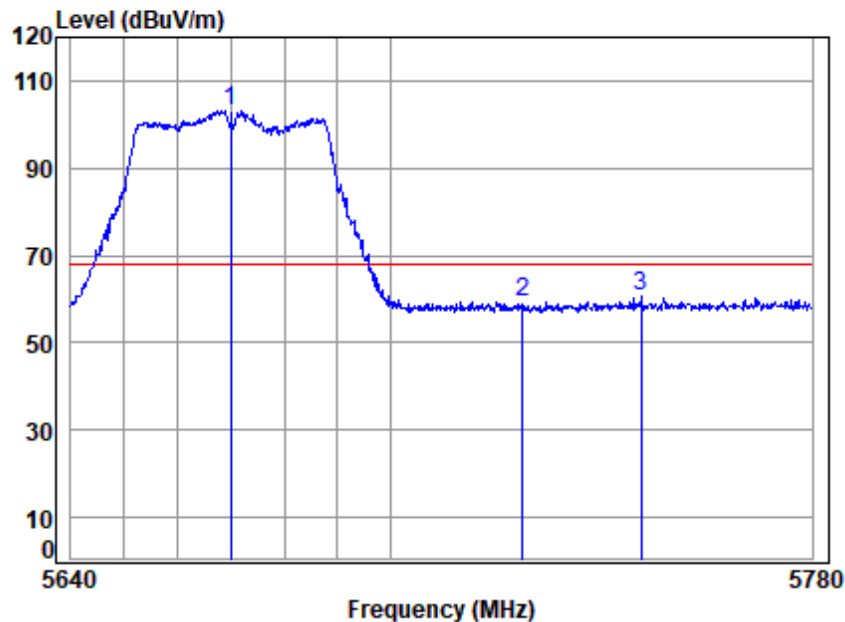

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5670 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	90.11	103.14	68.20	34.94	peak
2	5725.000	10.68	33.25	30.61	46.14	59.46	68.20	-8.74	peak
3	5747.354	10.78	33.29	30.60	47.06	60.53	68.20	-7.67	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

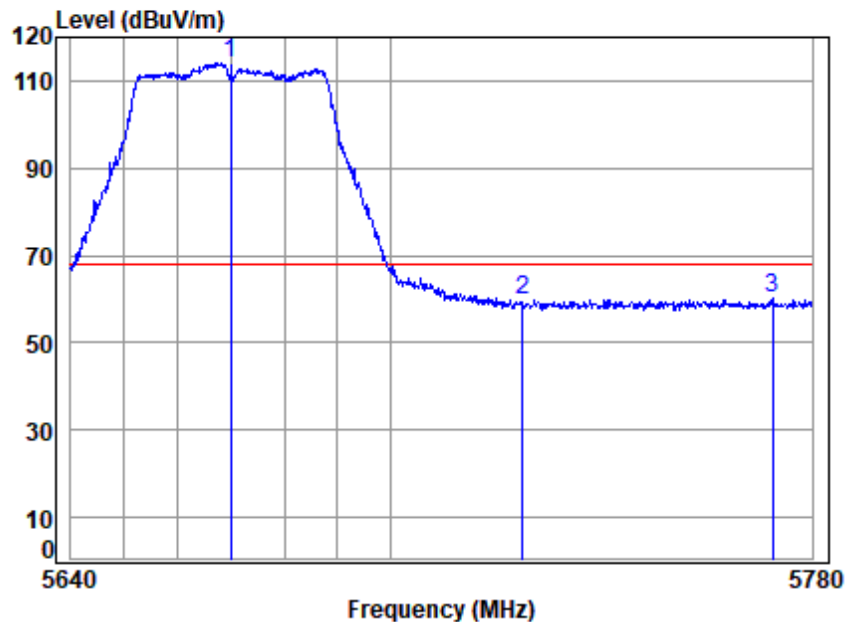

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5670 Band edge
: 5G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	101.09	114.12	68.20	45.92	Peak
2	5725.000	10.68	33.25	30.61	46.29	59.61	68.20	-8.59	Peak
3	5772.494	10.89	33.34	30.59	46.48	60.12	68.20	-8.08	Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

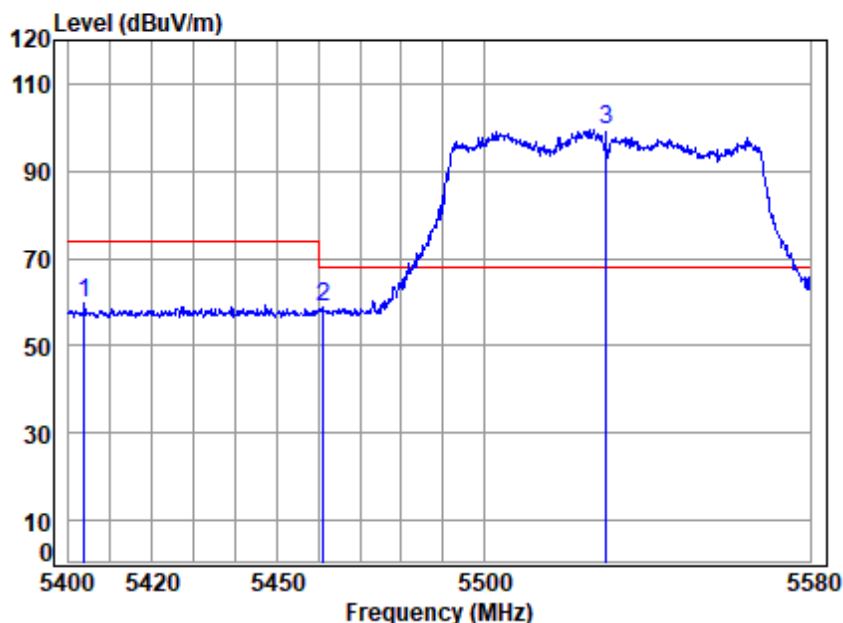

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5403.720	10.62	32.81	30.74	47.10	59.79	74.00	-14.21	peak
2 5461.076	10.60	32.90	30.72	45.89	58.67	68.20	-9.53	peak
3 pp 5530.000	10.53	32.90	30.69	86.60	99.34	68.20	31.14	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

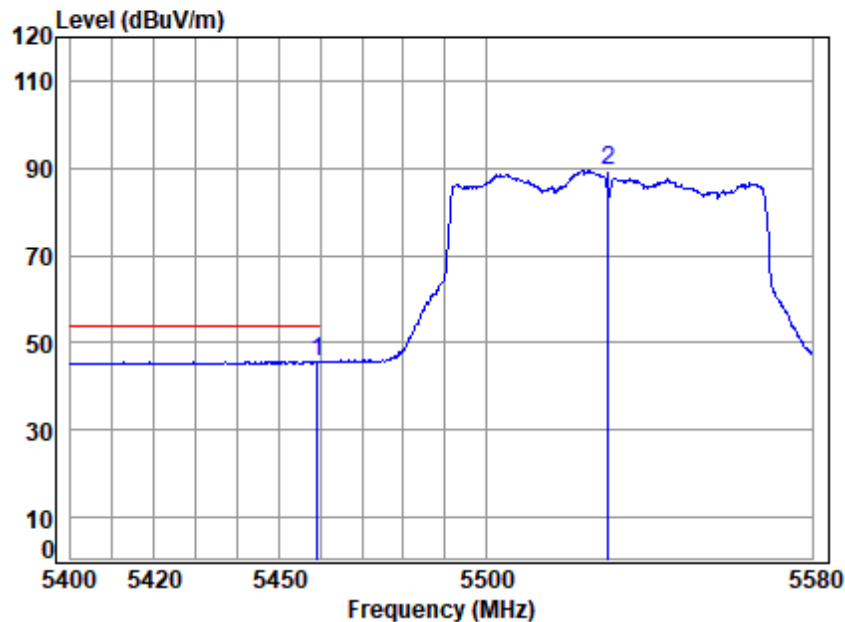

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.286	10.60	32.90	30.72	32.89	45.67	54.00	-8.33	Average
2	5530.000	10.53	32.90	30.69	76.78	89.52	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

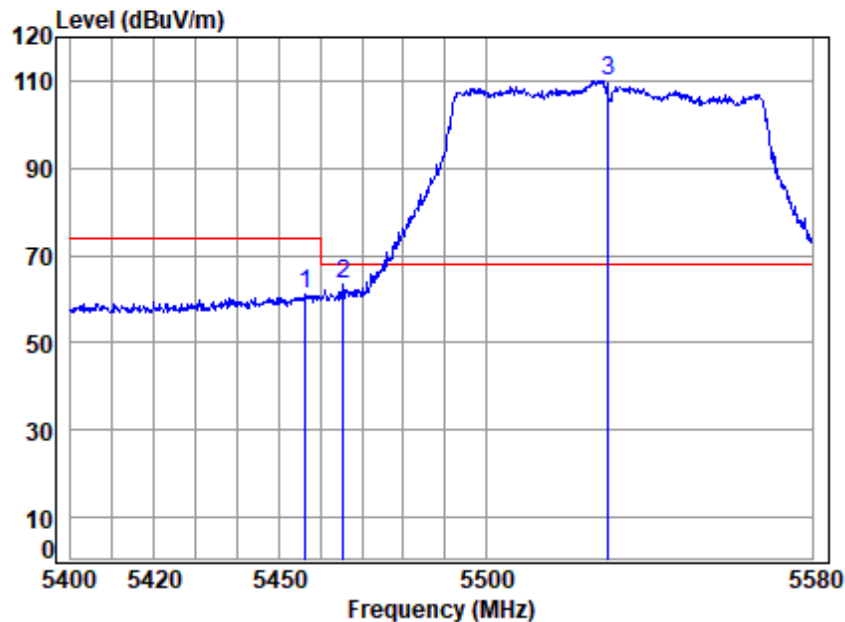

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5530 Band edge
: 5G Wi-Fi 11ac80

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5456.244	10.60	32.90	30.72	48.28	61.06	74.00	-12.94 Peak
2	5465.555	10.59	32.90	30.71	50.42	63.20	68.20	-5.00 peak
3	pp 5530.000	10.53	32.90	30.69	97.39	110.13	68.20	41.93 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:Low

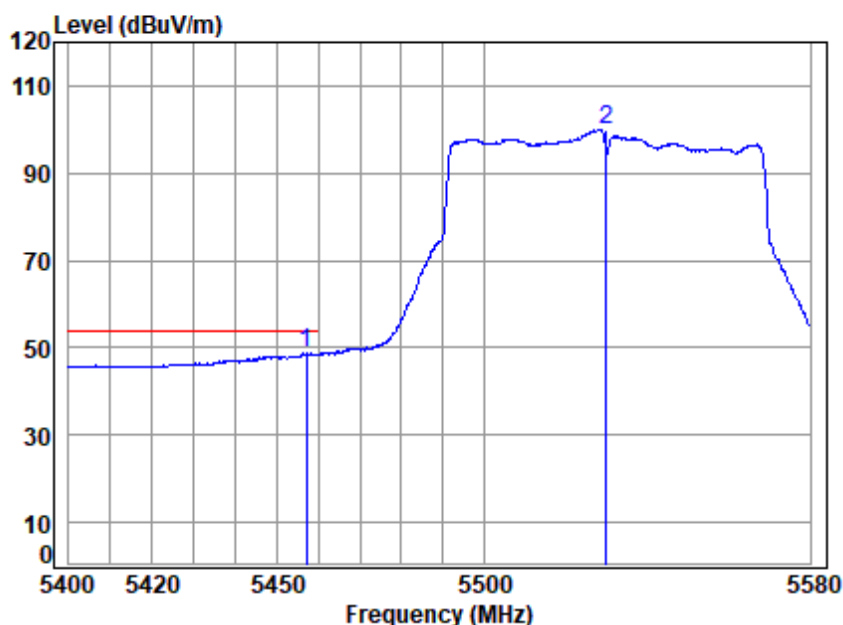

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5530 Band edge

: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5457.138	10.60	32.90	30.72	35.89	48.67	54.00	-5.33 Average
2	5530.000	10.53	32.90	30.69	87.21	99.95	-----	----- Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

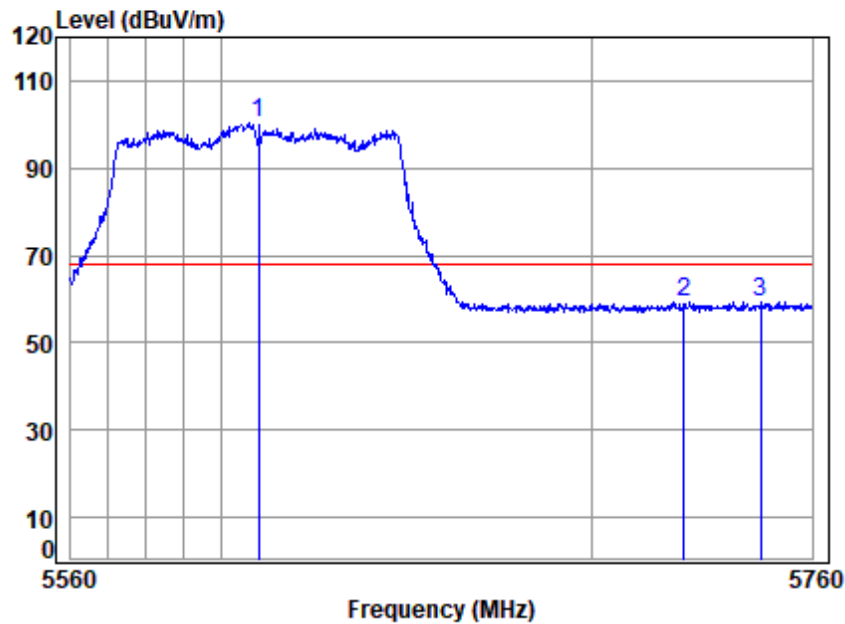

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5610 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	87.61	100.40	68.20	32.20	peak
2	5725.000	10.68	33.25	30.61	45.96	59.28	68.20	-8.92	peak
3	5745.972	10.77	33.29	30.60	45.96	59.42	68.20	-8.78	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:High

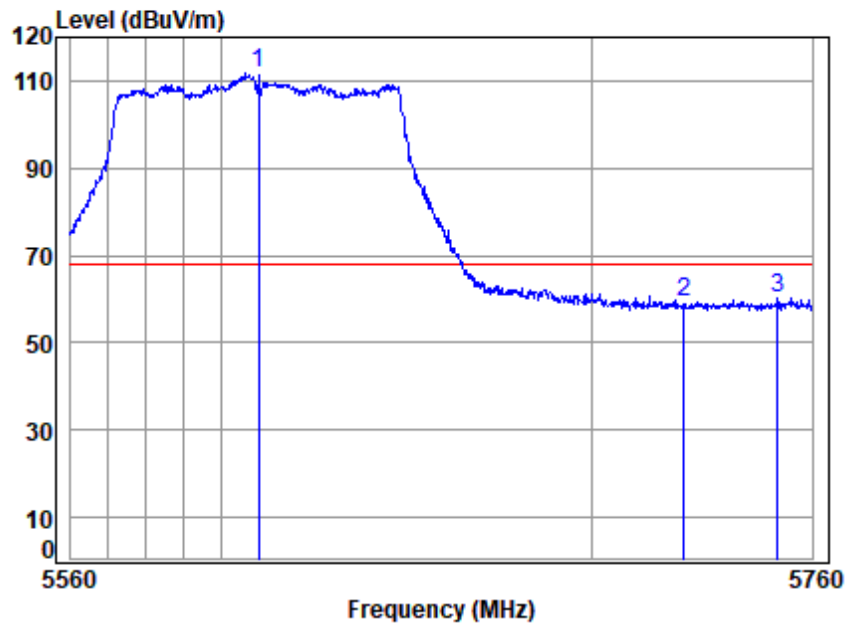

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5610 Band edge
: 5G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	99.11	111.90	68.20	43.70	Peak
2	5725.000	10.68	33.25	30.61	45.84	59.16	68.20	-9.04	peak
3	5750.441	10.79	33.30	30.60	46.86	60.35	68.20	-7.85	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

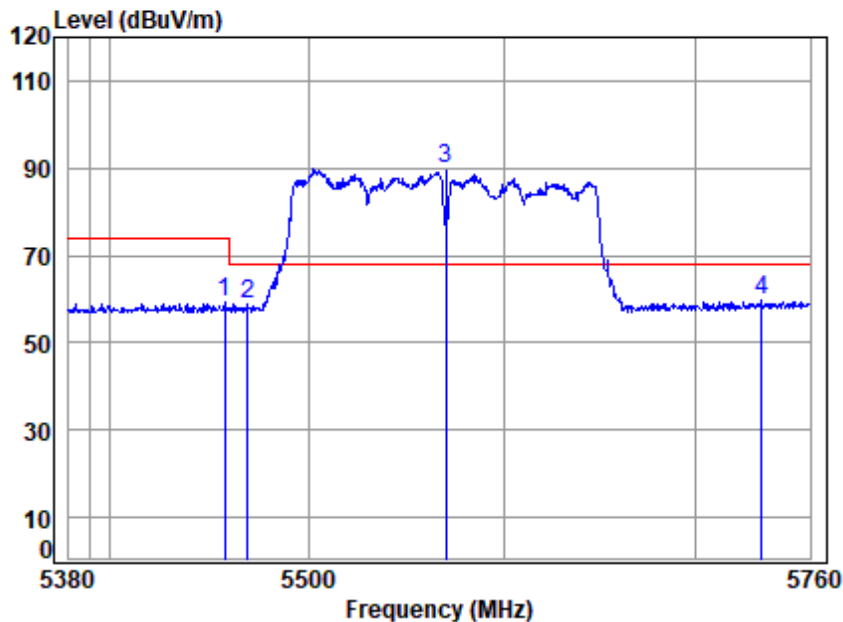

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5570 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5457.663	10.60	32.90	30.72	46.75	59.53	74.00	-14.47	peak
2	5469.595	10.59	32.90	30.71	46.20	58.98	68.20	-9.22	peak
3 pp	5570.000	10.46	32.94	30.67	77.02	89.75	68.20	21.55	peak
4	5734.504	10.72	33.27	30.61	46.23	59.61	68.20	-8.59	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

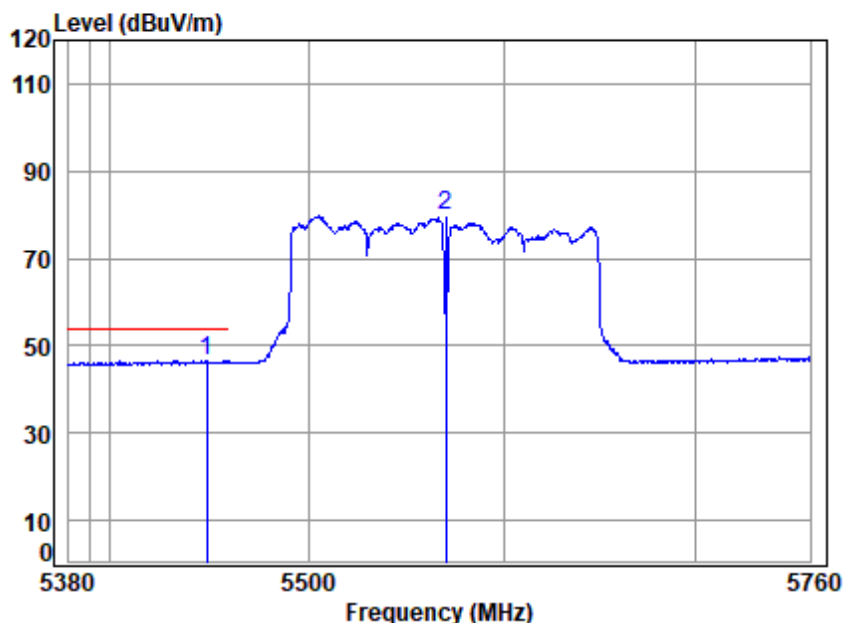

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5448.731	10.60	32.90	30.72	33.83	46.61	54.00	-7.39	Average
2	5570.000	10.46	32.94	30.67	66.91	79.64	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

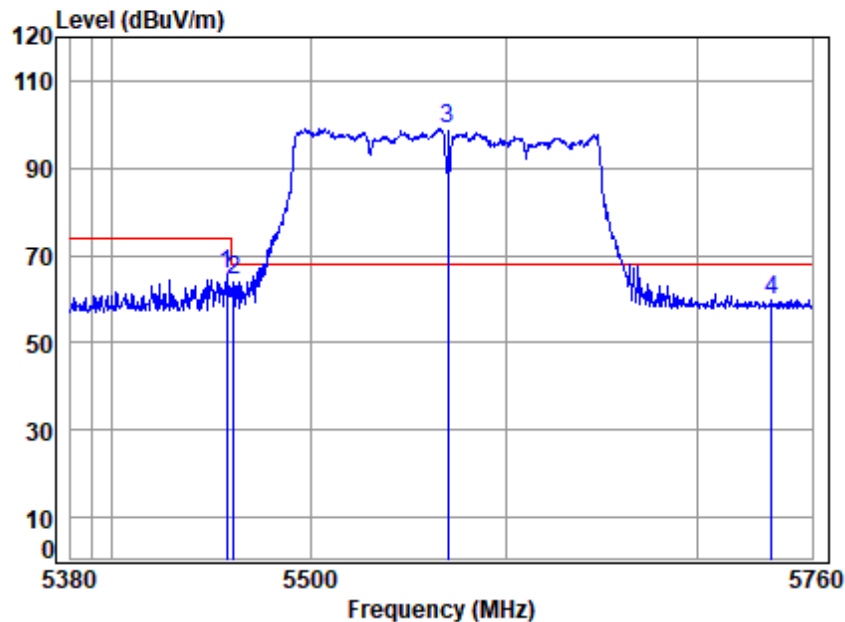

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.036	10.60	32.90	30.72	52.71	65.49	74.00	-8.51	peak
2	5461.389	10.60	32.90	30.72	51.36	64.14	68.20	-4.06	peak
3 pp	5570.000	10.46	32.94	30.67	86.44	99.17	68.20	30.97	peak
4	5738.419	10.74	33.28	30.60	46.18	59.60	68.20	-8.60	peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ac; Bandwidth:160MHz; Channel:middle

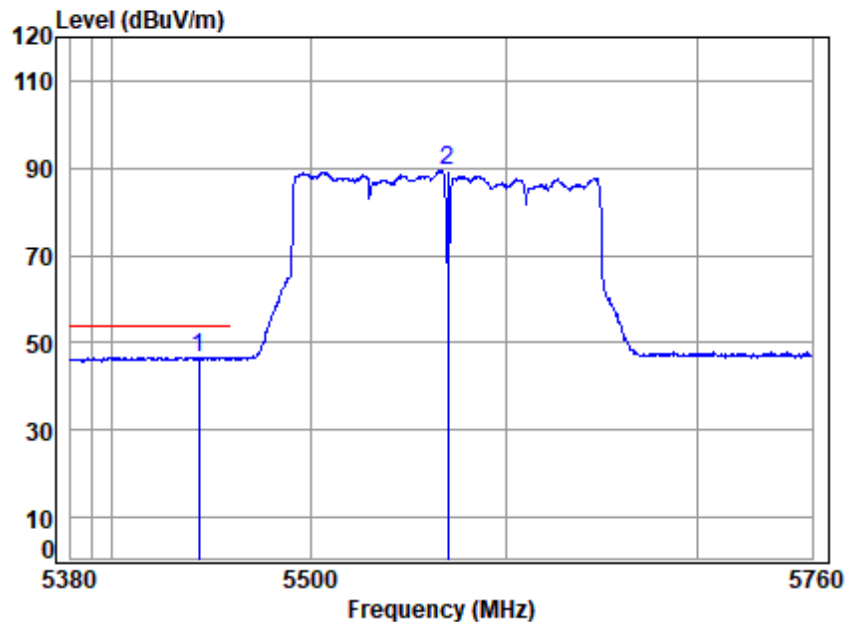

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11ac160

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5443.898	10.60	32.89	30.72	33.91	46.68	54.00	-7.32	Average	
2 5570.000	10.46	32.94	30.67	76.74	89.47	-----	-----	Average	



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

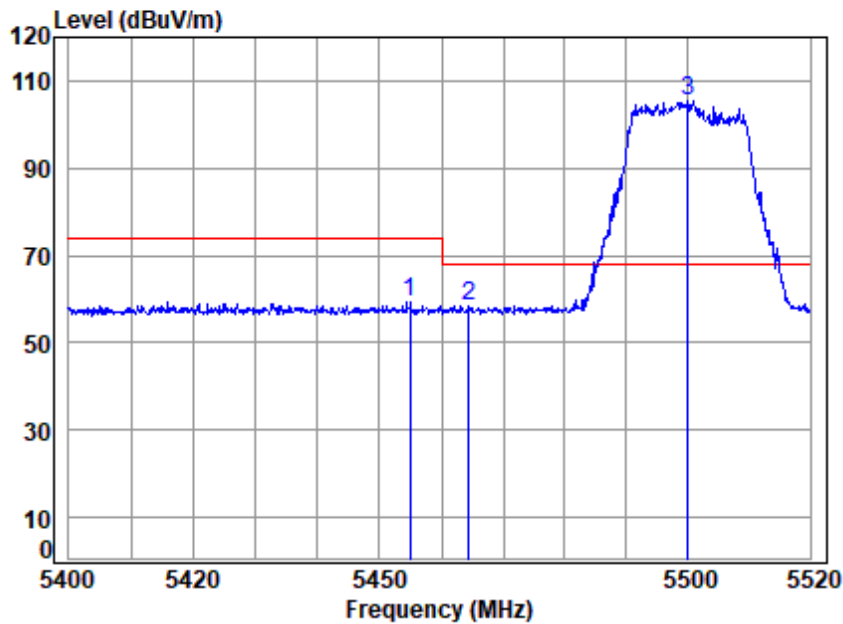

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5454.992	10.60	32.90	30.72	46.66	59.44	74.00	-14.56	peak
2	5464.352	10.59	32.90	30.71	45.77	58.55	68.20	-9.65	peak
3 pp	5500.000	10.58	32.90	30.70	92.79	105.57	68.20	37.37	peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

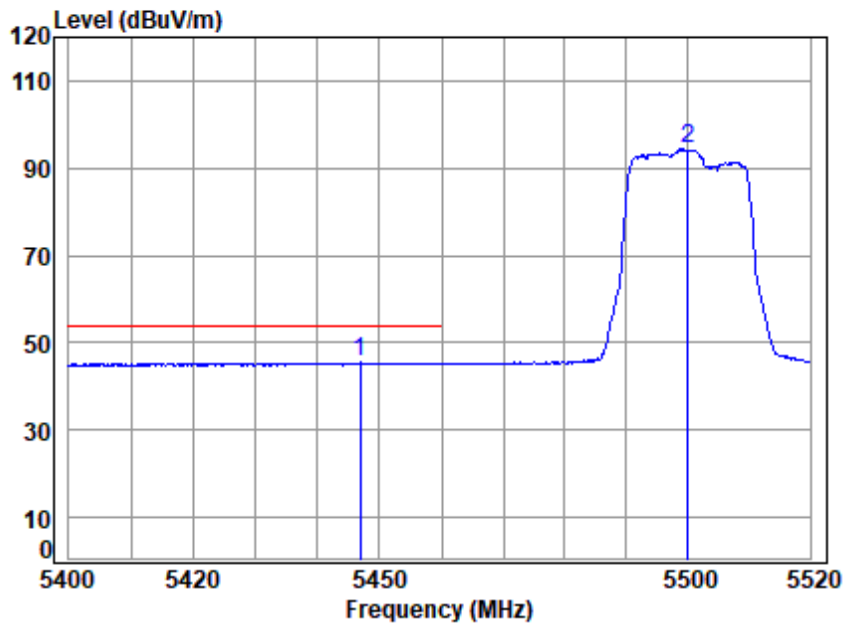

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11ax20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5446.846	10.60	32.89	30.72	32.64	45.41	54.00	-8.59	Average
2	5500.000	10.58	32.90	30.70	81.64	94.42	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

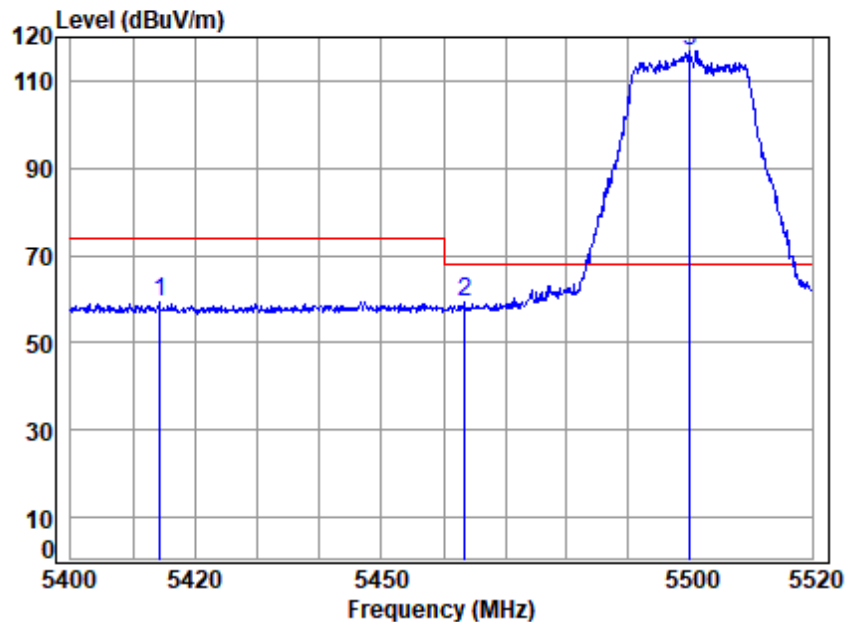

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5414.261	10.61	32.83	30.73	46.66	59.37	74.00	-14.63 Peak
2	5463.512	10.59	32.90	30.71	46.36	59.14	68.20	-9.06 peak
3	pp 5500.000	10.58	32.90	30.70	104.19	116.97	68.20	48.77 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

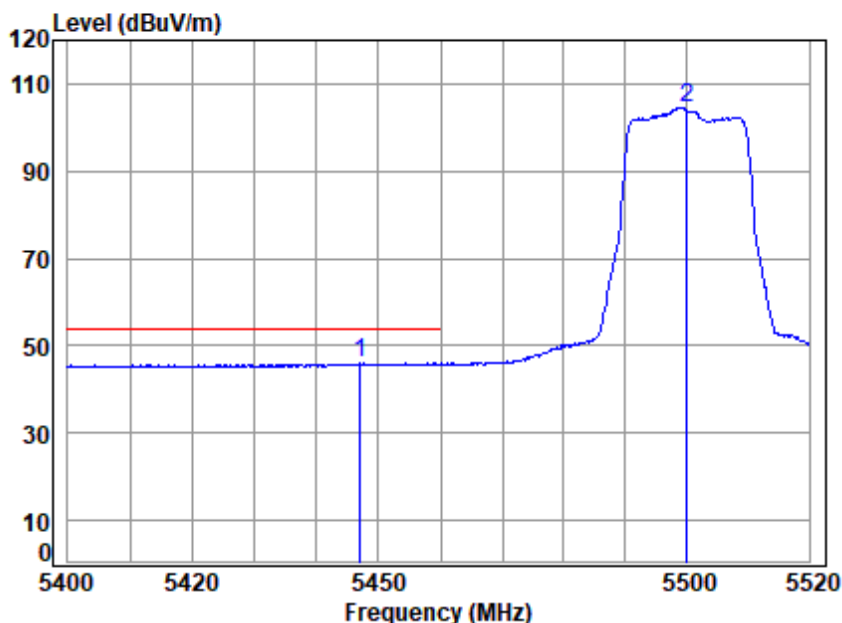

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5447.085	10.60	32.89	30.72	33.19	45.96	54.00	-8.04	Average	
2 5500.000	10.58	32.90	30.70	91.88	104.66	-----	-----	Average	



Test Mode: 03; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

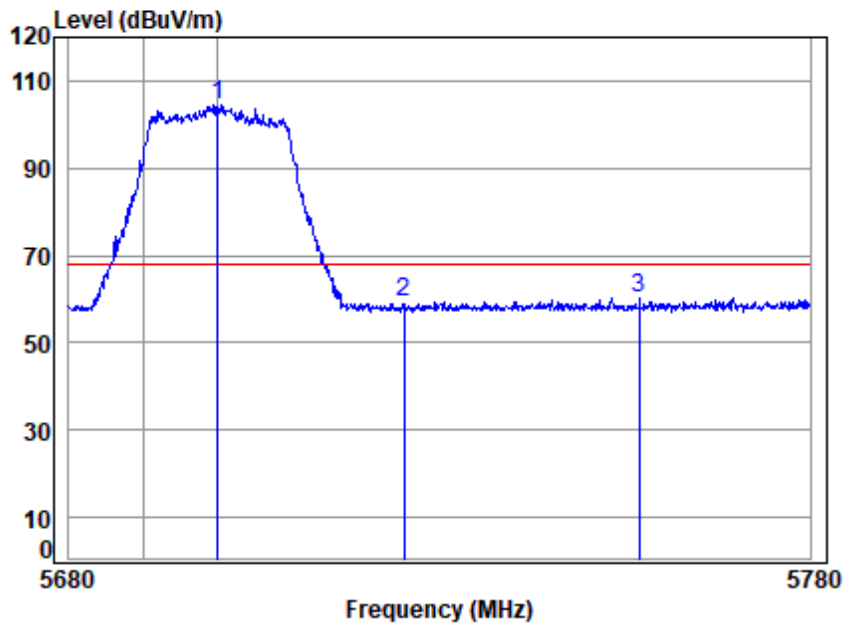

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5700 Band edge

: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	91.36	104.50	68.20	36.30	peak
2	5725.000	10.68	33.25	30.61	45.78	59.10	68.20	-9.10	peak
3	5756.845	10.82	33.31	30.60	46.67	60.20	68.20	-8.00	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

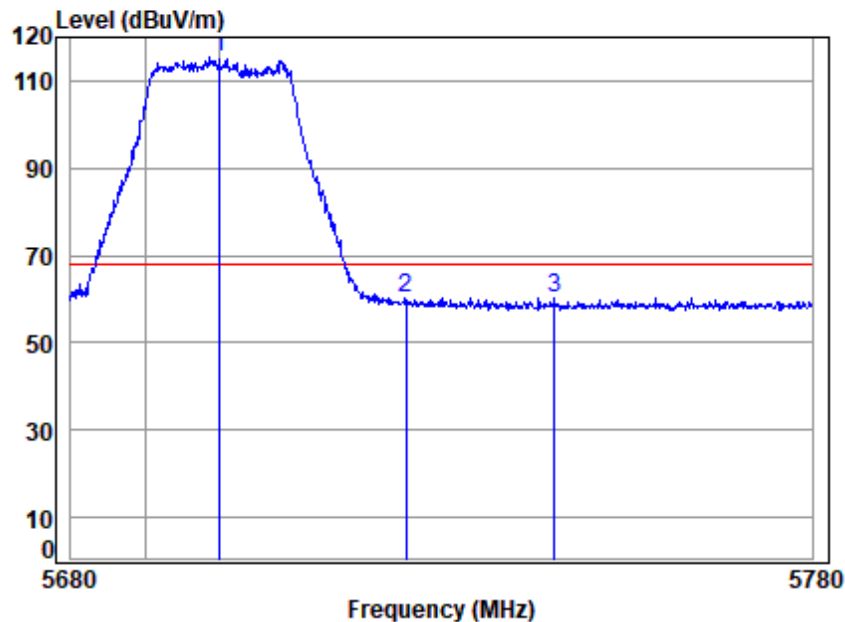

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5700 Band edge
: 5G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	102.37	115.51	68.20	47.31	Peak
2	5725.000	10.68	33.25	30.61	46.99	60.31	68.20	-7.89	Peak
3	5745.102	10.77	33.29	30.60	46.95	60.41	68.20	-7.79	Peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation: 802.11be(Full RU0); Bandwidth: 20MHz; Channel: Low

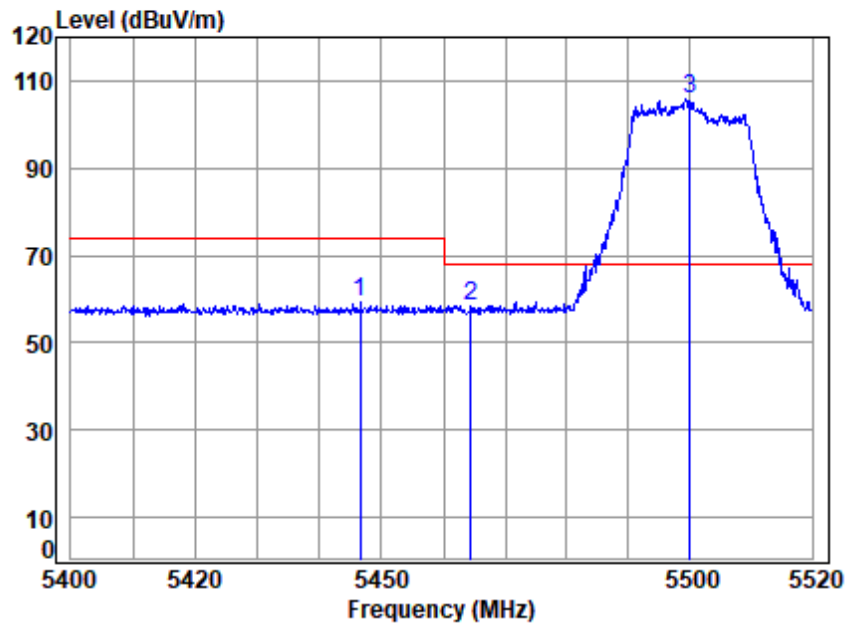

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11be20

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5446.606	10.60	32.89	30.72	46.33	59.10	74.00	-14.90 peak
2	5464.472	10.59	32.90	30.71	45.82	58.60	68.20	-9.60 peak
3	pp 5500.000	10.58	32.90	30.70	92.85	105.63	68.20	37.43 peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

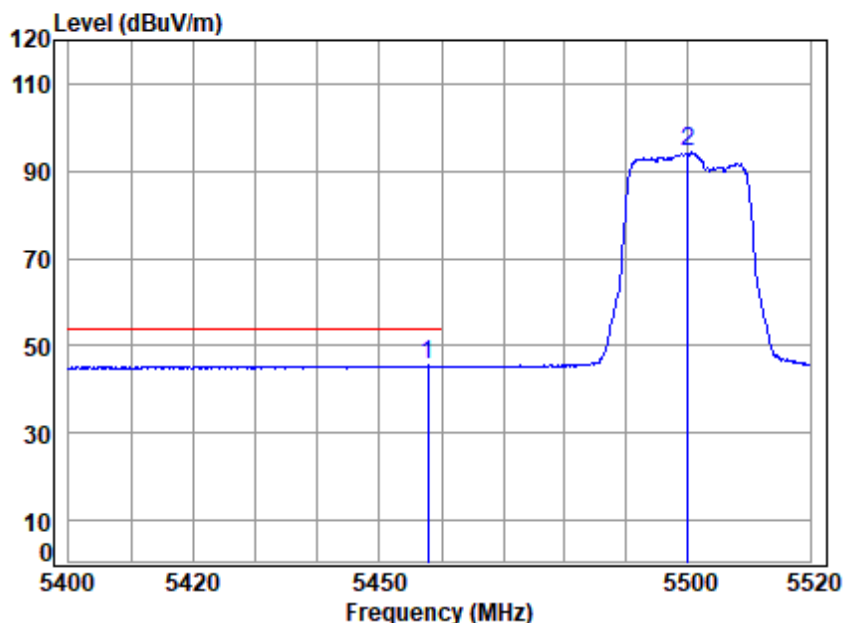

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5457.750	10.60	32.90	30.72	32.88	45.66	54.00	-8.34	Average
2	5500.000	10.58	32.90	30.70	81.46	94.24	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

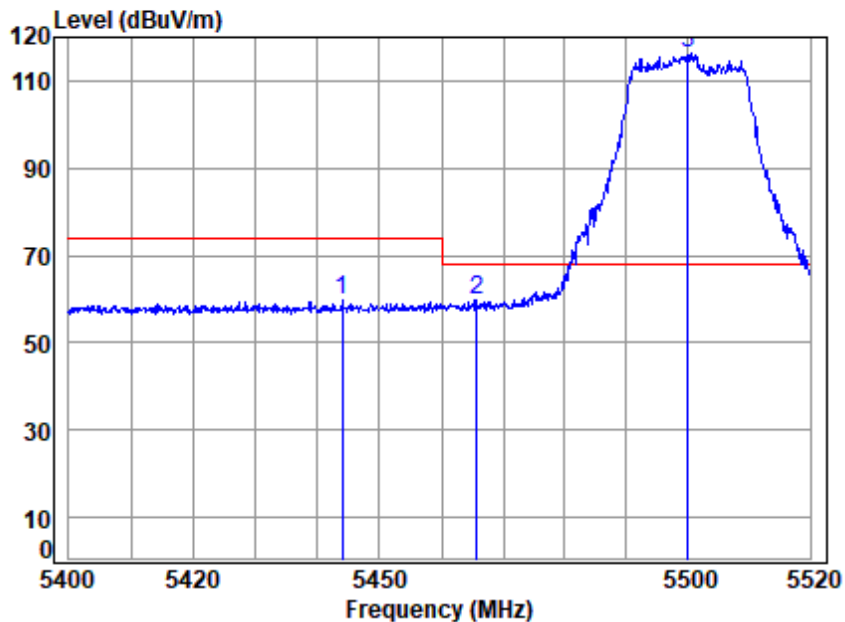

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5500 Band edge

: 5G Wi-Fi 11be20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5443.973	10.60	32.89	30.72	46.88	59.65	74.00	-14.35 Peak
2	5465.673	10.59	32.90	30.71	46.78	59.56	68.20	-8.64 peak
3	pp 5500.000	10.58	32.90	30.70	103.50	116.28	68.20	48.08 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

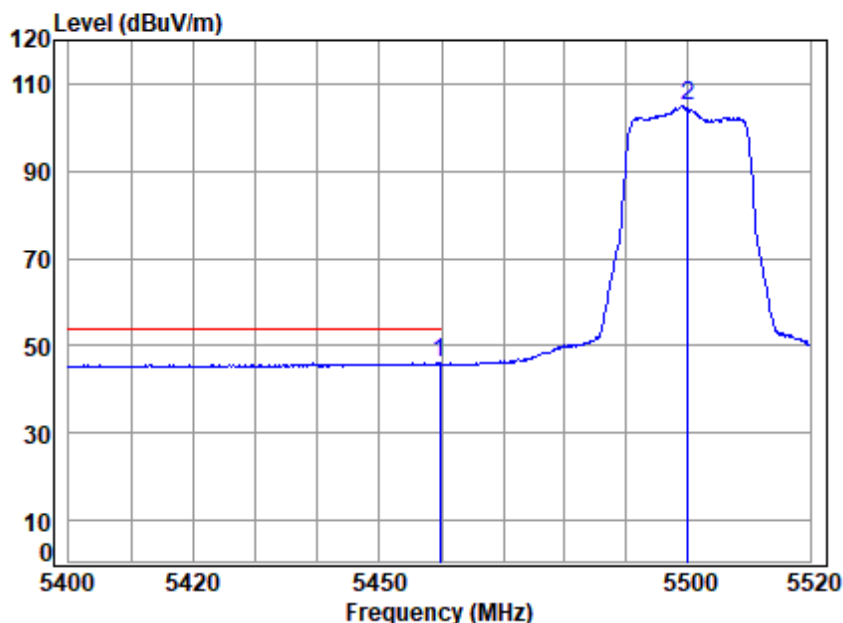

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5500 Band edge
: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5459.791	10.60	32.90	30.72	33.21	45.99	54.00	-8.01	Average
2	5500.000	10.58	32.90	30.70	92.15	104.93	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

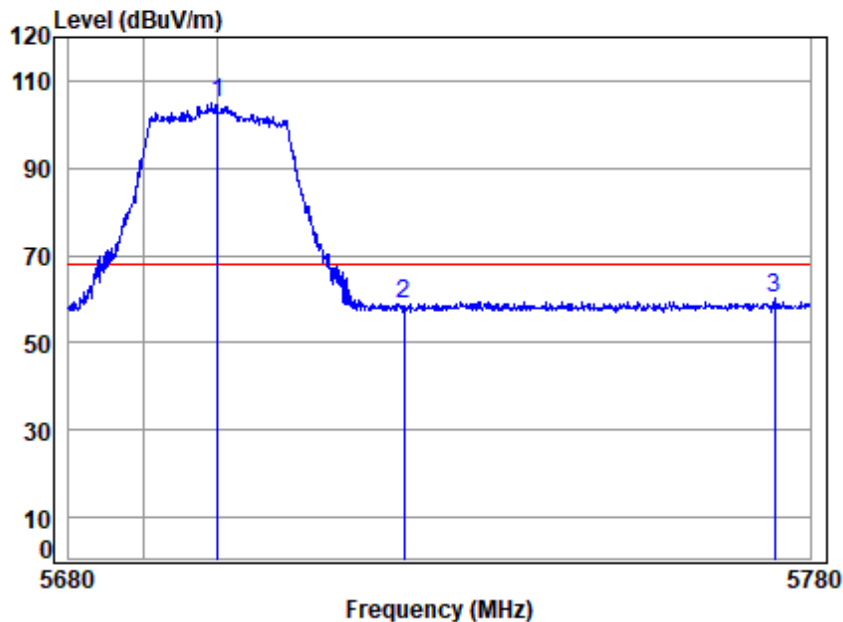

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5700 Band edge

: 5G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	91.61	104.75	68.20	36.55	peak
2	5725.000	10.68	33.25	30.61	45.63	58.95	68.20	-9.25	peak
3	5775.160	10.91	33.35	30.59	46.34	60.01	68.20	-8.19	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

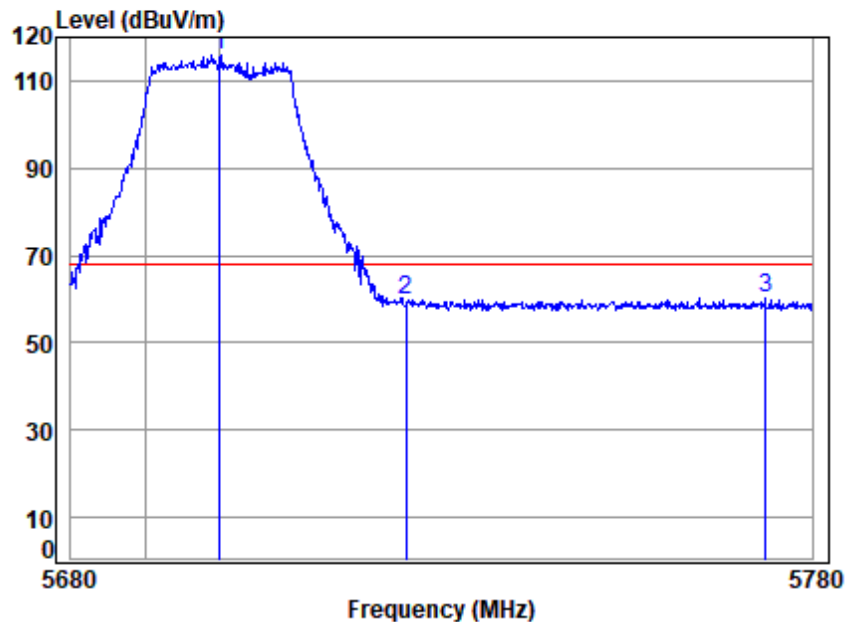

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5700 Band edge

: 5G Wi-Fi 11be20


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5700.000	10.56	33.20	30.62	102.69	115.83	68.20	47.63	Peak
2	5725.000	10.68	33.25	30.61	46.64	59.96	68.20	-8.24	Peak
3	5773.648	10.90	33.35	30.59	46.46	60.12	68.20	-8.08	Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

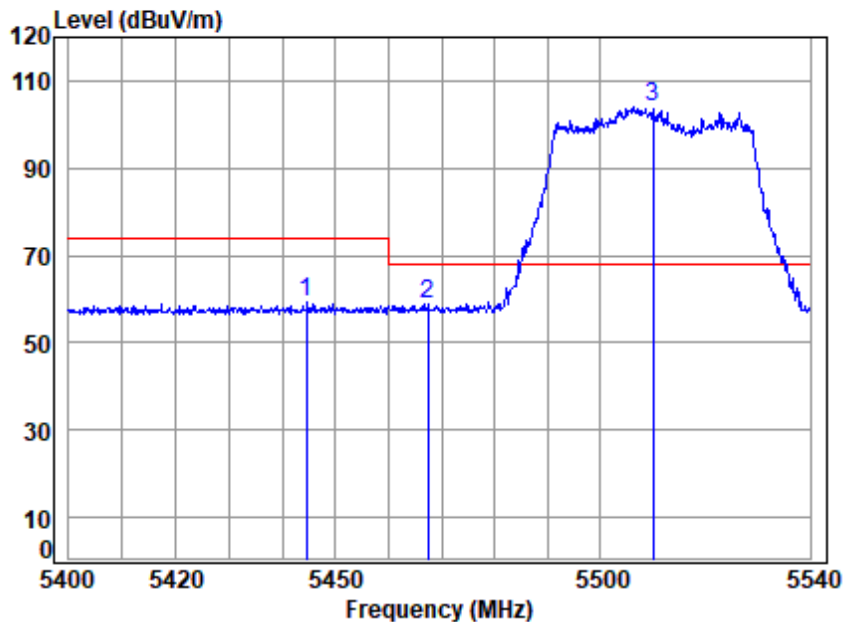

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5510 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5444.550	10.60	32.89	30.72	46.36	59.13	74.00	-14.87	peak
2	5467.313	10.59	32.90	30.71	46.01	58.79	68.20	-9.41	peak
3	pp 5510.000	10.56	32.90	30.70	91.26	104.02	68.20	35.82	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

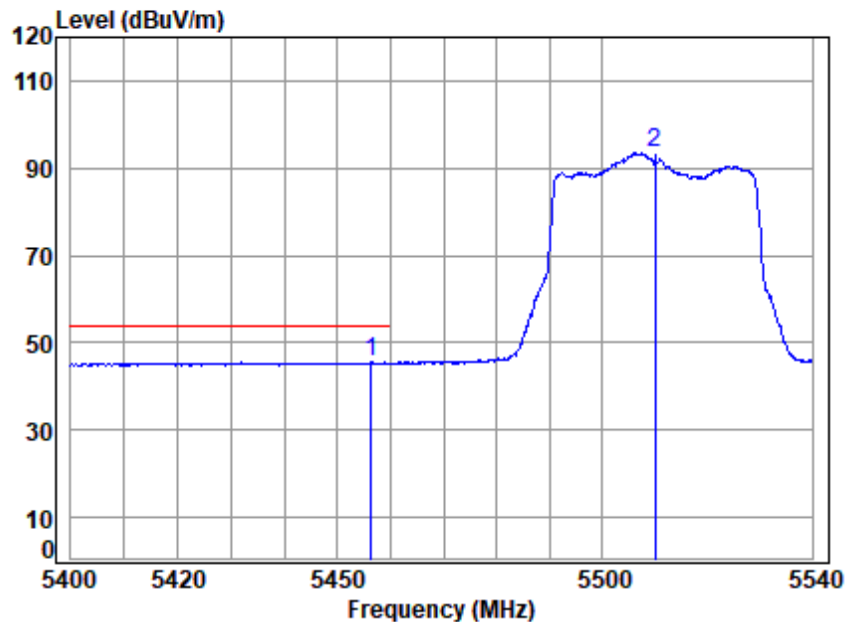

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5510 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5456.269	10.60	32.90	30.72	32.69	45.47	54.00	-8.53	Average
2	5510.000	10.56	32.90	30.70	80.69	93.45	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

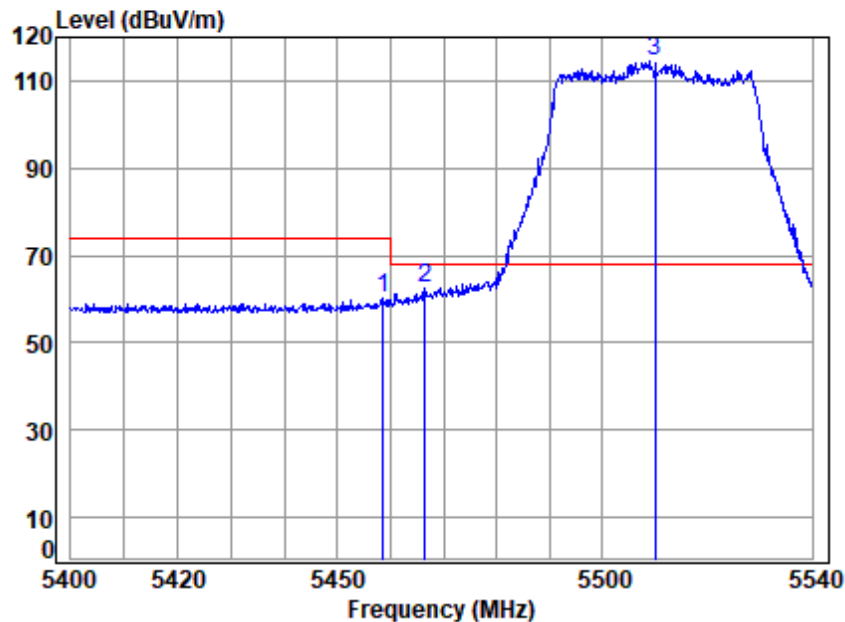

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5510 Band edge

: 5G Wi-Fi 11be40

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5458.503	10.60	32.90	30.72	47.53	60.31	74.00	-13.69 Peak
2	5466.473	10.59	32.90	30.71	49.74	62.52	68.20	-5.68 peak
3	pp 5510.000	10.56	32.90	30.70	101.82	114.58	68.20	46.38 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

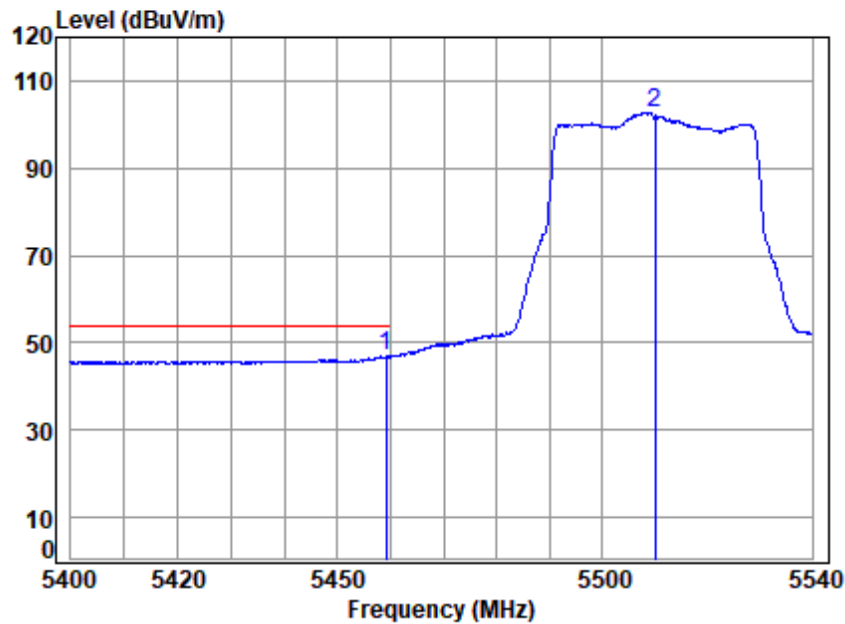

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5510 Band edge
: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5459.202	10.60	32.90	30.72	34.02	46.80	54.00	-7.20	Average
2 5510.000	10.56	32.90	30.70	90.04	102.80	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

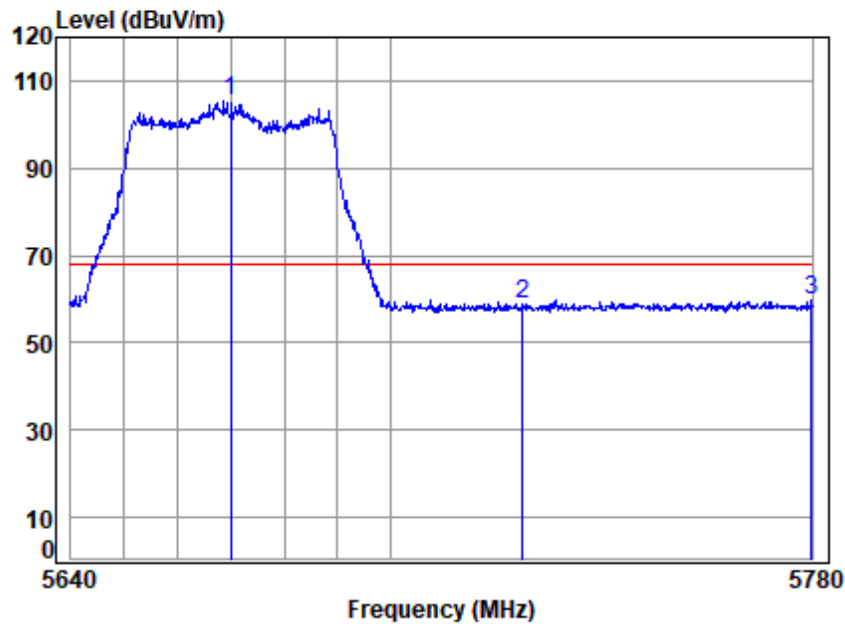

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5670 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	92.56	105.59	68.20	37.39	peak
2	5725.000	10.68	33.25	30.61	45.70	59.02	68.20	-9.18	peak
3	5779.858	10.93	33.36	30.59	46.29	59.99	68.20	-8.21	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing & Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

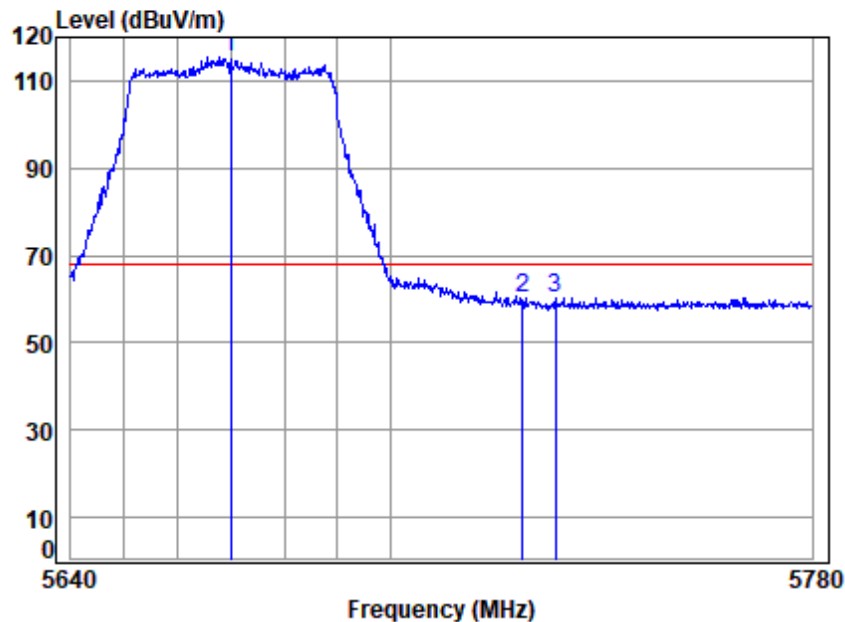

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5670 Band edge

: 5G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5670.000	10.52	33.14	30.63	102.52	115.55	68.20	47.35	Peak
2	5725.000	10.68	33.25	30.61	46.92	60.24	68.20	-7.96	Peak
3	5731.171	10.70	33.26	30.61	46.93	60.28	68.20	-7.92	Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:Low

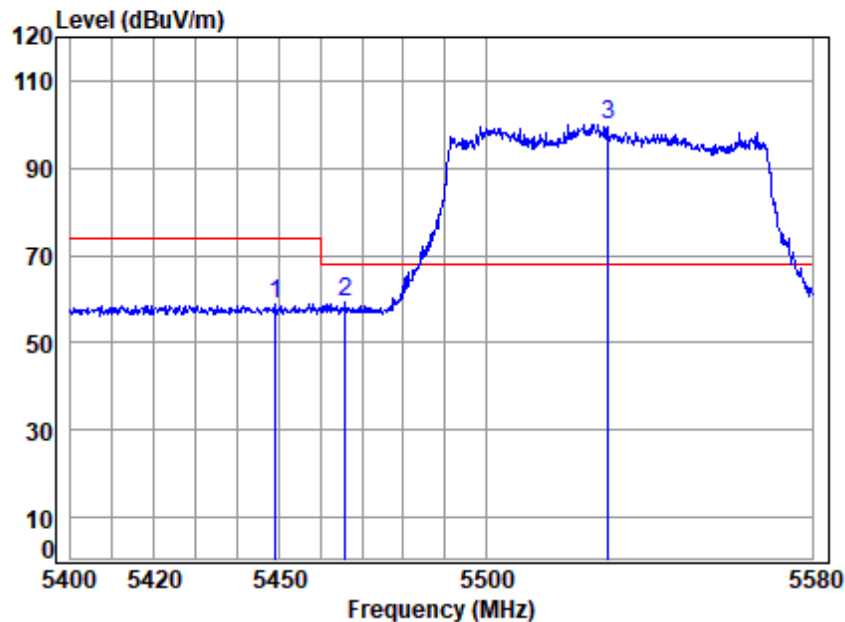

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5530 Band edge

: 5G Wi-Fi 11be80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5449.092	10.60	32.90	30.72	46.26	59.04	74.00 -14.96 peak
2	5466.092	10.59	32.90	30.71	46.39	59.17	68.20 -9.03 peak
3	pp 5530.000	10.53	32.90	30.69	87.19	99.93	68.20 31.73 peak



Test Mode: 03; Polarity: Horizontal; Modulation: 802.11be(Full RU0); Bandwidth: 80MHz; Channel: Low

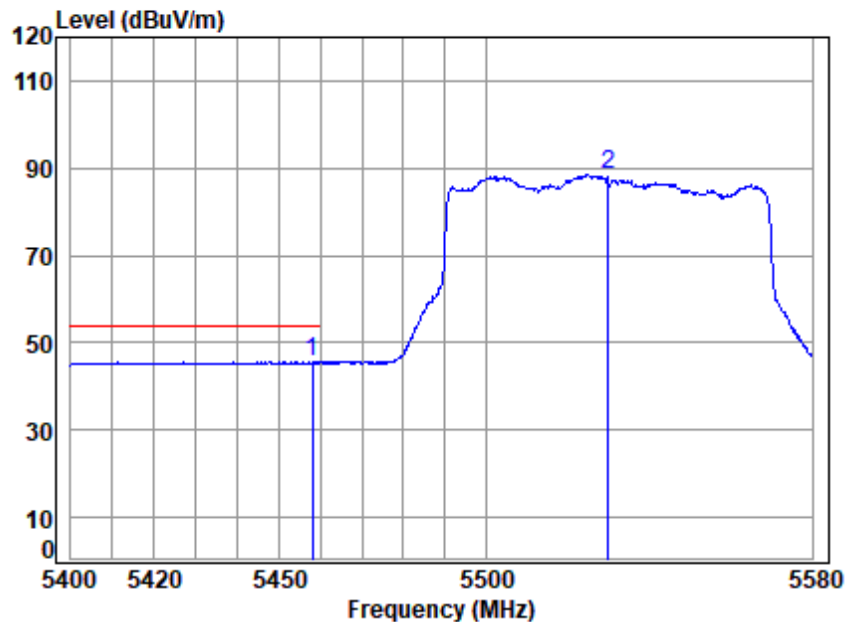

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5530 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5458.033	10.60	32.90	30.72	32.86	45.64	54.00	-8.36	Average	
2 5530.000	10.53	32.90	30.69	75.72	88.46	-----	-----	Average	



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:Low

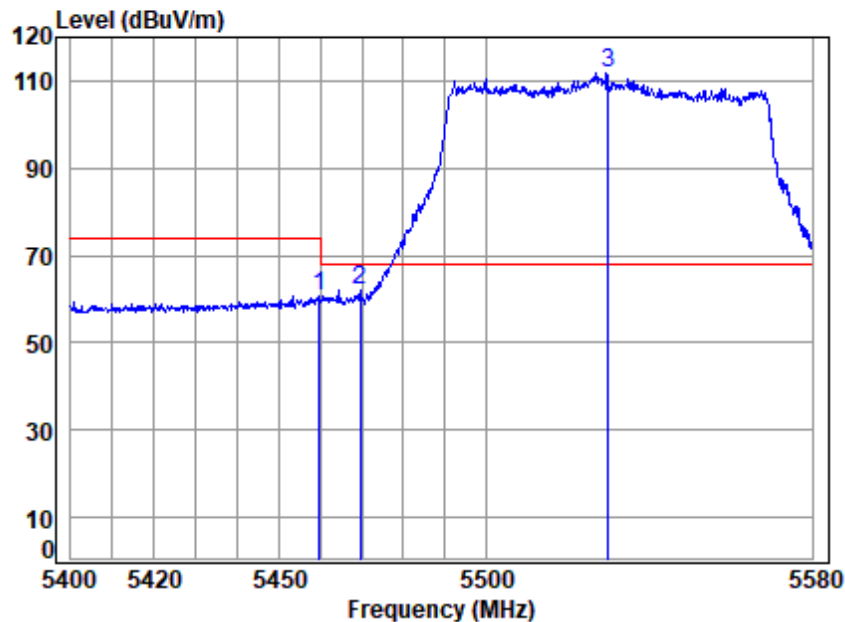

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5530 Band edge
: 5G Wi-Fi 11be80

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5459.644	10.60	32.90	30.72	47.97	60.75	74.00 -13.25 Peak
2	5469.499	10.59	32.90	30.71	49.32	62.10	68.20 -6.10 peak
3	pp 5530.000	10.53	32.90	30.69	99.07	111.81	68.20 43.61 Peak



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:Low

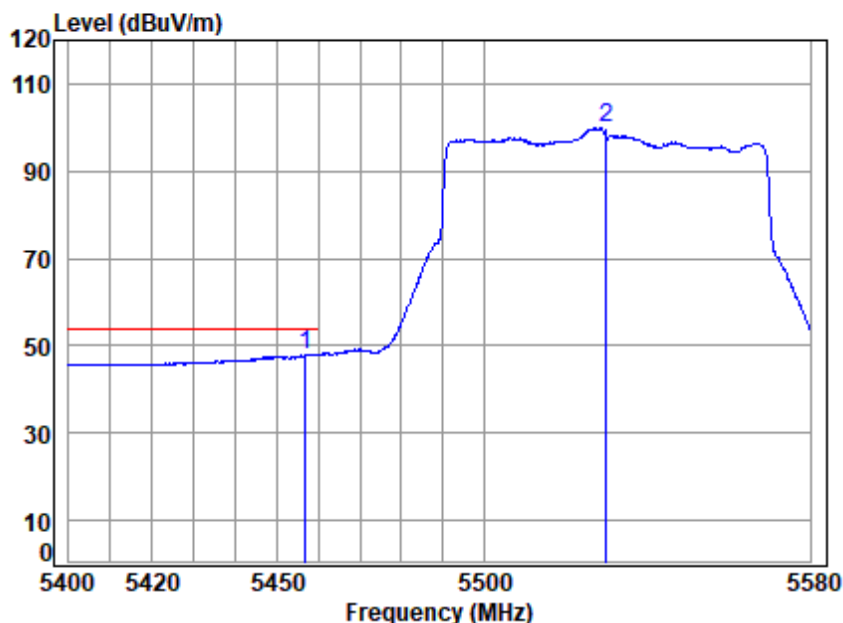

Condition: 3m VERTICAL


Job No : 01048TL

Mode : 5530 Band edge
: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5456.780	10.60	32.90	30.72	35.27	48.05	54.00	-5.95	Average
2 5530.000	10.53	32.90	30.69	87.06	99.80	-----	-----	Average



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:High

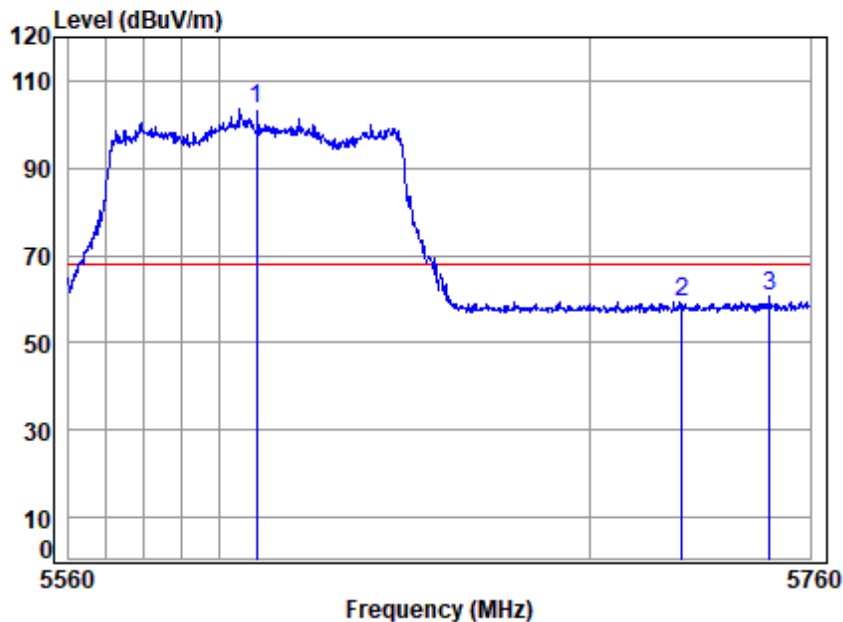

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5610 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	90.72	103.51	68.20	35.31	peak
2	5725.000	10.68	33.25	30.61	45.87	59.19	68.20	-9.01	peak
3	5749.019	10.79	33.30	30.60	46.97	60.46	68.20	-7.74	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:High

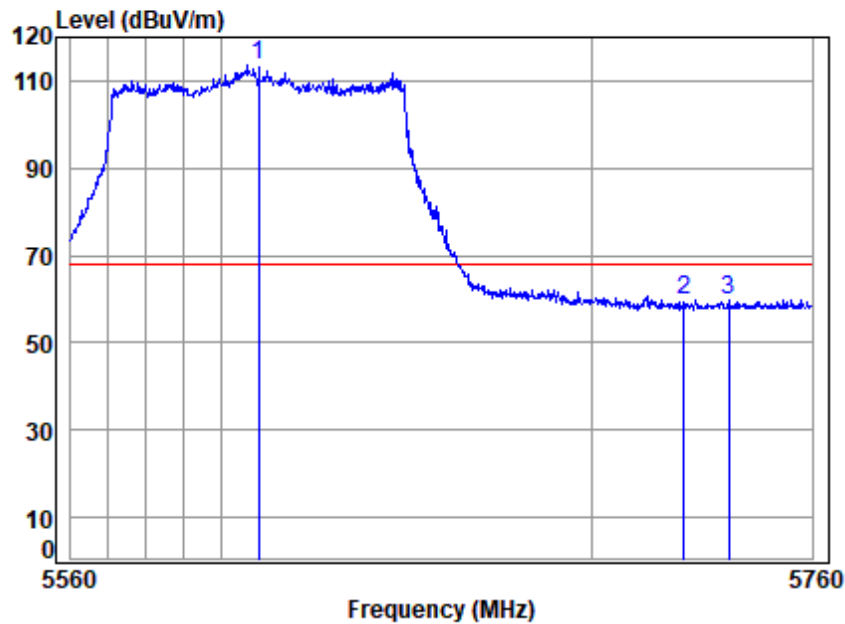

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5610 Band edge

: 5G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5610.000	10.43	33.02	30.66	100.87	113.66	68.20	45.46	Peak
2	5725.000	10.68	33.25	30.61	46.49	59.81	68.20	-8.39	peak
3	5737.247	10.73	33.27	30.61	46.58	59.97	68.20	-8.23	Peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

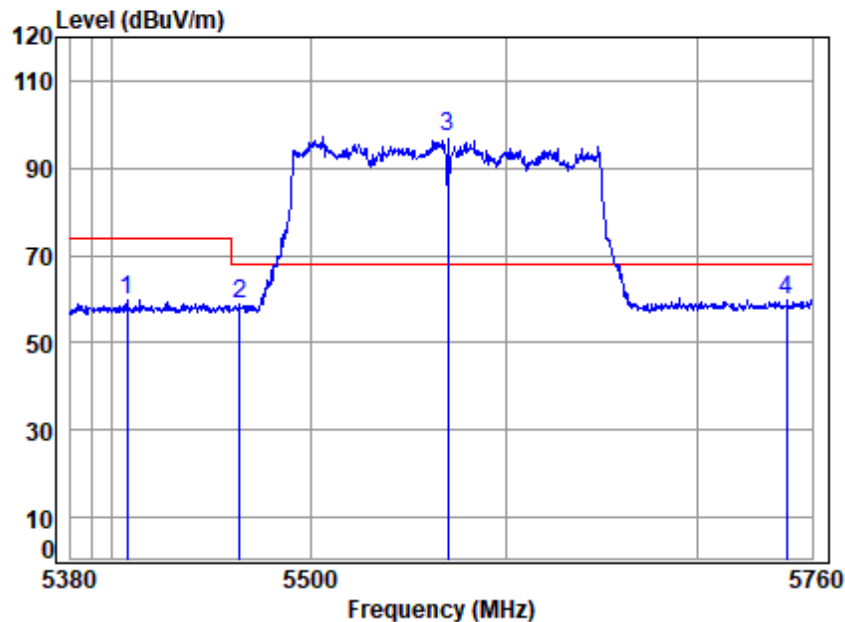

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5407.978	10.62	32.82	30.74	47.02	59.72	74.00	-14.28	peak
2	5464.372	10.59	32.90	30.71	46.06	58.84	68.20	-9.36	peak
3 pp	5570.000	10.46	32.94	30.67	84.31	97.04	68.20	28.84	peak
4	5746.649	10.77	33.29	30.60	46.24	59.70	68.20	-8.50	peak



Test Mode: 03; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

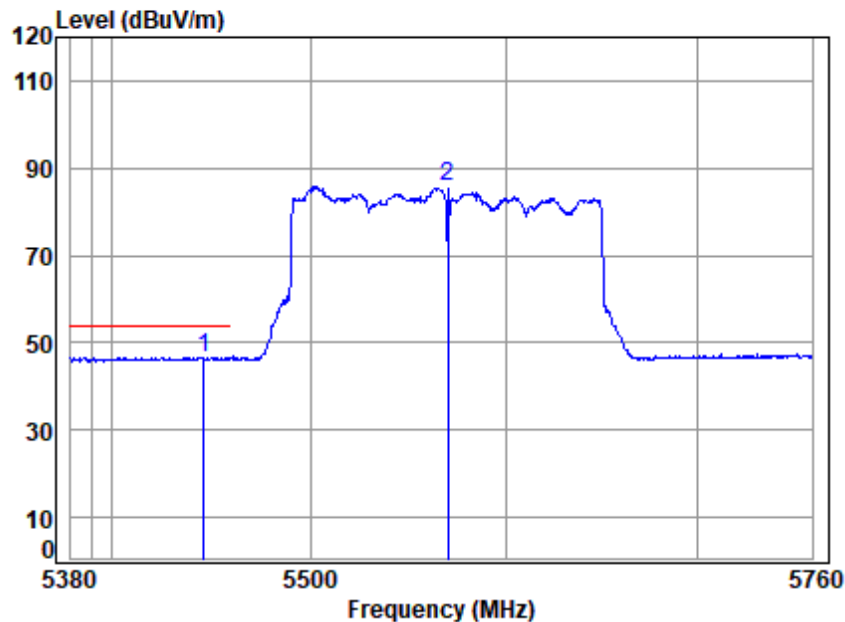

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5446.128	10.60	32.89	30.72	33.96	46.73	54.00	-7.27	Average
2	5570.000	10.46	32.94	30.67	73.05	85.78	-----	-----	Average



Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

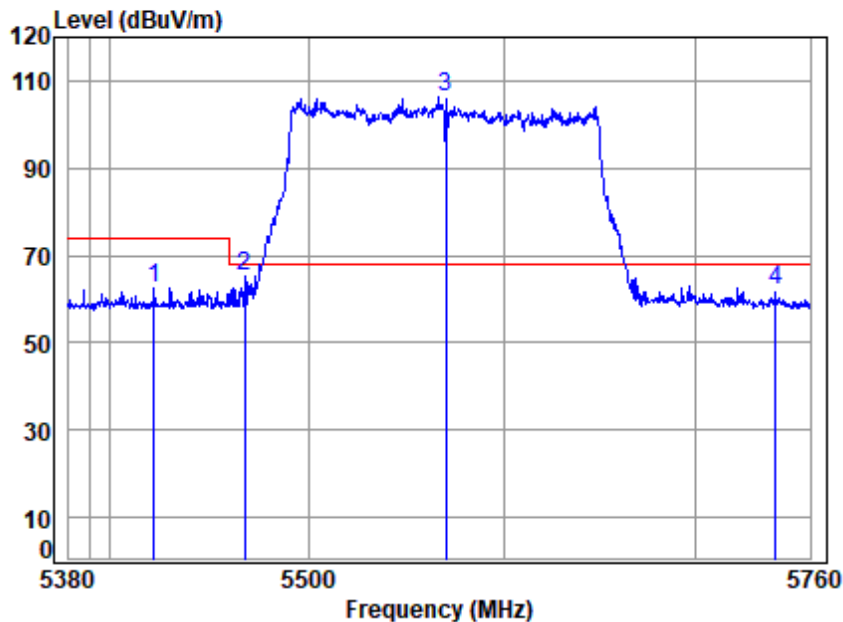

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5570 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5422.392	10.61	32.84	30.73	49.70	62.42	74.00	-11.58	peak
2	5467.729	10.59	32.90	30.71	52.29	65.07	68.20	-3.13	peak
3 pp	5570.000	10.46	32.94	30.67	93.40	106.13	68.20	37.93	peak
4	5741.945	10.75	33.28	30.60	48.82	62.25	68.20	-5.95	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgsgroup.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 03; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:160MHz; Channel:middle

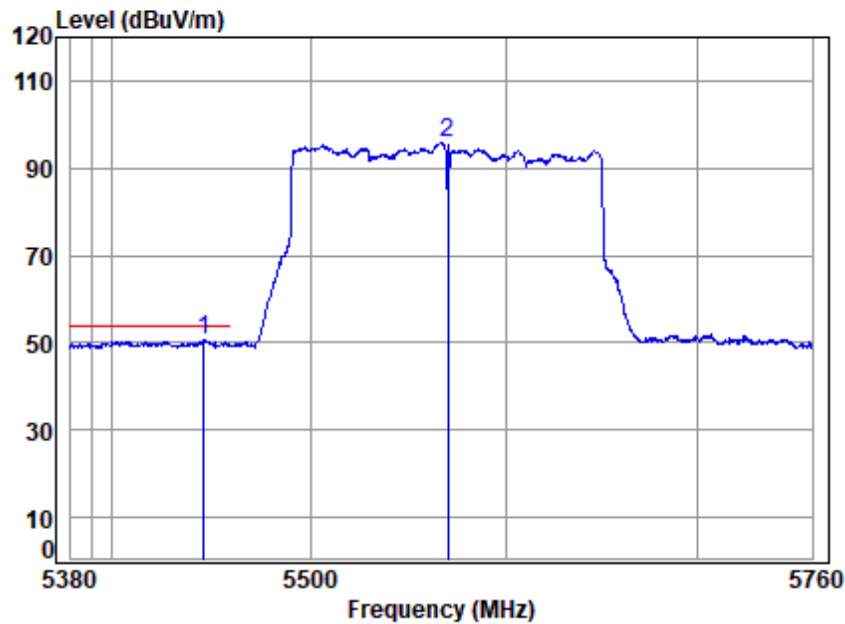

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5570 Band edge

: 5G Wi-Fi 11be160

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5446.500	10.60	32.89	30.72	37.88	50.65	54.00	-3.35	Average
2	5570.000	10.46	32.94	30.67	83.11	95.84	-----	-----	Average



Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

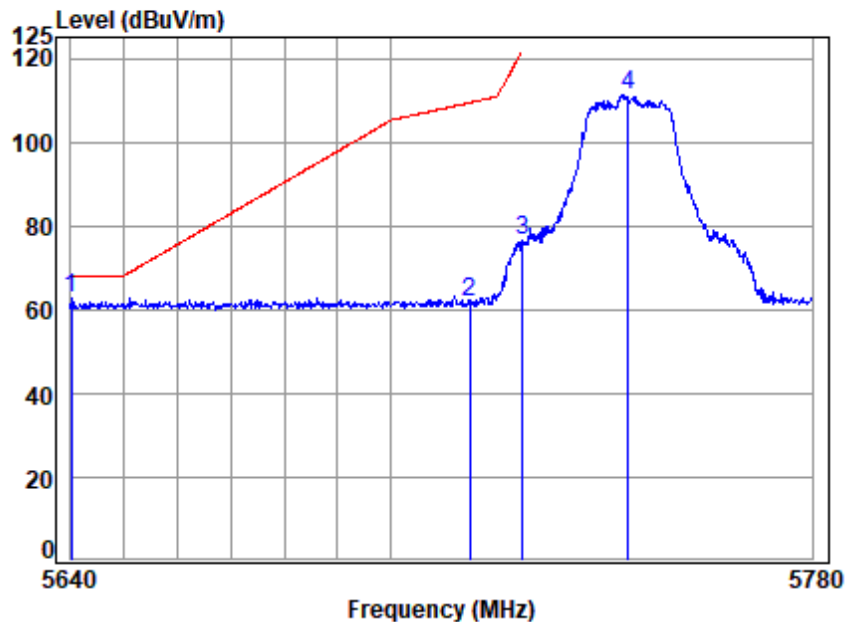

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5745 Band edge
: 5.8G Wi-Fi 11a

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5640.138	10.47	33.08	30.64	49.61	62.52	68.20	-5.68	peak
2	5715.000	10.63	33.23	30.61	48.41	61.66	109.40	-47.74	peak
3	5725.000	10.68	33.25	30.61	63.42	76.74	122.20	-45.46	peak
4	5745.000	10.77	33.29	30.60	97.91	111.37	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:Low

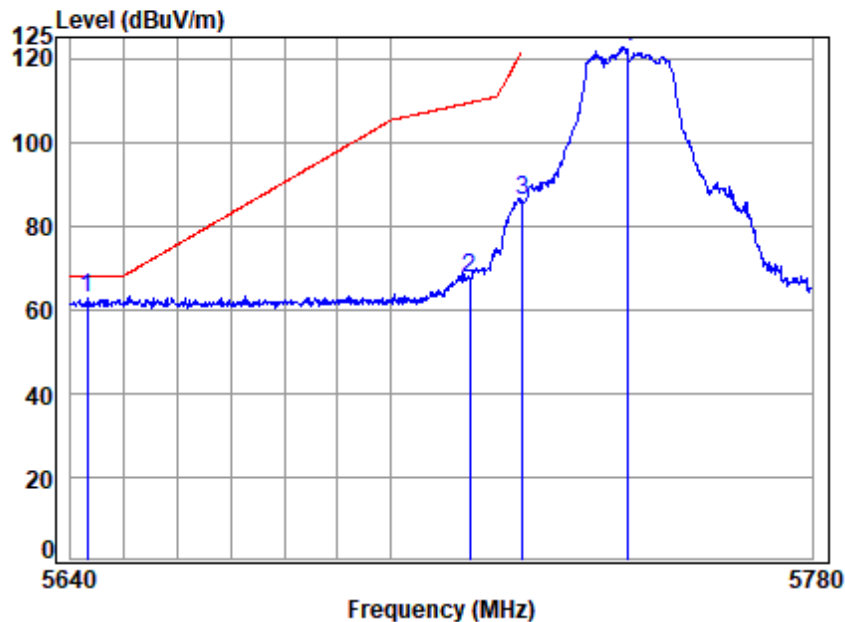

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5745 Band edge
: 5.8G Wi-Fi 11a


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5643.043	10.47	33.09	30.64	49.66	62.58	68.20	-5.62 peak
2	5715.000	10.63	33.23	30.61	54.19	67.44	109.40	-41.96 peak
3	5725.000	10.68	33.25	30.61	72.89	86.21	122.20	-35.99 peak
4	5745.000	10.77	33.29	30.60	109.17	122.63	-----	----- peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel:High

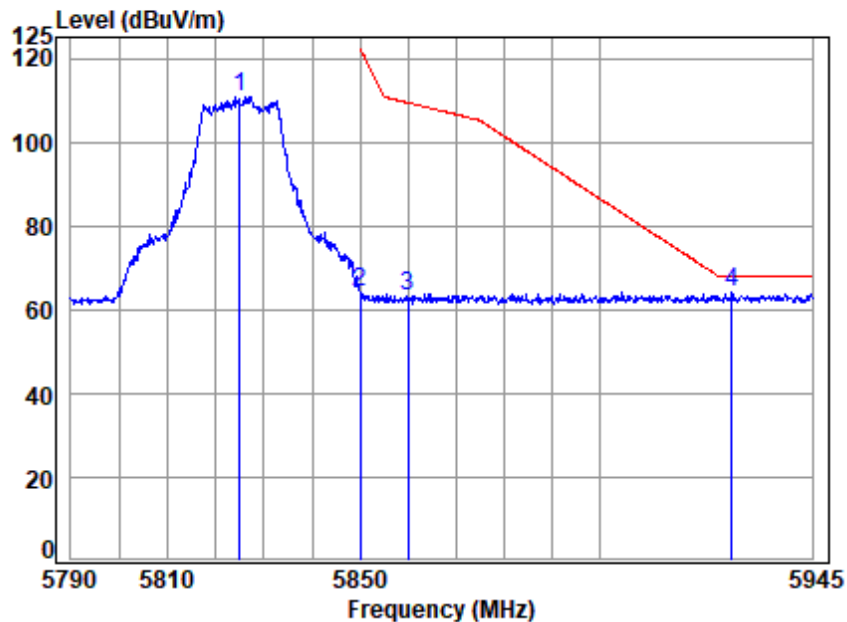

Condition: 3m HORIZONTAL


Job No : 01048TL

Mode : 5825 Band edge
: 5.8G Wi-Fi 11a

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5825.000	10.99	33.50	30.57	96.92	110.84	-----	-----	peak
2 5850.000	10.95	33.60	30.56	50.00	63.99	122.20	-58.21	peak
3 5860.000	10.94	33.58	30.56	49.16	63.12	109.40	-46.28	peak
4 pp 5928.062	10.87	33.56	30.53	50.05	63.95	68.20	-4.25	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel:High

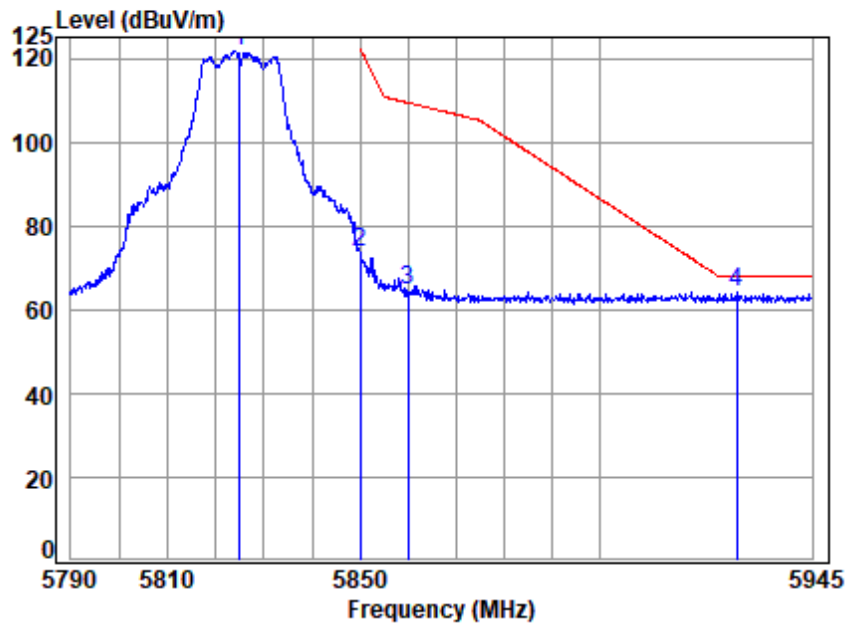

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5825 Band edge
: 5.8G Wi-Fi 11a


	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5825.000	10.99	33.50	30.57	107.84	121.76	-----	-----	peak
2 5850.000	10.95	33.60	30.56	59.76	73.75	122.20	-48.45	peak
3 5860.000	10.94	33.58	30.56	50.50	64.46	109.40	-44.94	peak
4 pp 5929.002	10.87	33.56	30.53	50.12	64.02	68.20	-4.18	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

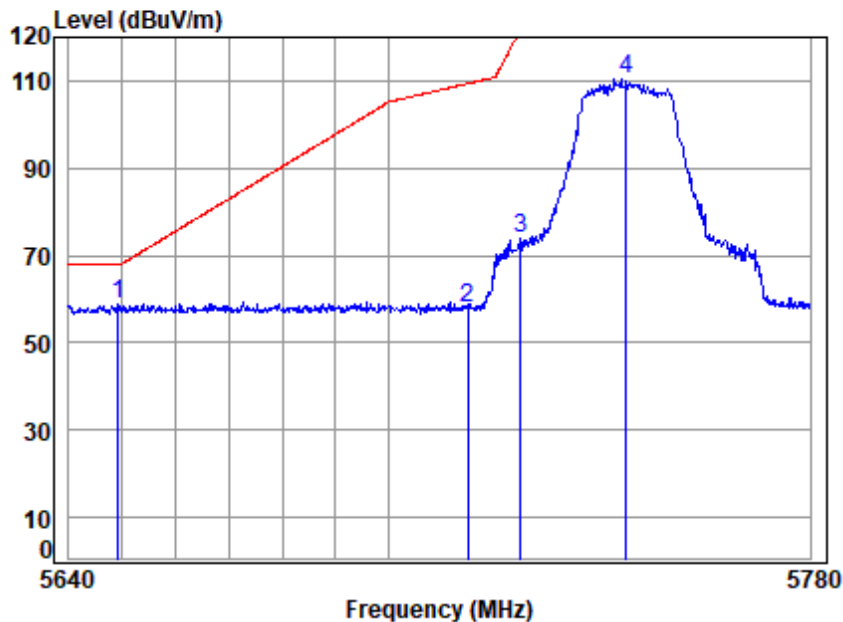

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5649.135	10.48	33.10	30.64	45.85	58.79	68.20	-9.41	peak
2	5715.000	10.63	33.23	30.61	44.78	58.03	109.40	-51.37	peak
3	5725.000	10.68	33.25	30.61	60.61	73.93	122.20	-48.27	peak
4	5745.000	10.77	33.29	30.60	96.83	110.29	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:Low

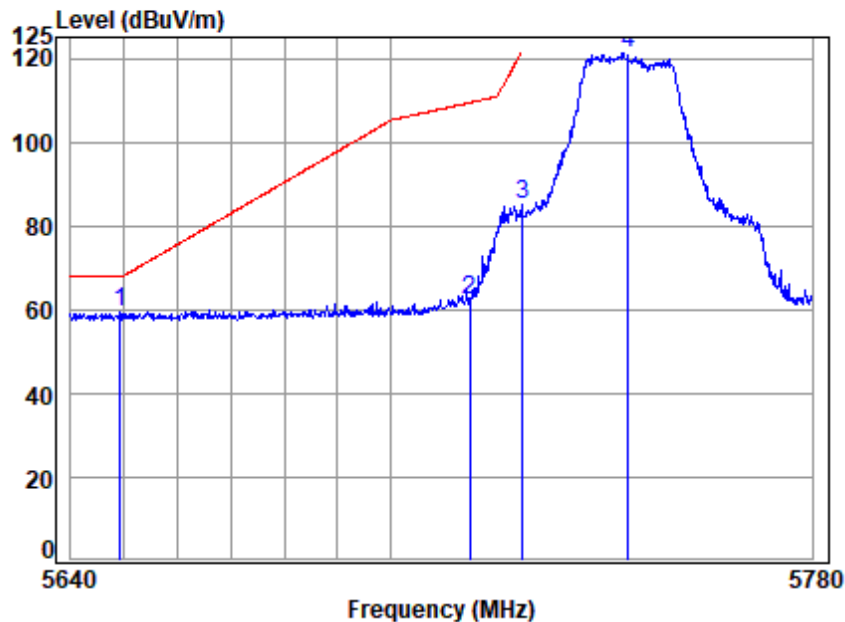

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11n20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	5649.273	10.48	33.10	30.64	46.27	59.21	68.20	-8.99 peak
2	5715.000	10.63	33.23	30.61	49.02	62.27	109.40	-47.13 peak
3	5725.000	10.68	33.25	30.61	71.85	85.17	122.20	-37.03 peak
4	5745.000	10.77	33.29	30.60	107.71	121.17	-----	----- peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

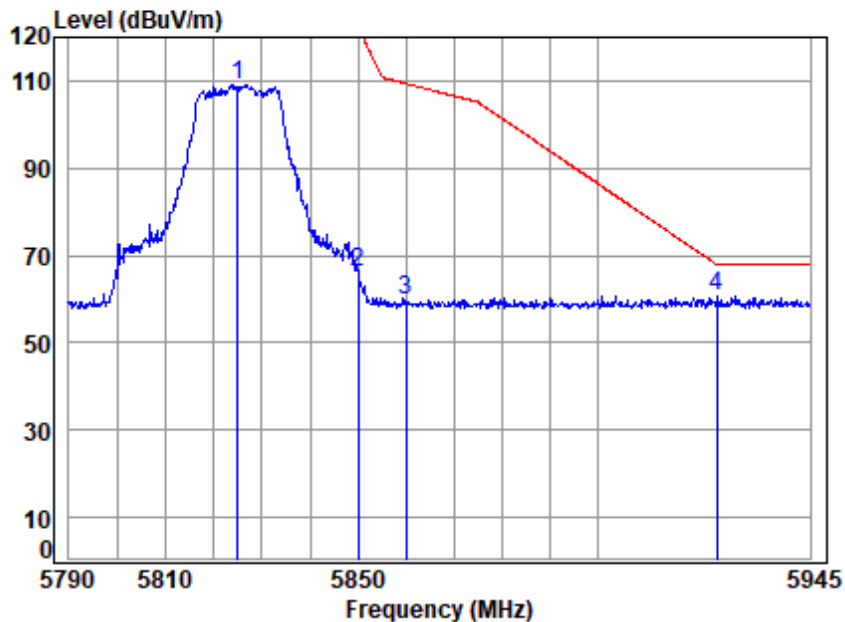

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5825 Band edge

: 5.8G Wi-Fi 11n20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
5825.000	10.99	33.50	30.57	95.10	109.02	-----	-----	peak
5850.000	10.95	33.60	30.56	52.14	66.13	122.20	-56.07	peak
5860.000	10.94	33.58	30.56	45.69	59.65	109.40	-49.75	peak
5925.244	10.87	33.55	30.53	46.96	60.85	68.20	-7.35	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

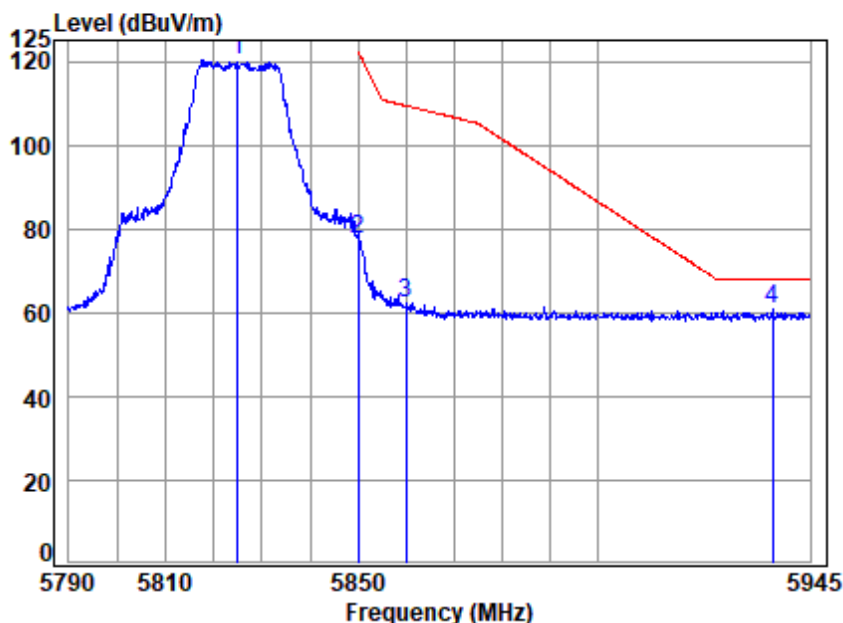

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5825 Band edge
: 5.8G Wi-Fi 11n20


		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	5825.000	10.99	33.50	30.57	106.41	120.33	-----	----- peak
2	5850.000	10.95	33.60	30.56	63.49	77.48	122.20	-44.72 peak
3	5860.000	10.94	33.58	30.56	48.25	62.21	109.40	-47.19 peak
4 pp	5936.996	10.86	33.57	30.53	47.05	60.95	68.20	-7.25 peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

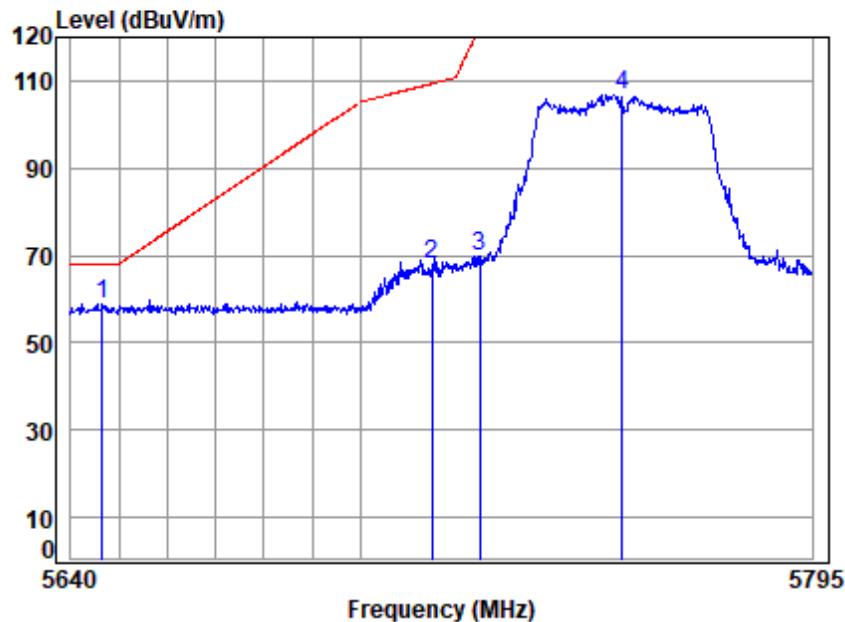

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 5646.579	10.48	33.09	30.64	46.01	58.94	68.20	-9.26	peak
2 5715.000	10.63	33.23	30.61	54.62	67.87	109.40	-41.53	peak
3 5725.000	10.68	33.25	30.61	56.40	69.72	122.20	-52.48	peak
4 5755.000	10.81	33.31	30.60	93.15	106.67	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

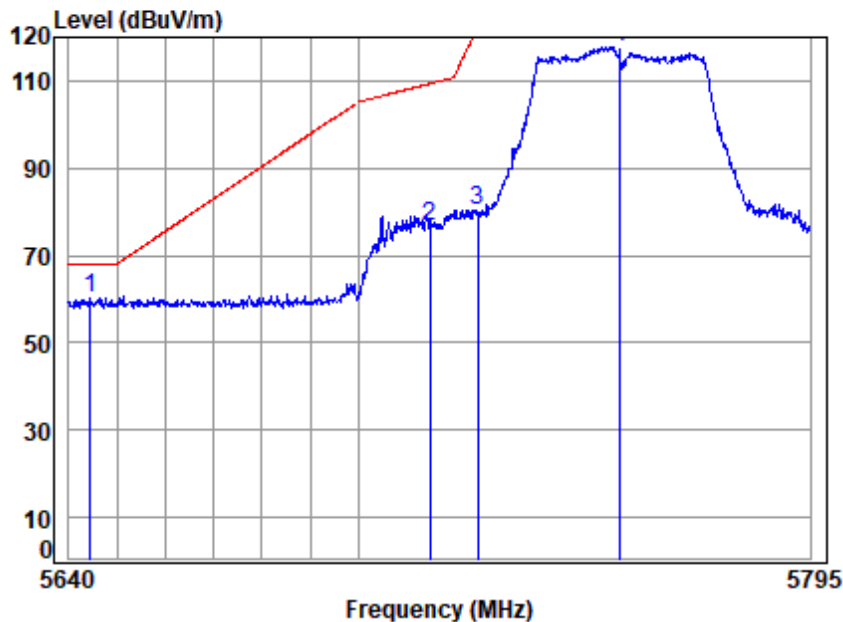

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5755 Band edge

: 5.8G Wi-Fi 11n40


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5644.436	10.48	33.09	30.64	47.36	60.29	68.20	-7.91	peak
2	5715.000	10.63	33.23	30.61	63.52	76.77	109.40	-32.63	peak
3	5725.000	10.68	33.25	30.61	66.85	80.17	122.20	-42.03	peak
4	5755.000	10.81	33.31	30.60	104.40	117.92	-----	-----	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

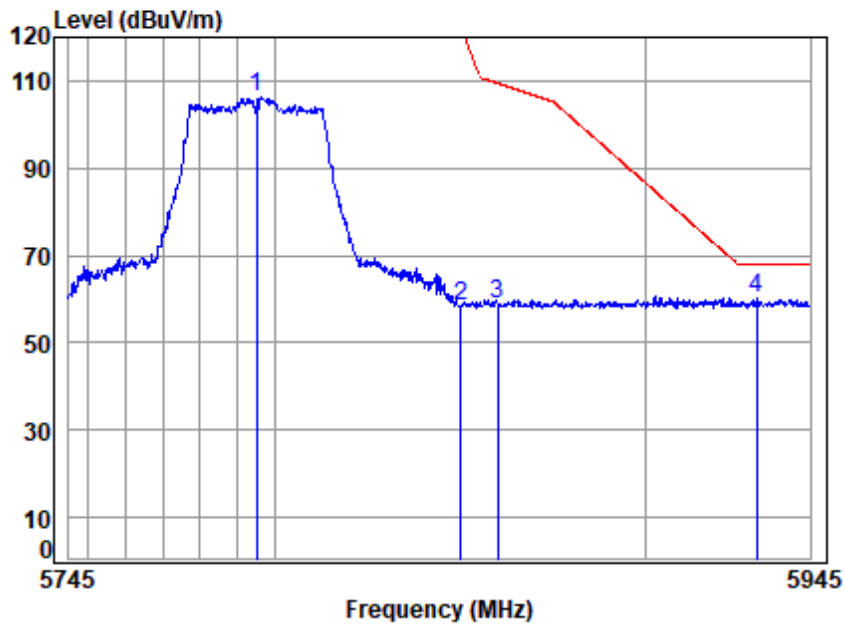

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	92.55	106.36	-----	-----	peak
2	5850.000	10.95	33.60	30.56	44.57	58.56	122.20	-63.64	peak
3	5860.000	10.94	33.58	30.56	45.02	58.98	109.40	-50.42	peak
4 pp	5930.370	10.87	33.56	30.53	46.25	60.15	68.20	-8.05	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

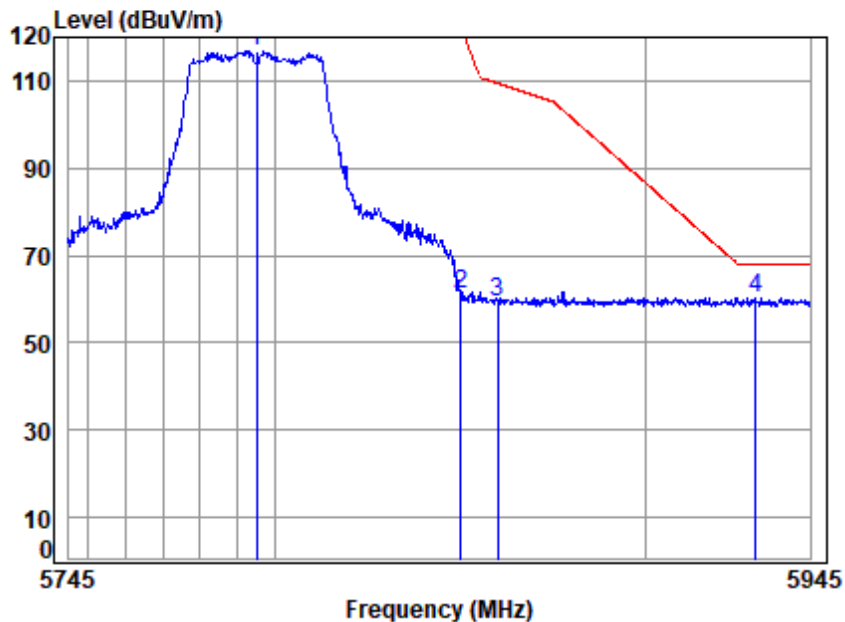

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5795 Band edge

: 5.8G Wi-Fi 11n40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	102.98	116.79	-----	-----	peak
2	5850.000	10.95	33.60	30.56	47.09	61.08	122.20	-61.12	peak
3	5860.000	10.94	33.58	30.56	45.45	59.41	109.40	-49.99	peak
4 pp	5930.167	10.87	33.56	30.53	46.52	60.42	68.20	-7.78	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

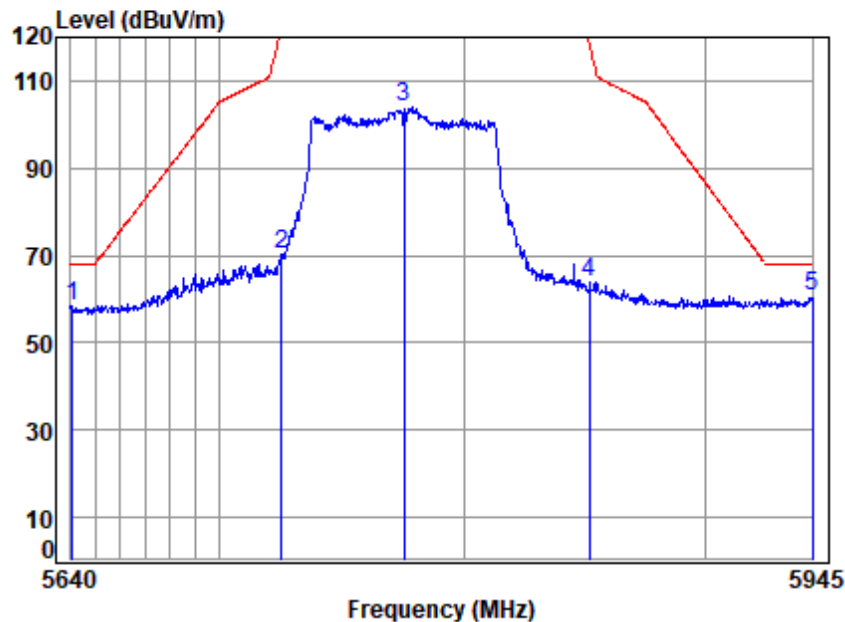

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5775 Band edge

: 5.8G Wi-Fi 11ac80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5640.594	10.47	33.08	30.64	45.36	58.27	68.20	-9.93	Peak
2	5724.993	10.67	33.25	30.61	56.76	70.07	122.18	-52.11	peak
3	5775.000	10.91	33.35	30.59	90.20	103.87	-----	-----	peak
4	5851.808	10.95	33.60	30.56	49.91	63.90	118.08	-54.18	peak
5 pp	5945.000	10.85	33.59	30.52	46.61	60.53	68.20	-7.67	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

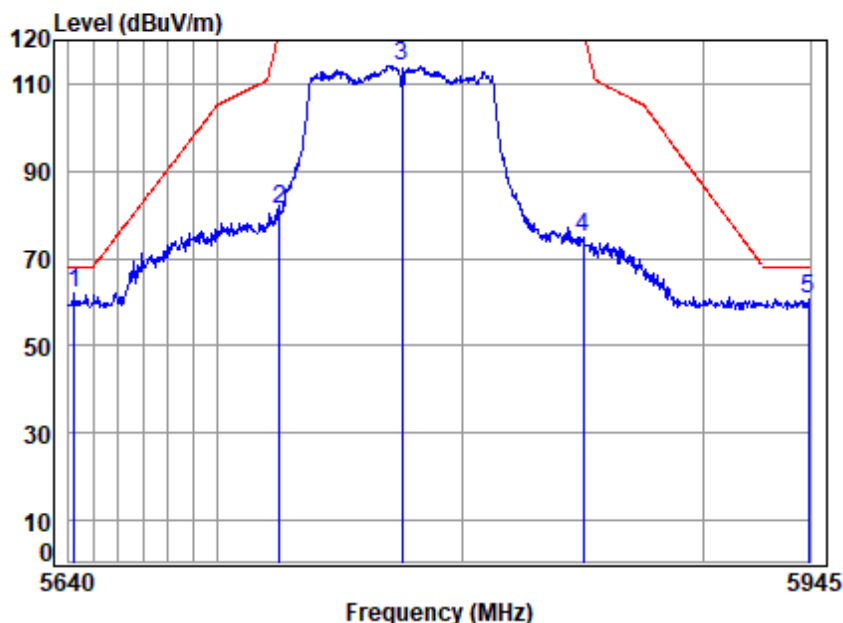

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5775 Band edge

: 5.8G Wi-Fi 11ac80


		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5642.080	10.47	33.08	30.64	49.12	62.03	68.20	-6.17	Peak
2	5724.993	10.67	33.25	30.61	68.05	81.36	122.18	-40.82	peak
3	5775.000	10.91	33.35	30.59	100.60	114.27	-----	-----	peak
4	5849.958	10.96	33.60	30.56	60.60	74.60	-----	-----	peak
5	5944.374	10.85	33.59	30.52	46.82	60.74	68.20	-7.46	peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ax(Full RU0); Bandwidth: 20MHz; Channel: Low

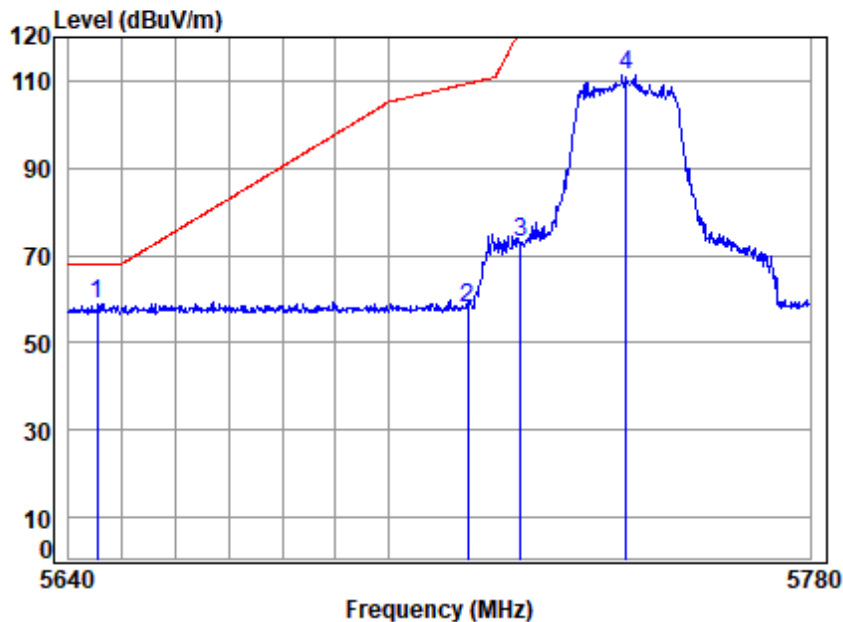

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5645.396	10.48	33.09	30.64	46.02	58.95	68.20	-9.25	peak
2	5715.000	10.63	33.23	30.61	44.48	57.73	109.40	-51.67	peak
3	5725.000	10.68	33.25	30.61	59.87	73.19	122.20	-49.01	peak
4	5745.000	10.77	33.29	30.60	98.10	111.56	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:Low

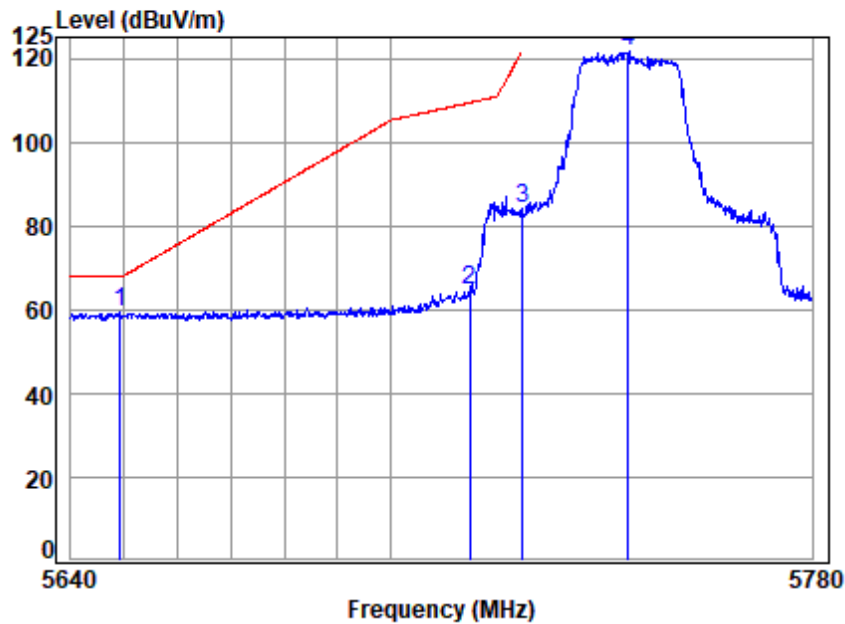

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11ax20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5649.135	10.48	33.10	30.64	46.67	59.61	68.20	-8.59	peak
2	5715.000	10.63	33.23	30.61	51.48	64.73	109.40	-44.67	peak
3	5725.000	10.68	33.25	30.61	70.64	83.96	122.20	-38.24	peak
4	5745.000	10.77	33.29	30.60	108.18	121.64	-----	-----	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

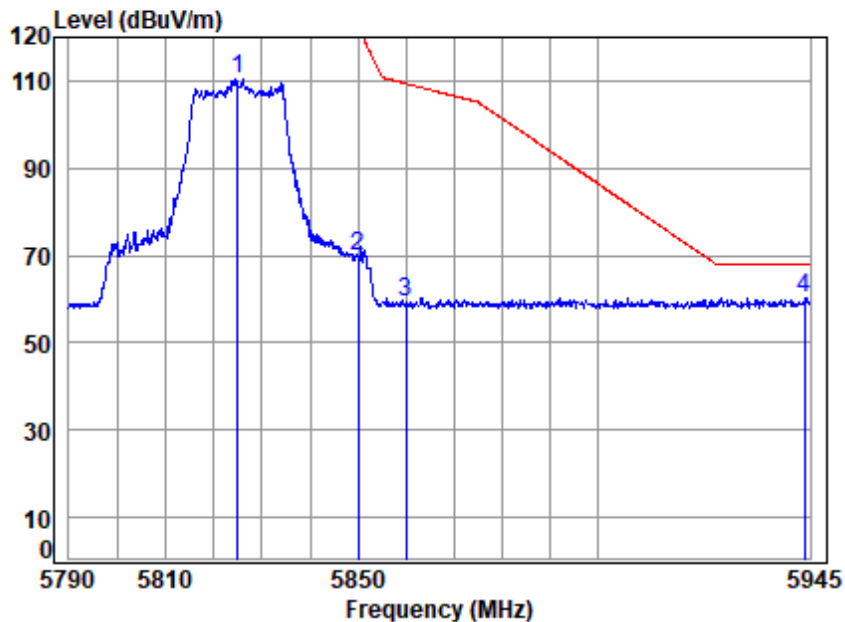

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5825 Band edge

: 5.8G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 5825.000	10.99	33.50	30.57	96.38	110.30	-----	----- peak
2 5850.000	10.95	33.60	30.56	55.84	69.83	122.20	-52.37 peak
3 5860.000	10.94	33.58	30.56	45.41	59.37	109.40	-50.03 peak
4 pp 5943.744	10.86	33.59	30.52	46.48	60.41	68.20	-7.79 peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11ax(Full RU0); Bandwidth:20MHz; Channel:High

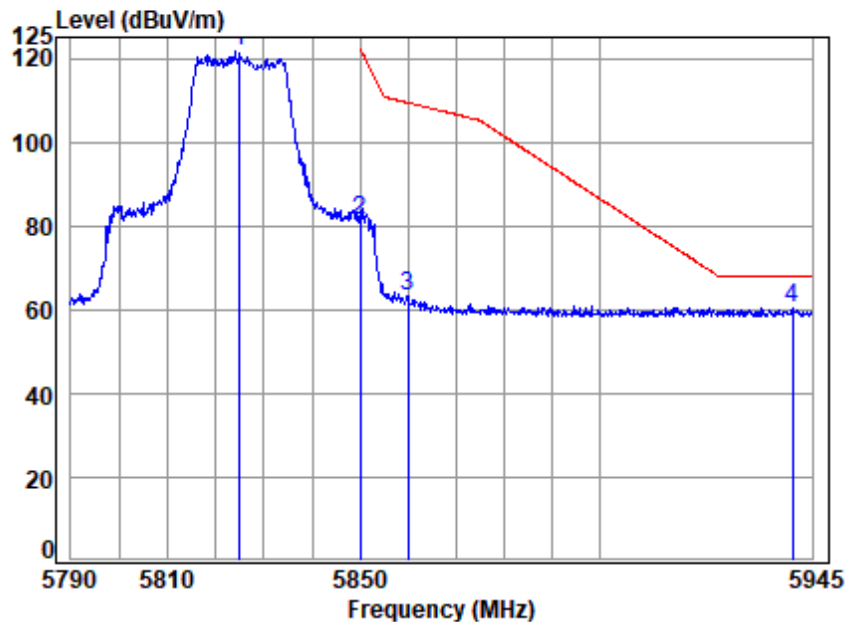

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5825 Band edge

: 5.8G Wi-Fi 11ax20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
5825.000	10.99	33.50	30.57	107.61	121.53	-----	-----	peak
5850.000	10.95	33.60	30.56	67.36	81.35	122.20	-40.85	peak
5860.000	10.94	33.58	30.56	49.17	63.13	109.40	-46.27	peak
5940.761	10.86	33.58	30.52	46.40	60.32	68.20	-7.88	peak



Test Mode: 04; Polarity: Horizontal; Modulation: 802.11be(Full RU0); Bandwidth: 20MHz; Channel: Low

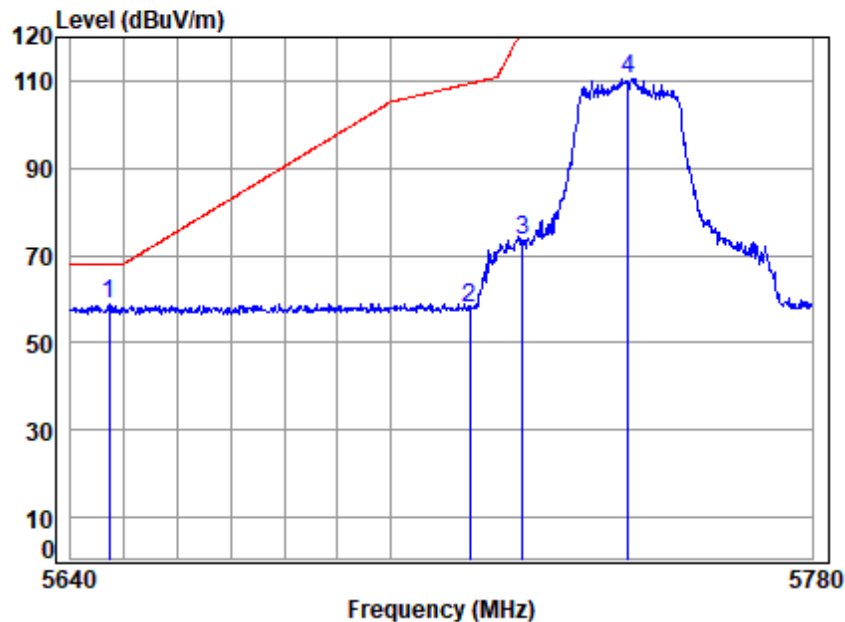

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5647.196	10.48	33.09	30.64	45.94	58.87	68.20	-9.33	peak
2	5715.000	10.63	33.23	30.61	44.52	57.77	109.40	-51.63	peak
3	5725.000	10.68	33.25	30.61	60.04	73.36	122.20	-48.84	peak
4	5745.000	10.77	33.29	30.60	97.13	110.59	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:Low

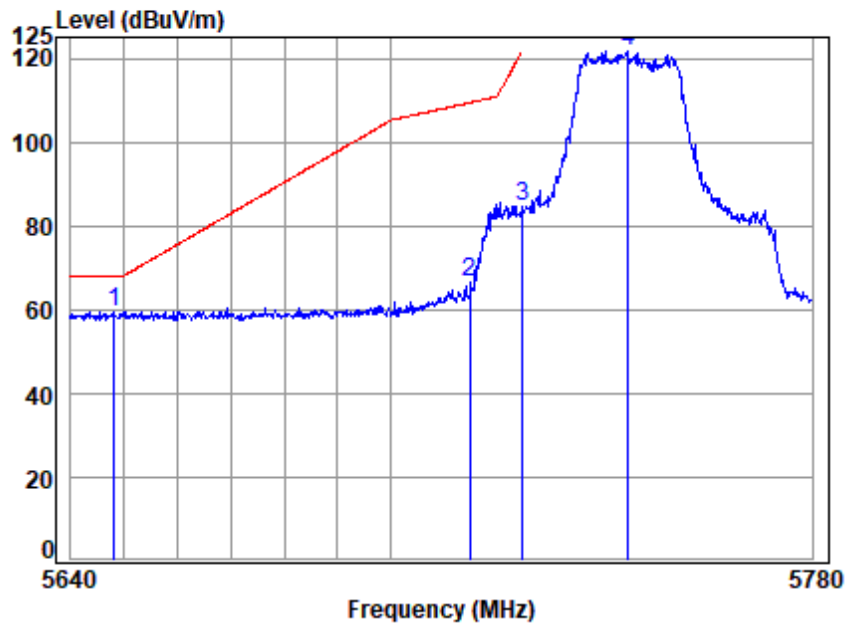

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5745 Band edge

: 5.8G Wi-Fi 11be20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5648.165	10.48	33.10	30.64	46.45	59.39	68.20	-8.81	peak
2	5715.000	10.63	33.23	30.61	53.07	66.32	109.40	-43.08	peak
3	5725.000	10.68	33.25	30.61	71.30	84.62	122.20	-37.58	peak
4	5745.000	10.77	33.29	30.60	108.20	121.66	-----	-----	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

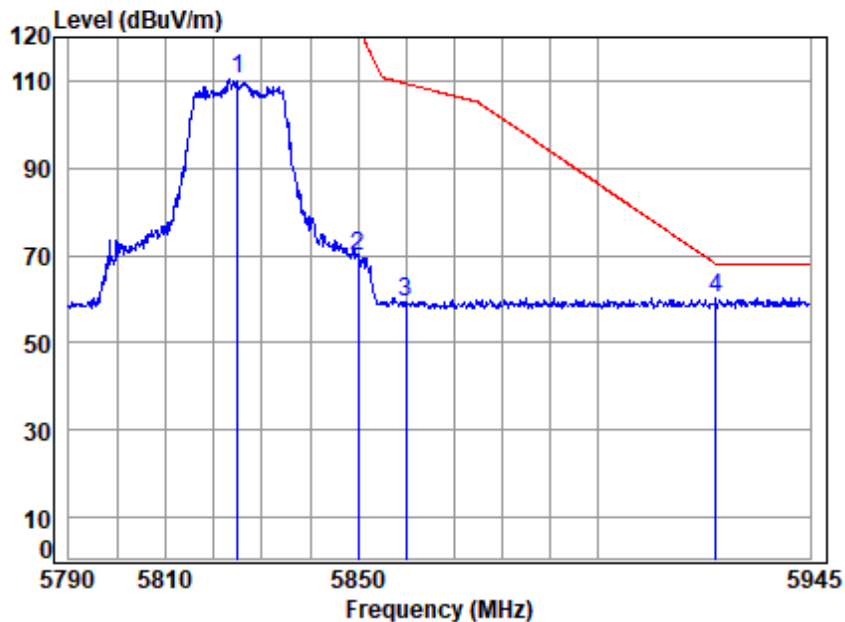

Condition: 3m HORIZONTAL

Job No : 01048TL

Mode : 5825 Band edge

: 5.8G Wi-Fi 11be20

	Cable	Ant	Preamp	Read		Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5825.000	10.99	33.50	30.57	96.40	110.32	-----	-----	peak
2 5850.000	10.95	33.60	30.56	55.76	69.75	122.20	-52.45	peak
3 5860.000	10.94	33.58	30.56	45.26	59.22	109.40	-50.18	peak
4 pp 5925.087	10.87	33.55	30.53	46.55	60.44	68.20	-7.76	peak




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch Testing and Calibration Laboratory

No.1 Workshop, M-10, Middle Section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057 t (86-755) 26012053 f (86-755) 26710594 www.sgs.com.cn
中国·广东·深圳市南山区科技园中区M-10栋1号厂房 邮编: 518057 t (86-755) 26012053 f (86-755) 26710594 sgs.china@sgs.com

Test Mode: 04; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:20MHz; Channel:High

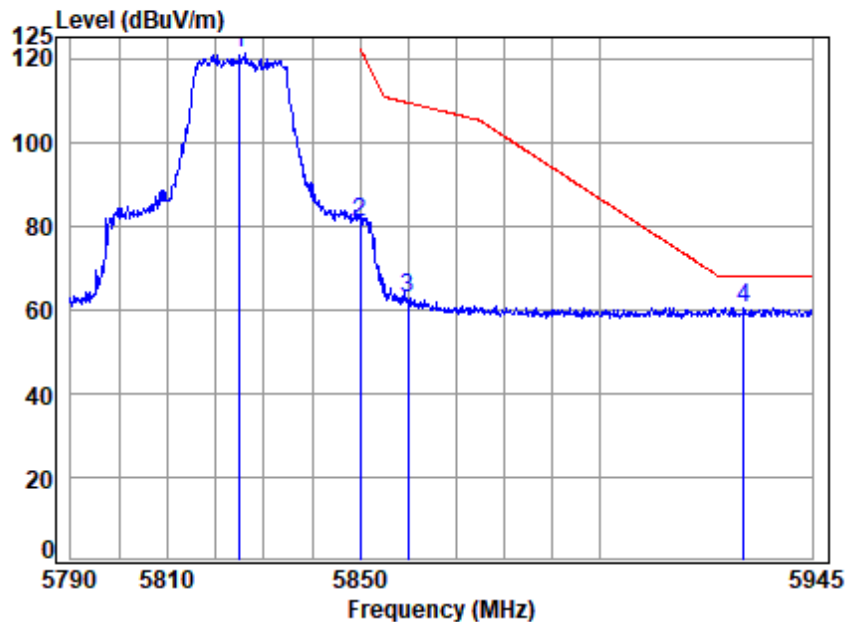

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5825 Band edge

: 5.8G Wi-Fi 11be20

		Cable	Ant	Preamp	Read	Limit	Over	
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5825.000	10.99	33.50	30.57	107.38	121.30	-----	peak
2	5850.000	10.95	33.60	30.56	66.69	80.68	122.20	-41.52 peak
3	5860.000	10.94	33.58	30.56	48.91	62.87	109.40	-46.53 peak
4 pp	5930.568	10.87	33.56	30.53	46.62	60.52	68.20	-7.68 peak



Test Mode: 04; Polarity: Horizontal; Modulation: 802.11be(Full RU0); Bandwidth: 40MHz; Channel: Low

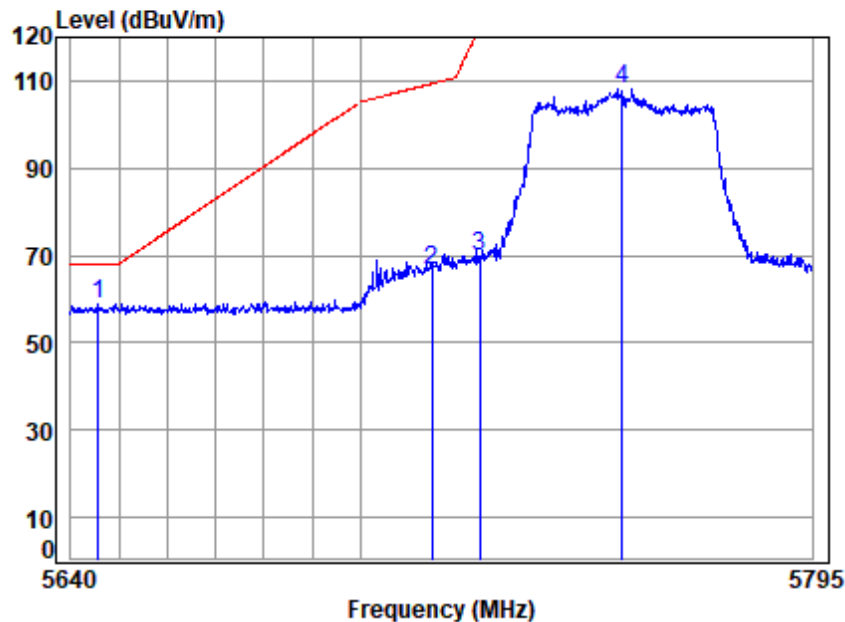

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5755 Band edge

: 5.8G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5645.661	10.48	33.09	30.64	45.88	58.81	68.20	-9.39	peak
2	5715.000	10.63	33.23	30.61	53.25	66.50	109.40	-42.90	peak
3	5725.000	10.68	33.25	30.61	56.70	70.02	122.20	-52.18	peak
4	5755.000	10.81	33.31	30.60	94.65	108.17	-----	-----	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:Low

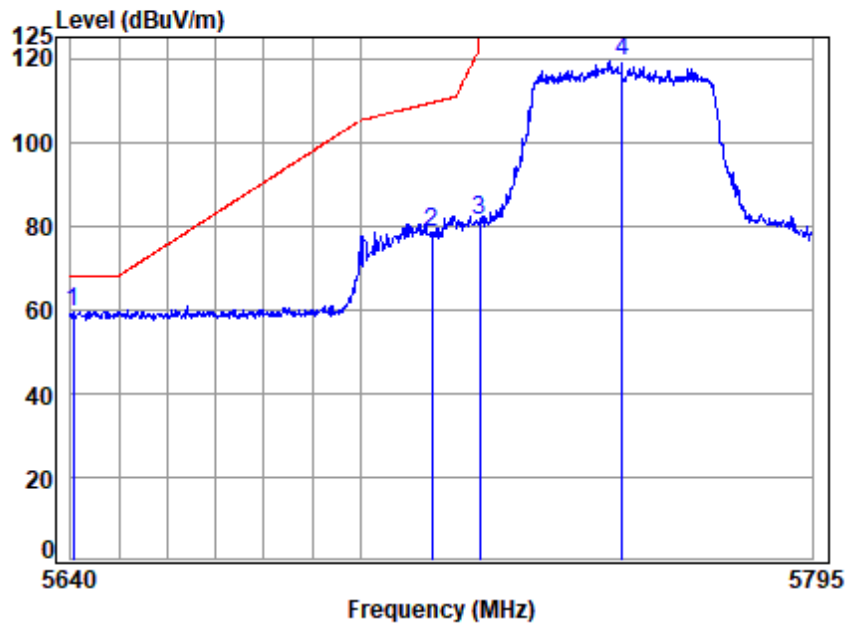

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5755 Band edge

: 5.8G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	5640.459	10.47	33.08	30.64	46.69	59.60	68.20	-8.60	peak
2	5715.000	10.63	33.23	30.61	65.34	78.59	109.40	-30.81	peak
3	5725.000	10.68	33.25	30.61	68.16	81.48	122.20	-40.72	peak
4	5755.000	10.81	33.31	30.60	106.01	119.53	-----	-----	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

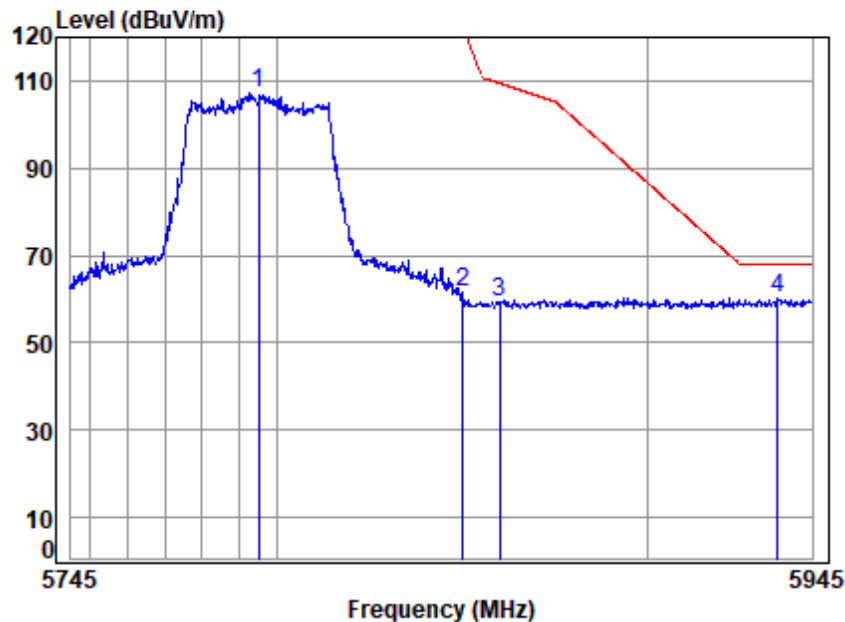

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5795 Band edge

: 5.8G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	93.37	107.18	-----	-----	peak
2	5850.000	10.95	33.60	30.56	47.68	61.67	122.20	-60.53	peak
3	5860.000	10.94	33.58	30.56	45.49	59.45	109.40	-49.95	peak
4 pp	5935.649	10.86	33.57	30.53	46.46	60.36	68.20	-7.84	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:40MHz; Channel:High

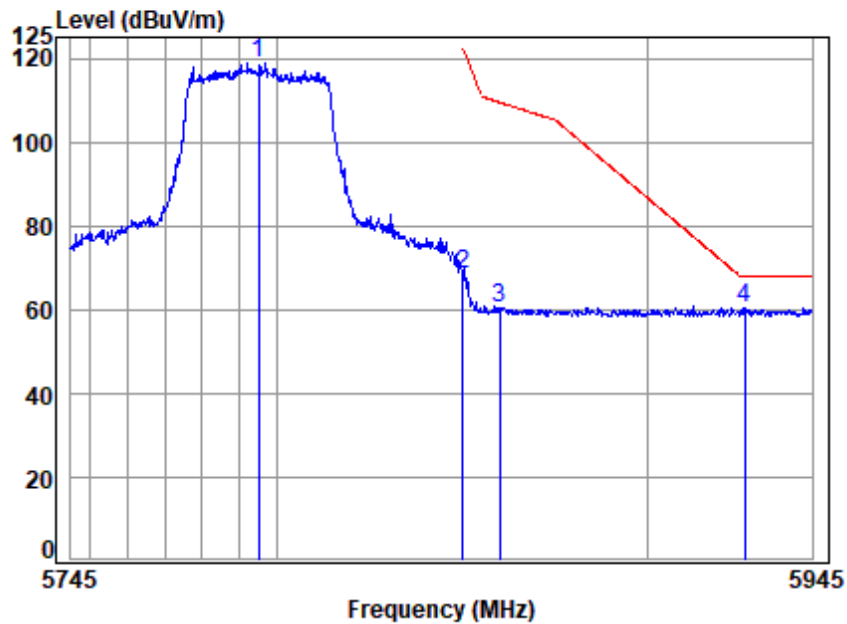

Condition: 3m VERTICAL

Job No : 01048TL


Mode : 5795 Band edge

: 5.8G Wi-Fi 11be40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5795.000	11.00	33.39	30.58	105.03	118.84	-----	-----	peak
2	5850.000	10.95	33.60	30.56	54.37	68.36	122.20	-53.84	peak
3	5860.000	10.94	33.58	30.56	46.47	60.43	109.40	-48.97	peak
4 pp	5926.516	10.87	33.55	30.53	46.33	60.22	68.20	-7.98	peak



Test Mode: 04; Polarity: Horizontal; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

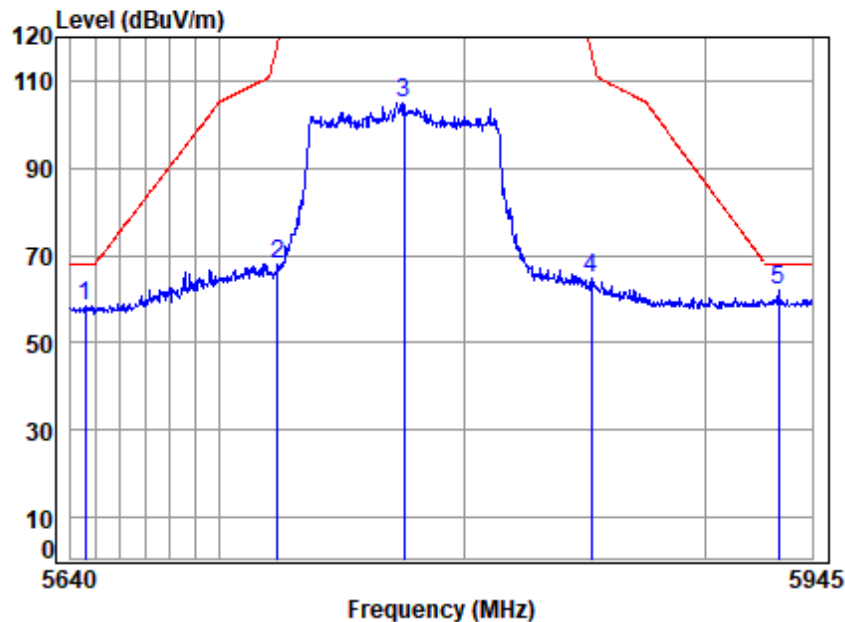

Condition: 3m HORIZONTAL

Job No : 01048TL


Mode : 5775 Band edge

: 5.8G Wi-Fi 11be80

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	5645.646	10.48	33.09	30.64	45.59	58.52	68.20	-9.68	Peak
2	5723.486	10.67	33.25	30.61	54.88	68.19	118.75	-50.56	peak
3	5775.000	10.91	33.35	30.59	91.44	105.11	-----	-----	peak
4	5852.424	10.95	33.60	30.56	50.68	64.67	116.67	-52.00	peak
5 pp	5930.927	10.87	33.56	30.53	48.14	62.04	68.20	-6.16	peak



Test Mode: 04; Polarity: Vertical; Modulation:802.11be(Full RU0); Bandwidth:80MHz; Channel:middle

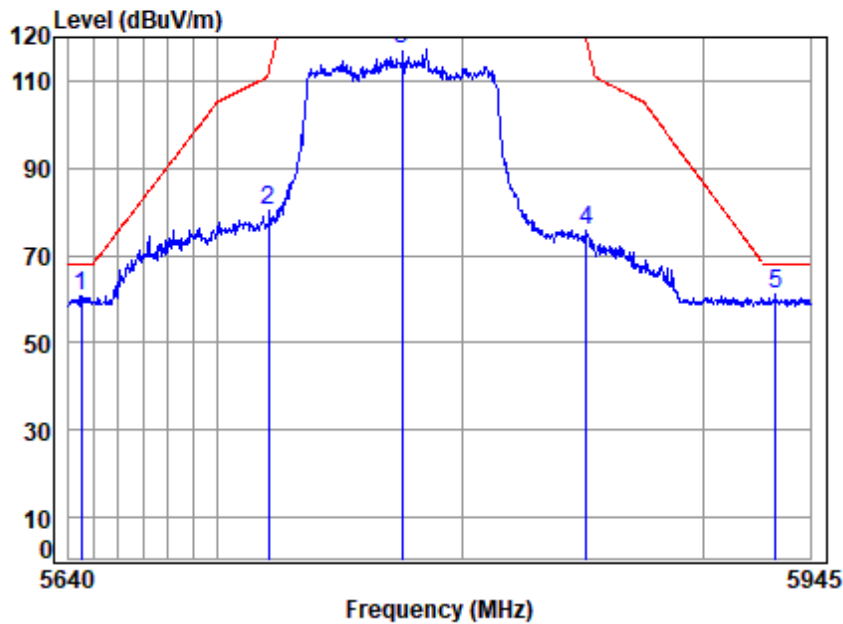

Condition: 3m VERTICAL

Job No : 01048TL

Mode : 5775 Band edge

: 5.8G Wi-Fi 11be80

	Cable	Ant	Preamp	Read	Limit	Over		
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 5645.052	10.48	33.09	30.64	47.92	60.85	68.20	-7.35	Peak
2 5720.773	10.66	33.24	30.61	67.22	80.51	112.56	-32.05	peak
3 5775.000	10.91	33.35	30.59	103.66	117.33	-----	-----	peak
4 5851.191	10.95	33.60	30.56	61.56	75.55	119.48	-43.93	peak
5 pp 5930.302	10.87	33.56	30.53	47.05	60.95	68.20	-7.25	peak



7 Test Setup Photo

Refer to Appendix – Test Setup Photos for SZCR2503001048TL



8 EUT Constructional Details (EUT Photos)

Refer to External and Internal Photos for SZCR2503001048TL

- End of the Report -

