

承 認 書

SPECIFICATION FOR APPROVAL

制 造 商: MANUFACTURER:	Shenzhen HuaZeng Technology Co., Ltd
地 址 : ADDRESS:	2nd Floor, Fenghua cloud valley, Complex Building, No. 2,Phase 2, Chuangxin Industrial Park, First Industrial Zone, Loucun Community, Xinhua Street, Guangming District, Shenzhen
誠 佳 料 號: FINE P/N:	
產 品 型 號: DESC:	D44C
日 期: DATE:	2021/03/1
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
邱海	韦汉	杨城	

版本變更履歷

Version Change History

版本 Rev.	變 更 前 Before Change	變 更 後 After Change	更 改 日 期 Change Date	批 准 Approved By
A.0	新发行	----	2021/3/1	邱海

SPECIFICATION

產 品 型 號:

客 戶 CUST:

336

DESC

D44C

料号 Fine P/N:

FYD336001


客户料号 CUST P/N:

A11

版本

Rev: A.0


一、尺寸 DIMENSION:(mm)

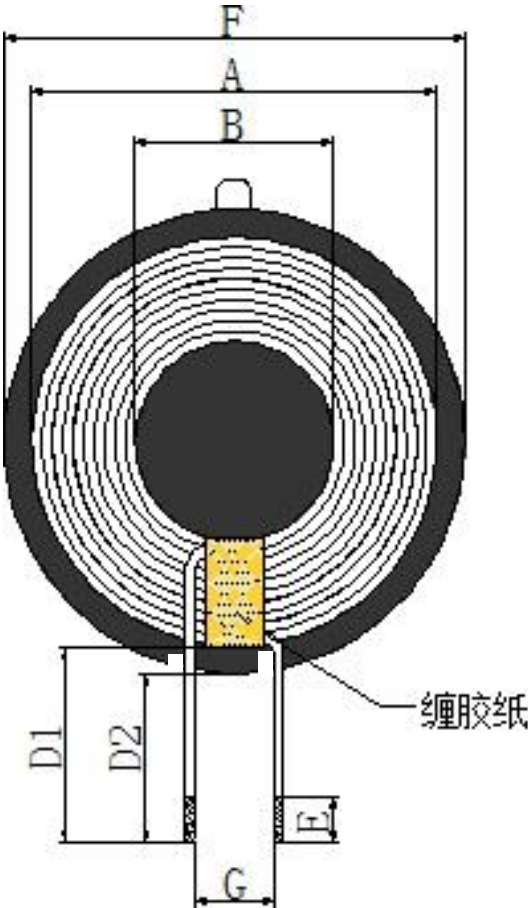

A	40.0±1.5
B	20.5±0.5
C	1.0±0.05
D1	20±1
D2	16±1
F	44±1
G	10.0 ref
H	2.5 Max
I	5.3 ref

- 注:
- 1.线圈贴磁片，磁片尺寸 44±1mm,内孔 5.3mm,厚度为 0.8.0±0.2mm。
 - 2.线圈出线位置缠5mm(ref)宽度高温胶纸 1-2Ts;
 - 3.磁片前面贴圆形直径 43mm(ref)白色双面胶,内孔 6.0mm (ref)，（必须加带孔双面胶）。

二、原理图 SCHEMATIC DIAGRAM:

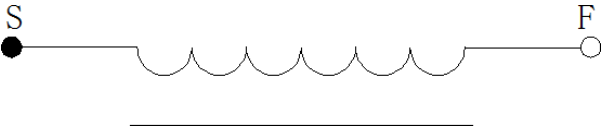

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	漆包线 0.08*24*2P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	3.8uH ±20%单独线圈	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.8uH ±15%加磁片	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	≤50m Ω		LCZ METER 502B

拟制/日期 PREPARED BY/DATE

邱海 2021/03/1

审核/日期 CHECKED BY/DATE

韦汉 2021/03/1