



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1607142685-WF-02

Compiled by:
(position+printed name+signature)

Jacky Chen
(File administrators)

Jacky Chen

Tested by:
(position+printed name+signature)

Allen Wang
(Test Engineer)

Allen Wang

Approved by:
(position+printed name+signature)

Tracy Qi
(Manager)

Tracy Qi

Product Name.....: WaRP7

Model/Type reference: WaRP7

List Model(s).....: N/A

Trade Mark: N/A

FCC ID: 2AFLY-WARP7

Applicant's name: Embest Technology Co.,Ltd

Address of applicant: Tower B 4/F,Shanshui Building, Nanshan Yungu Innovation
Industry Park, Liuxian Ave.No.1183, Nanshan District, Shenzhen,
Guangdong, China

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shaheixi Road,
Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247: Operation within the bands 902-928 MHz,
2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Jul. 14, 2016

Date of Test Date.....: Jul. 20, 2016–Aug. 10, 2016

Data of Issue.....: Aug. 11, 2016

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1607142685-WF-02	Aug. 11, 2016 Date of issue
--------------------------	----------------------------	--------------------------------

Equipment under Test : WaRP7

Model /Type : WaRP7

Listed Models : N/A

Applicant : Embest Technology Co.,Ltd

Address : Tower B 4/F,Shanshui Building, Nanshan Yungu
Innovation Industry Park, Liuxian Ave.No.1183,
Nanshan District, Shenzhen, Guangdong, China

Manufacturer : Embest Technology Co.,Ltd

Address : Tower B 4/F,Shanshui Building, Nanshan Yungu
Innovation Industry Park, Liuxian Ave.No.1183,
Nanshan District, Shenzhen, Guangdong, China

Test result	Pass *
--------------------	---------------

*In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****

Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2016-08-11	CTL1607142685-WF-02	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	9
2.6. MODIFICATIONS.....	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	13
3.3. MAXIMUM PEAK OUTPUT POWER	19
3.4. 20dB BANDWIDTH.....	23
3.5. FREQUENCY SEPARATION	27
3.6. NUMBER OF HOPPING FREQUENCY.....	29
3.7. TIME OF OCCUPANCY (DWEIL TIME).....	31
3.8. OUT-OF-BAND EMISSIONS	35
3.9. PSEUDORANDOM FREQUENCY HOPPING SEQUENCE.....	43
3.10. ANTENNA REQUIREMENT.....	44
4. TEST SETUP PHOTOS OF THE EUT	45
5. PHOTOS OF THE EUT.....	47

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

[KDB558074 D01 V03r03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(1)(i)	20dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Peak Output Power	PASS
FCC Part 15.247(b)	Pseudorandom Frequency Hopping Sequence	PASS
FCC Part 15.247(a)(1)(iii)	Number of hopping frequency& Time of Occupancy	PASS
FCC Part 15.247(a)(1)	Frequency Separation	PASS
FCC Part 15.205/15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge Compliance of RF Emission	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	WaRP7
Model/Type reference:	WaRP7
Power supply:	DC 3.7V from battery
Hardware version:	REV 2.0
Software version:	V1.0
Bluetooth :	
Version:	Supported BT3.0
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	2.5dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Preliminary tests were performed in each mode and packet length of BT, and found worst case as below, finally test were conducted at those mode and recorded in this report.

Test Items	Worst case
Conducted Emissions	DH5 Middle channel
Radiated Emissions and Band Edge	DH5
Maximum Conducted Output Power	DH5/2DH5/3DH5
20dB Bandwidth	DH5/2DH5/3DH5
Frequency Separation	DH5/2DH5/3DH5 Middle channel
Number of hopping frequency	DH5/2DH5/3DH5
Time of Occupancy (Dwell Time)	DH1/DH3/DH5 Middle channel 2DH1/2DH3/2DH5 Middle channel 3DH1/3DH3/3DH5 Middle channel
Out-of-band Emissions	DH5/2DH5/3DH5

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2016/06/02	2017/06/01
LISN	R&S	ESH2-Z5	860014/010	2016/06/02	2017/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2016/06/02	2017/06/01
EMI Test Receiver	R&S	ESCI	103710	2016/06/02	2017/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2016/05/21	2017/05/20
Spectrum Analyzer	Agilent	N9020	US46220290	2016/01/17	2017/01/16
Controller	EM Electronics	Controller EM 1000	N/A	2016/05/21	2017/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2016/05/19	2017/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2016/05/19	2017/05/18
Amplifier	Agilent	8349B	3008A02306	2016/05/19	2017/05/18
Amplifier	Agilent	8447D	2944A10176	2016/05/19	2017/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2016/05/20	2017/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2016/05/20	2017/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2016/05/20	2017/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2016/06/02	2017/06/01

RF Cable	Megalon	RF-A303	N/A	2016/06/02	2017/06/01
----------	---------	---------	-----	------------	------------

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AFly-WARP7 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.



3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

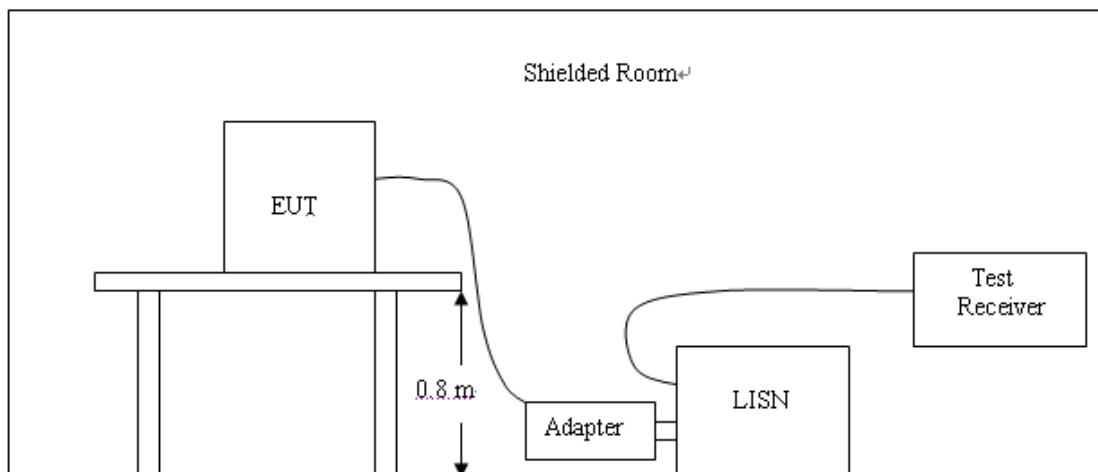

TEST PROCEDURE


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Remark: All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of 8DPSK High Channel was reported as below:

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

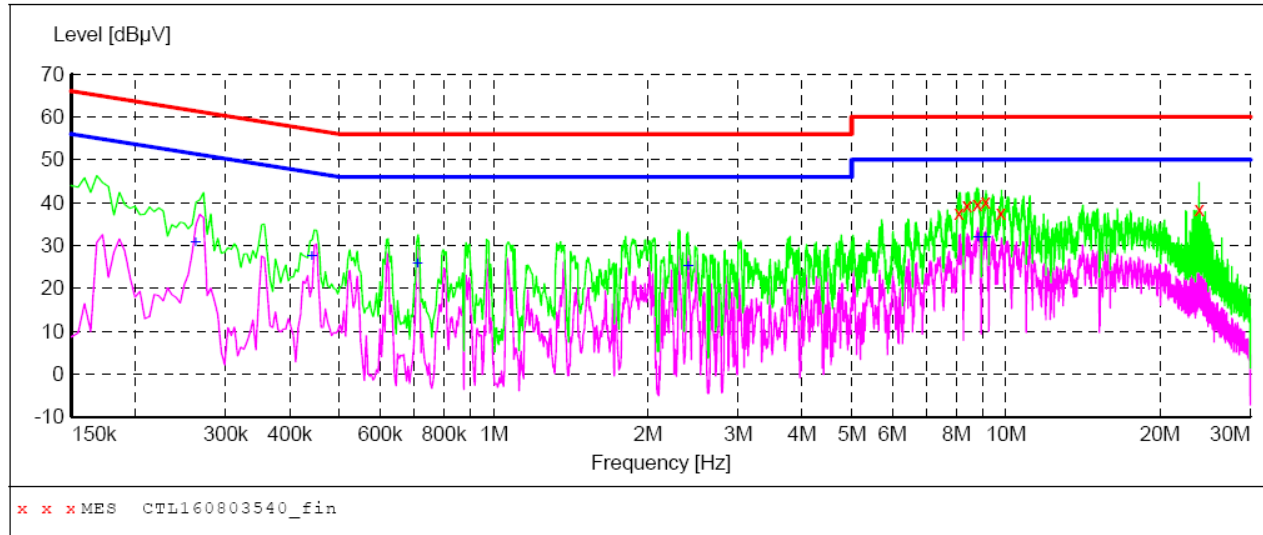***MEASUREMENT RESULT: "CTL160803540_fin"***

8/3/2016 8:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
8.090000	37.70	10.5	60	22.3	QP	L1	GND
8.396000	39.20	10.6	60	20.8	QP	L1	GND
8.792000	39.60	10.6	60	20.4	QP	L1	GND
9.122000	40.30	10.6	60	19.7	QP	L1	GND
9.770000	37.50	10.6	60	22.5	QP	L1	GND
23.822000	38.50	11.1	60	21.5	QP	L1	GND


MEASUREMENT RESULT: "CTL160803540_fin2"

8/3/2016 8:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.262000	30.50	10.2	51	20.9	AV	L1	GND
0.442000	27.40	10.2	47	19.6	AV	L1	GND
0.710000	25.60	10.2	46	20.4	AV	L1	GND
2.396000	25.00	10.4	46	21.0	AV	L1	GND
8.822000	31.80	10.6	50	18.2	AV	L1	GND
9.134000	31.90	10.6	50	18.1	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

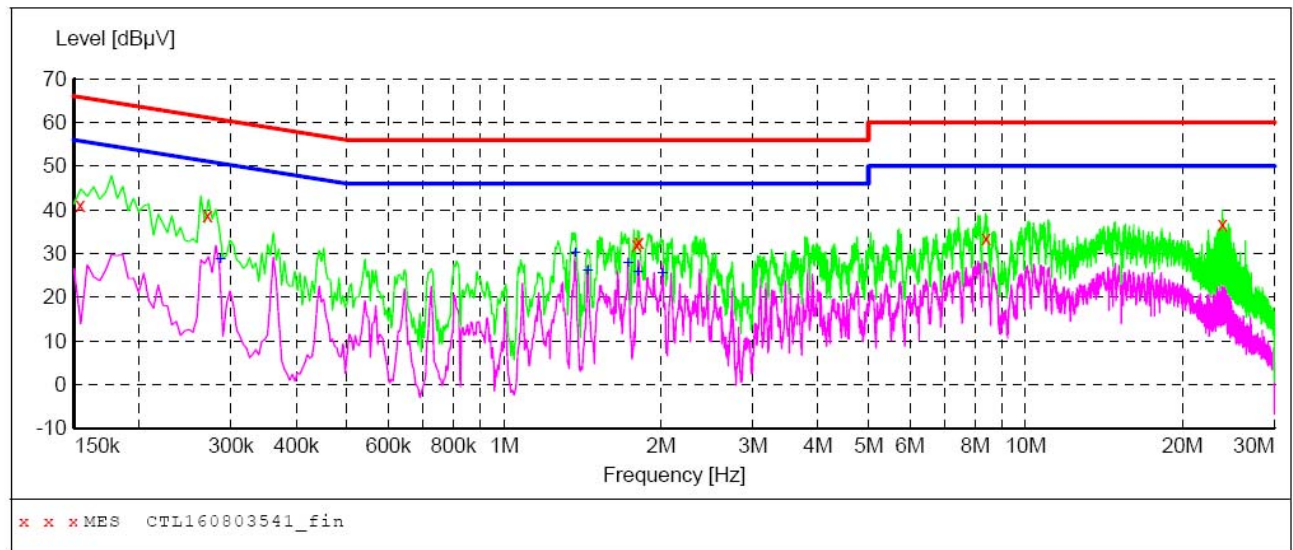**MEASUREMENT RESULT: "CTL160803541_fin"**

8/3/2016 8:52PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.154000	41.10	10.2	66	24.7	QP	N	GND
0.270000	38.70	10.2	61	22.4	QP	N	GND
1.796000	32.10	10.3	56	23.9	QP	N	GND
1.814000	32.60	10.3	56	23.4	QP	N	GND
8.390000	33.40	10.6	60	26.6	QP	N	GND
23.822000	36.70	11.1	60	23.3	QP	N	GND

MEASUREMENT RESULT: "CTL160803541_fin2"

8/3/2016 8:52PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.286000	28.60	10.2	51	22.0	AV	N	GND
1.370000	30.10	10.3	46	15.9	AV	N	GND
1.448000	26.00	10.3	46	20.0	AV	N	GND
1.730000	27.60	10.3	46	18.4	AV	N	GND
1.808000	25.50	10.3	46	20.5	AV	N	GND
2.012000	25.20	10.4	46	20.8	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

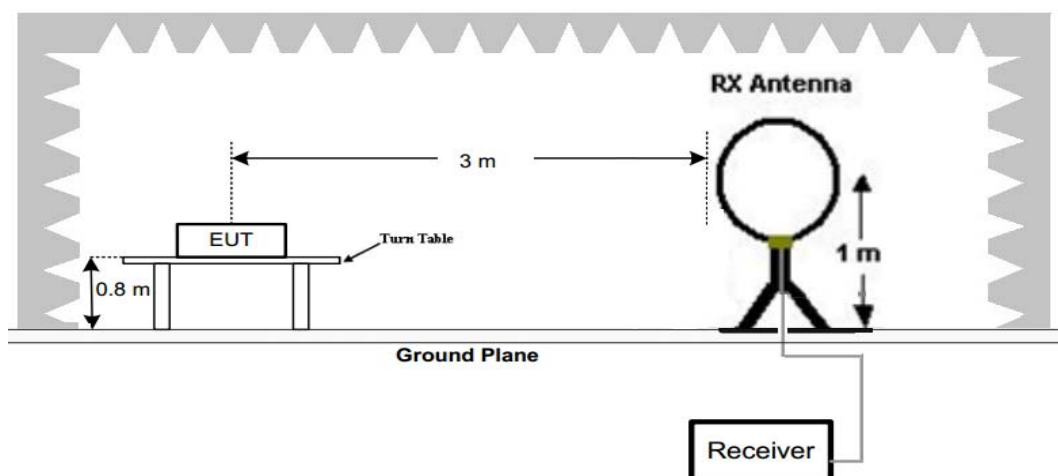

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

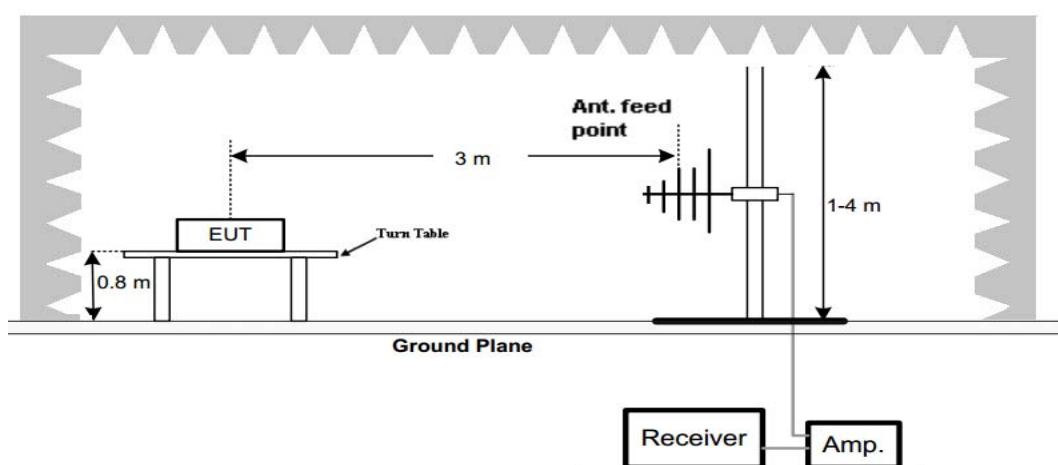

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

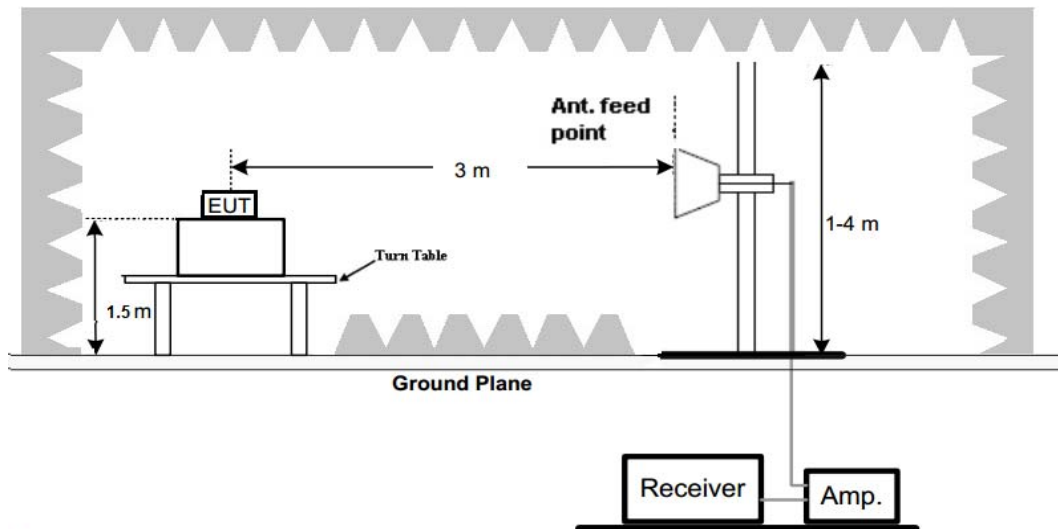**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. For below 1GHz testing recorded worst at GFSK DH5 low channel.
3. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

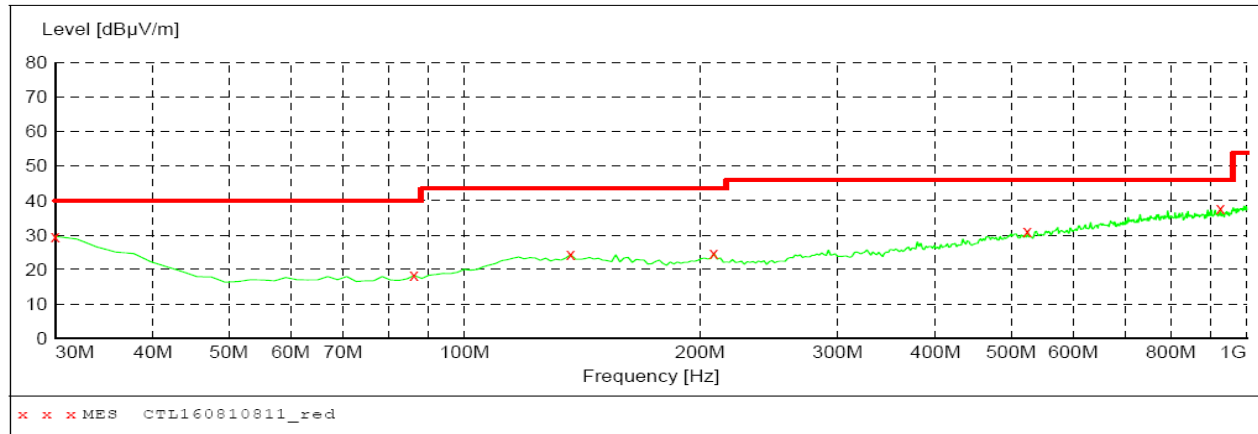**MEASUREMENT RESULT: "CTL160810811_red"**


8/10/2016 7:51PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	29.60	20.8	40.0	10.4	---	0.0	0.00	HORIZONTAL
86.260000	18.30	9.0	40.0	21.7	---	0.0	0.00	HORIZONTAL
136.700000	24.30	14.4	43.5	19.2	---	0.0	0.00	HORIZONTAL
208.480000	24.80	14.0	43.5	18.7	---	0.0	0.00	HORIZONTAL
524.700000	31.20	20.4	46.0	14.8	---	0.0	0.00	HORIZONTAL
926.280000	37.70	26.2	46.0	8.3	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description:		Field Strength			
Start	Stop	Detector	Meas. Time	IF Bandw.	Transducer
Frequency 30.0 MHz	Frequency 1.0 GHz	MaxPeak	300.0 ms	120 kHz	JB1

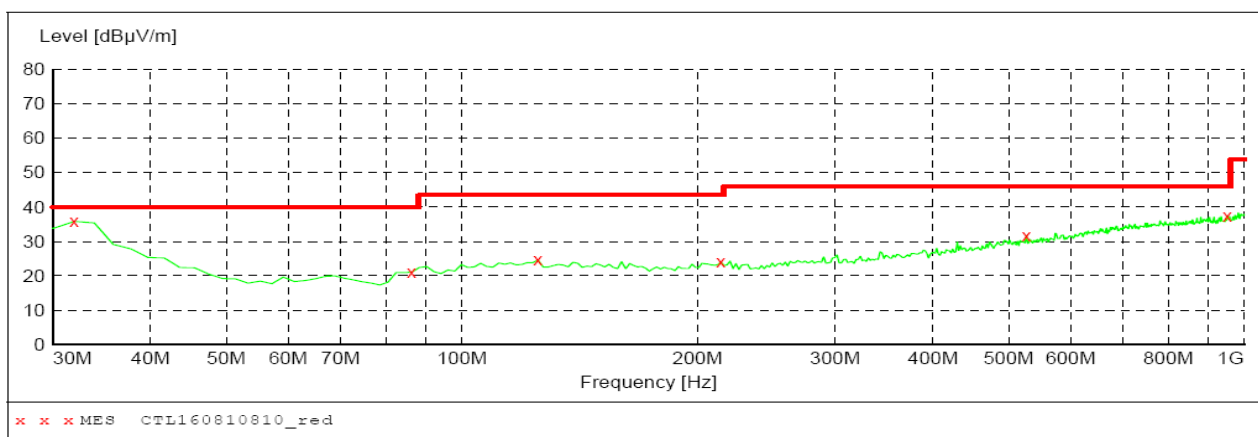**MEASUREMENT RESULT: "CTL160810810_red"**

8/10/2016 7:48PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
31.940000	35.80	19.2	40.0	4.2	---	0.0	0.00	VERTICAL
86.260000	21.00	9.0	40.0	19.0	---	0.0	0.00	VERTICAL
125.060000	24.60	14.6	43.5	18.9	---	0.0	0.00	VERTICAL
214.300000	24.00	14.0	43.5	19.5	---	0.0	0.00	VERTICAL
526.640000	31.70	20.4	46.0	14.3	---	0.0	0.00	VERTICAL
951.500000	37.50	26.5	46.0	8.5	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz**GFSK (above 1GHz)**

Frequency(MHz):				2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	94.25	PK	--	--	60.85	28.78	4.61	0.00	33.40
1	2402.00	87.69	AV	--	--	54.29	28.78	4.61	0.00	33.40
2	2390.00	36.58	PK	74	37.42	3.26	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	44.48	PK	74	29.52	11.09	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	55.59	PK	74	18.41	51.08	33.49	6.91	35.89	4.51
4	4804.00	47.54	AV	54	6.46	43.03	33.49	6.91	35.89	4.51
5	5005.25	43.21	PK	74	30.79	36.41	34.00	7.03	34.23	6.80
5	5005.25	--	AV	54	--	--	--	--	--	--
6	7206.00	46.48	PK	74	27.52	35.37	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	94.35	PK	--	--	60.95	28.78	4.61	0.00	33.40
1	2402.00	87.54	AV	--	--	54.14	28.78	4.61	0.00	33.40
2	2390.00	36.58	PK	74	37.42	3.26	28.72	4.60	0.00	33.32
2	2390.00	--	AV	54	--	--	--	--	--	--
3	2400.00	44.78	PK	74	29.22	11.39	28.78	4.61	0.00	33.39
3	2400.00	--	AV	54	--	--	--	--	--	--
4	4804.00	55.25	PK	74	18.75	50.74	33.49	6.91	35.89	4.51
4	4804.00	46.41	AV	54	7.59	41.90	33.49	6.91	35.89	4.51
5	5211.75	42.98	PK	74	31.02	35.59	34.55	7.15	34.31	7.39
5	5211.75	--	AV	54	--	--	--	--	--	--
6	7206.00	47.22	PK	74	26.78	36.11	36.95	9.18	35.03	11.11
6	7206.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

Frequency(MHz):				2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	94.36	PK	--	--	60.85	28.85	4.66	0.00	33.51
1	2441.00	87.52	AV	--	--	54.01	28.85	4.66	0.00	33.51
2	4120.50	40.84	PK	74	33.16	36.29	32.81	6.47	34.73	4.55
2	4120.50	--	AV	54	--	--	--	--	--	--
3	4882.00	55.15	PK	74	18.85	48.89	33.60	6.95	34.30	6.26
3	4882.00	46.52	AV	54	7.48	40.26	33.60	6.95	34.30	6.26
4	5125.25	43.49	PK	74	30.51	36.16	34.38	7.10	34.16	7.33
4	5125.25	--	AV	54	--	--	--	--	--	--
5	7323.00	46.49	PK	74	27.51	34.79	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	94.26	PK	--	--	60.75	28.85	4.66	0.00	33.51
1	2441.00	87.19	AV	--	--	53.68	28.85	4.66	0.00	33.51
2	4112.50	40.52	PK	74	33.48	35.98	32.81	6.47	34.74	4.54
2	4112.50	--	AV	54	--	--	--	--	--	--
3	4882.00	56.63	PK	74	17.37	50.37	33.60	6.95	34.30	6.26
3	4882.00	47.52	AV	54	6.48	41.26	33.60	6.95	34.30	6.26
4	5135.50	42.89	PK	74	31.11	35.53	34.40	7.11	34.15	7.36
4	5135.50	--	AV	54	--	--	--	--	--	--
5	7323.00	46.48	PK	74	27.52	34.78	37.46	9.23	35.00	11.70
5	7323.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3 MHz VBW 3 MHz Peak detectors are for PK Value; RMS detector is for AV value.

Frequency(MHz):				2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	95.26	PK	--	--	61.64	28.92	4.70	0.00	33.62
1	2480.00	88.15	AV	--	--	54.53	28.92	4.70	0.00	33.62
2	2483.50	45.26	PK	74	28.74	11.63	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	40.25	PK	74	33.75	6.57	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	55.96	PK	74	18.04	51.04	33.84	7.00	35.92	4.92
4	4960.00	47.54	AV	54	6.46	42.62	33.84	7.00	35.92	4.92
5	5250.50	43.23	PK	74	30.77	35.79	34.59	7.17	34.32	7.44
5	5250.50	--	AV	54	--	--	--	--	--	--
6	7440.00	46.74	PK	74	27.26	34.79	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):				2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	96.01	PK	--	--	62.39	28.92	4.70	0.00	33.62
1	2480.00	89.01	AV	--	--	55.39	28.92	4.70	0.00	33.62
2	2483.50	45.52	PK	74	28.48	11.89	28.93	4.70	0.00	33.63
2	2483.50	--	AV	54	--	--	--	--	--	--
3	2500.00	39.48	PK	74	34.52	5.80	28.96	4.72	0.00	33.68
3	2500.00	--	AV	54	--	--	--	--	--	--
4	4960.00	56.23	PK	74	17.77	51.31	33.84	7.00	35.92	4.92
4	4960.00	47.41	AV	54	6.59	42.49	33.84	7.00	35.92	4.92
5	5125.75	42.59	PK	74	31.41	35.38	34.38	7.10	34.28	7.21
5	5125.75	--	AV	54	--	--	--	--	--	--
6	7440.00	46.89	PK	74	27.11	34.94	37.64	9.28	34.97	11.95
6	7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value ; RMS detector is for AV value.

3.3. Maximum Peak Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum.

Test Configuration




Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	3.083	30.00	Pass
	39	3.844		
	78	4.841		
π/4DQPSK	00	0.624	30.00	Pass
	39	0.544		
	78	1.060		
8DPSK	00	0.983	30.00	Pass
	39	0.910		
	78	1.423		


Note: 1.The test results including the cable lose.

Test plot as follows:

GFSK Modulation

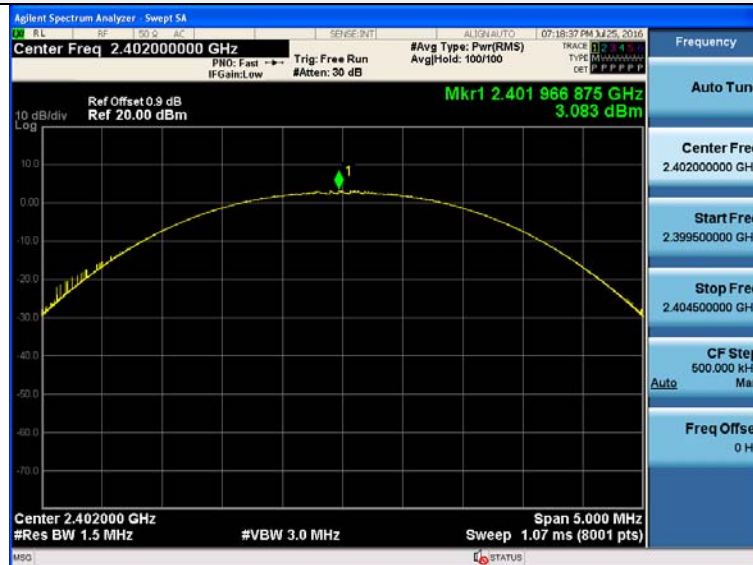


CH00

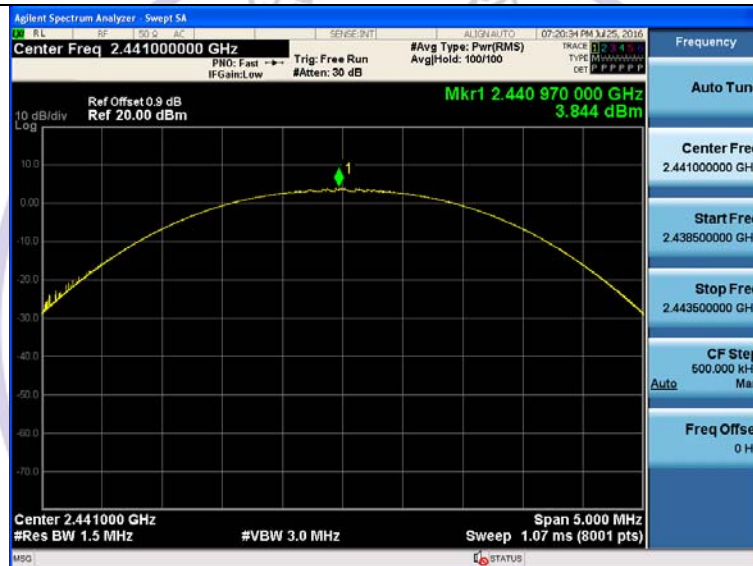


CH39




CH78

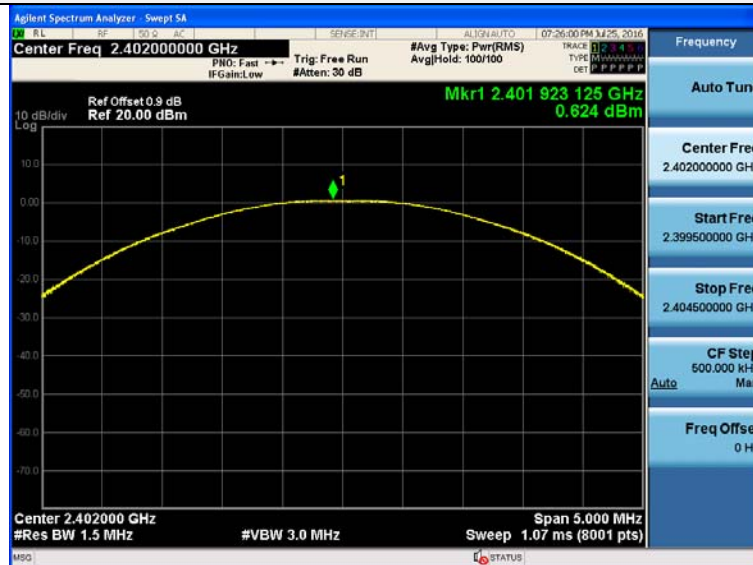$\pi/4$ DQPSK Modulation

CH00

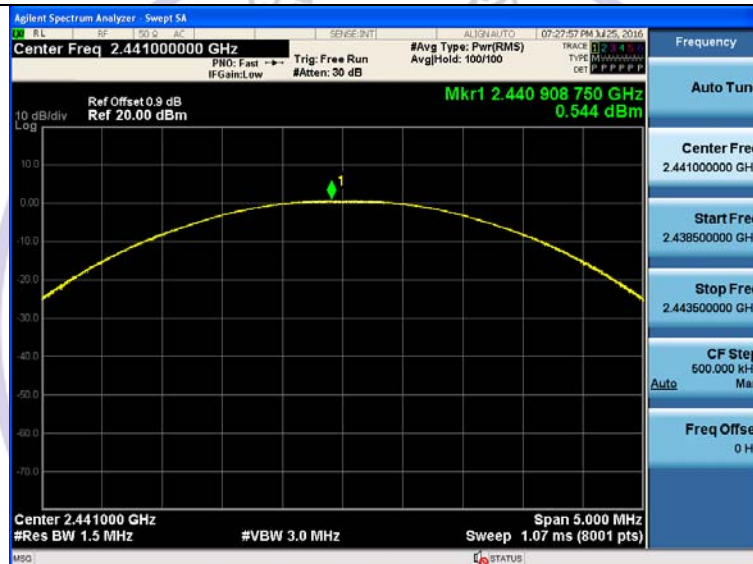


CH39

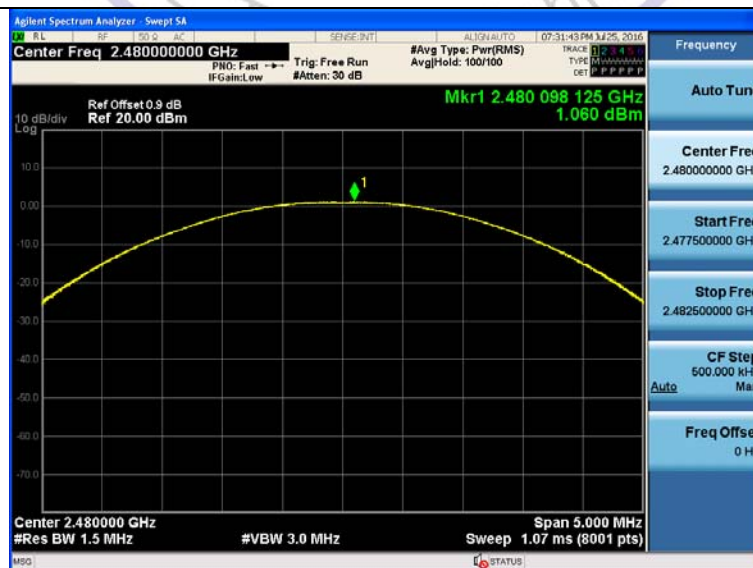


CH78


8DPSK Modulation

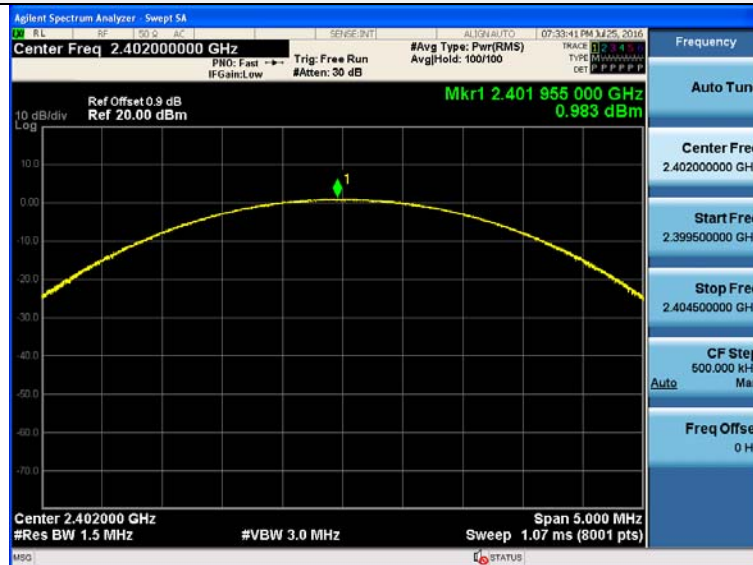

CH00

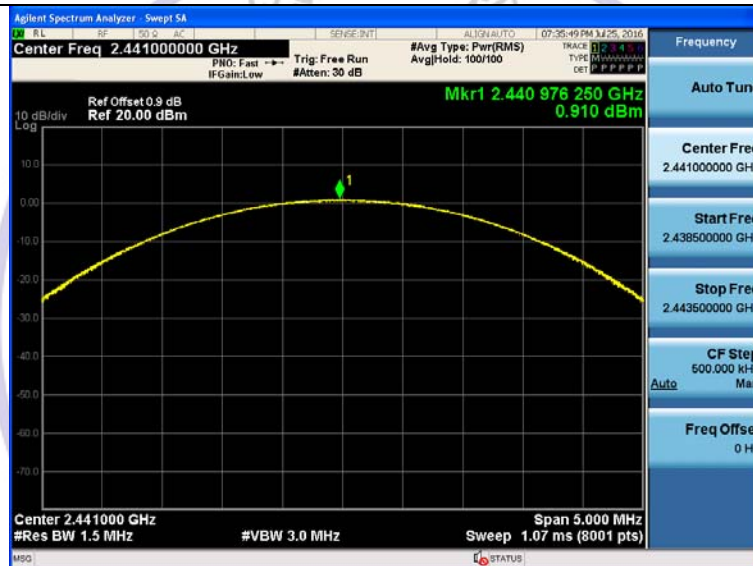

CH39

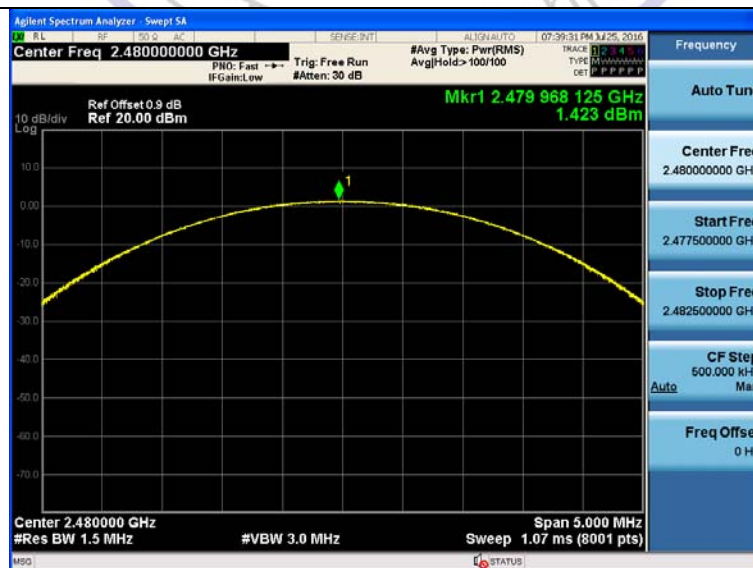

CH78

3.4. 20dB Bandwidth

Limit

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Configuration



Test Results


Modulation	Channel	20dB bandwidth (MHz)	99% OBW(MHz)	Result
GFSK	CH00	0.964	0.886	Pass
	CH39	0.973	0.890	
	CH78	0.968	0.885	
π/4DQPSK	CH00	1.329	1.213	
	CH39	1.353	1.217	
	CH78	1.344	1.206	
8DPSK	CH00	1.315	1.225	
	CH39	1.314	1.216	
	CH78	1.339	1.222	

Test plot as follows:


GFSK Modulation



CH00

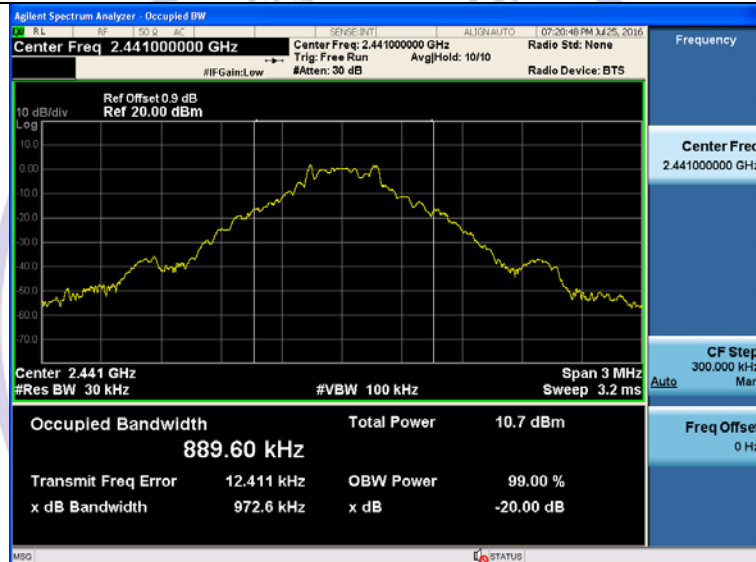

CH39

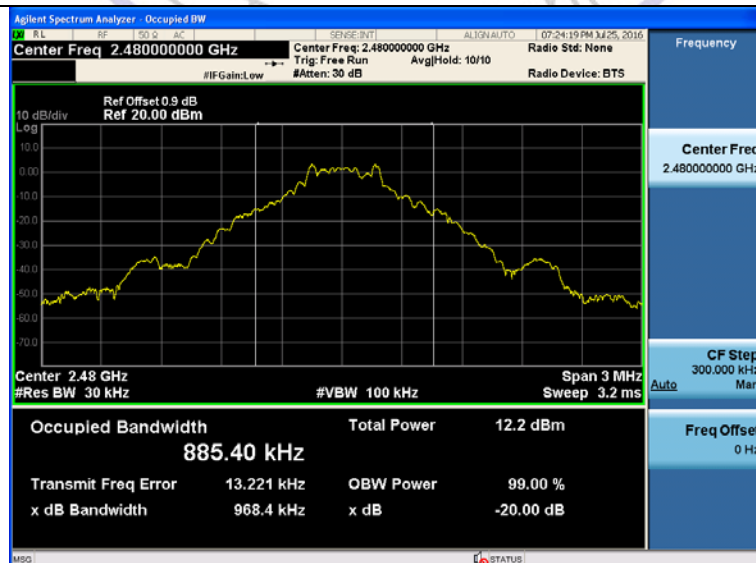

CH78

The screenshot displays the Agilent Spectrum Analyzer interface. At the top, the title bar reads "Agilent Spectrum Analyzer - Occupied BW". The main display area shows a frequency spectrum plot with a yellow trace. The x-axis represents frequency, and the y-axis represents power in dBm. A prominent peak is visible at 2.402 GHz.

Parameter	Value
Center Freq	2.402000000 GHz
Ref Offset	0.9 dB
Ref Power	20.00 dBm
Span	3 MHz
Res BW	30 kHz
#VBW	100 kHz
Sweep	3.2 ms
Occupied Bandwidth	1.2131 MHz
Total Power	6.44 dBm
Transmit Freq Error	1.237 kHz
OBW Power	99.00 %
x dB Bandwidth	1.329 MHz
x dB	-20.00 dB

Agilent Spectrum Analyzer - Occupied BW

[F1] [F2] [F3] [F4] [F5] [F6] [F7] [F8] [F9] [F10] [F11] [F12] [F13] [F14] [F15] [F16] [F17] [F18] [F19] [F20] [F21] [F22] [F23] [F24] [F25] [F26] [F27] [F28] [F29] [F30] [F31] [F32] [F33] [F34] [F35] [F36] [F37] [F38] [F39] [F40] [F41] [F42] [F43] [F44] [F45] [F46] [F47] [F48] [F49] [F50] [F51] [F52] [F53] [F54] [F55] [F56] [F57] [F58] [F59] [F60] [F61] [F62] [F63] [F64] [F65] [F66] [F67] [F68] [F69] [F70] [F71] [F72] [F73] [F74] [F75] [F76] [F77] [F78] [F79] [F80] [F81] [F82] [F83] [F84] [F85] [F86] [F87] [F88] [F89] [F90] [F91] [F92] [F93] [F94] [F95] [F96] [F97] [F98] [F99] [F100] [F101] [F102] [F103] [F104] [F105] [F106] [F107] [F108] [F109] [F110] [F111] [F112] [F113] [F114] [F115] [F116] [F117] [F118] [F119] [F120] [F121] [F122] [F123] [F124] [F125] [F126] [F127] [F128] [F129] [F130] [F131] [F132] [F133] [F134] [F135] [F136] [F137] [F138] [F139] [F140] [F141] [F142] [F143] [F144] [F145] [F146] [F147] [F148] [F149] [F150] [F151] [F152] [F153] [F154] [F155] [F156] [F157] [F158] [F159] [F160] [F161] [F162] [F163] [F164] [F165] [F166] [F167] [F168] [F169] [F170] [F171] [F172] [F173] [F174] [F175] [F176] [F177] [F178] [F179] [F180] [F181] [F182] [F183] [F184] [F185] [F186] [F187] [F188] [F189] [F190] [F191] [F192] [F193] [F194] [F195] [F196] [F197] [F198] [F199] [F200] [F201] [F202] [F203] [F204] [F205] [F206] [F207] [F208] [F209] [F210] [F211] [F212] [F213] [F214] [F215] [F216] [F217] [F218] [F219] [F220] [F221] [F222] [F223] [F224] [F225] [F226] [F227] [F228] [F229] [F230] [F231] [F232] [F233] [F234] [F235] [F236] [F237] [F238] [F239] [F240] [F241] [F242] [F243] [F244] [F245] [F246] [F247] [F248] [F249] [F250] [F251] [F252] [F253] [F254] [F255] [F256] [F257] [F258] [F259] [F260] [F261] [F262] [F263] [F264] [F265] [F266] [F267] [F268] [F269] [F270] [F271] [F272] [F273] [F274] [F275] [F276] [F277] [F278] [F279] [F280] [F281] [F282] [F283] [F284] [F285] [F286] [F287] [F288] [F289] [F290] [F291] [F292] [F293] [F294] [F295] [F296] [F297] [F298] [F299] [F300] [F301] [F302] [F303] [F304] [F305] [F306] [F307] [F308] [F309] [F310] [F311] [F312] [F313] [F314] [F315] [F316] [F317] [F318] [F319] [F320] [F321] [F322] [F323] [F324] [F325] [F326] [F327] [F328] [F329] [F330] [F331] [F332] [F333] [F334] [F335] [F336] [F337] [F338] [F339] [F340] [F341] [F342] [F343] [F344] [F345] [F346] [F347] [F348] [F349] [F350] [F351] [F352] [F353] [F354] [F355] [F356] [F357] [F358] [F359] [F360] [F361] [F362] [F363] [F364] [F365] [F366] [F367] [F368] [F369] [F370] [F371] [F372] [F373] [F374] [F375] [F376] [F377] [F378] [F379] [F380] [F381] [F382] [F383] [F384] [F385] [F386] [F387] [F388] [F389] [F390] [F391] [F392] [F393] [F394] [F395] [F396] [F397] [F398] [F399] [F400] [F401] [F402] [F403] [F404] [F405] [F406] [F407] [F408] [F409] [F410] [F411] [F412] [F413] [F414] [F415] [F416] [F417] [F418] [F419] [F420] [F421] [F422] [F423] [F424] [F425] [F426] [F427] [F428] [F429] [F430] [F431] [F432] [F433] [F434] [F435] [F436] [F437] [F438] [F439] [F440] [F441] [F442] [F443] [F444] [F445] [F446] [F447] [F448] [F449] [F450] [F451] [F452] [F453] [F454] [F455] [F456] [F457] [F458] [F459] [F460] [F461] [F462] [F463] [F464] [F465] [F466] [F467] [F468] [F469] [F470] [F471] [F472] [F473] [F474] [F475] [F476] [F477] [F478] [F479] [F480] [F481] [F482] [F483] [F484] [F485] [F486] [F487] [F488] [F489] [F490] [F491] [F492] [F493] [F494] [F495] [F496] [F497] [F498] [F499] [F500] [F501] [F502] [F503] [F504] [F505] [F506] [F507] [F508] [F509] [F510] [F511] [F512] [F513] [F514] [F515] [F516] [F517] [F518] [F519] [F520] [F521] [F522] [F523] [F524] [F525] [F526] [F527] [F528] [F529] [F530] [F531] [F532] [F533] [F534] [F535] [F536] [F537] [F538] [F539] [F540] [F541] [F542] [F543] [F544] [F545] [F546] [F547] [F548] [F549] [F550] [F551] [F552] [F553] [F554] [F555] [F556] [F557] [F558] [F559] [F560] [F561] [F562] [F563] [F564] [F565] [F566] [F567] [F568] [F569] [F570] [F571] [F572] [F573] [F574] [F575] [F576] [F577] [F578] [F579] [F580] [F581] [F582] [F583] [F584] [F585] [F586] [F587] [F588] [F589] [F590] [F591] [F592] [F593] [F594] [F595] [F596] [F597] [F598] [F599] [F600] [F601] [F602] [F603] [F604] [F605] [F606] [F607] [F608] [F609] [F610] [F611] [F612] [F613] [F614] [F615] [F616] [F617] [F618] [F619] [F620] [F621] [F622] [F623] [F624] [F625] [F626] [F627] [F628] [F629] [F630] [F631] [F632] [F633] [F634] [F635] [F636] [F637] [F638] [F639] [F640] [F641] [F642] [F643] [F644] [F645] [F646] [F647] [F648] [F649] [F650] [F651] [F652] [F653] [F654] [F655] [F656] [F657] [F658] [F659] [F660] [F661] [F662] [F663] [F664] [F665] [F666] [F667] [F668] [F669] [F670] [F671] [F672] [F673] [F674] [F675] [F676] [F677] [F678] [F679] [F680] [F681] [F682] [F683] [F684] [F685] [F686] [F687] [F688] [F689] [F690] [F691] [F692] [F693] [F6

Agilent Spectrum Analyzer - Occupied BW

IF L RF ISO Q ZC SENSE INT ALIGN AUTO 07:31:57 PM 3/25, 2016

Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None
 Trig: Free Run Avg/Hold: > 10/10
 #IFGain: Low #Atten: 30 dB Radio Device: BTS

Ref Offset 0.9 dB
Ref 20.00 dBm

Center 2.48 GHz Span 3 MHz
 #Res BW 30 kHz #VBW 100 kHz Sweep 3.2 ms

Occupied Bandwidth		Total Power	
1.2064 MHz		6.78 dBm	

Transmit Freq Error		OBW Power	
9.303 kHz		99.00 %	

x dB Bandwidth		x dB	
1.344 MHz		-20.00 dB	

Frequency
Center Freq
2.480000000 GHz

CF Step
300.000 kHz
Man


Auto

Freq Offset
0 Hz


MSO STATUS

CH78


8DPSK Modulation

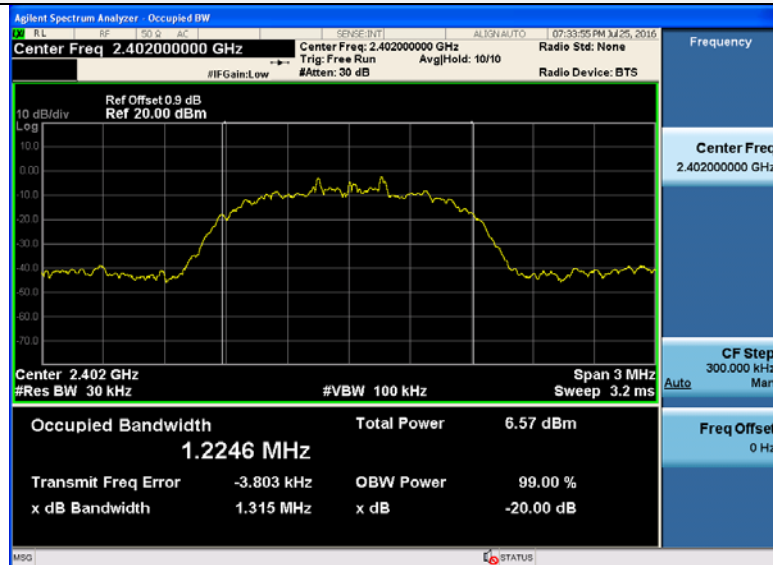

CH00

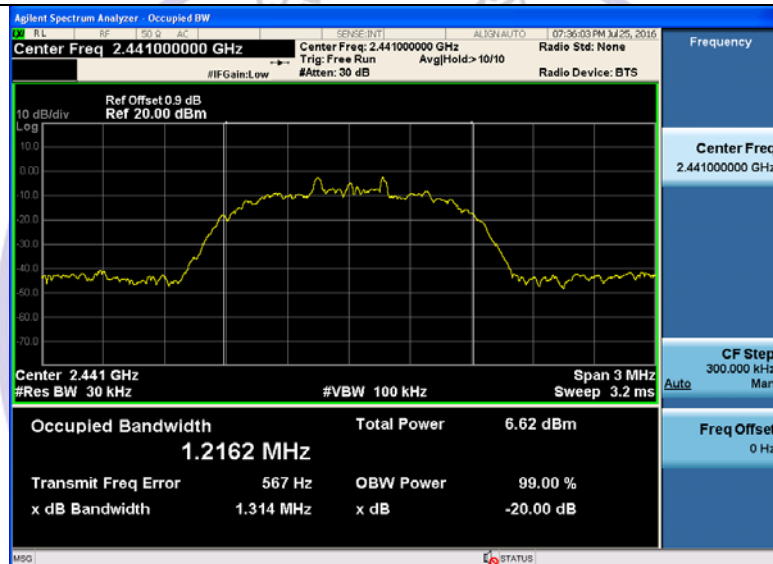

CH39

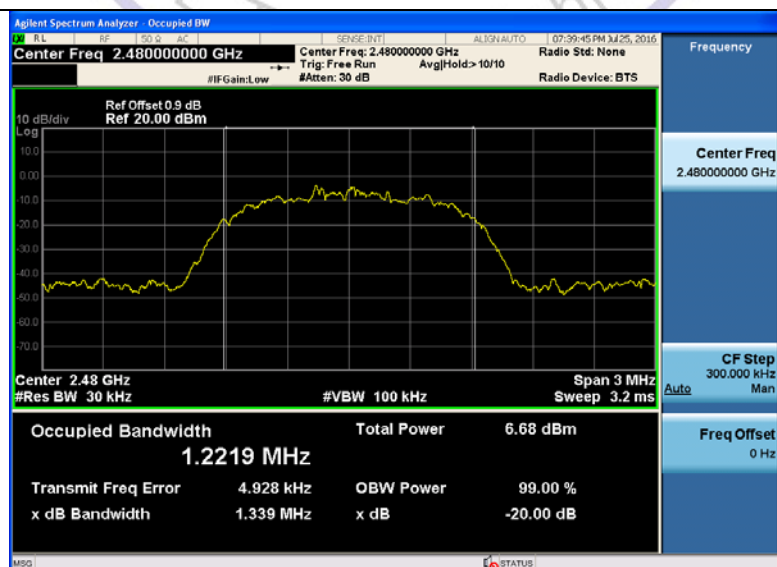

CH78

3.5. Frequency Separation

LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

TEST CONFIGURATION



TEST RESULTS

Modulation	Channel	Channel Separation (MHz)	Limit(MHz)	Result
GFSK	CH39	1.000	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
$\pi/4$ DQPSK	CH39	1.002	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			
8DPSK	CH39	1.002	25KHz or $2/3 \times 20\text{dB}$ bandwidth	Pass
	CH40			

Note:

We have tested all mode at high, middle and low channel, and recorded worst case at middle

Test plot as follows:



GFSK

 $\pi/4$ DQPSK

8DPSK

3.6. Number of hopping frequency


Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.


Test Configuration




Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
π/4DQPSK	79		
8DPSK	79		


Test plot as follows:

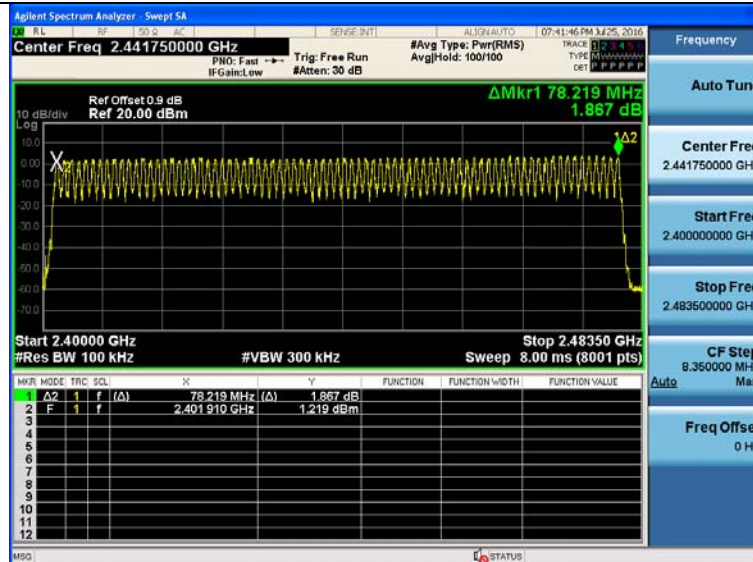

GFSK Modulation

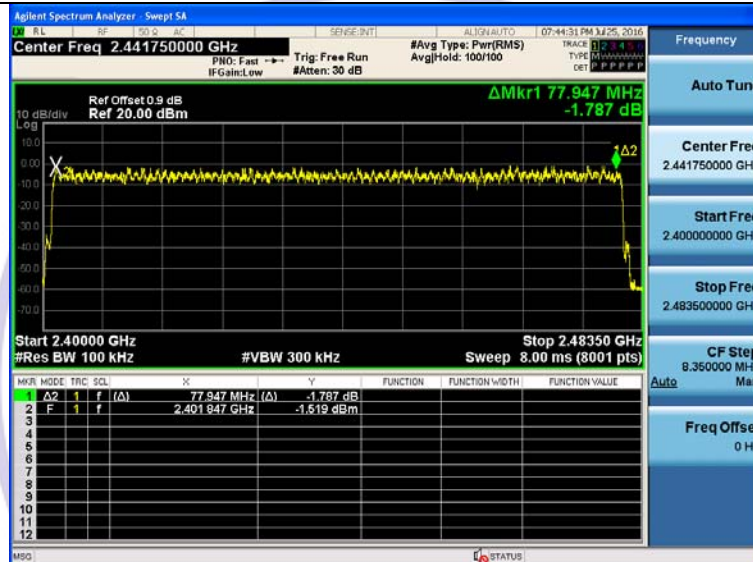

$\pi/4$ DQPSK Modulation

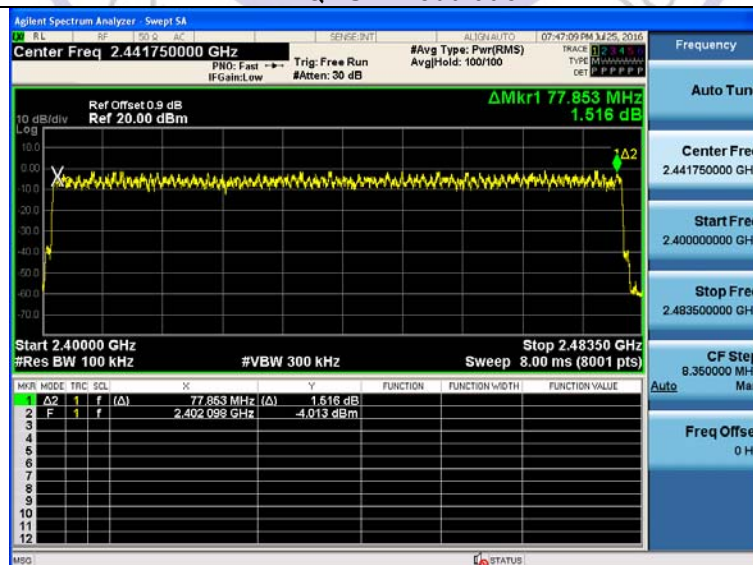

8DPSK Modulation

3.7. Time of Occupancy (Dwell Time)


Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

Test Configuration



Test Results


Modulation	Packet	Pulse time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.383	0.123	0.40	Pass
	DH3	1.638	0.262		
	DH5	2.886	0.308		
π/4DQPSK	2-DH1	0.434	0.124	0.40	Pass
	2-DH3	1.639	0.262		
	2-DH5	2.888	0.308		
8DPSK	3-DH1	0.388	0.124	0.40	Pass
	3-DH3	1.639	0.262		
	3-DH5	2.890	0.308		

Note:


- We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
- $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 2 \div 79) \times 31.6$ Second for DH1, 2-DH1, 3-DH1
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 4 \div 79) \times 31.6$ Second for DH3, 2-DH3, 3-DH3
 $\text{Dwell time} = \text{Pulse time (ms)} \times (1600 \div 6 \div 79) \times 31.6$ Second for DH5, 2-DH5, 3-DH5

Test plot as follows:


GFSK Modulation

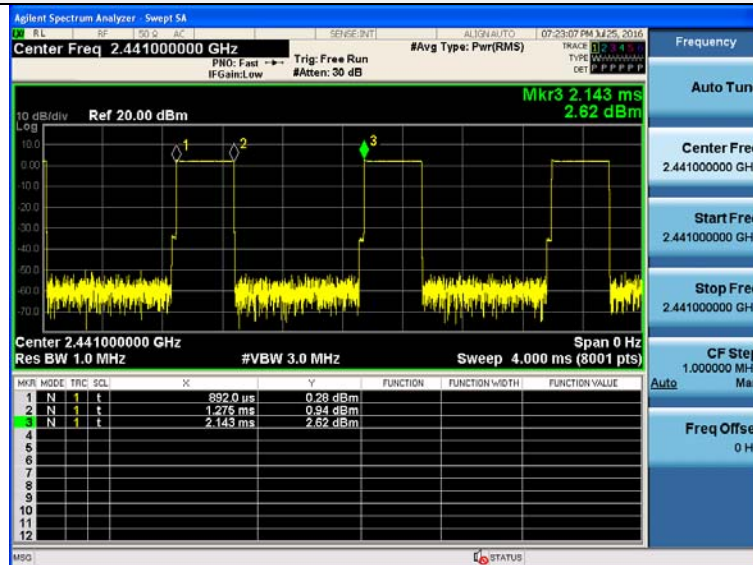


DH1

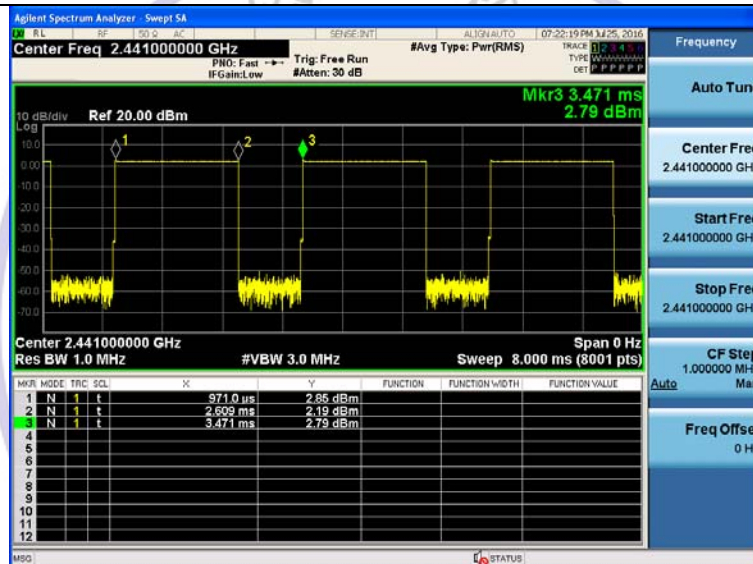


DH3

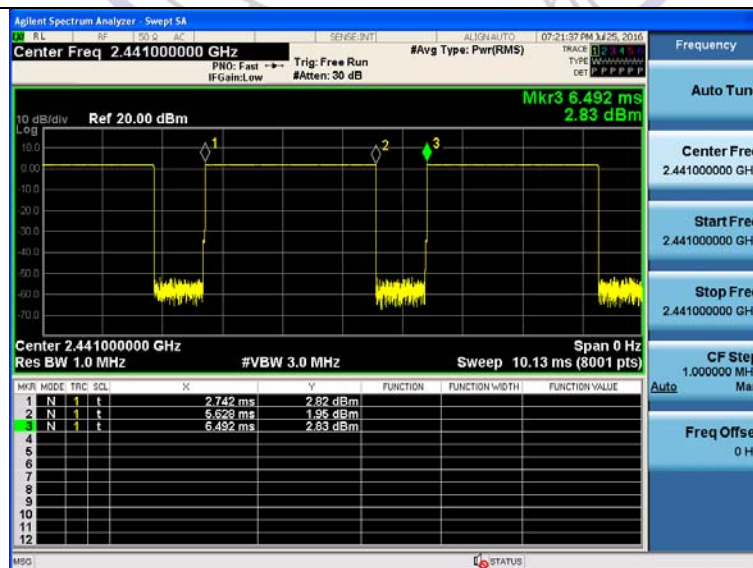


DH5

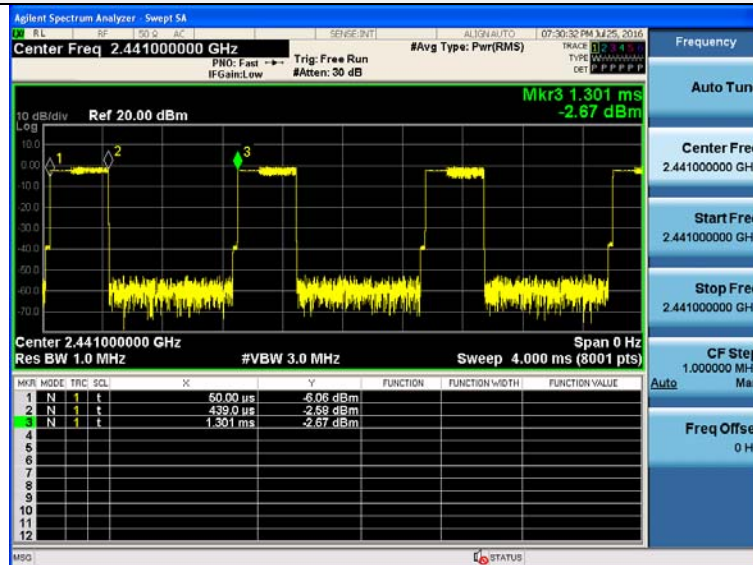$\pi/4$ DQPSK Modulation

2-DH1

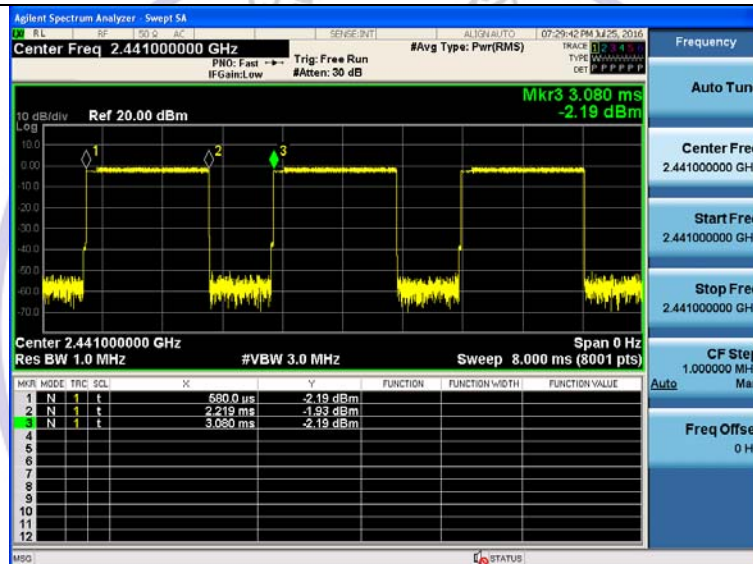


2-DH3

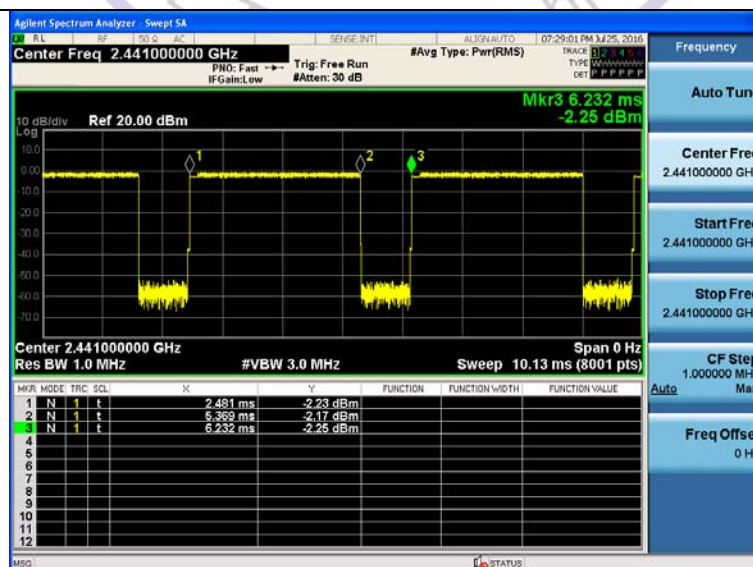


2-DH5


8DPSK Modulation

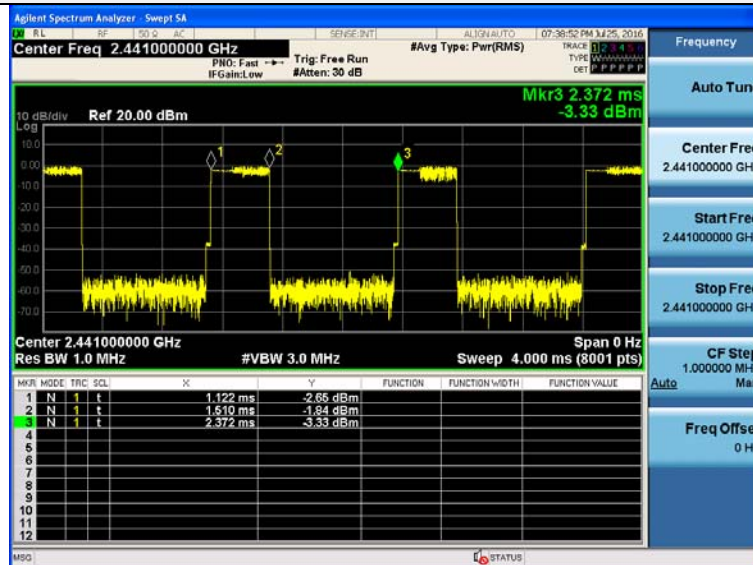

3-DH1

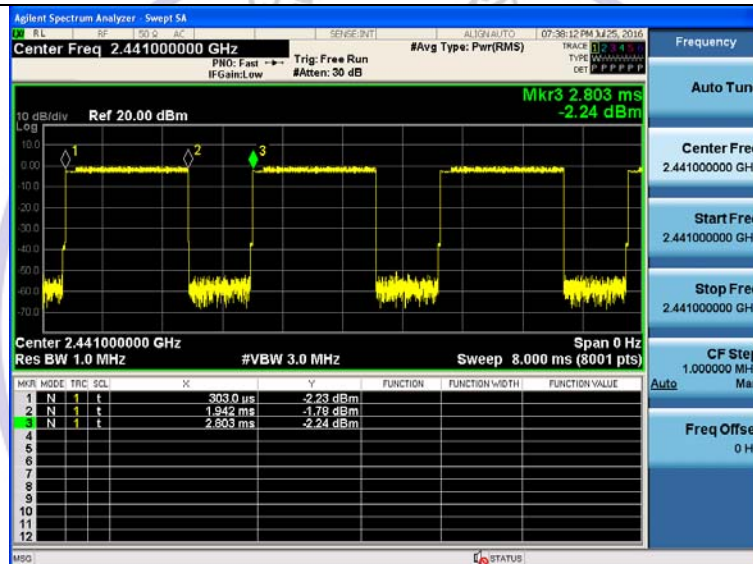

3-DH3

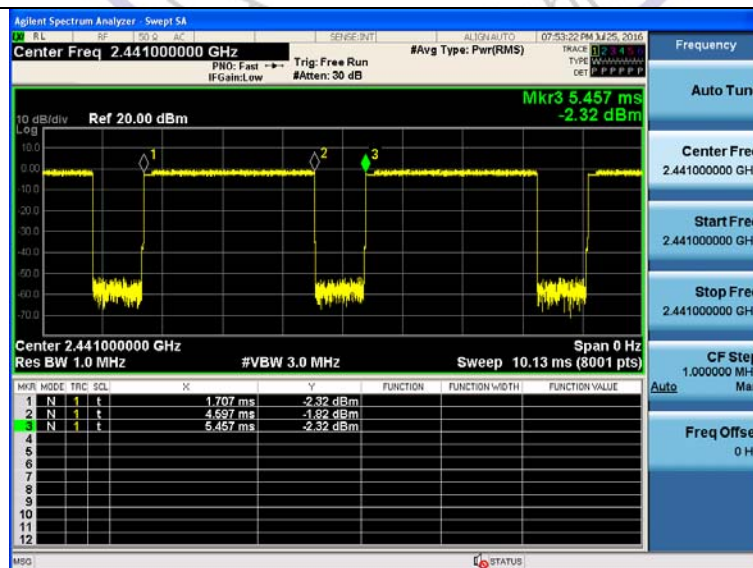

3-DH5

3.8. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

We measured all conditions (DH1, DH3, DH5) and recorded worst case at DH5

Test plot as follows:


GFSK CH00




GFSK CH39



Reference

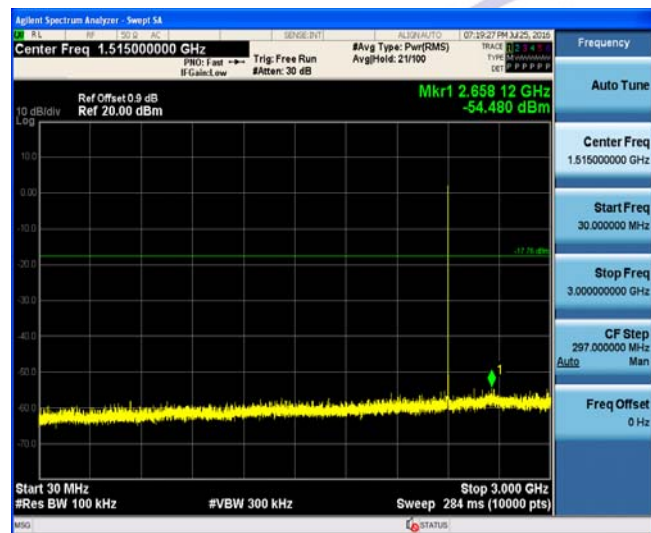

Reference

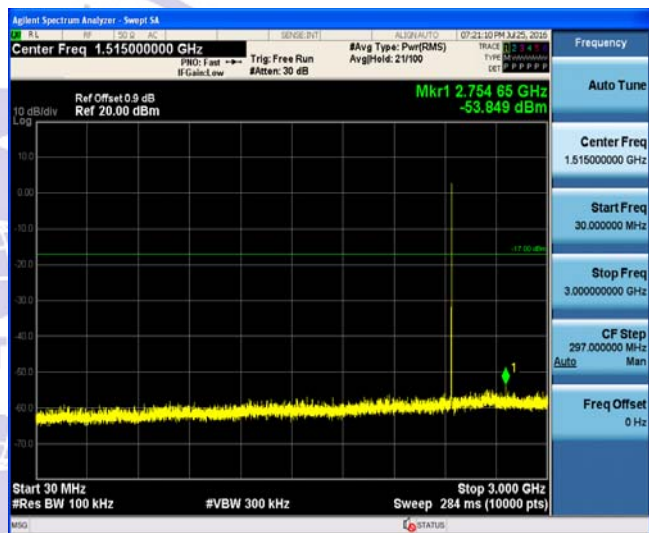

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz

3GHz-25GHz


GFSK CH78



Reference

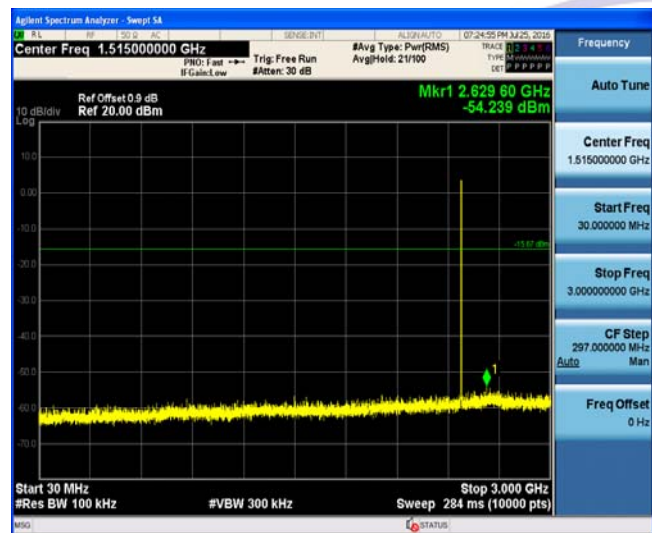


30MHz-3GHz

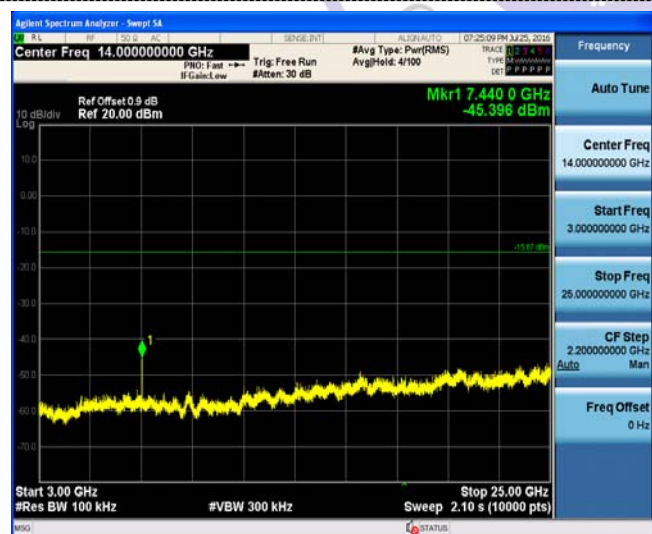


3GHz-25GHz

 $\pi/4$ DQPSK CH01

Reference

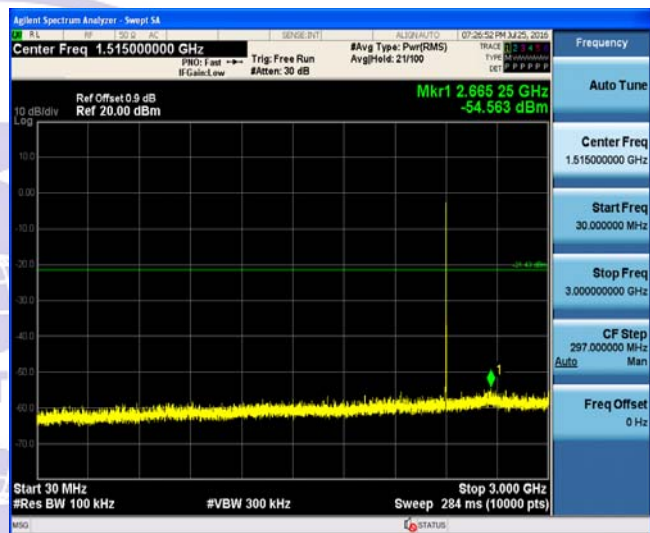


30MHz-3GHz

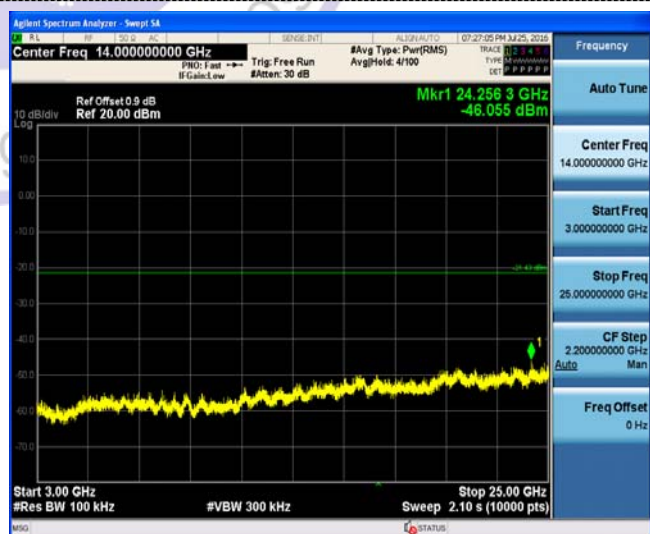


3GHz-25GHz

$\pi/4$ DQPSK CH39 $\pi/4$ DQPSK CH78


Reference

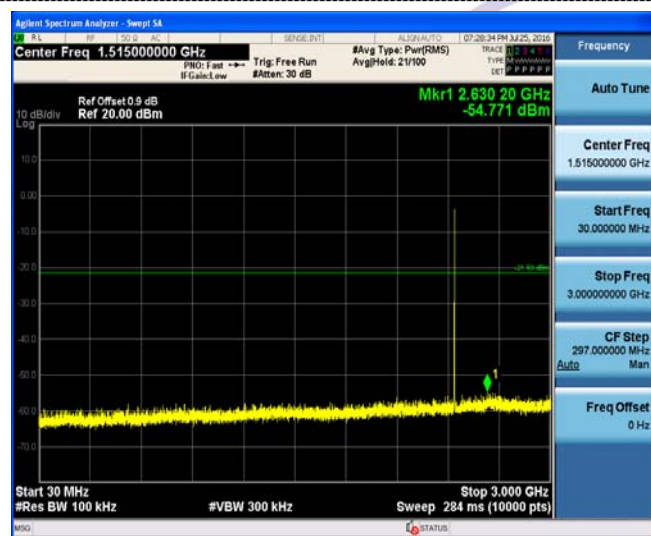

Reference

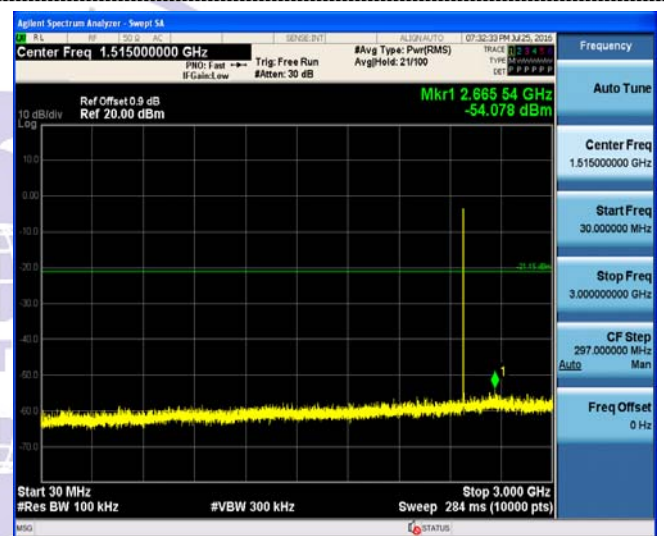

30MHz-3GHz

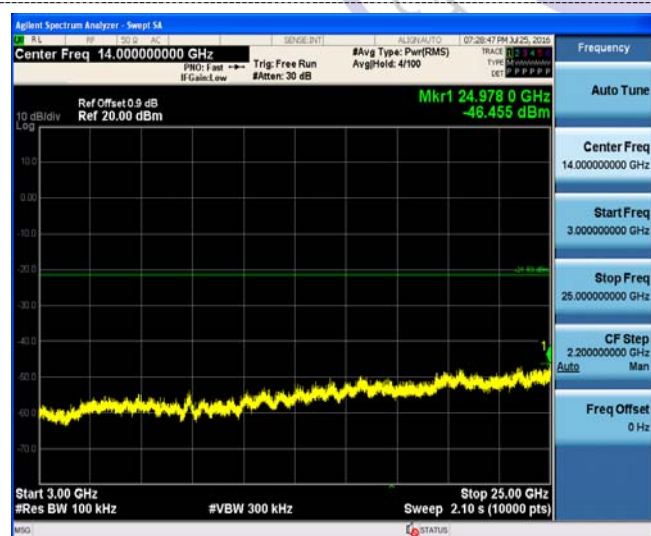

30MHz-3GHz



3GHz-25GHz

3GHz-25GHz


8DPSK CH00




8DPSK CH39



Reference

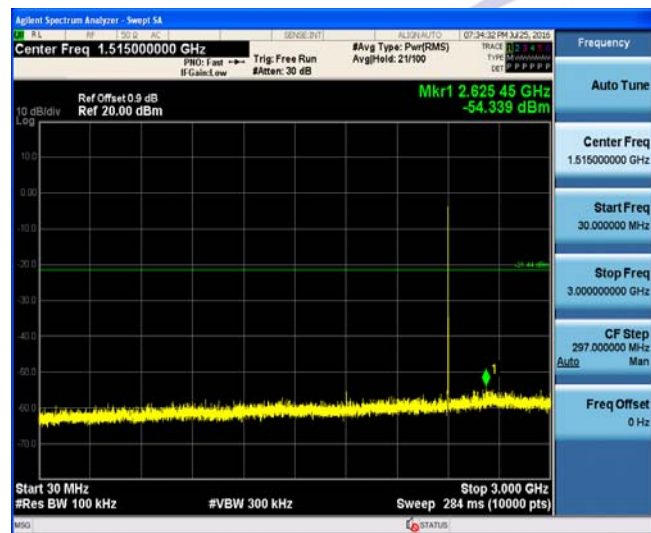

Reference

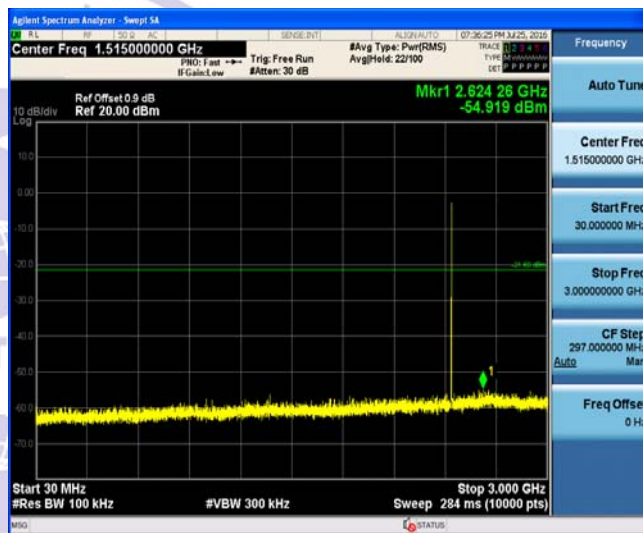

30MHz-3GHz



30MHz-3GHz




3GHz-25GHz

3GHz-25GHz


8DPSK CH78



Reference

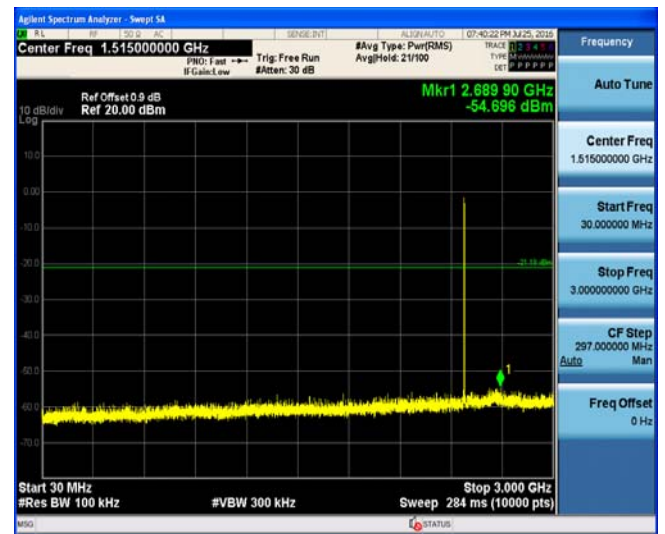


30MHz-3GHz

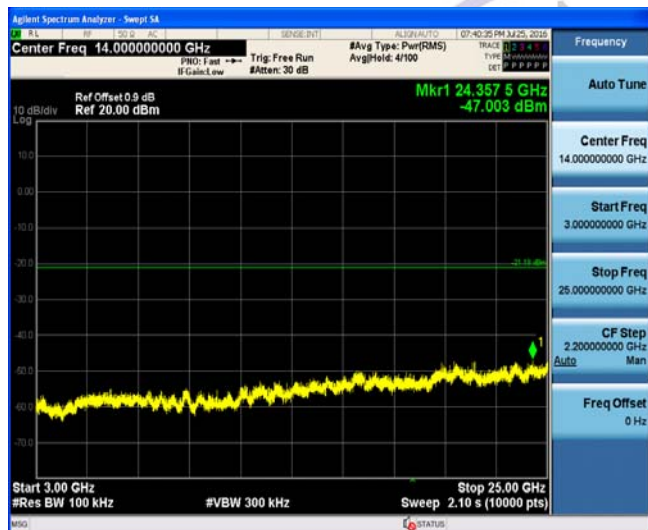


3GHz-25GHz

CTL Testing Technology Co., Ltd.

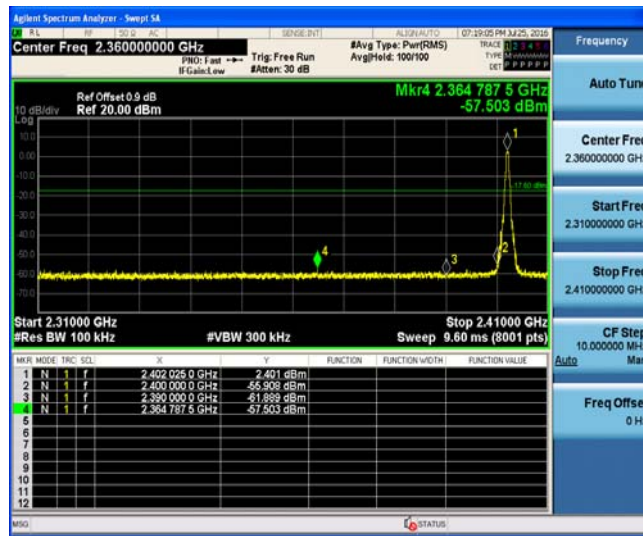Band-edge Measurements for RF Conducted Emissions:**GFSK**


Left Band edge hopping off

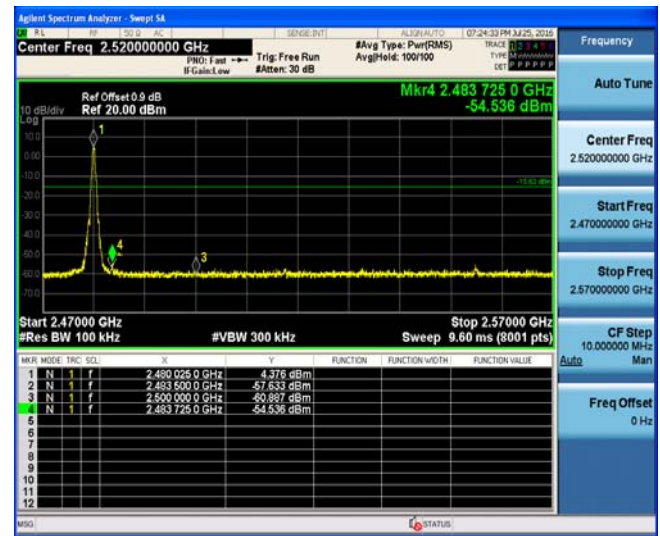


Right Band edge hopping off




Left Band edge hopping on

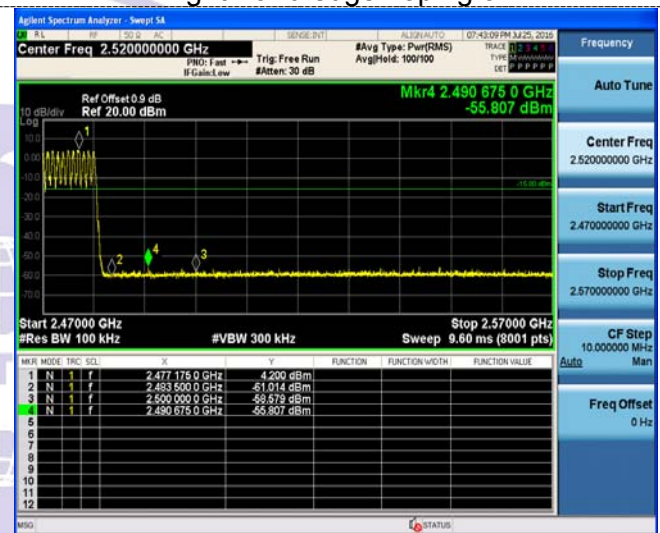


Right Band edge hopping on

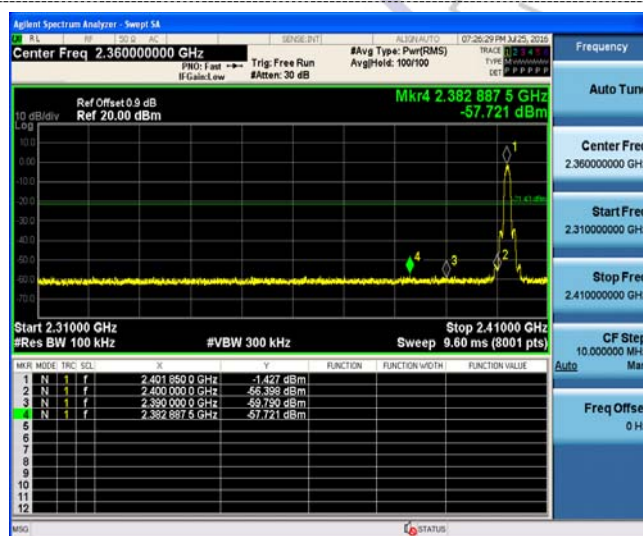 $\pi/4$ DQPSK


Left Band edge hopping off

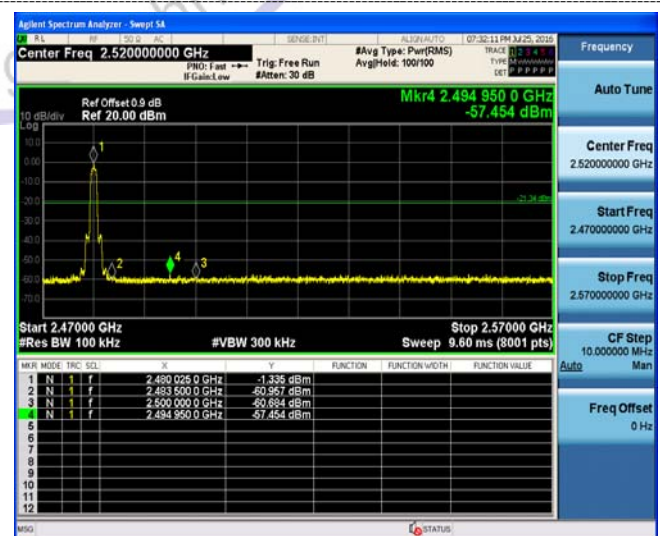

Right Band edge hopping off

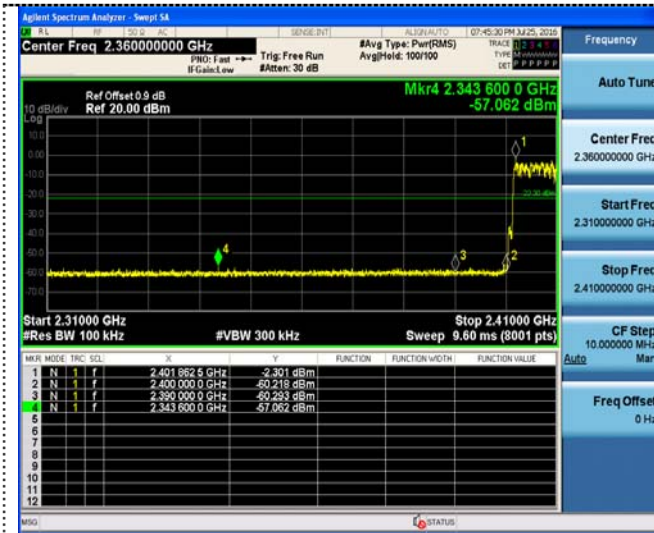


Left Band edge hopping on

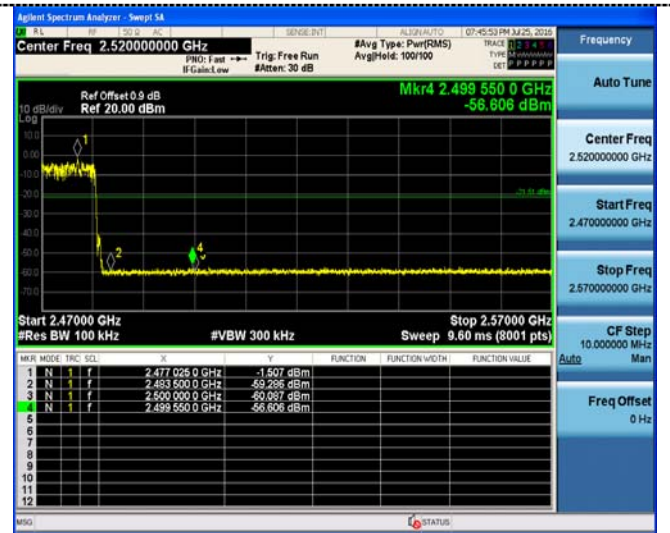


Right Band edge hopping on

8DPSK

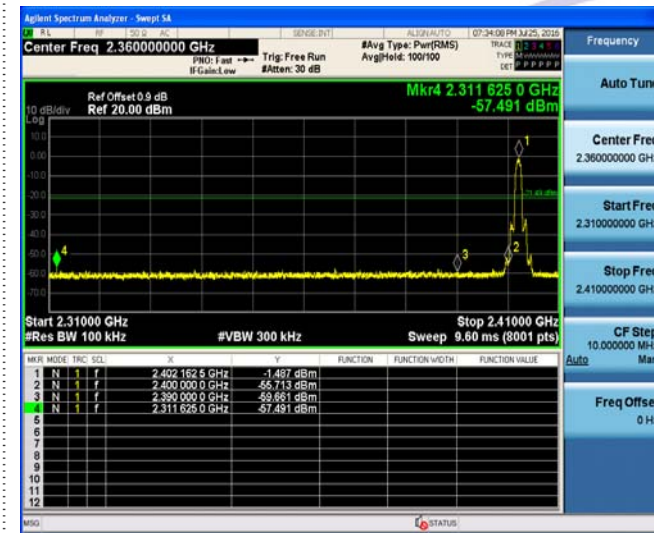


Left Band edge hopping off

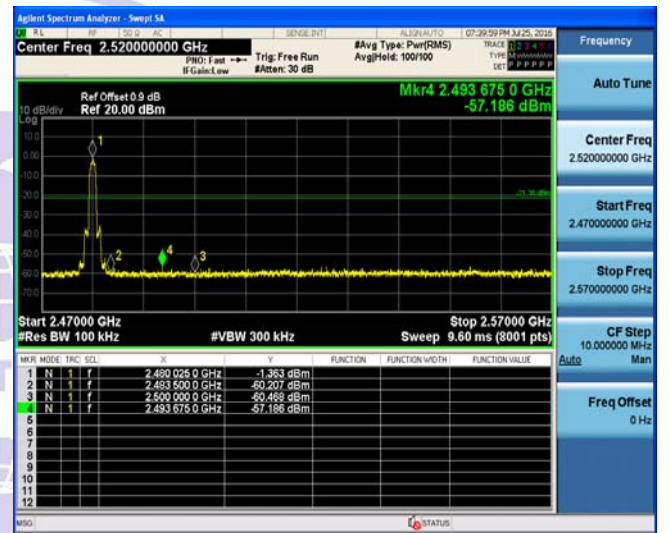

Right Band edge hopping off



Left Band edge hopping on

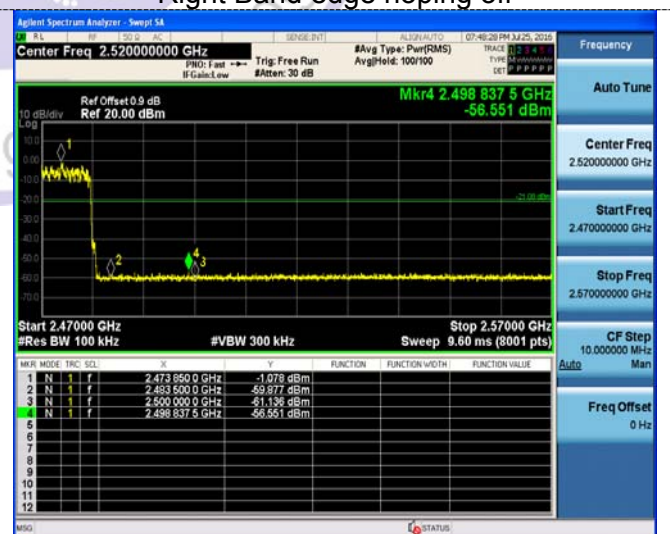

Right Band edge hopping on

3.9. Pseudorandom Frequency Hopping Sequence

TEST APPLICABLE


For 47 CFR Part 15C section 15.247 (a) (1) requirement:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

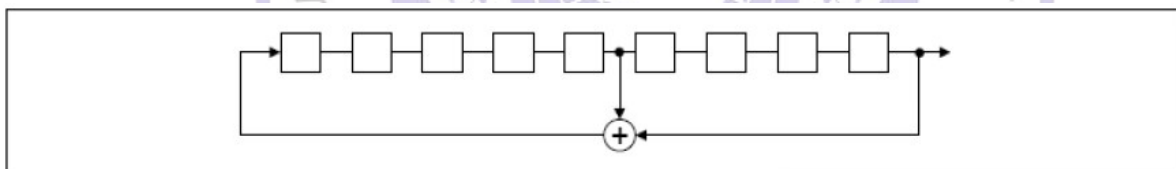

Linear Feedback Shift Register for Generation of the PRBS sequence

An example of pseudorandom frequency hopping sequence as follows:

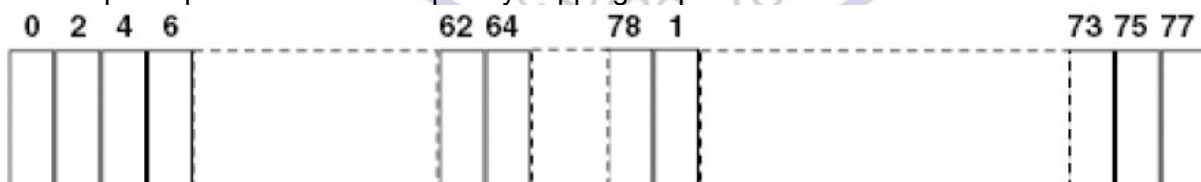

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

3.10. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.


Antenna Connected Construction

The maximum gain of antenna was 2.5dBi.

WIFI/BT
Antenna

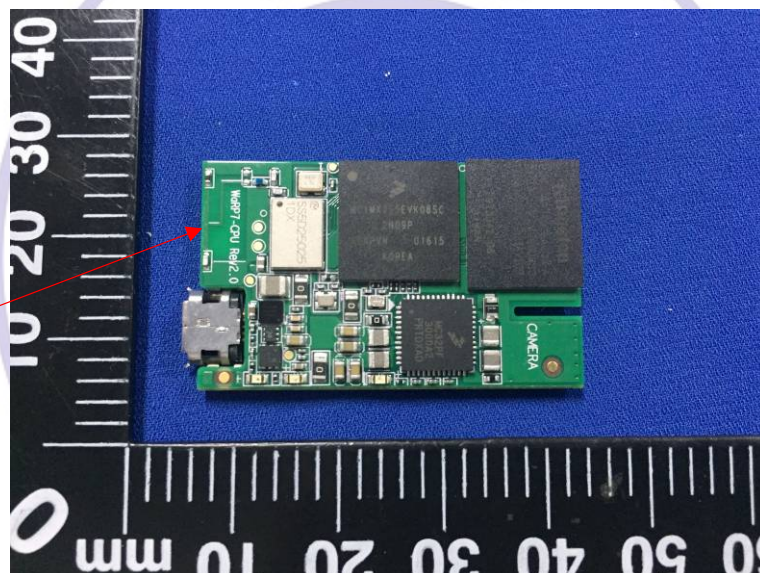

4. Test Setup Photos of the EUT

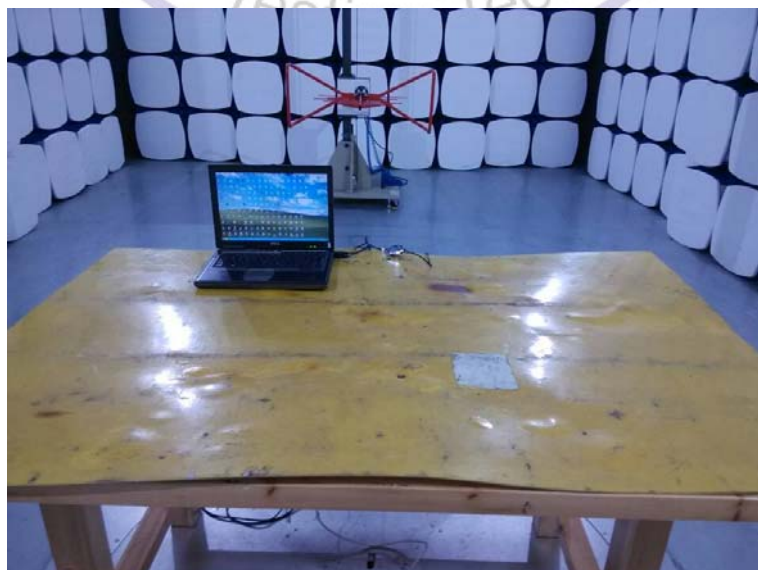



5. Photos of the EUT

Please reference to the test report No.: CTL1607142685-WF-01

***** End of Report *****

