



Test Report No. 9512312314

Applicant: Green Point Systems Ltd.

Equipment Under Test:

RF transceiver

Models: IGHF

FCC ID: 2AFMJ-IGHF

***From The Standards Institution
Of Israel***

Industry Division

Electronics & Telematics Laboratory

EMC Branch



AClass Accreditation Services

Certificate Number: AT-1359



Test Report No.: 9512312314

Page 2 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

Applicant:	Green Point Systems Ltd.
Address:	7 Haeshel St., South Industrial Park, P.O.Box 3136, Caesarea, 3088900, Israel
Sample for test selected by:	The customer
The date of tests:	11, 17 May 2015

Description of Equipment Under Test (EUT):	RF transceiver.
Models:	IGHF
Software version of radio unit	B1
Manufactured by:	Green Point Systems Ltd.

Reference Documents:

- ❖ CFR 47 FCC: Rules and Regulations; Part 15. "Radio frequency devices";
Subpart C: "Intentional radiators"
Section 15.205. "Restricted bands of operations",
Section 15.207. "Conducted limit"
Section 15.209. "Radiated emission limits, general requirements".
"Radiated Emission Limits, Additional Provisions";
Section 15.231. "Periodic operation in the bands 40.66 – 40.70 MHz,
and above 70 MHz".

This Test Report contains 27 pages
and may be used only in full.

This Test Report applies only to the specimen tested and may not
be applied to other specimens of the same product.



Test Report No.: 9512312314

Page 3 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

Table of Contents

1. EUT Description and operation	4
1.1. General description:	4
2. Test summary	5
2.1. Potential emission sources:	7
2.2. EUT setup and operation:	7
3. Measurements and derived results	7
3.1. Location of the Test Site:	7
3.2. Test condition:	7
3.3. Radiated emission test.	8
3.4. Common conditions for operation in the band above 70 MHz.	9
3.5. Test of field strength emission from intentional radiator.	10
3.6. Test of occupied bandwidth per 15.231(c)	19
3.7. Conducted emission test on AC main line.	20
4. Appendix 1. Test equipment used	22
5. Appendix 2: Antenna Factor and Cable Loss	23
6. Appendix 3: Test setups photo.	27

Test Report No.: 9512312314

Page 4 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

1. EUT Description and operation

1.1. General description:

* Note: the customer supplied all information in clause below.

RF transceiver IGHF is integrated in IGHH smart switch that is a part of smart home system. The IGHF enables smart control over lights shutters, air conditioning and power appliances and can be operated locally or from Internet via the Internet Gateway. Switch is built with touch technology and no mechanical parts. The switch is designed with subtle LED lights which display the current switch mode.

Type of modulation:	FSK
Antenna type:	Integrated

The EUT external view is presented in photo # 1.



Photo 1. Smart switch side and rear view.

**Test Report No.: 9512312314****Page 5 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF

2. Test summary

Parameter	FCC Part 15 Reference paragraph	Verdict
Conducted emission test on AC line.	Subpart C Section 15.207	Comply
Radiated emission from intentional radiators in restricted bands	Subpart C Section 15.205	Comply
Test of field strength emission from intentional radiators	"Radiated Emission Limits, Additional Provisions"; Section 15.231.	Comply
Occupied bandwidth	Subpart C Section 15.231(c)	Comply

Electronics & Telematics
Laboratory

May 2015

Name: Eng. Yuri Rozenberg
Position: Head of EMC BranchName: Michael Feldman
Position: Test Technician

Measurement uncertainty.

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error.

The laboratory calibrates its standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements.

In the following table the uncertainty calculation is given.

Type of disturbance Test description	Calculated uncertainty U_{LAB}
Radiated disturbance electric field strength in a SAR at 3 m distance 30 MHz – 1.0 GHz	± 4.32 dB
electric field strength in a FAR at 3 m distance 1.0 – 18 GHz. 18 – 40 GHz.	± 4.47 dB ± 2.78 dB



Test Report No.: 9512312314

Page 6 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

Normative References.

FCC 47 CFR Part 15, Subpart C, 2015	Radio Frequency Devices Subpart C – Intentional Radiators
ANSI C63.4: 2009	American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard for Testing of Unlicensed Wireless Devices.

**Test Report No.: 9512312314****Page 7 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF**2.1. Potential emission sources:**

The potential emission sources are detailed in Table 1.

Table 1. Potential emission sources

Frequency	Location
30.0 MHz	RF Lo oscillator
433.04 – 434.4 MHz	RF signal

2.2. EUT setup and operation:

Test was performed in continuous transmission mode at two frequency points – near bottom and near top of 433 – 434.5 MHz frequency band.

3. Measurements and derived results**3.1. Location of the Test Site:**

Radiated test was conducted at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

3.2. Test condition:

Temperature: 24 °C. Humidity: 53 %. Atmospheric pressure: 1008 mbar.



Test Report No.: 9512312314

Page 8 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

3.3. Radiated emission test.

3.3.1. General:

Per FCC Part 15 Subpart C Sections 15.209, 15.231.

- * Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- * A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak, QP or Average detectors.

3.3.2. Radiated emission measurements:

Preliminary investigation was performed from the lowest radio frequency signal generated in the equipment up to ten harmonic of a carrier frequency.

The final radiated emission measurements were performed in the semi Anechoic chamber at the 3 m test distances. The EUT was operated in continue transmission mode. The transmitter was installed on a turn - table. Active Loop, Biconilog and Double Ridged Guide antennas were used. The measurements were performed at frequencies at which the signal level was 10 dB below the limit or less. The levels were maximized by rotating turntable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worse case result was noted in tables.

3.3.3. Radiated emission test results:

Final result measurements are presented in tables and plots ## 1 - 12 in section 3.5.



Test Report No.: 9512312314

Page 9 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

3.4. Common conditions for operation in the band above 70 MHz.

3.4.1. General:

Per FCC Part 15 Subpart C clause 15.231 (a).

3.4.2. Requirements:

15.231(a)(1) – Transmitter is activated manually. Transmission duration is limited by program and after activation is less than 5 second.

15.231(a)(3) – Transmitter not intended for regular predetermined interval transmissions.

15.231(a)(4) – Transmitter is not designed to use during the emergencies.

3.4.3. Summary:

The EUT is complies with the requirements of clause 15.231(a).

**Test Report No.: 9512312314****Page 10 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF****3.5. Test of field strength emission from intentional radiator.****3.5.1. General:**

Per FCC Part 15 Subpart C clause 15.231(b).

3.5.2. Requirements:

The EUT's operation frequencies range is 433.04 – 434.4 MHz.

The field strength emissions from intentional radiators operated on this frequency shall comply with the limit based on the average value.

Fundamental Frequency	Calculated Field Strength limit of Fundamental dB μ V/m	Calculated Field Strength limit of Harmonics dB μ V/m
433.04 – 434.4 MHz	80.8	60.8

Note: Peak field strength shall not exceed the maximum permitted specified limit by more than 20 dB.

Field strength limits are specified at a distance of 3 meters.

3.5.3. Test procedure:

The test was conducted according to clause 15.231.

3.5.4. Test summary:

The tested unit meets the standard requirement.

**Test Report No.: 9512312314****Page 11 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF****3.5.5. Test results:****Radiated emission result at carrier frequencies.**

Carrier frequency MHz	Peak Ampl. dB (μV/m)	Avg Ampl.* dB (μV/m)	Specified @3m limit, dB (μV/m)	Margin dB
433.04	80.6	79.1	80.8	1.7
434.4	80.7	79.2	80.8	1.6

*Average amplitude result was calculated from measured Peak value – Average factor.

Average factor = $20 \log \text{Tx on}/100\text{msec} = 20 \log [84 \text{ ms}/100] = -1.5 \text{ dB}$

For transmitter average factor calculation see plot # 13.

For recorded Fundamental frequencies result see plots #1 and 2.

All received spurious emissions were found below the specified limit.

Founded spurious emissions results presented in tables below.

Unwanted emissions test result.

Freq. MHz	Antenna Polariz. V/H	Antenna Height (m)	Turn table Angle (°)	QP. Emission Level (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Reference to plot #
36.5	V	1.0	204	27.7	40.0	12.3	4
194.4	H	1.5	271	27.7	43.5	15.8	4
227.1	H	1.5	238	31.3	46.0	14.7	4

**Test Report No.: 9512312314****Page 12 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF**Spurious emission result.**Carrier frequency 433.04 MHz.

Freq. MHz	Antenna polarization V/H	Peak Ampl dB μ V/m	Specified @3m limit, dB μ V/m	Margin dB	Ref. to plot #
866.08	H	49.7	60.8	11.1	7
1299.3	H	50.6	60.8	10.2	9

Carrier frequency 434.4 MHz.

Freq. MHz	Antenna pol. V/H	Peak Ampl dB μ V/m	Peak Ampl limit, dB μ V/m	Margin dB	Avg Ampl. dB μ V/m	Specified @3m limit, dB μ V/m	Margin dB	Ref. to plot #
868.8	H	49.7	-	-	-	60.8	11.1	10
1303.2	H	48.1	74.0*	>20	41.2	54.0*	12.8	12

*Limit 15.205 restricted bands.



Test Report No.: 9512312314


Page 13 of 27 pages

Title: RF transceiver


Model: IGHF

FCC ID: 2AFMJ-IGHF

Fundamental frequency test.

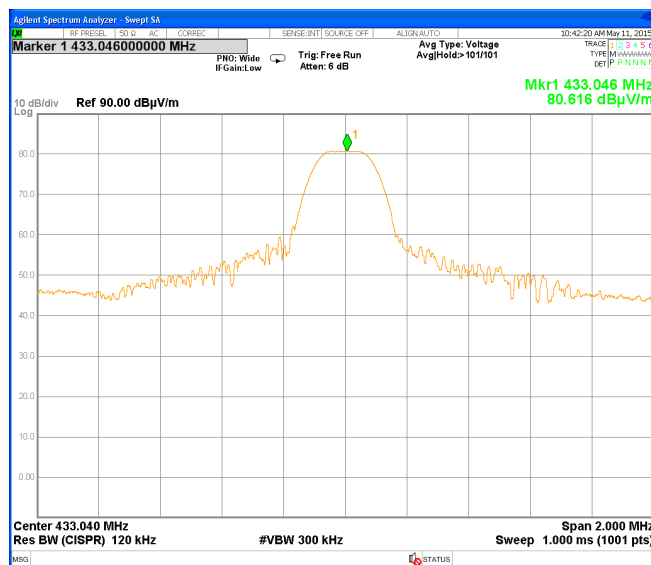

Plot # 1. Carrier frequency 433.04 MHz.

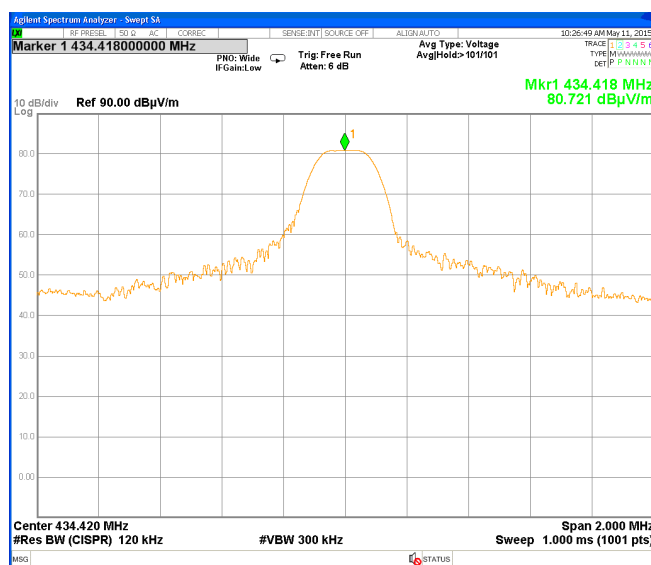

Plot # 2. Carrier frequency 434.4 MHz.




Test Report No.: 9512312314

Page 14 of 27 pages


Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

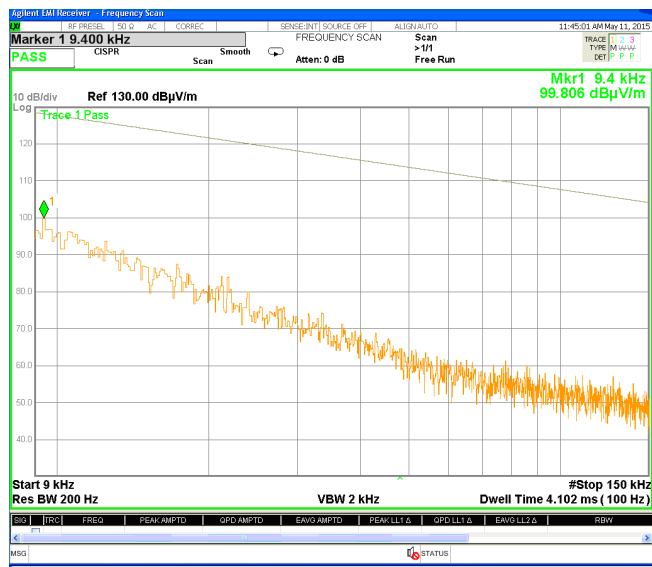

Plot # 3. Spurious emissions scan 0.009 MHz – 0.15 MHz.

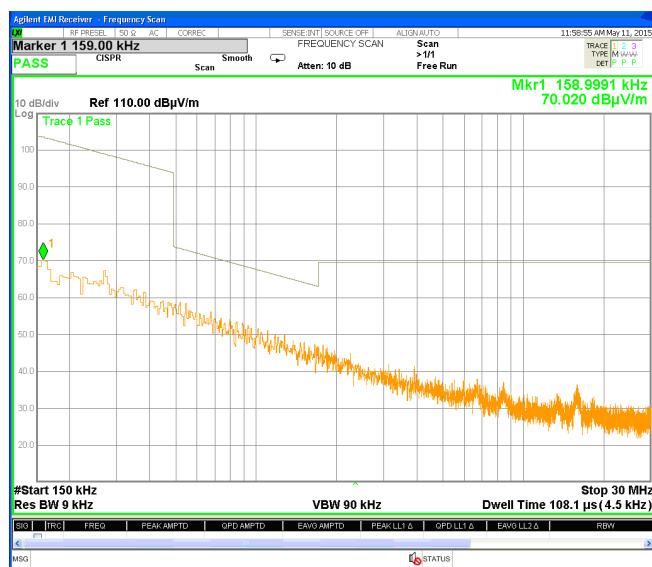

Plot # 4. Spurious emissions scan 0.15 MHz – 30 MHz.




Test Report No.: 9512312314

Page 15 of 27 pages


Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

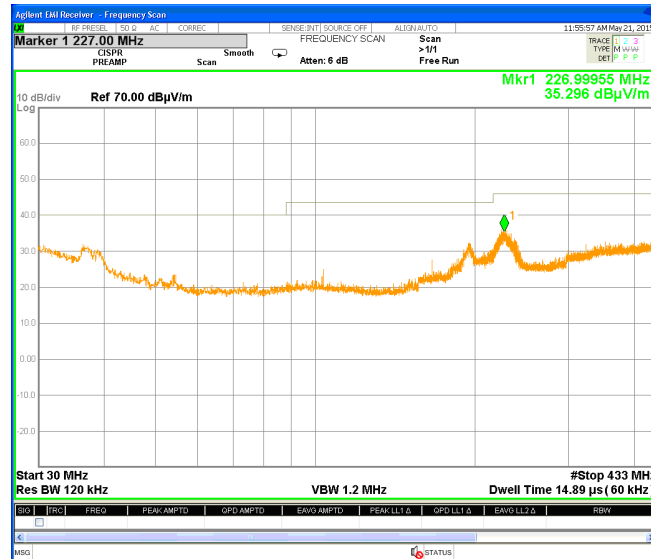

Plot # 5. Spurious emissions scan 30 MHz – 433 MHz.

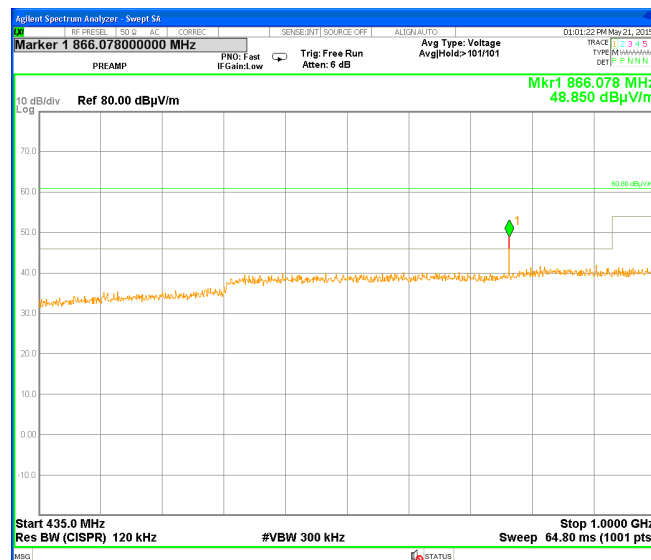

Plot # 6. Spurious emissions scan 435 MHz – 1000 MHz.



Test Report No.: 9512312314


Page 16 of 27 pages

Title: RF transceiver


Model: IGHF

FCC ID: 2AFMJ-IGHF


Carrier frequency 433.04 MHz.

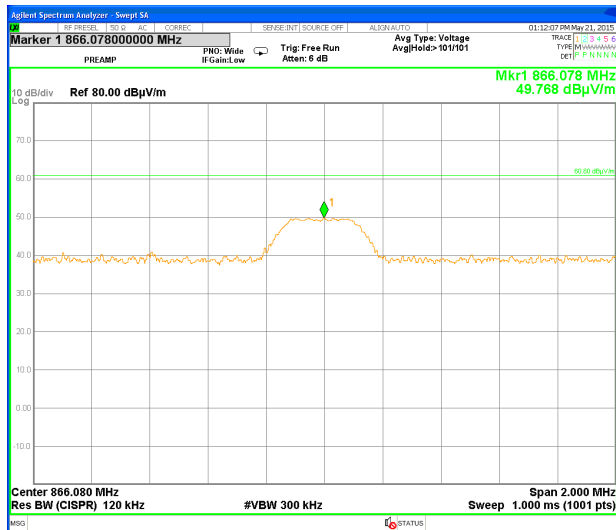

Plot # 7.

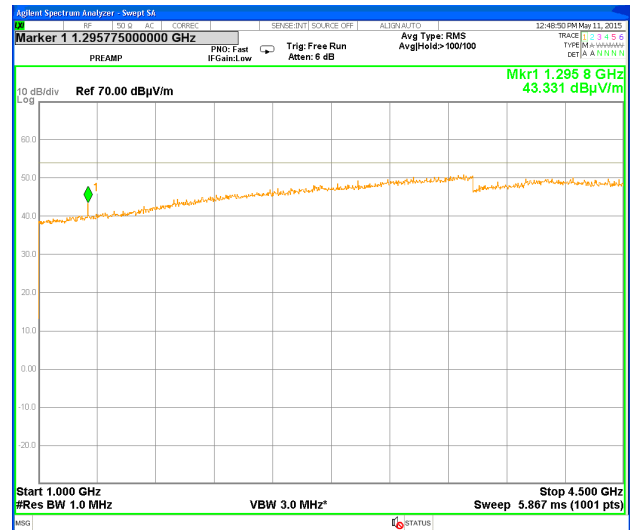

Plot # 8.

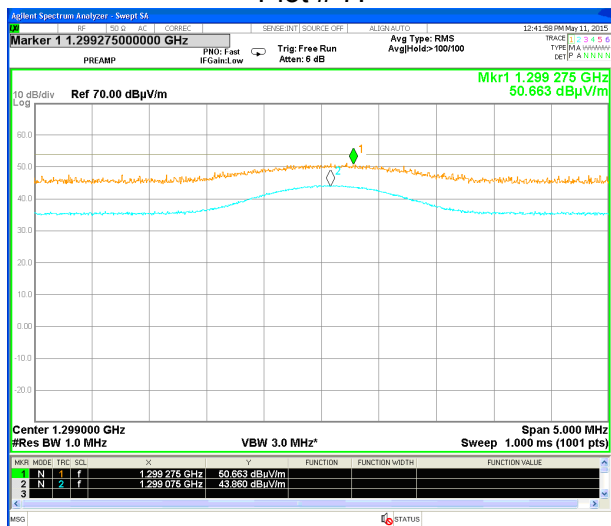

Plot # 9.



Test Report No.: 9512312314


Page 17 of 27 pages

Title: RF transceiver


Model: IGHF

FCC ID: 2AFMJ-IGHF


Carrier frequency 434.4 MHz.

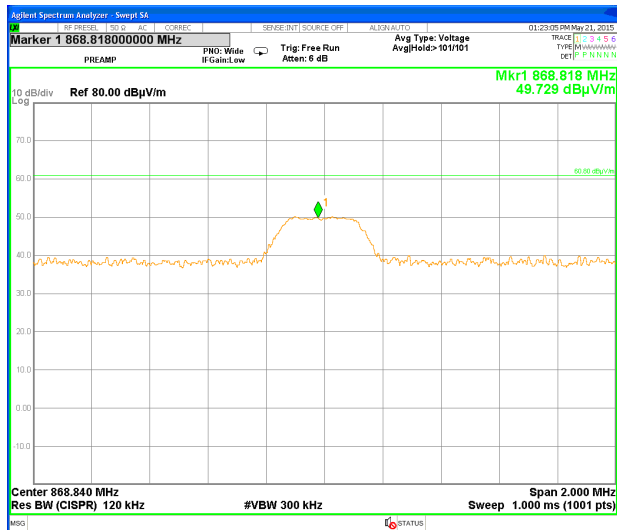

Plot # 10.

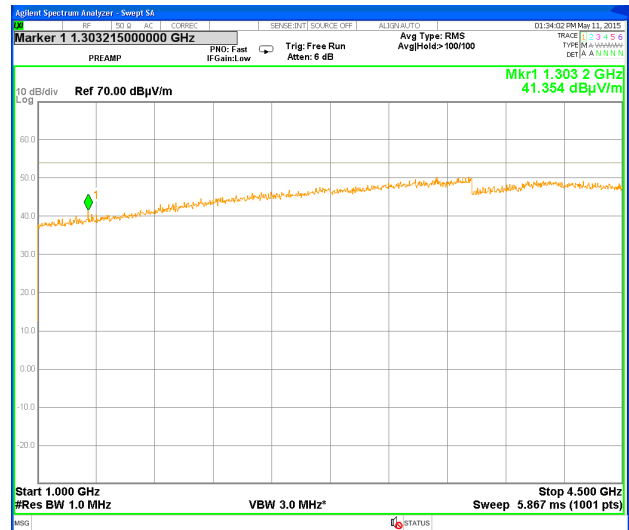

Plot # 11.

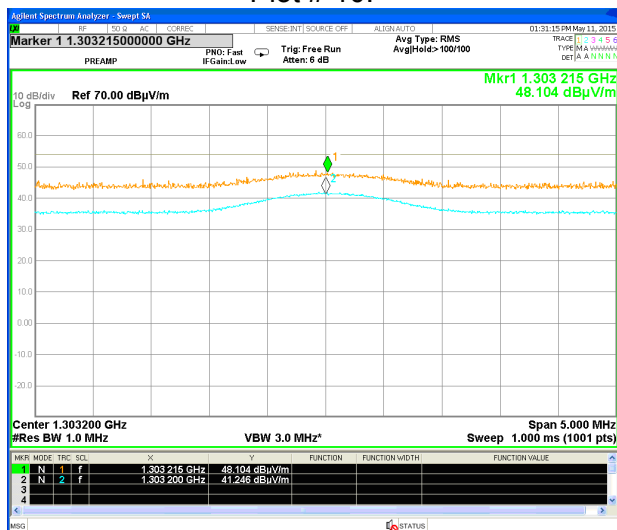

Plot # 12.




Test Report No.: 9512312314

Page 18 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

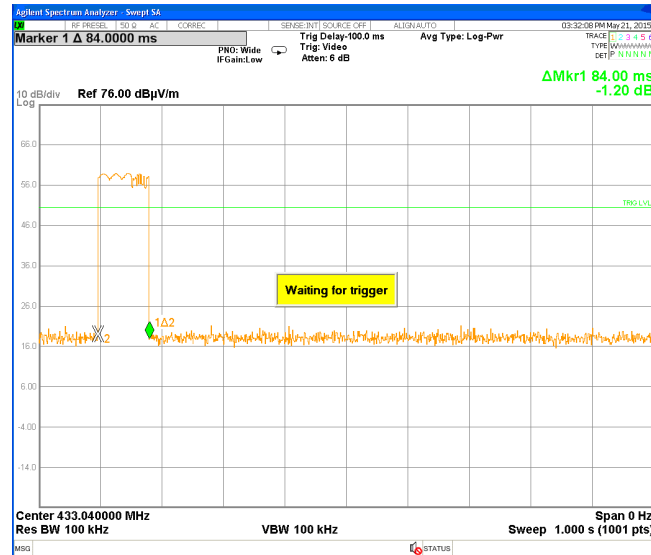

Plot # 13. Transmitter time duration.

**Test Report No.: 9512312314****Page 19 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF

3.6. Test of occupied bandwidth per 15.231(c)


3.6.1. Requirements:

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

For 434 MHz centre frequency allowed emission bandwidth shall be less than $(434/100) 0.25\% = 1.085$ MHz.

3.6.2. Test results:

Test result presented in plot below.

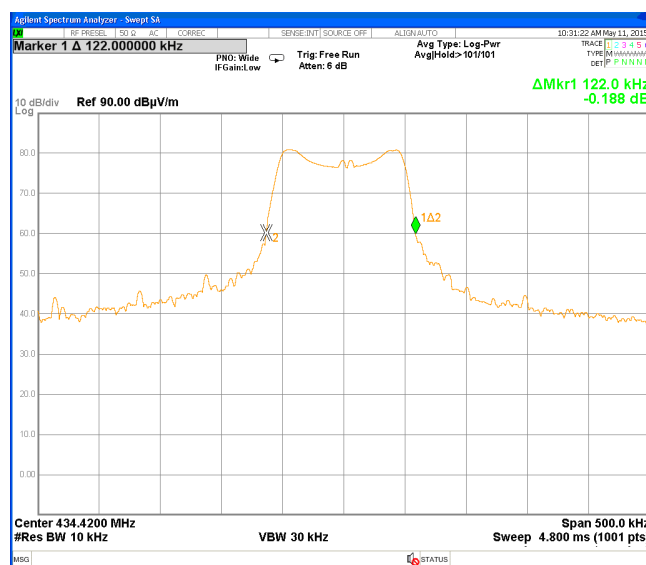

Plot # 14. Occupied bandwidth test result

3.6.3. Test summary:

20 dB occupied bandwidth is 122 kHz.

The tested unit meets the standard requirement.

**Test Report No.: 9512312314****Page 20 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF**

3.7. Conducted emission test on AC main line.


3.7.1. Requirements:

Frequency, MHz	Conducted limit, dB μ V	
	QP	AVRG
0.15 - 0.5	66 - 56*	56 - 46*
0.5 - 5	56	46
5 - 30	60	50

* Decreases linearly with the logarithm of the frequency.


EUT was placed on a wooden table in a shielded chamber at a height of 80 cm from the floor and 40 cm from the vertical reference plane. The measurements were performed at mains terminals by means of LISN, connected to spectrum analyzer in the frequency range as referred to in the table above. The measurements were made with quasi-peak (CISPR) and average detectors. The position of the EUT cables was varied to determine maximum emission level.

3.7.2. Test results:

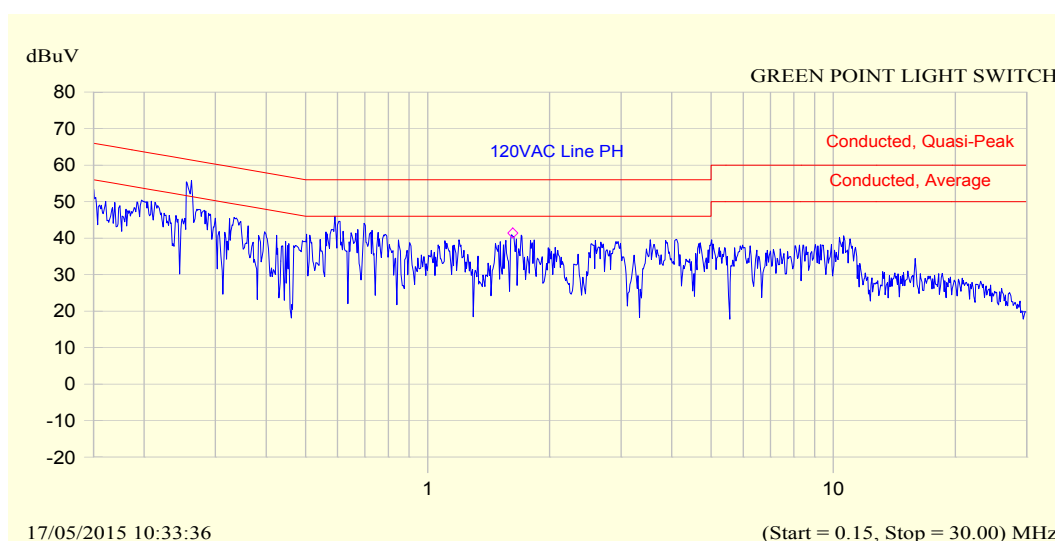

**Test Report No.: 9512312314****Page 21 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF

Frequency	QP dB μ V	Limit QP dB μ V	Margin dB	Avg dB μ V	Limit Avg dB μ V	Margin dB
0.153	58.6	65.8	7.2	47.1	55.8	8.7
0.210	57.0	63.2	6.2	45.5	53.2	7.7
0.271	52.9	61.1	8.2	42.4	51.1	8.7
0.570	42.0	56.0	14.0	33.2	46.0	12.8
0.706	40.5	56.0	15.5	33.0	46.0	13.0
1.622	38.6	56.0	17.4	31.7	46.0	14.3

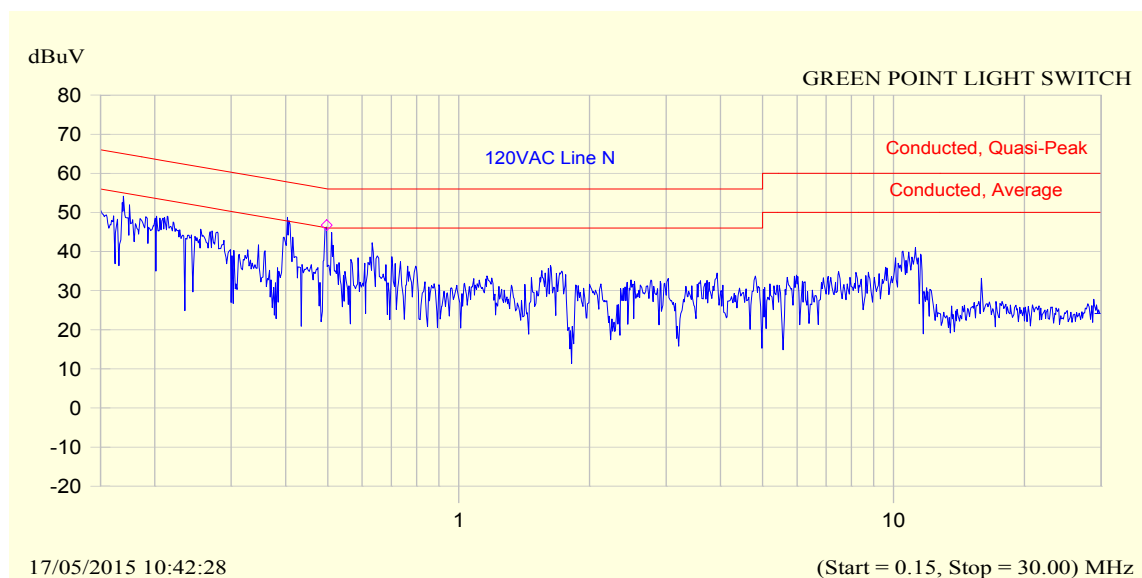Plot # 15. AC line conducted emissions test. Line PH.

Frequency	QP dB μ V	Limit QP dB μ V	Margin dB	Avg dB μ V	Limit Avg dB μ V	Margin dB
0.152	58.0	65.9	7.8	46.6	55.9	9.3
0.203	56.0	63.5	7.5	44.8	53.5	8.8
0.272	52.1	61.0	9.0	41.0	51.0	10.0
0.347	48.5	59.0	10.6	37.0	49.0	12.1
0.497	41.5	56.0	14.6	28.7	46.0	17.4
0.578	40.2	56.0	15.8	30.7	46.0	15.3
1.622	32.8	56.0	23.2	26.0	46.0	20.0

Plot # 16. AC line conducted emissions test. Line N.

**Test Report No.: 9512312314****Page 22 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF**

4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

Test equipment used

No	Description	Manufacturer information			Due Calibration date
		Name	Model	Serial No	
1	MXE EMI Receiver 20 Hz -26.5 GHz	Agilent	N9038A	SII 650114	February 2016
2	Double Ridged Guide Antenna 0.75 – 18 GHz	ETS-Lindgren	3115	00143138	December 2015
3	Broadband Horn antenna 15 – 40 GHz	Schwarzbeck Mess-Electronik	BBHA 9170	9170-341	December 2015
4	Double Ridged Waveguide Horn Antenna 1 – 18 GHz	ETS-Lindgren	3117	00139055	December 2015
5	Antenna Biconilog 30 – 6000 MHz	ETS-Lindgren	31142D	0146490	December 2015
6	Spectrum analyzer 9 kHz-6.0 GHz	Rohde&Schwarz	FSL	SII5912	May 2015
7	EMI Analyser 9 kHz - 26.5 GHz	HP	E7405A	SII 4944	May 2015
8	Attenuator 3 dB DC – 12.4 GHz	HP	8491A	50469	October 2015
9	LISN 9 kHz – 30 MHz	FCC	LISN 250-32-4-16	SII5023	October 2015
10	Transient limiter 0.009-200 MHz	HP	11947A	3107105	August 2015
11	Cable RF 1m	Huber-Suhner	Sucoflex 104PE	21325/4PE	October 2015
12	Cable RF 4m	Huber-Suhner	Sucoflex 104PE	21329/4PE	October 2015
13	Cable RF 0.5m	Huber-Suhner	Multiflex 141	520201	October 2015
14	Active Loop antenna 1.0 kHz – 30 MHz	ETS-Lindgren	6507	00144641	December 2015

**Test Report No.: 9512312314****Page 23 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF**

5. Appendix 2: Antenna Factor and Cable Loss

Cable Loss. Mast 6 m set cable.

Point	Frequency, MHz	Cable Loss, dB	Point	Frequency, MHz	Cable Loss, dB
1	30	0.3	21	1000	2.5
2	50	0.4	22	1100	2.6
3	100	0.6	23	1200	2.8
4	150	0.8	24	1300	2.9
5	200	1.0	25	1400	3.1
6	250	1.1	26	1500	3.2
7	300	1.2	27	1600	3.3
8	350	1.3	28	1700	3.5
9	400	1.5	29	1800	3.6
10	450	1.6	30	1900	3.7
11	500	1.7	31	2000	3.9
12	550	1.8	32	2100	4.0
13	600	1.9	33	2200	4.1
14	650	1.9	34	2300	4.2
15	700	2.0	35	2400	4.4
16	750	2.1	36	2500	4.6
17	800	2.1	37	2600	4.7
18	850	2.2	38	2700	4.8
19	900	2.3	39	2800	4.9
20	950	2.4	40	2900	5.0



Test Report No.: 9512312314

Page 24 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

Antenna factor
Biconilog Antenna, ETS-Lindgren mod. 31142D, S/N: 0146490 3m calibration.

No.	f / MHz	AF / dB/m	f / MHz	AF / dB/m	f / MHz	AF / dB/m
1	30	18.7	250	12.0	2750	31.0
2	35	15.7	300	13.8	3000	31.2
3	40	12.9	400	16.2	3250	32.7
4	45	10.6	500	18.6	3500	34.5
5	50	9.0	600	20.2	3750	34.3
6	60	7.3	700	21.8	4000	34.5
7	70	7.7	800	22.9	4250	35.3
8	80	8.2	900	24.1	4500	35.5
9	90	9.2	1000	24.8	4750	36.1
10	100	9.4	1250	26.9	5000	37.4
11	120	8.5	1500	30.2	5250	38.4
12	140	8.5	1750	28.5	5000	39.9
13	160	9.1	2000	28.9	5750	38.2
14	180	10.5	2250	29.8	6000	39.1
15	200	10.9	2500	32.5		



Test Report No.: 9512312314

Page 25 of 27 pages

Title: RF transceiver

Model: IGHF

FCC ID: 2AFMJ-IGHF

Antenna Factor
Double Ridged Guide Antenna mfr ETS-Lindgren model 3115 1m calibration

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	1000	23.7
2	2000	28.5
3	3000	29.6
4	4000	32.5
5	4500	32.6
6	5000	33.5
7	6000	36.1
8	6500	36.5
9	7000	37.3
10	7500	38.0
11	8000	37.3
12	8500	37.9
13	9000	38.1
14	9500	38.5
15	10000	38.7
16	10500	38.8
17	11000	38.6
18	11500	38.8
19	12000	38.9
20	12500	39.3
21	13000	40.2
22	13500	40.8
23	14000	40.6
24	14500	40.4
25	15000	39.6
26	15500	39.5
27	16000	39.8
28	16500	40.4
29	17000	41.3
30	17500	42.8
31	18000	43.2

**Test Report No.: 9512312314****Page 26 of 27 pages****Title: RF transceiver****Model: IGHF****FCC ID: 2AFMJ-IGHF****Cable Loss****Type: Sucoflex 104PE; Ser.No.21329/4PE; 4 m length**

Point	Frequency, GHz	Cable Loss, dB
1	0.0-1.0	1.7
2	1.0- 3.5	3.2
3	3.5- 5.5	4.0
4	5.5 - 7.5	4.7
5	7.5 - 9.5	5.3
6	9.5 - 10.5	5.6
7	10.5 - 12.5	6.2
8	12.5 - 14.5	6.8
9	14.5 - 16.5	7.5
10	16.5 - 18.0	8.1

Active Loop antenna mfr.ETS-Lindgren mod. 6507 S/N 144641.

Frequency, MHz	Magnetic Antenna factor dBS/m	Electric Antenna factor dB/m
0.009	-20.0	31.5
0.010	-21.0	30.5
0.020	-26.7	24.9
0.075	-32.4	19.1
0.100	-32.7	18.8
0.150	-32.9	18.6
0.250	-33.0	18.5
0.500	-33.0	18.5
0.750	-33.0	18.5
1.000	-32.8	18.7
2.000	-32.7	18.8
3.000	-32.9	18.7
4.000	-33.2	18.3
5.000	-33.4	18.2
10.000	-34.0	17.6
15.000	-34.2	17.3
20.000	-34.4	17.1
25.000	-34.8	16.7
30.000	-35.0	16.5

Test Report No.: 9512312314**Page 27 of 27 pages****Title:** RF transceiver**Model:** IGHF**FCC ID:** 2AFMJ-IGHF

6. Appendix 3: Test setups photo.

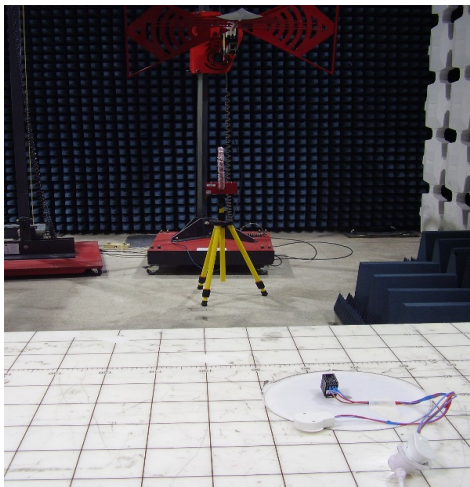


Photo 2.

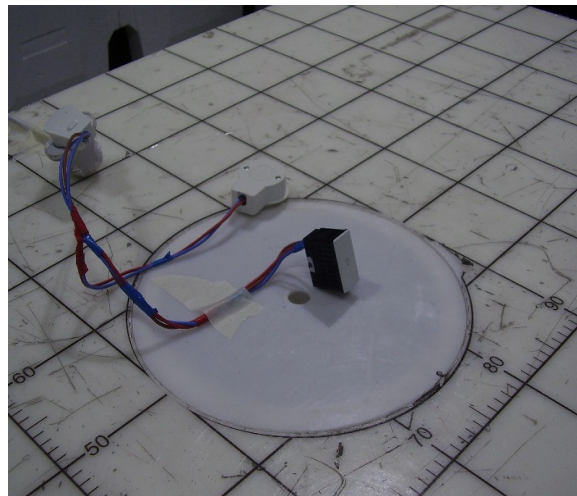


Photo 3.



Photo 4.