


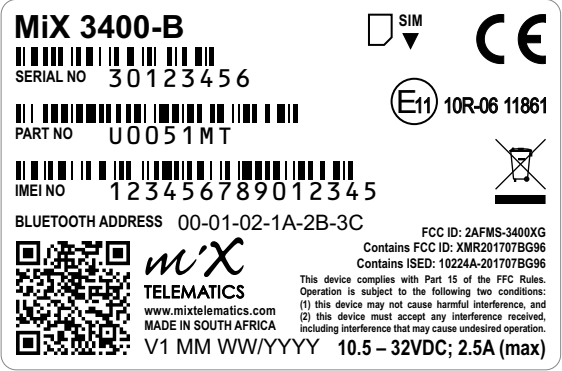

NOTES

1. Use 2mm margin on all sides of label
2. Do not scale logos. Use only logo artwork provided
3. Apply label symmetrically to indentation on bottom surface of the OBC's housing.
Orientate label so that bottom edge of label is closest to the OBC's connectors.

REF	DESCRIPTION	PART NUMBER
1	LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM	CON0153
2	RIBBON THER TRANS 110MMx70M NOTCHES B325	CON0154

	SPECIFICATION				REV	DATE	ECN	CHANGES
	DOCUMENT TITLE	MiX 3400-B: Housing Label			A	21/9/2021	N/A	Field trial release
	DOCUMENT NUMBER	SLU0051A			B	21/9/2022	N/A	Serial Number Prefix 30; Added SIM orientation
	SHEET	1 OF 1	SHEET SIZE	A4	C	27/9/2022	N/A	Certification mock-up
	SCALE	1:1 Except where shown otherwise						
	FORM	7.11.5-22		FORM REVISION	5			