


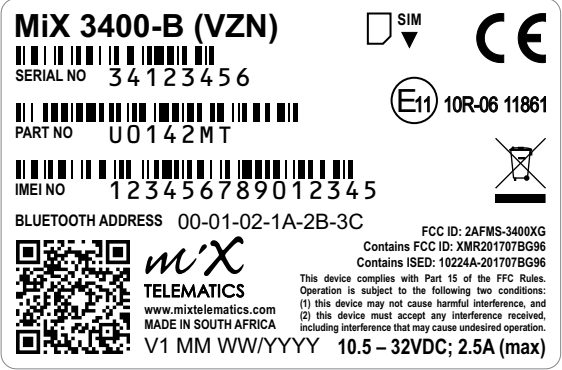

NOTES

- 1. Use 2mm margin on all sides of label
- 2. Do not scale logos. Use only logo artwork provided
- 3. Apply label symmetrically to indentation on bottom surface of the OBC's housing.
Orientate label so that bottom edge of label is closest to the OBC's connectors.

REF	DESCRIPTION	PART NUMBER
1	LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM	CON0153
2	RIBBON THER TRANS 110MMx70M NOTCHES B325	CON0154

	SPECIFICATION				REV	DATE	ECN	CHANGES
	DOCUMENT TITLE	MiX 3400-B (VZN): Housing Label			A	21/9/2022	N/A	Field trial release
	DOCUMENT NUMBER	SLU0142A			B	27/9/2022	N/A	Certification mock-up
	SHEET	1 OF 1	SHEET SIZE	A4				
	SCALE	1:1 Except where shown otherwise						
	FORM	7.11.5-22	FORM REVISION	5				