


Product Title
Font: Arial, Regular, 12pt
Top-align with Top Label Margin
Left-align with Left Label Margin

**Serial Number,
Part Number,
IMEI Number**
Heading Font: Arial Narrow, Bold, 6pt
Barcode Format: Code 128
Barcode Line Height: 2.5mm
Barcode Text Font: OCR-B 10 BT, Regular, 11pt /
Arial, Regular, 9pt
Left-align with Left Label Margin

Bluetooth MAC Address
Heading Font: Arial Narrow, Regular, 6pt
Paragraph Alignment: Justify
MAC Address Font: Arial, Regular, 8pt
Left-align with Left Label Margin

**Product Version,
Supplier Code,
Date Of Manufacture**
Font: Arial, Regular, 8pt
Paragraph alignment: Left
Left-align with Left Label Margin

MiX Telematics Logo
Width: 29.91mm
Height: 5.36mm
Bottom-align with Bottom Label Margin
Left-align with Left Label Margin

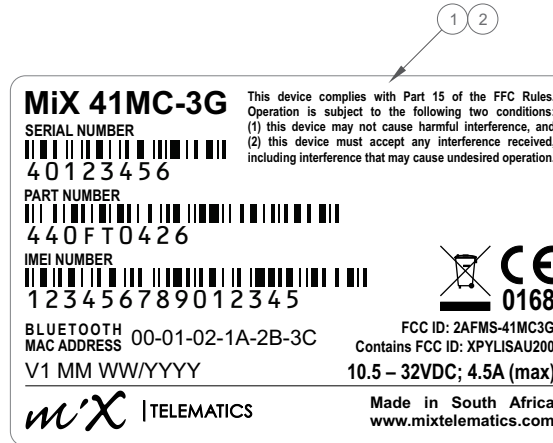

FCC Compliance Notice Text

Font: Arial Narrow, Bold, 5pt
Paragraph alignment: Justify
Right-align with Right Label Margin
Top-align with Top Label Margin

Wheelie Bin Logo

Width: 5.44mm
Height: 7.0mm
Right-align 1.5mm from CE Logo
Bottom-align with IMEI Barcode Text

CE Logo with Notified Body Number

Logo Width: 7.0mm
Logo Height: 5.0mm
Notified Body Text: Arial Narrow, Bold, 11pt
Right-align with Right Label Margin
Bottom-align with IMEI Barcode Text

FCC Text

Font: Arial Narrow, Bold, 6pt
Paragraph alignment: Right
Right-align with Right Label Margin
Bottom-align with Bluetooth MAC Address Heading

Power Rating Text

Font: Arial Narrow, Bold, 8pt
Right-align with Right Label Margin
Bottom-align with Date of Manufacture Text

Line

Height: 0.5pt
Width: (Area between Left and Right Label Margins)

Origin Text,

MiX Telematics Website

Font: Arial, Bold, 6pt
Paragraph alignment: Justify
Right-align with Right Label Margin
Centre vertically with MiX Telematics Logo

NOTES

1. Use 2mm margin on all sides of label
2. Do not scale logos. Use only logo artwork provided
3. Serial number has format 40XXXXXX, where
XXXXXX is a 6-digit number as in the artwork above
4. Product Version has format V_n, where n=1,2,... (e.g. V1). Use the version number as indicated in the artwork above.
This is not to be confused with the Document Specification Version as in the title block below
5. Supplier Code has format MM (e.g. AB). Use Supplier Code as specified by MiX Telematics
6. Date of Manufacture Code has format WW/YYYY, where WW is the week number, and YYYY the year of manufacture (e.g. 32/2011)
7. Apply label symmetrically to indentation on bottom surface of the OBC's housing.
Orientate label so that bottom edge of label is closest to the OBC's connectors.

REF	DESCRIPTION	PART NUMBER
1	LABEL HG DURAFLEX OD:77 ID:25MM 74x49MM	CON0153
2	RIBBON THER TRANS 110MMx70M NOTCHES B325	CON0154

	SPECIFICATION				REV	DATE	ECN	CHANGES
	DOCUMENT TITLE	MiX 41MC-3G Housing Label			1A	14 Sep 2016	-	First Release: Field Trial 1
	DOCUMENT NUMBER	440SL0426A			1B	19 Jan 2017	504	Added Certification details; Changed Barcode and Bluetooth MAC Address Heading fonts; Changed Origin and Website text to bold
	SHEET	1 OF 1	SHEET SIZE	A4				
	SCALE	1:1 Except where shown otherwise			1C	24 Mar 2017	511	Added FCC Compliance Notice Text
	FORM	7.11.5-22		FORM REVISION	5			