



FCC RADIO TEST REPORT-WIFI

FCC ID: 2AFMZ-K1

Product : RTEEK K1

Trade Name : RTEEK

Model Name : K1

Serial Model : IGLOO K1

Report No. : NTEK-2015NT07012159F2

Prepared for

Access Telecom

1882 NW 97th Avenue, Miami, Florida 33172, United States

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street
Bao'an District, Shenzhen P.R. China

Tel.: +86-0755-61156588 Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TEST RESULT CERTIFICATION

Applicant's name Access Telecom

Address..... 1882 NW 97th Avenue, Miami, Florida 33172, United States

Manufacture's Name... LOCOPO Technology Co, Limited

Address..... Shenzhen futian district tianan digital city with four LuJinSong building 12 d

Product description

Product name..... RTEEK K1

Model and/or type reference K1

Serial Model IGLOO K1

Standards FCC Part15.247 01 Oct. 2014

Test procedure ANSI C63.10-2013 and KDB 558074: June 5, 2014

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests..... 06 Jul. 2015 ~27 Jul. 2015

Date of Issue 27 Jul. 2015

Test Result..... **Pass**

Testing Engineer : Eileen Liu.
(Eileen Liu)

Technical Manager : Brown Lu
(Brown Lu)

Authorized Signatory : Sam. Chen
(Sam Chen)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	13
3.1.2 TEST PROCEDURE	14
3.1.3 DEVIATION FROM TEST STANDARD	14
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS	15
3.2 RADIATED EMISSION MEASUREMENT	23
3.2.1 RADIATED EMISSION LIMITS	23
3.2.2 TEST PROCEDURE	24
3.2.3 DEVIATION FROM TEST STANDARD	24
3.2.4 TEST SETUP	25
3.2.5 EUT OPERATING CONDITIONS	26
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	27
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	28
3.2.8 TEST RESULTS (ABOVE 1000 MHZ)	30
4 . POWER SPECTRAL DENSITY TEST	31
4.1 APPLIED PROCEDURES / LIMIT	31
4.1.1 TEST PROCEDURE	31
4.1.2 DEVIATION FROM STANDARD	31
4.1.3 TEST SETUP	31
4.1.4 EUT OPERATION CONDITIONS	31
4.1.5 TEST RESULTS	32
5 . BANDWIDTH TEST	36
5.1 APPLIED PROCEDURES / LIMIT	36
5.1.1 TEST PROCEDURE	36

Table of Contents

	Page
TEST SETUP	36
5.1.2 EUT OPERATION CONDITIONS	36
5.1.3 TEST RESULTS	37
6 . PEAK OUTPUT POWER TEST	41
6.1 APPLIED PROCEDURES / LIMIT	41
6.1.1 TEST PROCEDURE	41
6.1.2 DEVIATION FROM STANDARD	41
6.1.3 TEST SETUP	41
6.1.4 EUT OPERATION CONDITIONS	41
6.1.5 TEST RESULTS	42
7 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	43
7.1 DEVIATION FROM STANDARD	43
7.2 TEST SETUP	43
7.3 EUT OPERATION CONDITIONS	43
7.4 TEST RESULTS	44
8 . ANTENNA REQUIREMENT	48
8.1 STANDARD REQUIREMENT	48
8.2 EUT ANTENNA	48
9 . EUT TEST PHOTO	49
APPENDIX-PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247 (a)(2)	6dB Bandwidth	PASS	
15.247 (b)	Peak Output Power	PASS	
15.247 (c)	Radiated Spurious Emission	PASS	
15.247 (d)	Power Spectral Density	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 TEST FACILITY

NTEK Testing Technology Co., Ltd

Add.:1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

FCC Registration No.:238937; IC Registration No.:9270A-1

CNAS Registration No.:L5516

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %** .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power,conducted	$\pm 0.16\text{dB}$
3	Spurious emissions,conducted	$\pm 0.21\text{dB}$
4	All emissions,radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	RTEEK K1	
Trade Name	RTEEK	
Model Name	K1	
Serial Model	IGLOO K1	
Model Difference	All the model are the same circuit and RF module, except the model name and colour.	
Product Description	Operation Frequency:	802.11b/g: 2412~2462MHz
	Modulation Type:	IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK)
	Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps
	Number Of Channel	802.11b/g:11CH
	Antenna Designation:	Please see Note 3.
	Antenna Gain (dBi)	1.0 dBi
Channel List	Please refer to the Note 2.	
Ratings	DC 3.7V	
Adapter	Mode : YMK-12W050200B Input: 100-240V~, 50/60Hz, 0.15A Output: 5.0V---, 2000mA	
Battery	DC 3.7V, 1300mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Channel List for 802.11b/g							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Ceramic Antenna	N/A	1.0	WIFI Antenna

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	Link Mode

For Conducted Emission	
Final Test Mode	Description
Mode 3	Link Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	802.11b CH1/ CH6/ CH11
Mode 2	802.11g CH1/ CH6/ CH11
Mode 3	Link Mode


Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported
- (3) EUT configured to transmit continuously:


Operated Mode for Worst Duty Cycle	
Test Signal Duty Cycle (x)	Average correction factor (dB)
100% - IEEE 802.11b	0
100% - IEEE 802.11g	0

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission Test

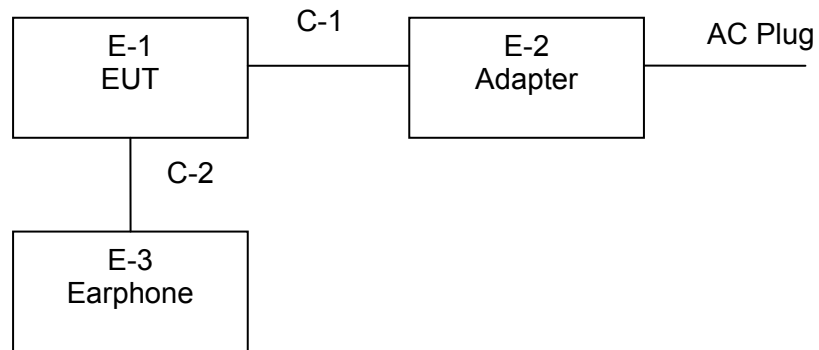

Radiated Spurious Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	RTEEK K1	RTEEK	K1	N/A	EUT
E-2	Adapter	N/A	YMK-12W050200B	N/A	
E-3	Earphone	N/A	2688		

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
3	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
6	Horn Antenna	EM	EM-AH-10180	2011071402	2015.07.06	2016.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2014.12.22	2015.12.21	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2015.07.06	2016.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2015.07.06	2016.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
2	LISN	R&S	ENV216	101313	2014.08.24	2015.08.23	1 year
3	LISN	EMCO	3816/2	00042990	2014.08.24	2015.08.23	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
5	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
6	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year
7	Test Cable	N/A	C01	N/A	2015.06.08	2016.06.07	1 year
8	Test Cable	N/A	C02	N/A	2015.06.08	2016.06.07	1 year
9	Test Cable	N/A	C03	N/A	2015.06.08	2016.06.07	1 year

1	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year
---	-------------	-----	----------	--------	------------	------------	--------

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

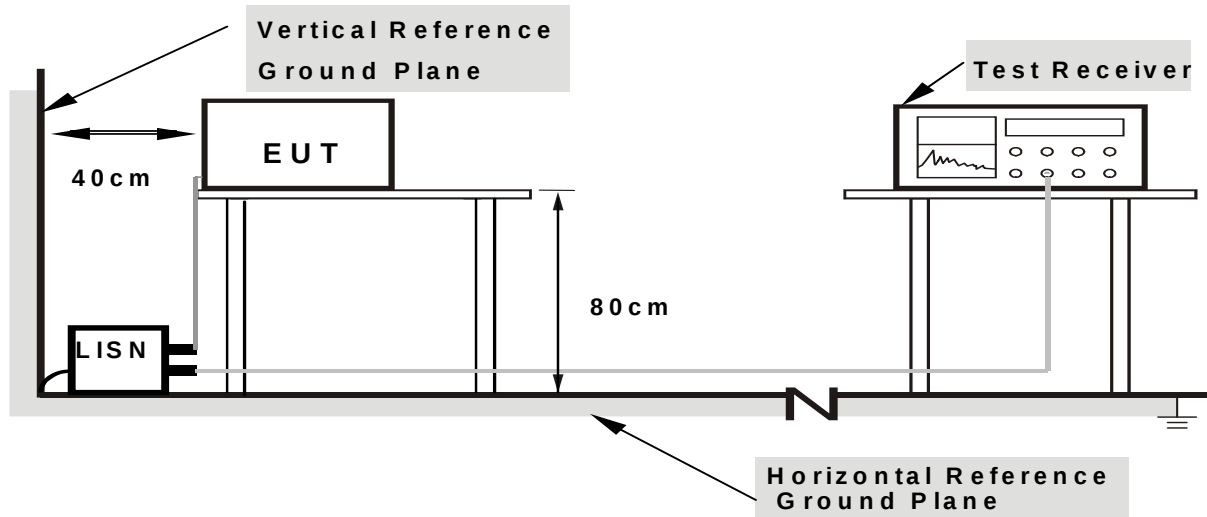

Note: 1.Support units were connected to second LISN .

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


3.1.6 TEST RESULTS

EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 3

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.1980	33.15	9.61	42.76	63.69	-20.93	QP
0.1980	26.40	9.61	36.01	53.69	-17.68	AVG
0.2579	33.70	9.62	43.32	61.50	-18.18	QP
0.3578	38.92	9.63	48.55	58.78	-10.23	QP
0.3578	28.19	9.63	37.82	48.78	-10.96	AVG
0.7940	32.10	9.63	41.73	56.00	-14.27	QP
0.7940	24.31	9.63	33.94	46.00	-12.06	AVG
1.2579	25.12	9.59	34.71	46.00	-11.29	AVG
1.8856	34.26	9.55	43.81	56.00	-12.19	QP
1.8856	25.22	9.55	34.77	46.00	-11.23	AVG
3.3140	32.73	9.51	42.24	56.00	-13.76	QP
3.3140	23.59	9.51	33.10	46.00	-12.90	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

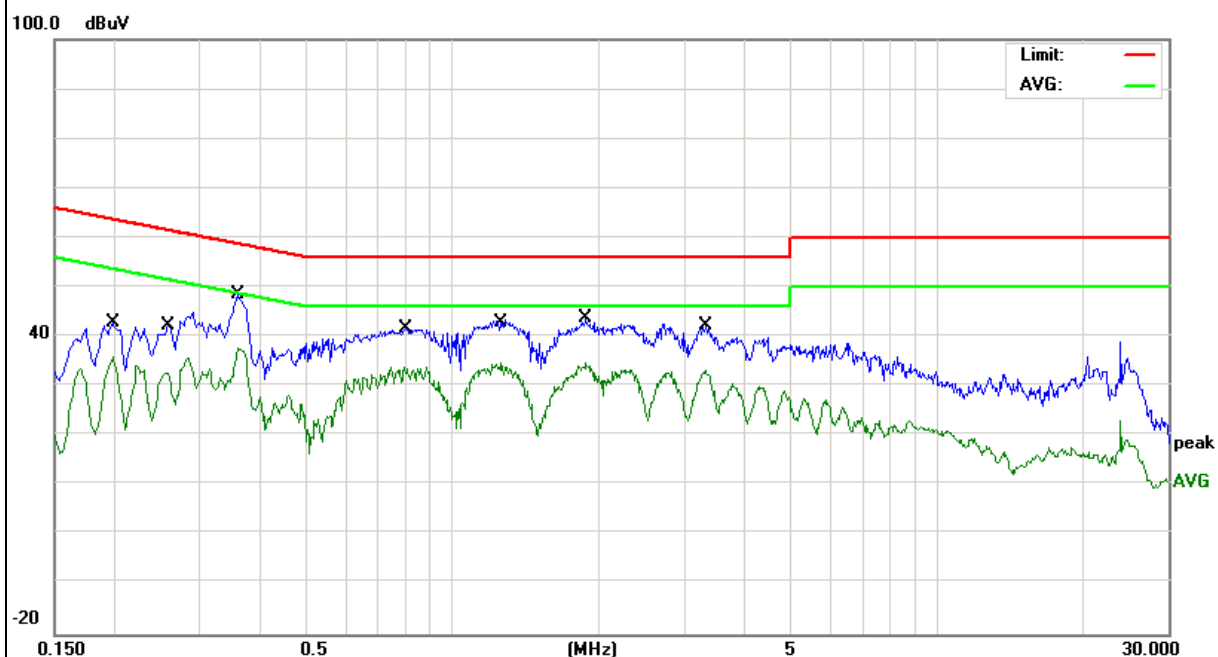


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1779	36.58	9.61	46.19	64.58	-18.39	QP
0.1779	23.74	9.61	33.35	54.58	-21.23	AVG
0.3300	40.98	9.62	50.60	59.45	-8.85	QP
0.3300	30.47	9.62	40.09	49.45	-9.36	AVG
0.3659	41.39	9.63	51.02	58.59	-7.57	QP
0.3659	29.95	9.63	39.58	48.59	-9.01	AVG
0.6820	37.38	9.64	47.02	56.00	-8.98	QP
0.6820	25.92	9.64	35.56	46.00	-10.44	AVG
1.0140	34.30	9.61	43.91	56.00	-12.09	QP
1.0140	24.91	9.61	34.52	46.00	-11.48	AVG
1.9899	36.48	9.54	46.02	56.00	-9.98	QP
1.9899	25.64	9.54	35.18	46.00	-10.82	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

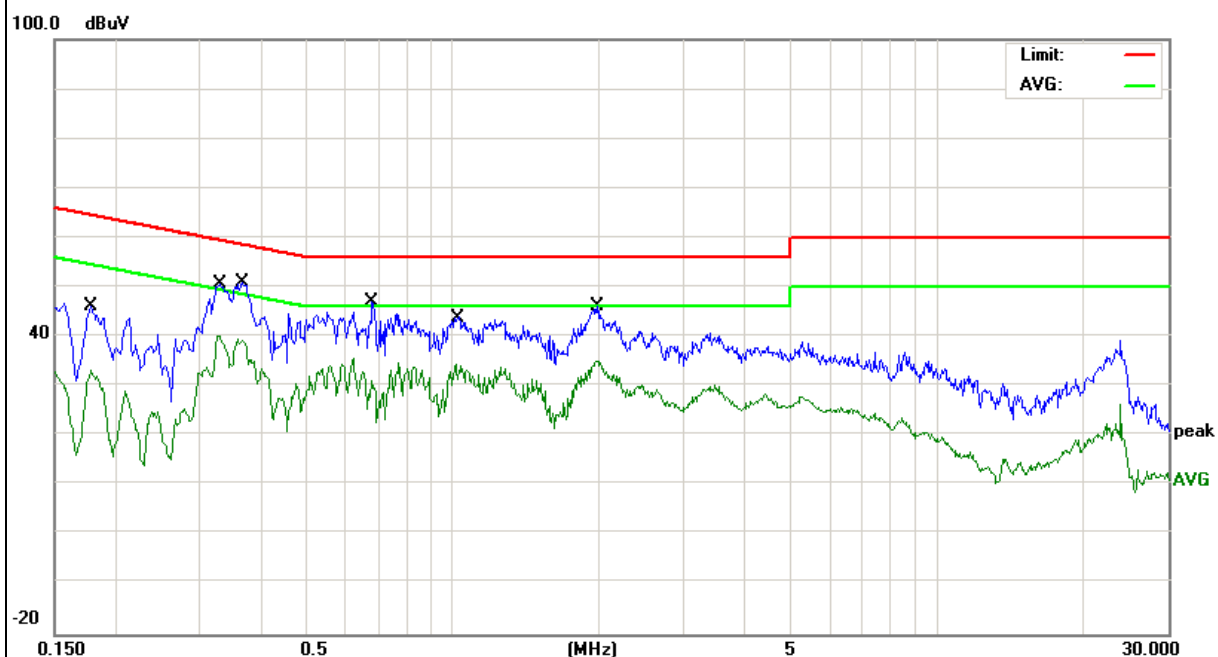


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1554	39.05	9.63	48.68	65.70	-17.02	QP
0.1554	27.52	9.63	37.15	55.70	-18.55	AVG
0.3300	40.97	9.63	50.60	59.45	-8.85	QP
0.3300	27.89	9.63	37.52	49.45	-11.93	AVG
0.3659	41.26	9.49	50.75	58.59	-7.84	QP
0.3659	27.54	9.49	37.03	48.59	-11.56	AVG
0.5220	38.88	9.77	48.65	56.00	-7.35	QP
0.5220	25.97	9.77	35.74	46.00	-10.26	AVG
1.9697	38.29	9.65	47.94	56.00	-8.06	QP
1.9697	25.03	9.65	34.68	46.00	-11.32	AVG
24.0016	31.04	9.93	40.97	60.00	-19.03	QP
24.0016	17.48	9.93	27.41	50.00	-22.59	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

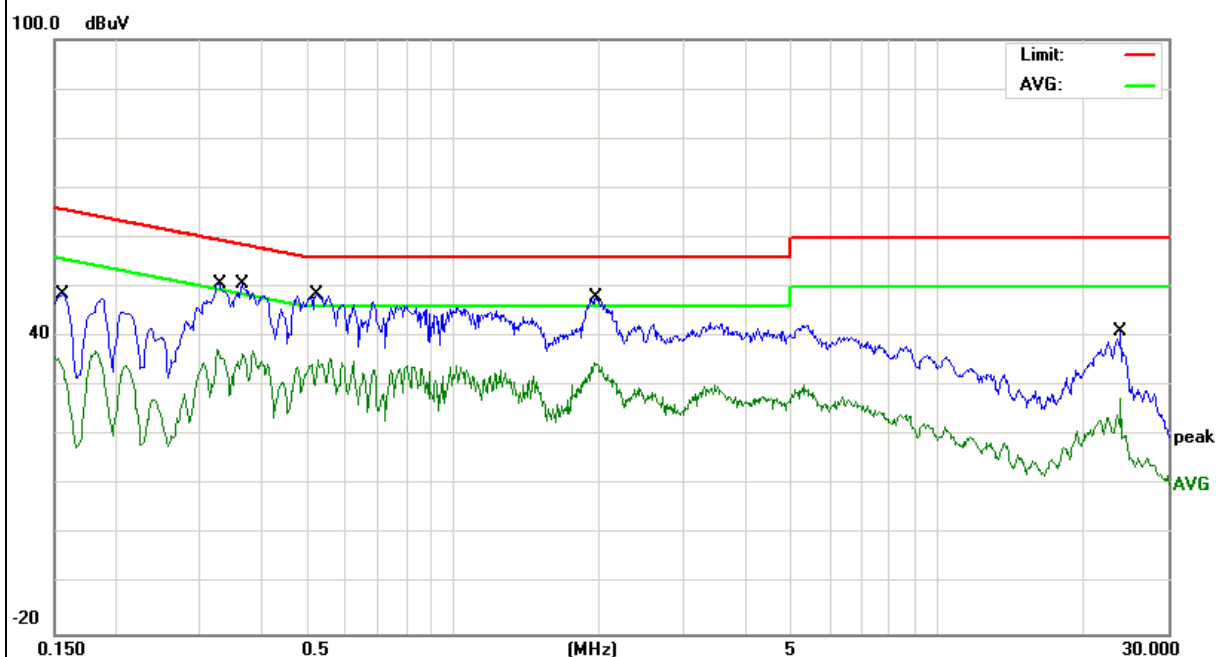


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1833	40.09	9.61	49.70	64.33	-14.63	QP
0.1833	29.62	9.61	39.23	54.33	-15.10	AVG
0.3339	42.71	9.61	52.32	59.35	-7.03	QP
0.3339	29.62	9.61	39.23	49.35	-10.12	AVG
0.7660	38.13	9.77	47.90	56.00	-8.10	QP
0.7660	27.07	9.77	36.84	46.00	-9.16	AVG
1.0220	39.45	9.73	49.18	56.00	-6.82	QP
1.0220	26.91	9.73	36.64	46.00	-9.36	AVG
1.9697	38.45	9.65	48.10	56.00	-7.90	QP
1.9697	25.45	9.65	35.10	46.00	-10.90	AVG
3.3700	35.24	9.68	44.92	56.00	-11.08	QP
3.3700	22.17	9.68	31.85	46.00	-14.15	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

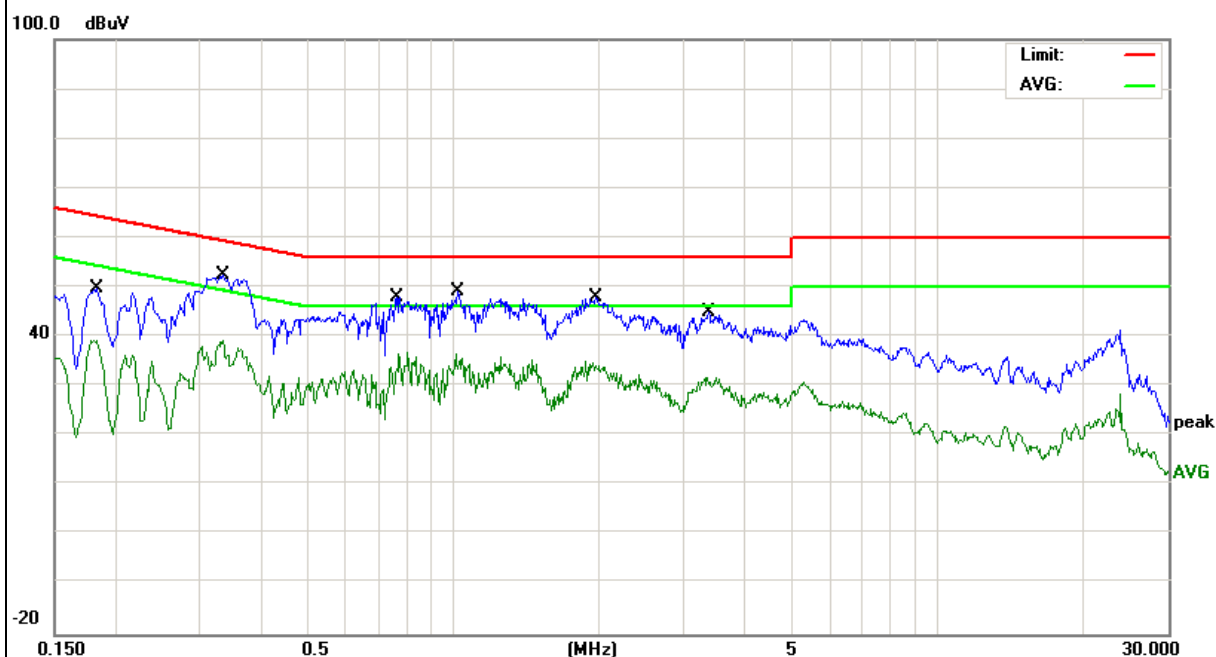


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2328	36.21	9.61	45.82	62.35	-16.53	QP
0.2328	21.06	9.61	30.67	52.35	-21.68	AVG
0.3410	32.52	9.62	42.14	59.18	-17.04	QP
0.3410	18.03	9.62	27.65	49.18	-21.53	AVG
0.5237	39.65	9.68	49.33	56.00	-6.67	QP
0.5237	19.55	9.68	29.23	46.00	-16.77	AVG
0.7046	36.85	9.64	46.49	56.00	-9.51	QP
0.7046	18.96	9.64	28.60	46.00	-17.40	AVG
0.9996	35.60	9.61	45.21	56.00	-10.79	QP
0.9996	16.88	9.61	26.49	46.00	-19.51	AVG
3.8808	30.75	9.51	40.26	56.00	-15.74	QP
3.8808	19.97	9.51	29.48	46.00	-16.52	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

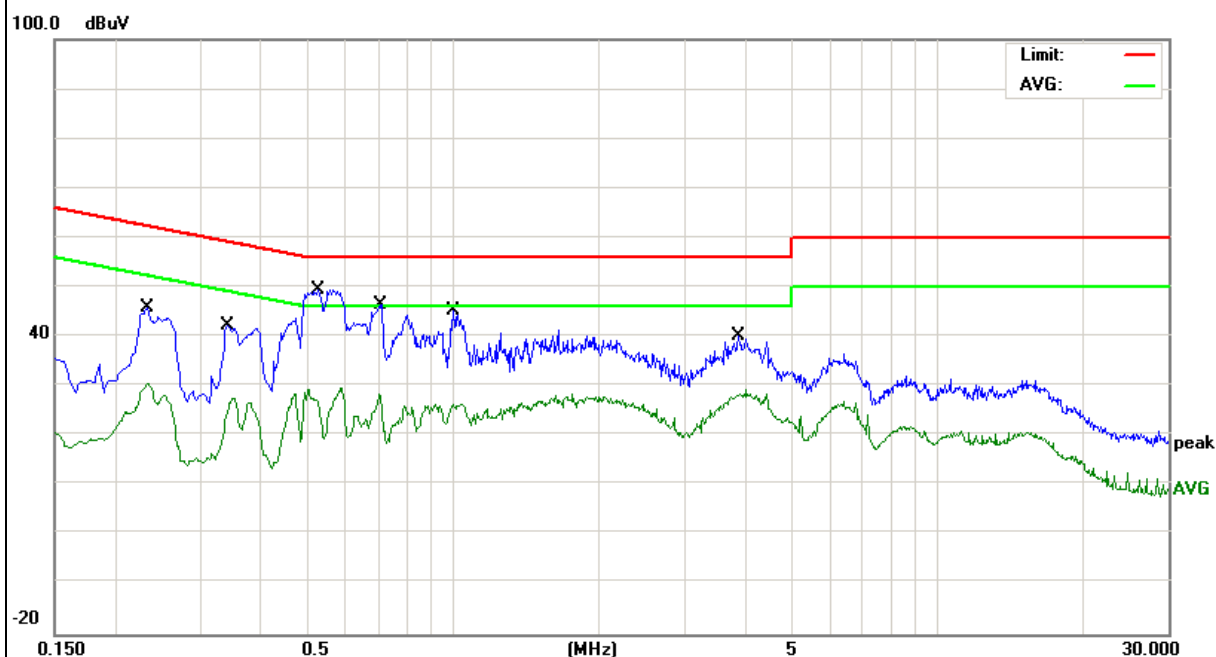


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form PC AC 120V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.2328	33.50	9.61	43.11	62.35	-19.24	QP
0.2328	21.30	9.61	30.91	52.35	-21.44	AVG
0.3410	32.54	9.62	42.16	59.18	-17.02	QP
0.3410	19.29	9.62	28.91	49.18	-20.27	AVG
0.5237	37.51	9.68	47.19	56.00	-8.81	QP
0.5237	18.46	9.68	28.14	46.00	-17.86	AVG
0.7046	35.63	9.64	45.27	56.00	-10.73	QP
0.7046	19.18	9.64	28.82	46.00	-17.18	AVG
1.0156	34.48	9.61	44.09	56.00	-11.91	QP
1.0156	18.40	9.61	28.01	46.00	-17.99	AVG
4.0061	30.49	9.51	40.00	56.00	-16.00	QP
4.0061	19.41	9.51	28.92	46.00	-17.08	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

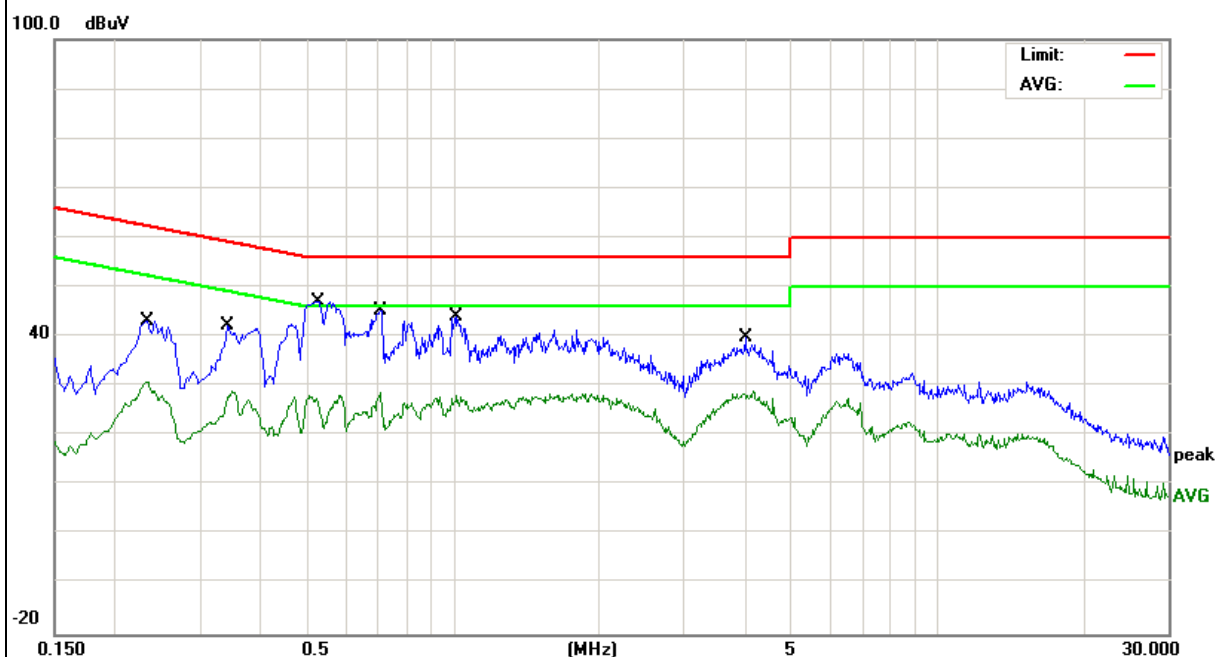


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form PC AC 240V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	44.08	9.60	53.68	65.99	-12.31	QP
0.1500	20.59	9.60	30.19	55.99	-25.80	AVG
0.2290	33.87	9.61	43.48	62.48	-19.00	QP
0.2290	19.08	9.61	28.69	52.48	-23.79	AVG
0.4686	32.41	9.66	42.07	56.54	-14.47	QP
0.4686	17.02	9.66	26.68	46.54	-19.86	AVG
0.6009	31.55	9.65	41.20	56.00	-14.80	QP
0.6009	14.48	9.65	24.13	46.00	-21.87	AVG
1.7808	28.39	9.56	37.95	56.00	-18.05	QP
1.7808	18.46	9.56	28.02	46.00	-17.98	AVG
4.0274	30.26	9.51	39.77	56.00	-16.23	QP
4.0274	21.26	9.51	30.77	46.00	-15.23	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

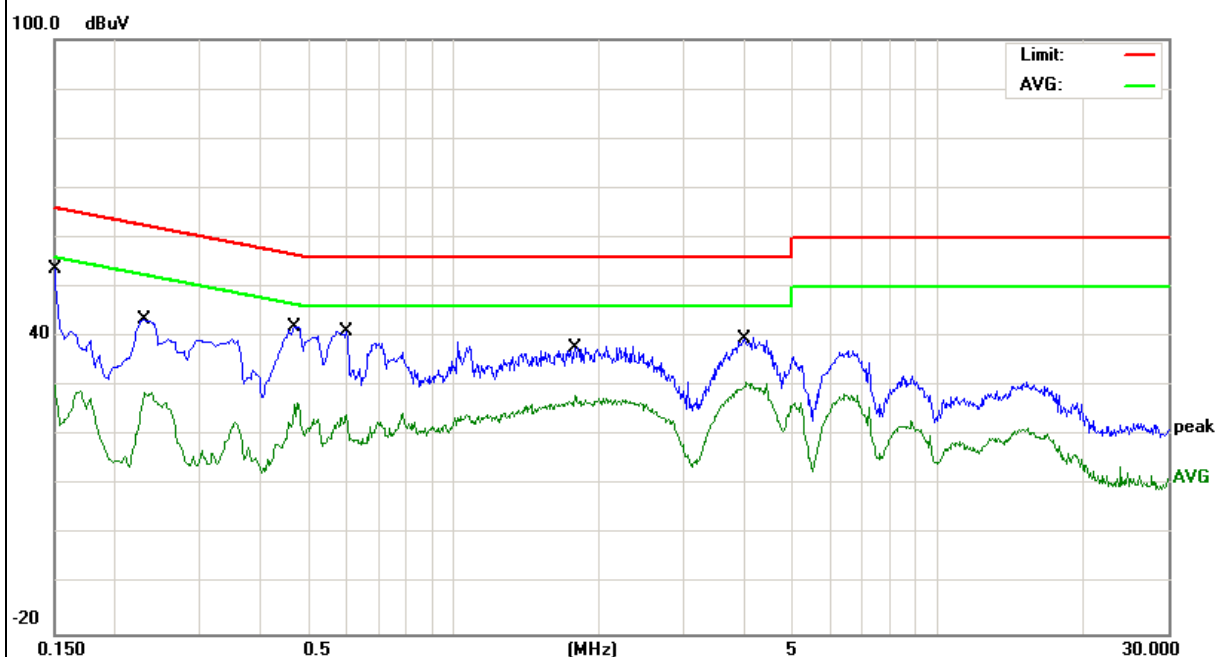


EUT :	RTEEK K1	Model Name :	K1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form PC AC 240V/60Hz	Test Mode :	Mode 3

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dBμV)	(dB)	(dBμV)	(dBμV)	(dB)	
0.1500	43.50	9.60	53.10	65.99	-12.89	QP
0.1500	22.92	9.60	32.52	55.99	-23.47	AVG
0.2290	30.13	9.61	39.74	62.48	-22.74	QP
0.2290	16.05	9.61	25.66	52.48	-26.82	AVG
0.3574	28.04	9.63	37.67	58.79	-21.12	QP
0.3574	16.58	9.63	26.21	48.79	-22.58	AVG
0.4736	30.72	9.66	40.38	56.45	-16.07	QP
0.4736	16.80	9.66	26.46	46.45	-19.99	AVG
2.1101	29.66	9.54	39.20	56.00	-16.80	QP
2.1101	18.63	9.54	28.17	46.00	-17.83	AVG
4.3375	29.61	9.51	39.12	56.00	-16.88	QP
4.3375	21.38	9.51	30.89	46.00	-15.11	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

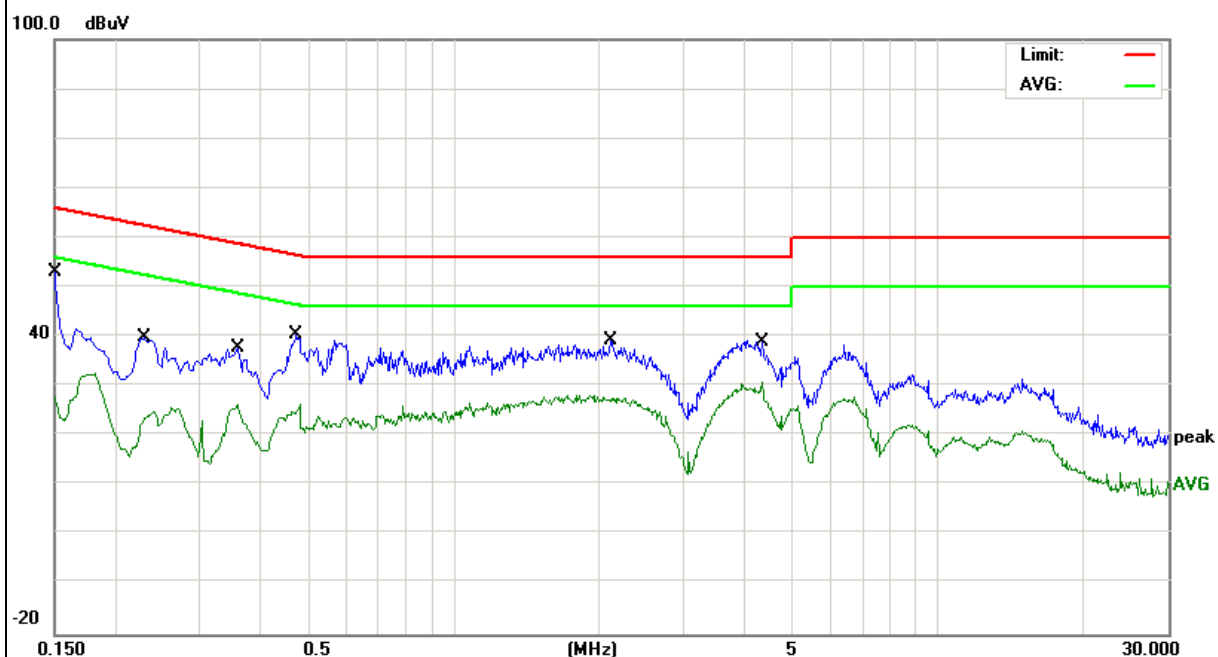

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	dBuV/m@at 3M	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

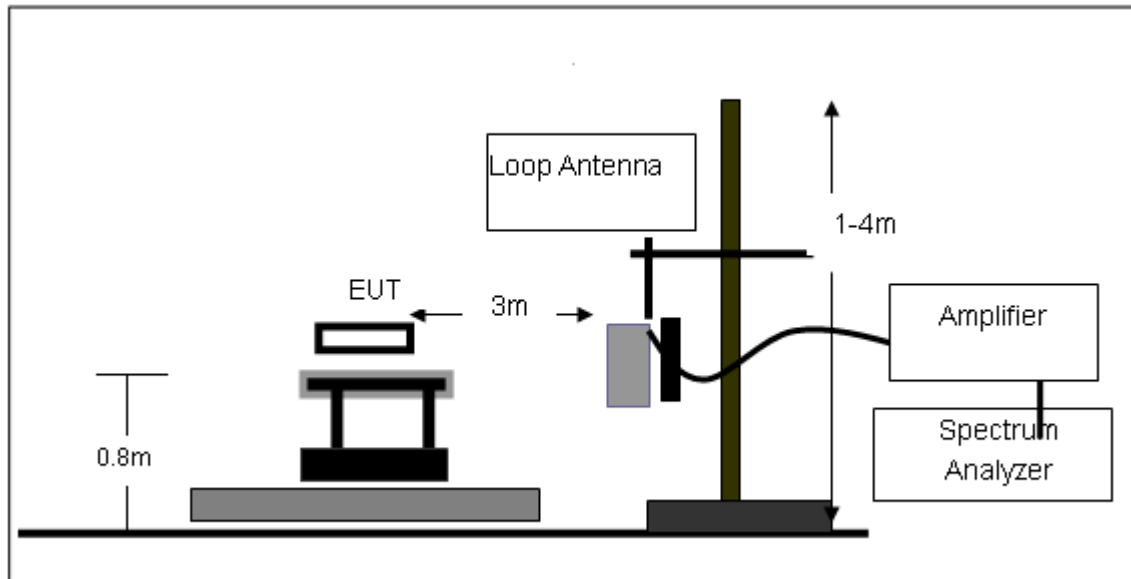

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

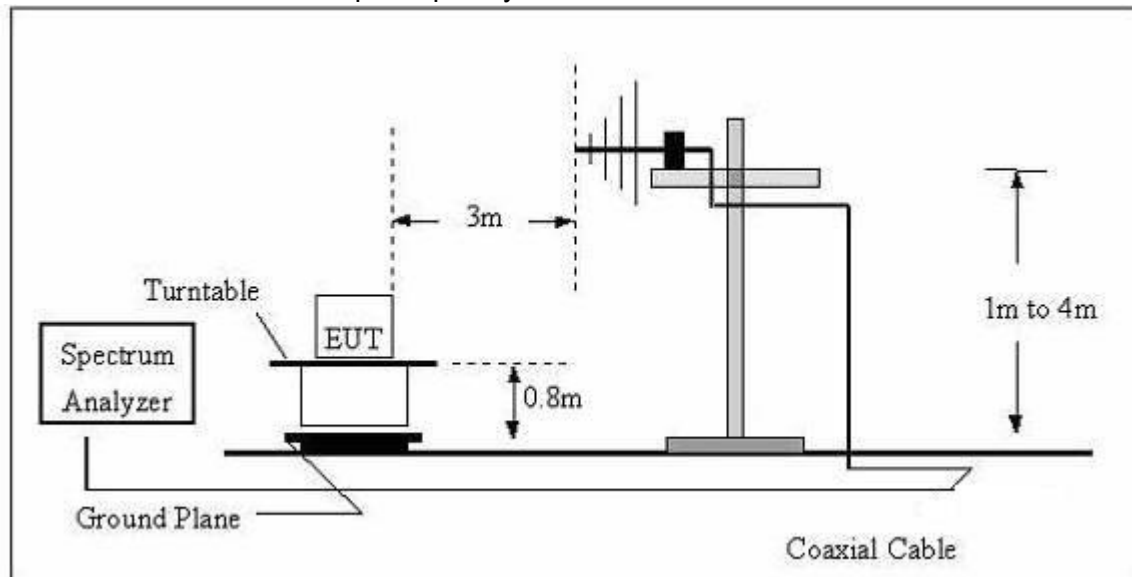

(C) Radiated Emission Test-Up Frequency Above 1GHz

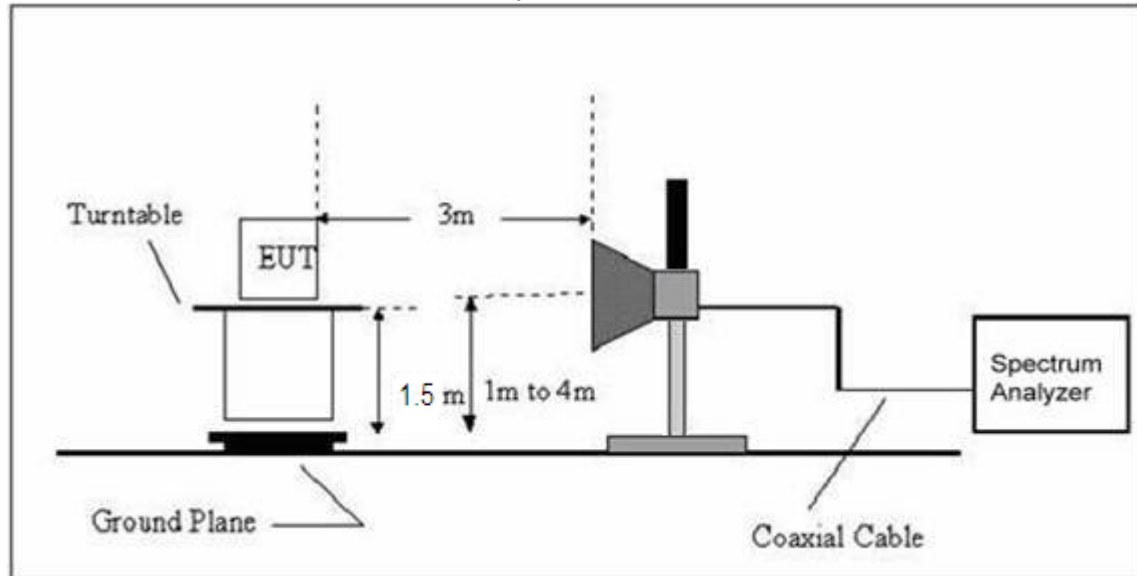**3.2.5 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)

EUT:	RTEEK K1	Model Name. :	K1
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)

EUT :	RTEEK K1	Model Name :	K1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.0950	16.44	17.73	34.17	40.00	-5.83	QP
V	65.1145	21.49	6.68	28.17	40.00	-11.83	QP
V	80.0806	21.40	5.87	27.27	40.00	-12.73	QP
V	143.8295	21.37	11.03	32.40	43.50	-11.10	QP
V	194.4534	17.06	10.74	27.80	43.50	-15.70	QP
V	217.5443	14.71	11.97	26.68	46.00	-19.32	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

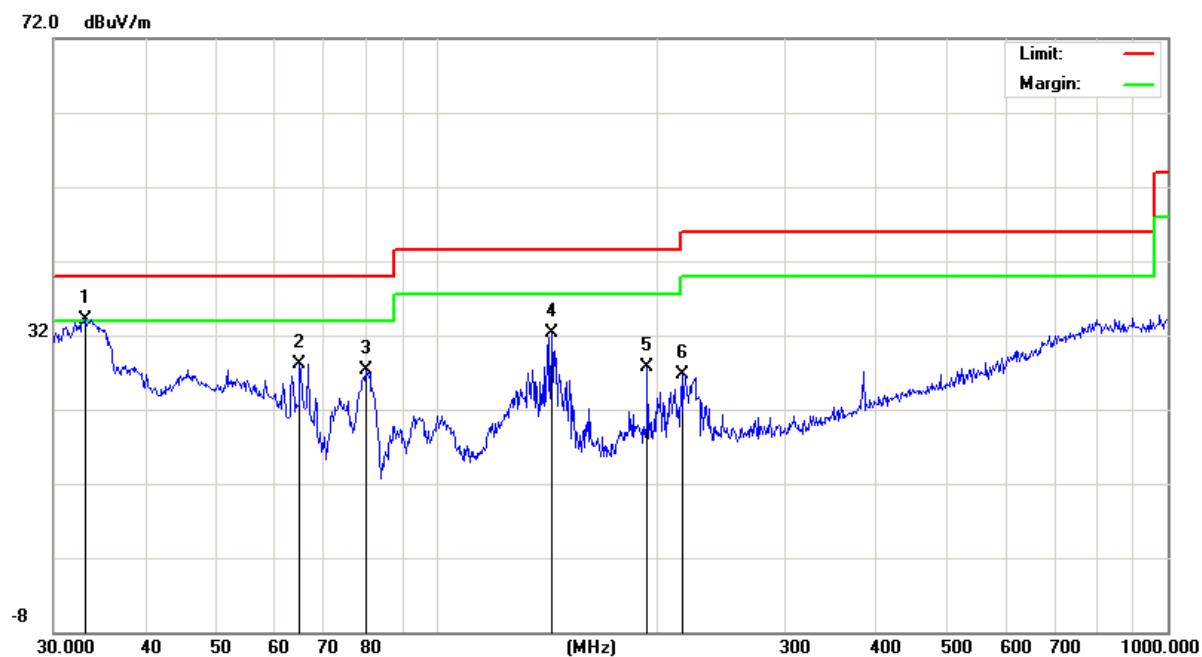

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	80.3619	21.40	5.92	27.32	40.00	-12.68	QP
H	95.4270	21.00	8.50	29.50	43.50	-14.00	QP
H	103.8055	17.78	9.35	27.13	43.50	-16.37	QP
H	222.9502	14.61	12.33	26.94	46.00	-19.06	QP
H	383.9318	11.15	17.64	28.79	46.00	-17.21	QP
H	827.4934	13.40	27.31	40.71	46.00	-5.29	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

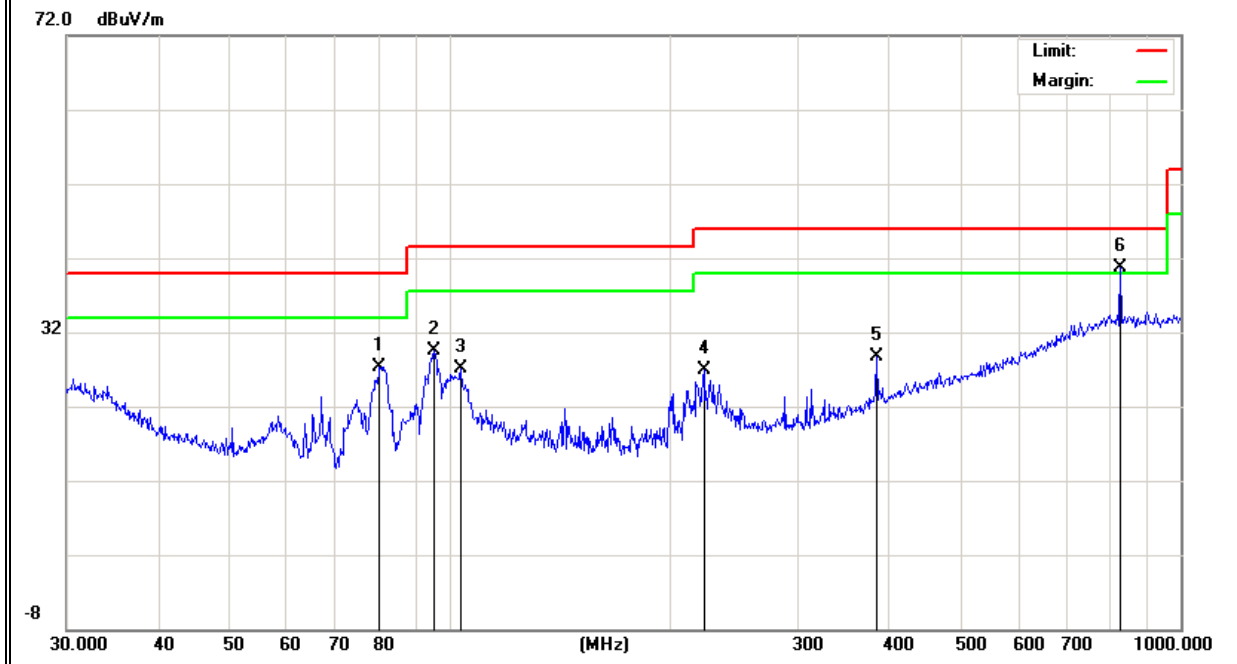

3.2.8 TEST RESULTS (ABOVE 1000 MHZ)

EUT :	RTEEK K1	Model Name :	K1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (2412 MHz)-Above 1G							
Vertical	4824.158	50.48	10.44	60.92	74.00	-13.08	Pk
Vertical	4824.158	36.12	10.44	46.56	54.00	-7.44	Av
Vertical	7236.245	47.14	12.39	59.53	74.00	-14.47	Pk
Vertical	7236.245	31.26	12.39	43.65	54.00	-10.35	Av
Horizontal	4824.296	52.44	10.44	62.88	74.00	-11.12	Pk
Horizontal	4824.296	31.65	10.44	42.09	54.00	-11.91	Av
Horizontal	7236.079	48.26	12.39	60.65	74.00	-13.35	Pk
Horizontal	7236.079	30.12	12.39	42.51	54.00	-11.49	Av
Mid Channel (2437 MHz)-Above 1G							
Vertical	4874.194	52.03	10.40	62.43	74.00	-11.57	Pk
Vertical	4874.194	31.94	10.40	42.34	54.00	-11.66	Av
Vertical	7311.243	48.15	12.75	60.90	74.00	-13.10	Pk
Vertical	7311.243	30.86	12.75	43.61	54.00	-10.39	Av
Horizontal	4874.162	51.17	10.40	61.57	74.00	-12.43	Pk
Horizontal	4874.162	33.08	10.40	43.48	54.00	-10.52	Av
Horizontal	7311.301	48.77	12.75	61.52	74.00	-12.48	Pk
Horizontal	7311.301	31.09	12.75	43.84	54.00	-10.16	Av
High Channel (2462 MHz)- Above 1G							
Vertical	4924.138	51.24	10.39	61.63	74.00	-12.37	Pk
Vertical	4924.138	32.55	10.39	42.94	54.00	-11.06	Av
Vertical	7386.119	46.18	12.68	58.86	74.00	-15.14	Pk
Vertical	7386.119	31.16	12.68	43.84	54.00	-10.16	Av
Horizontal	4924.337	51.44	10.39	61.83	74.00	-12.17	Pk
Horizontal	4924.337	31.95	10.39	42.34	54.00	-11.66	Av
Horizontal	7386.185	49.01	12.68	61.69	74.00	-12.31	Pk
Horizontal	7386.185	31.62	12.68	44.30	54.00	-9.70	Av

Note:"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record.

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

4.1.1 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. 3 kHz $\leq$ Set the RBW $\leq$ 100 kHz.
4. Set the VBW $\geq$ 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP




4.1.4 EUT OPERATION CONDITIONS



The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-10.04	8	PASS
2437 MHz	-5.46	8	PASS
2462 MHz	-6.90	8	PASS


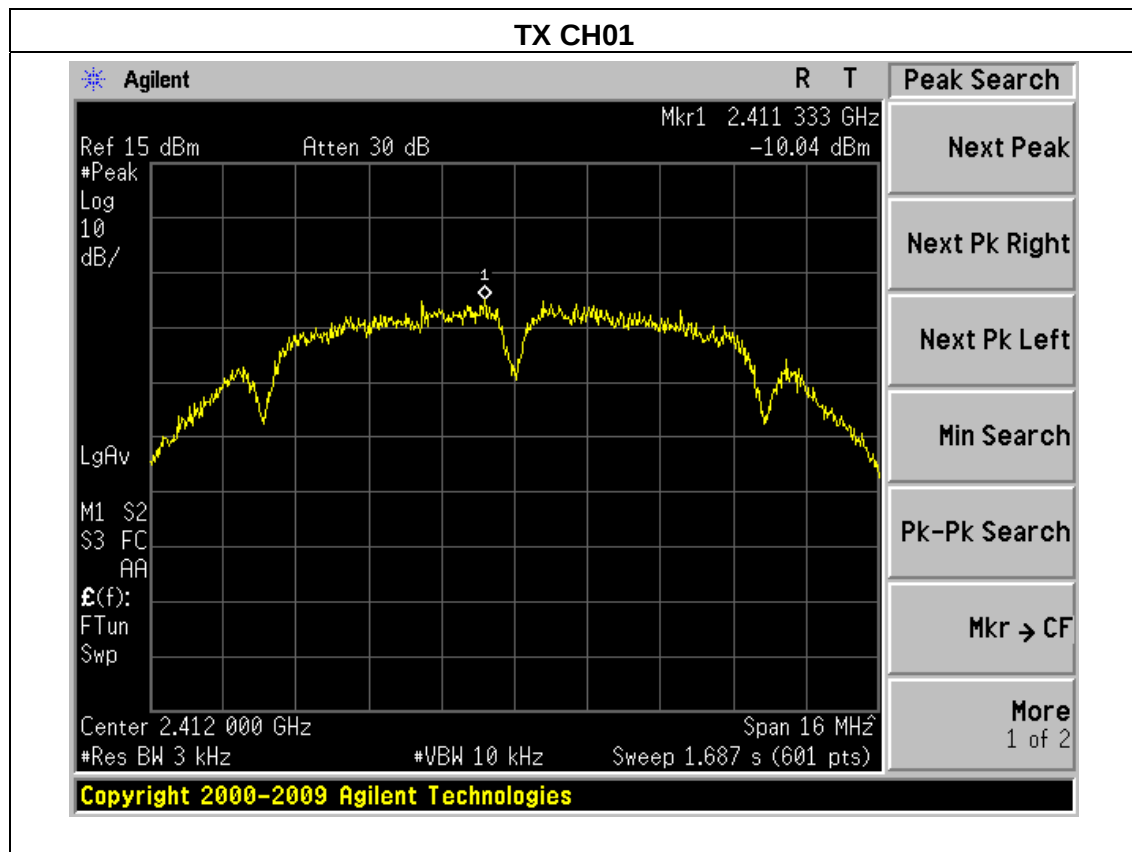


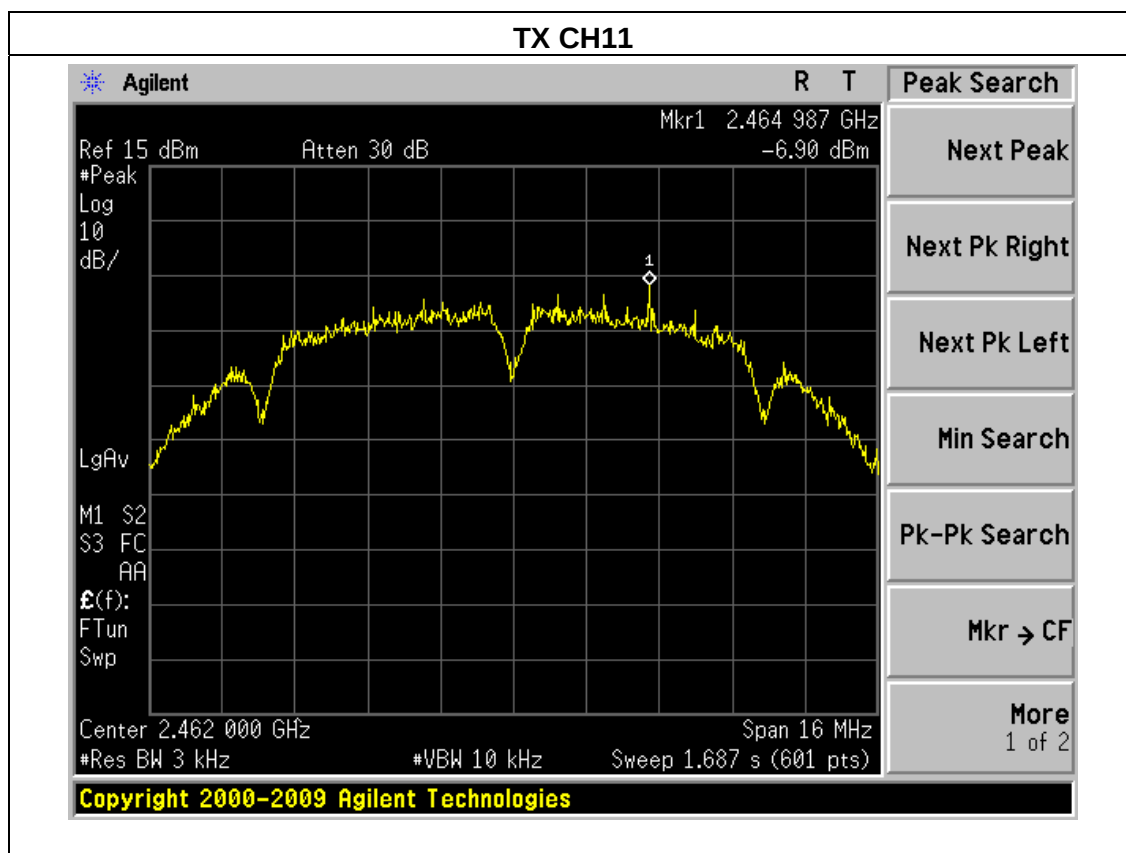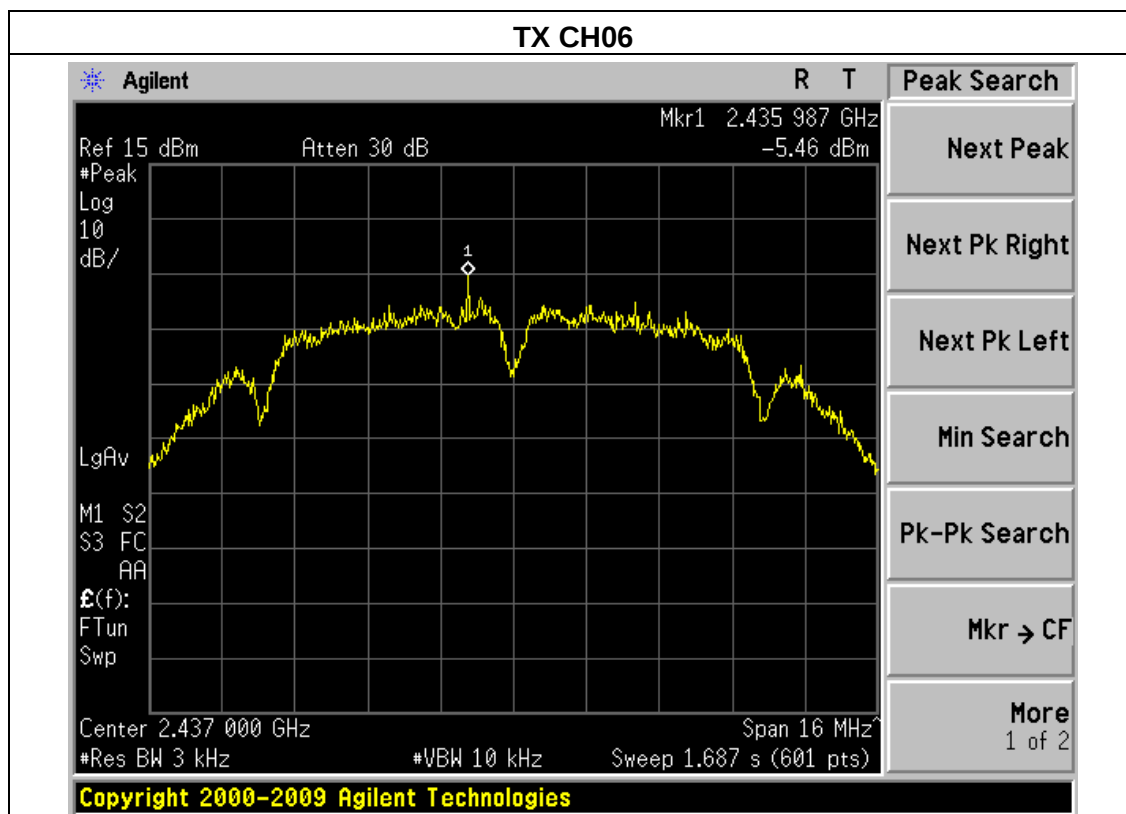

EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		

Frequency	Power Density (dBm)	Limit (dBm)	Result
2412 MHz	-14.02	8	PASS
2437 MHz	-11.26	8	PASS
2462 MHz	-12.99	8	PASS

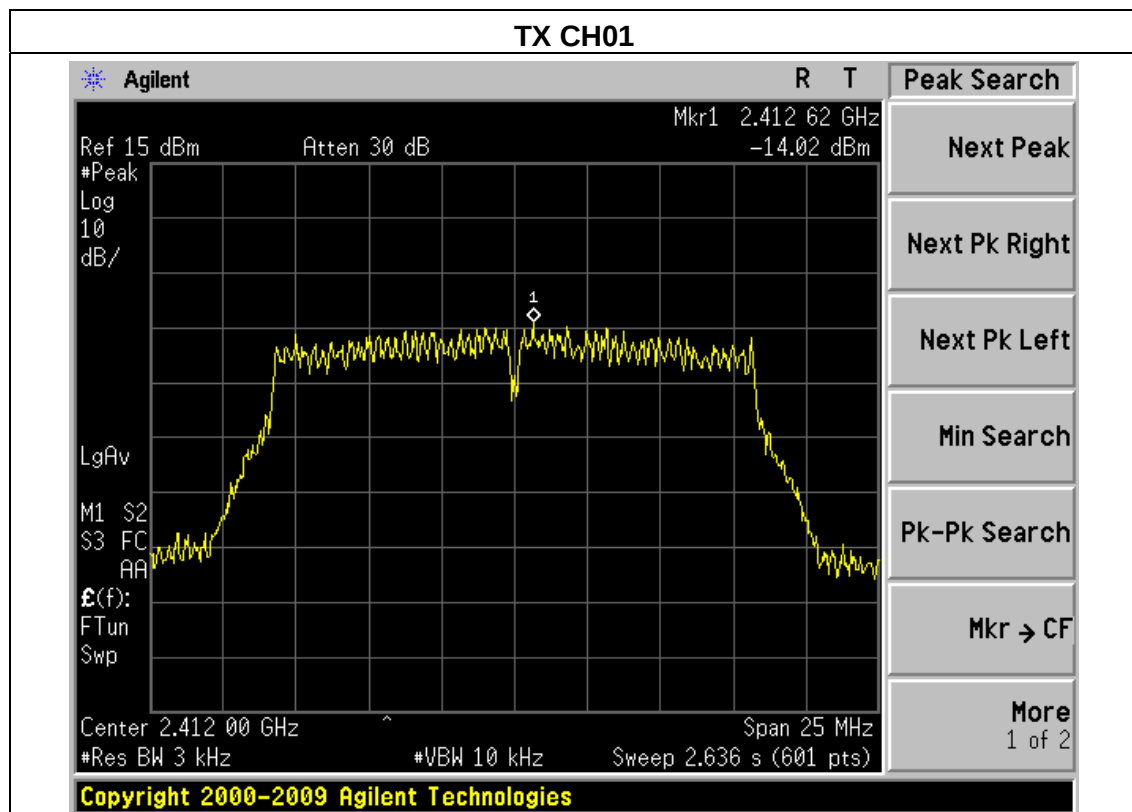

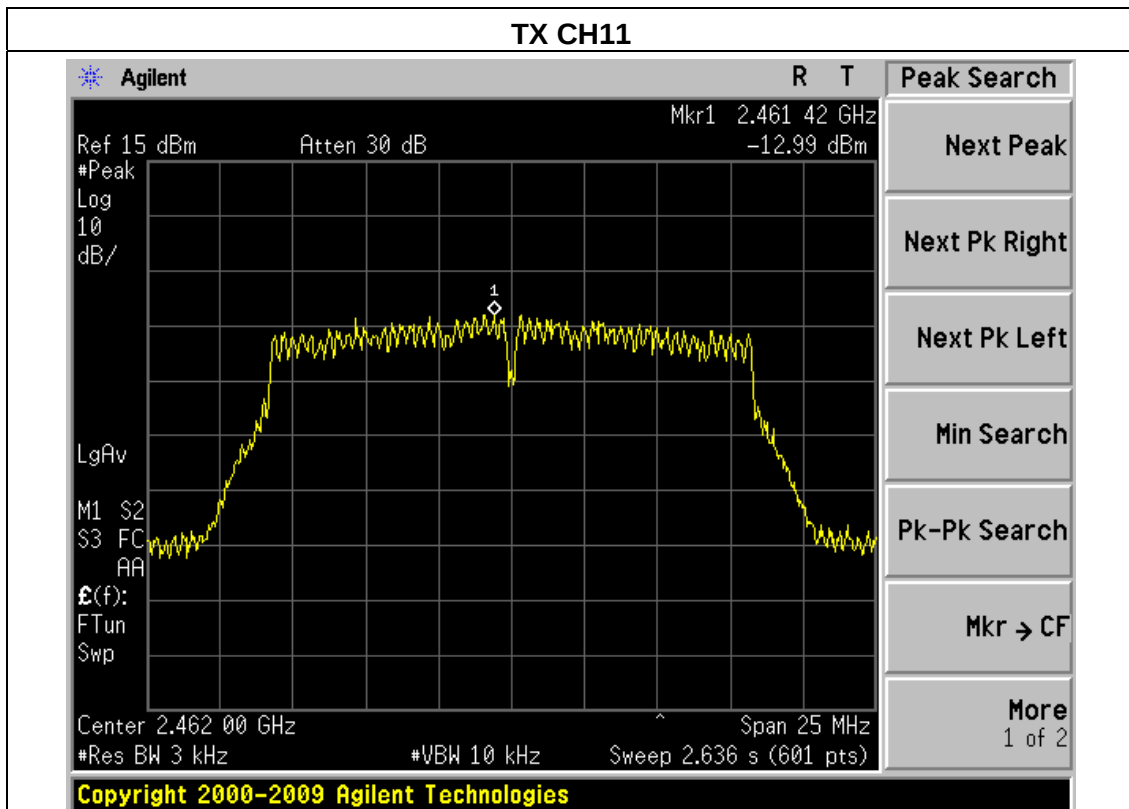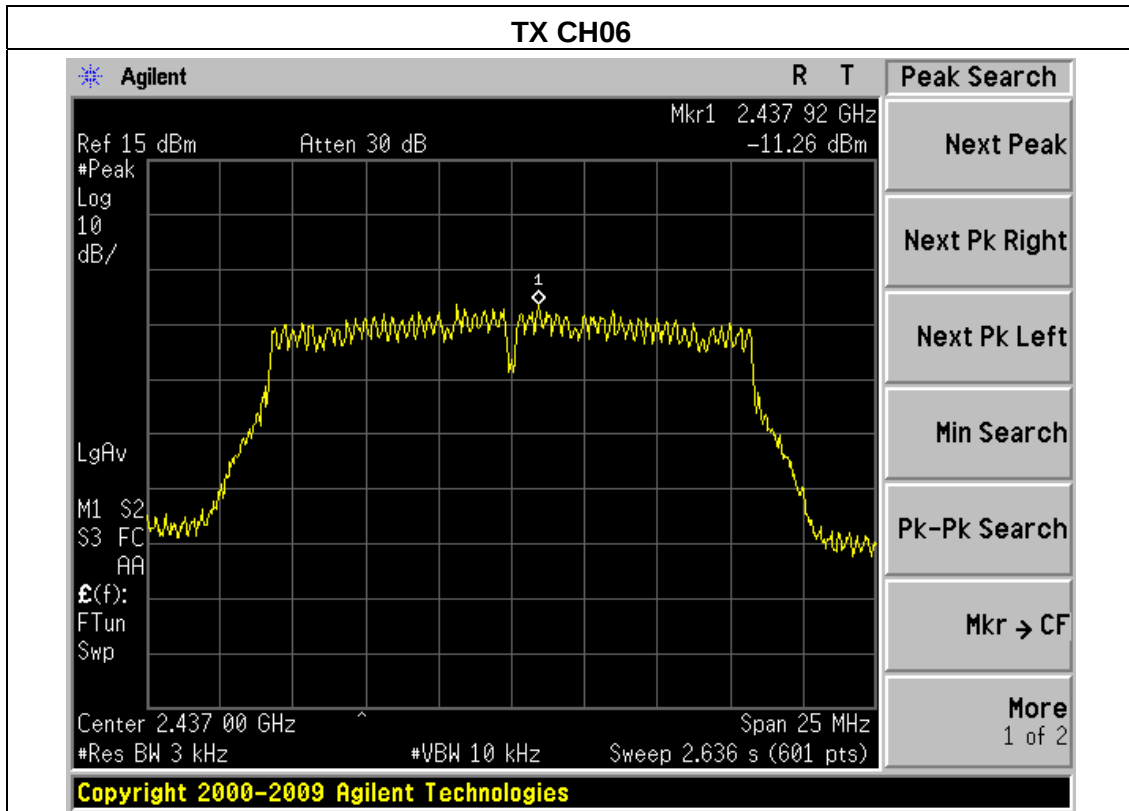

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

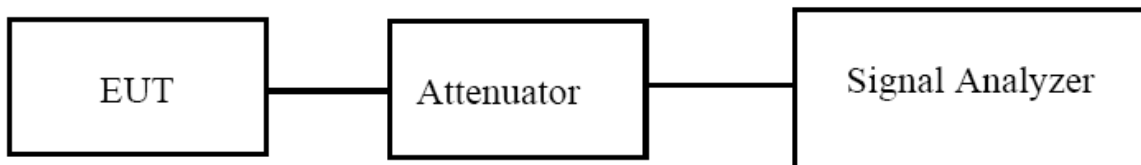


5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.1.3 TEST RESULTS

EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	9.609	500	Pass
Middle	2437	9.119	500	Pass
High	2462	9.117	500	Pass

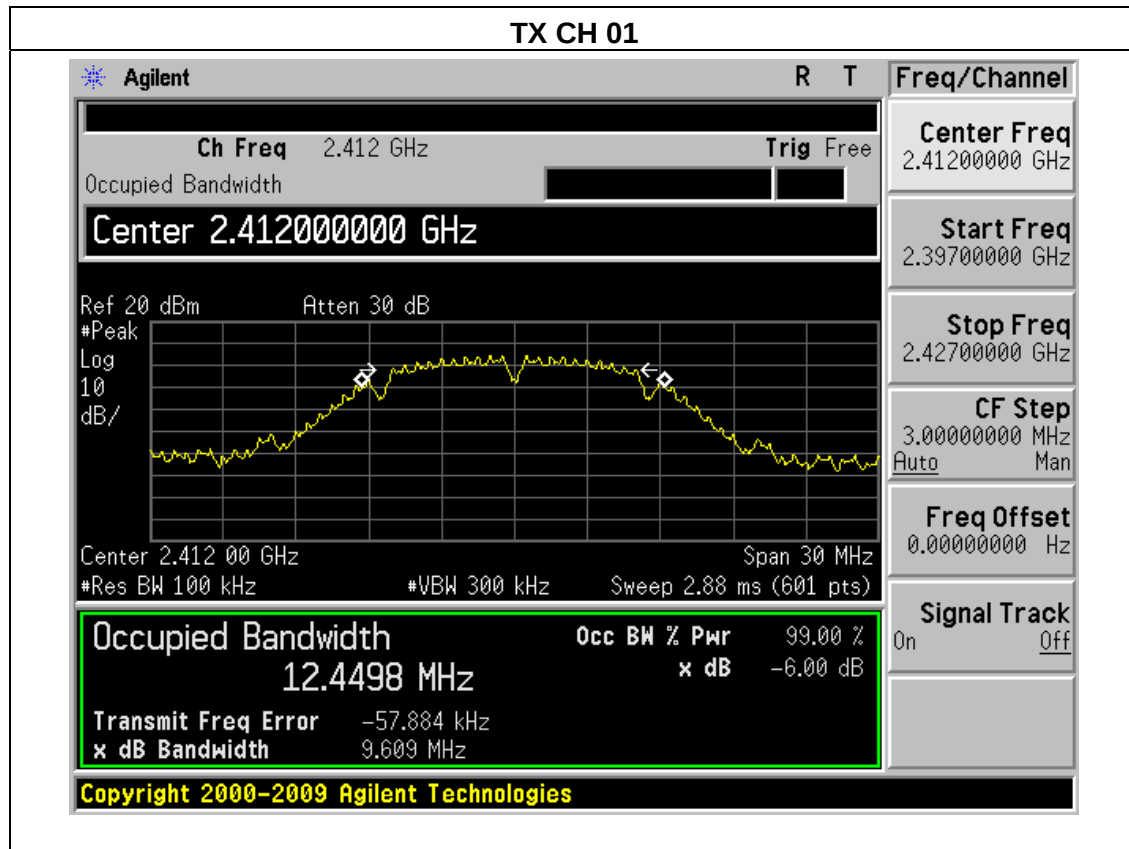

TX CH 06

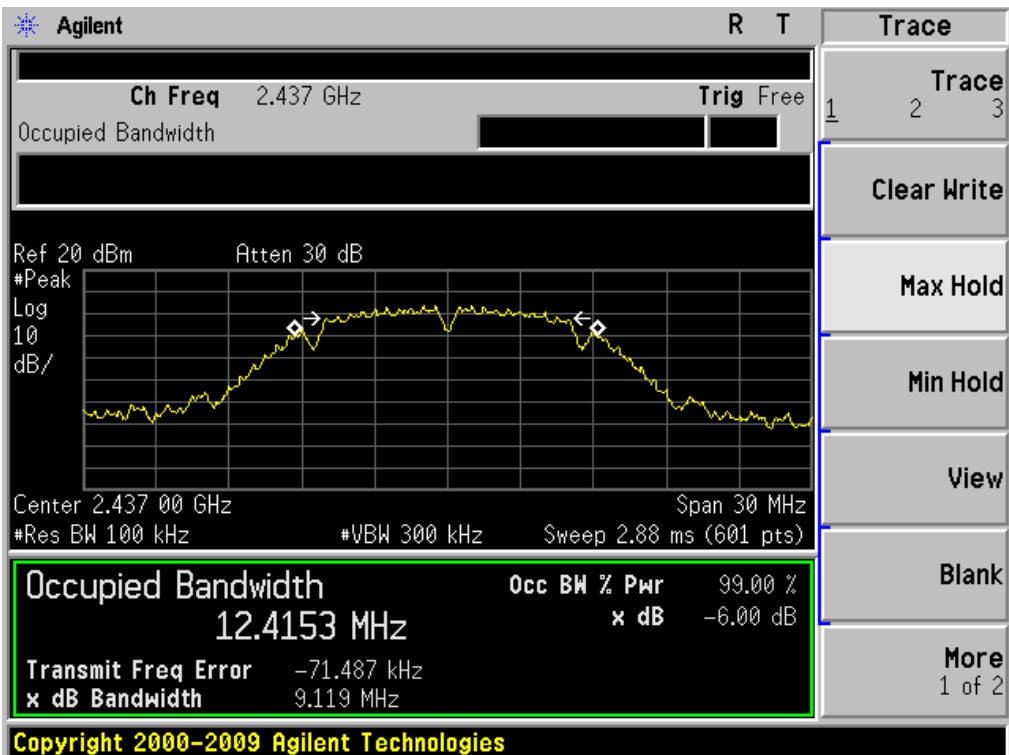


TX CH 11

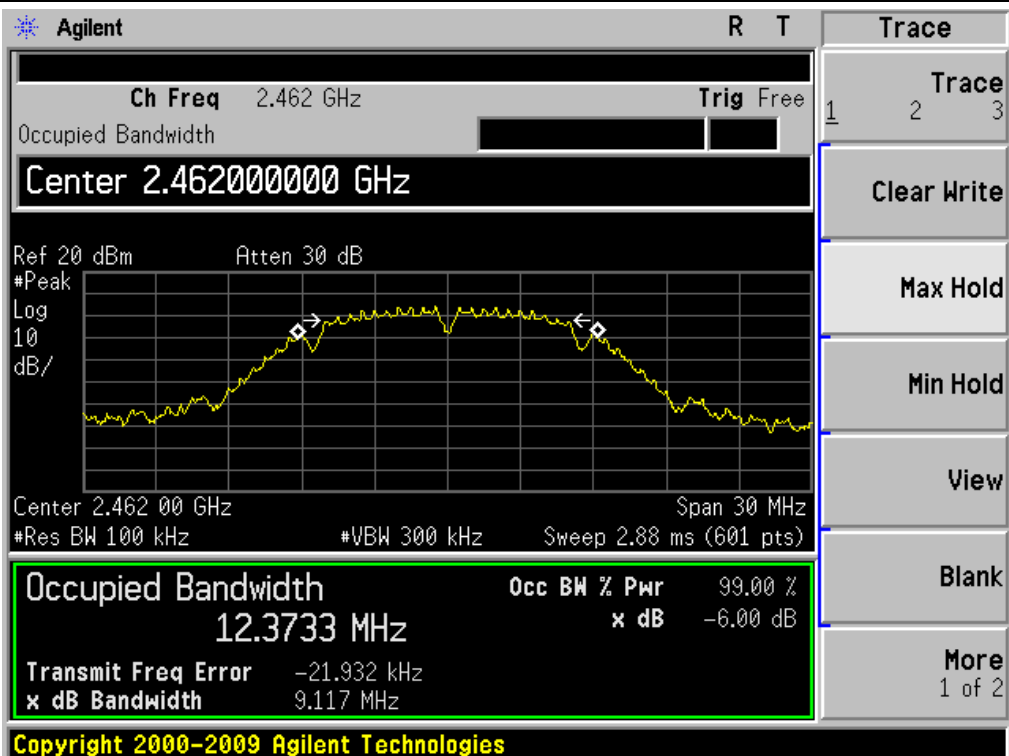


EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX g Mode /CH01, CH06, CH11		


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.151	500	Pass
Middle	2437	14.124	500	Pass
High	2462	15.123	500	Pass

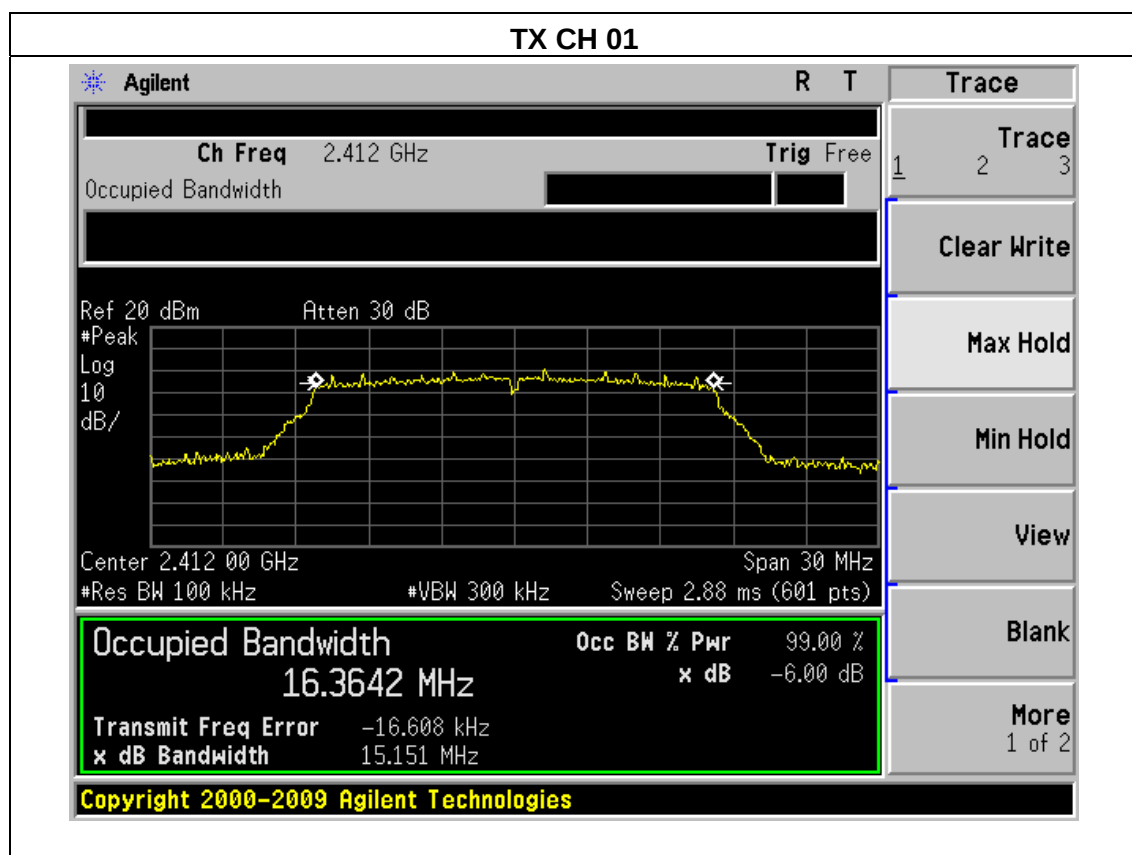

TX CH 06

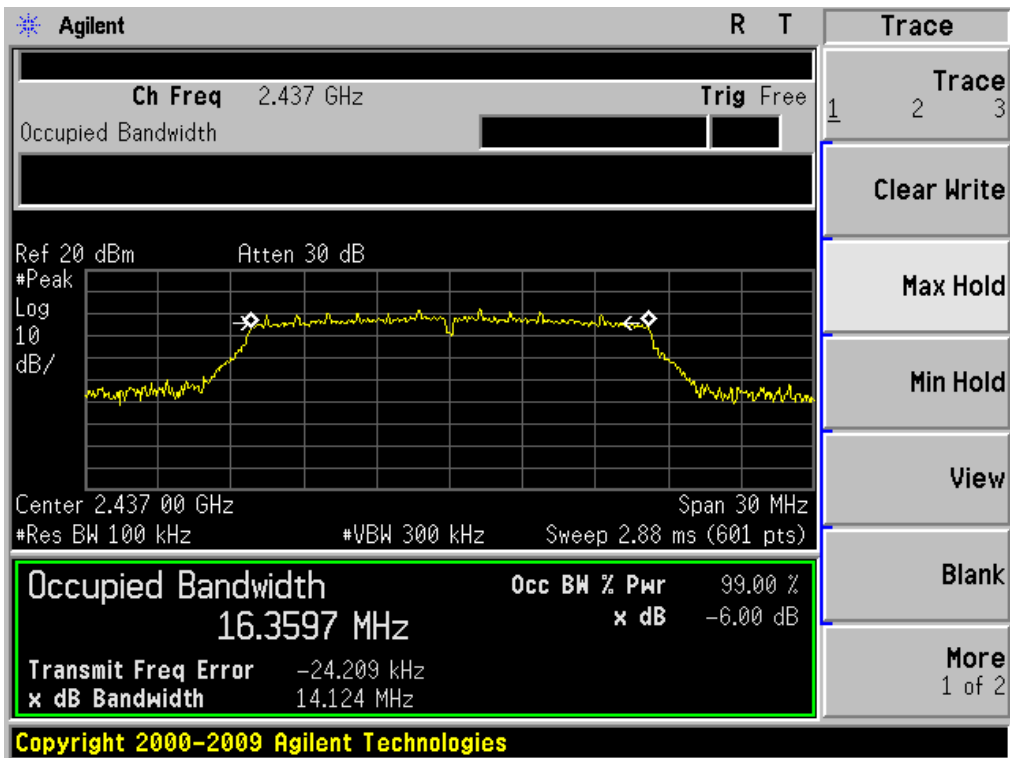

TX CH 11

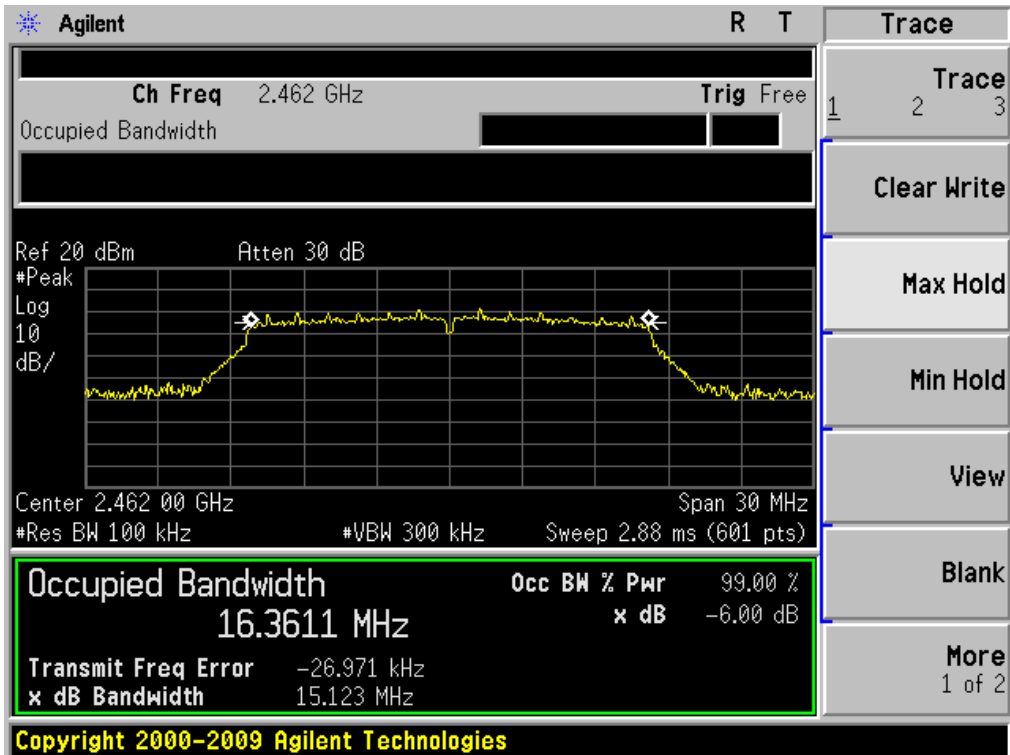

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS


6.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

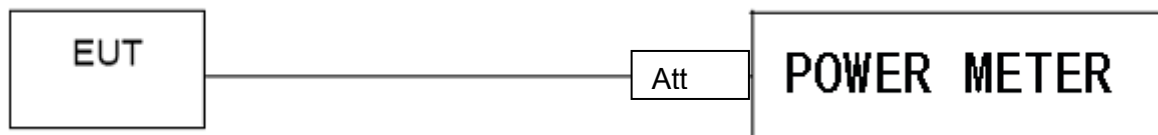

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	TX b/g Mode		

TX 802.11b Mode				
Test Channe	Frequency	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT
	(MHz)	(dBm)	(dBm)	dBm
CH01	2412	12.31	9.49	30
CH06	2437	11.98	9.16	30
CH11	2462	12.07	9.25	30
TX 802.11g Mode				
CH01	2412	10.29	7.16	30
CH06	2437	10.14	7.01	30
CH11	2462	10.57	7.44	30

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP

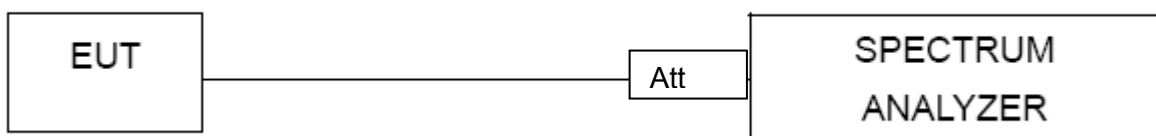

7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.4 TEST RESULTS

EUT :	RTEEK K1	Model Name :	K1
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V


Frequency Band MHz	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
802.11b mode			
2400	47.48	20	Pass
2483.5	63.28	20	Pass
802.11g mode			
2400	37.21	20	Pass
2483.5	44.45	20	Pass

Radiated band edge:


Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
802.11b							
2390	60.25	-13.06	47.19	74	-26.81	peak	Vertical
2390	59.54	-13.06	46.48	74	-27.52	peak	Horizontal
2483.5	60.1	-12.78	47.32	74	-26.68	peak	Vertical
2483.5	59.74	-12.78	46.96	74	-27.04	peak	Horizontal
802.11g							
2390	59.38	-13.06	46.32	74	-27.68	peak	Vertical
2390	59.25	-13.06	46.19	74	-27.81	peak	Horizontal
2483.5	60.37	-12.78	47.59	74	-26.41	peak	Vertical
2483.5	58.46	-12.78	45.68	74	-28.32	peak	Horizontal

Note: Test method to see chapter 3.2 . When PK value is lower than the Average value limit, average not record.


802.11b: Band Edge, Right Side

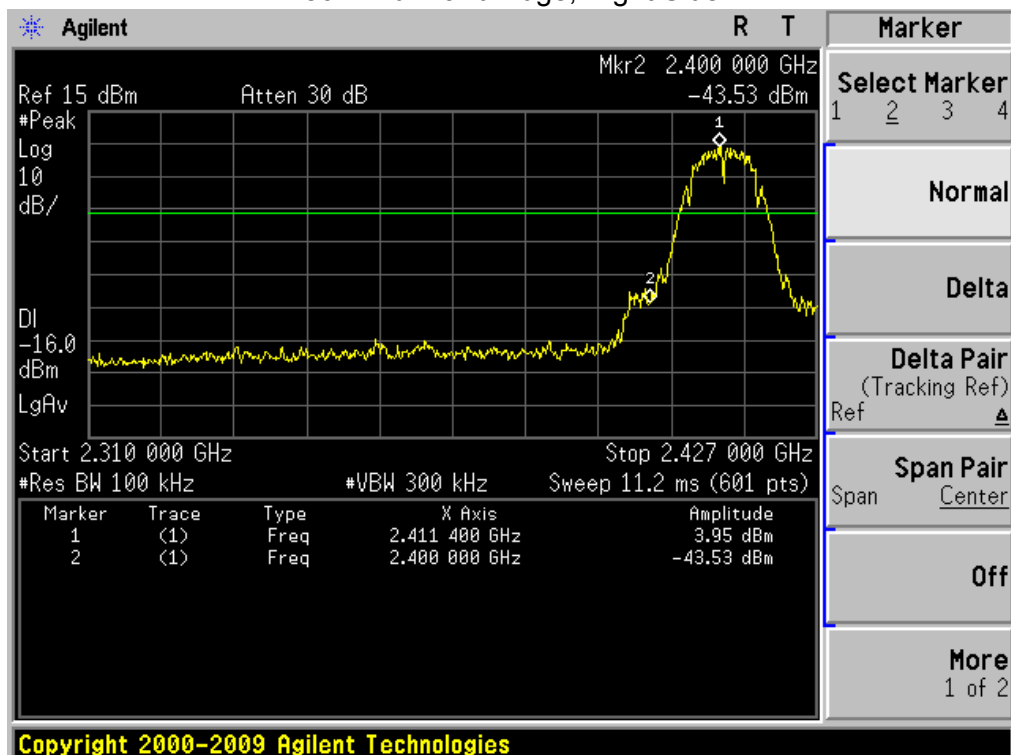


802.11b: Band Edge, Left Side

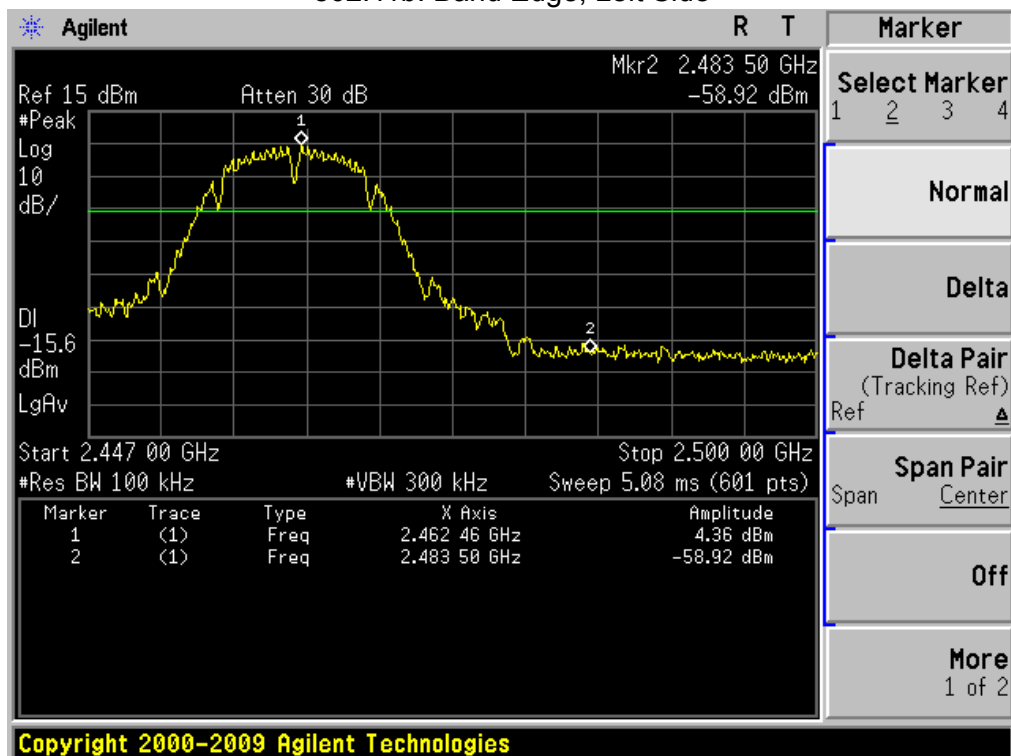

802.11g: Band Edge, Right Side

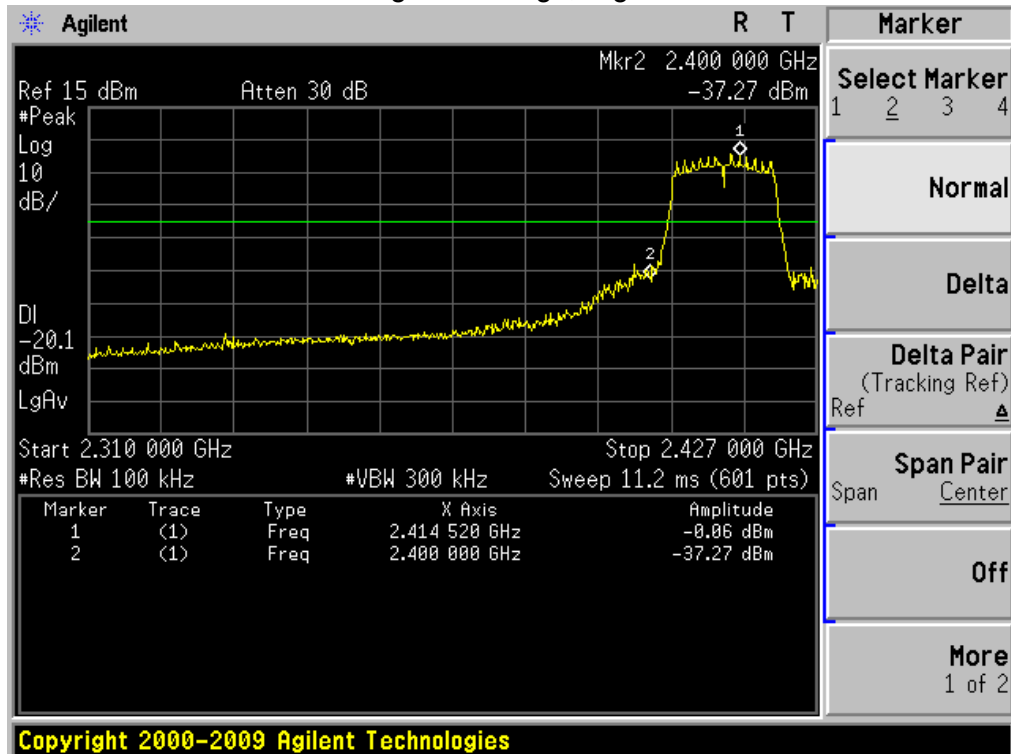

802.11g: Band Edge, Left Side

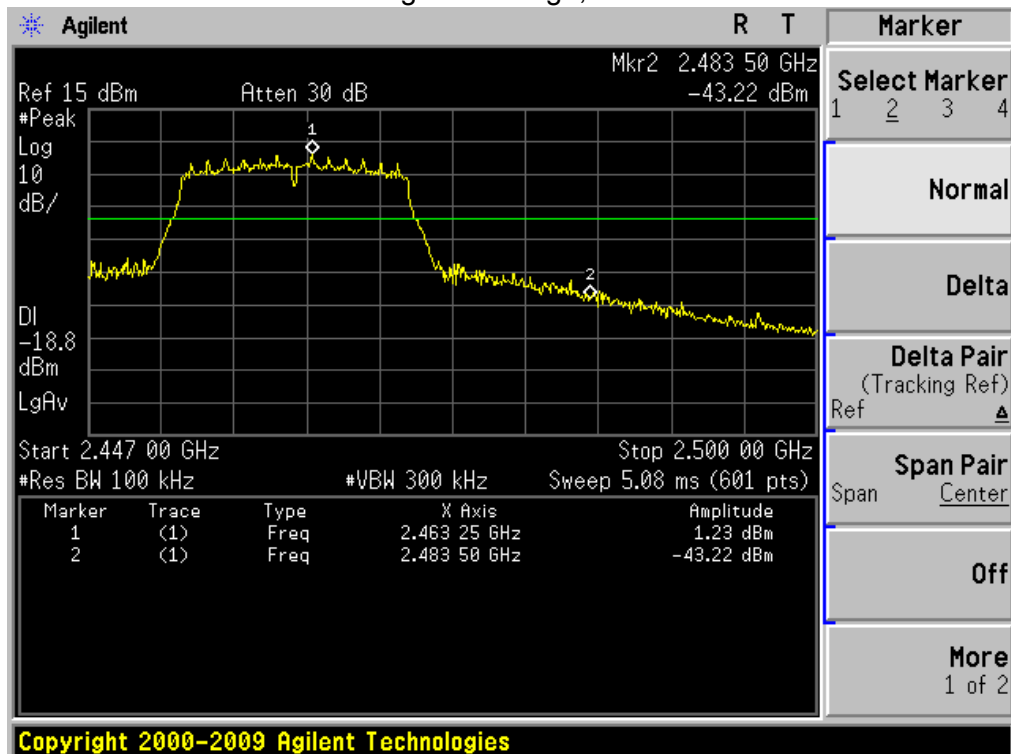

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

9. EUT TEST PHOTO

Radiated Measurement Photos

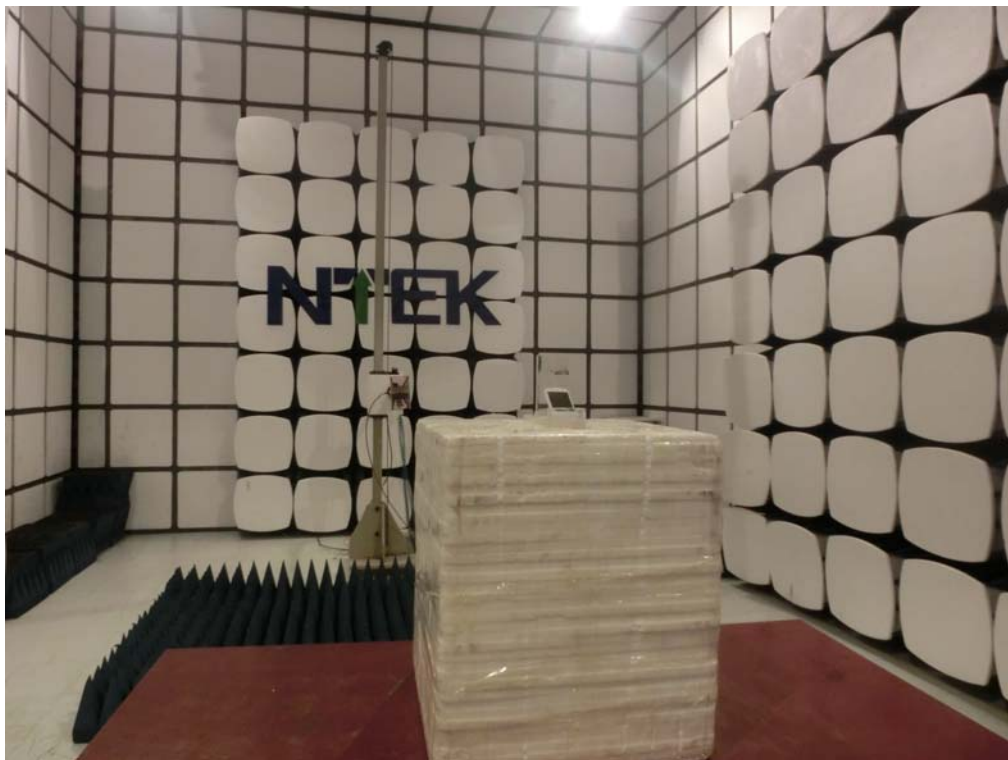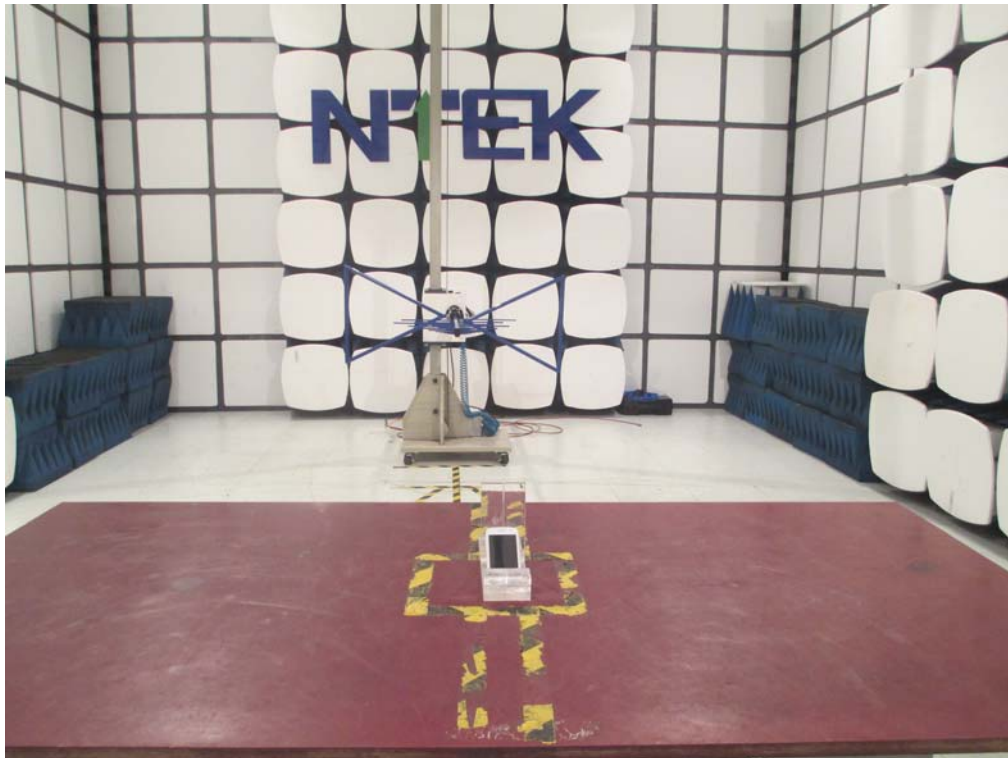

CONDUCTED EMISSION Photos

