


FCC Test Report

FCC ID : 2AFOA-VT36
Equipment : Tire-Pressure monitoring system (TPMS)
Model No. : VT36
Brand Name : ATEQ
Applicant : A.T.E.Q.(THAILAND) Co., Ltd.
Address : 903/47 Rama 3 Road, BangPongPang,
YanNaWa, BANGKOK, 10120 THAILAND
Standard : 47 CFR FCC Part 15.209
Received Date : Aug. 06, 2015
Tested Date : Apr. 12 ~ Apr. 15, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Test Setup Chart	5
1.3	The Equipment List	6
1.4	Test Standards	6
1.5	Measurement Uncertainty	6
2	TEST CONFIGURATION.....	7
2.1	Testing Condition	7
2.2	The Worst Test Modes and Channel Details	7
3	TRANSMITTER TEST RESULTS.....	8
3.1	Conducted Emissions.....	8
3.2	Radiated Emissions.....	11
4	TEST LABORATORY INFORMATION	18

Release Record

Report No.	Version	Description	Issued Date
FR580601	Rev. 01	Initial issue	May 11, 2016

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.471MHz 40.97 (Margin -5.52dB) - AV	Pass
15.209	Radiated Emissions	[dBuV/m at 3m]: 0.125MHz 105.37 (Margin -0.30dB) - AV	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (kHz)	Modulation	Ch. Frequency (kHz)	Channel Number	Data Rate
123 ~ 127	CW	125	1	10 kbps

Note: The device uses wirebound antenna.


1.1.2 EUT Operational Condition

Supply Voltage	5Vdc from adapter
----------------	-------------------

1.1.3 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand Name: Zhongshan Shangpin Model Name: SP-UH04 I/P: 100-240Vac, 50-60Hz, 0.5A O/P: 5Vdc, 2A
2	USB cable	0.5m shielded with one core (for charging use)
3	Rechargeable Li-ion Battery	Brand Name: NEXcell Model Name: 4-NL035L Rating: 3.7V, 1150mAh, 4.25WH

1.2 Test Setup Chart

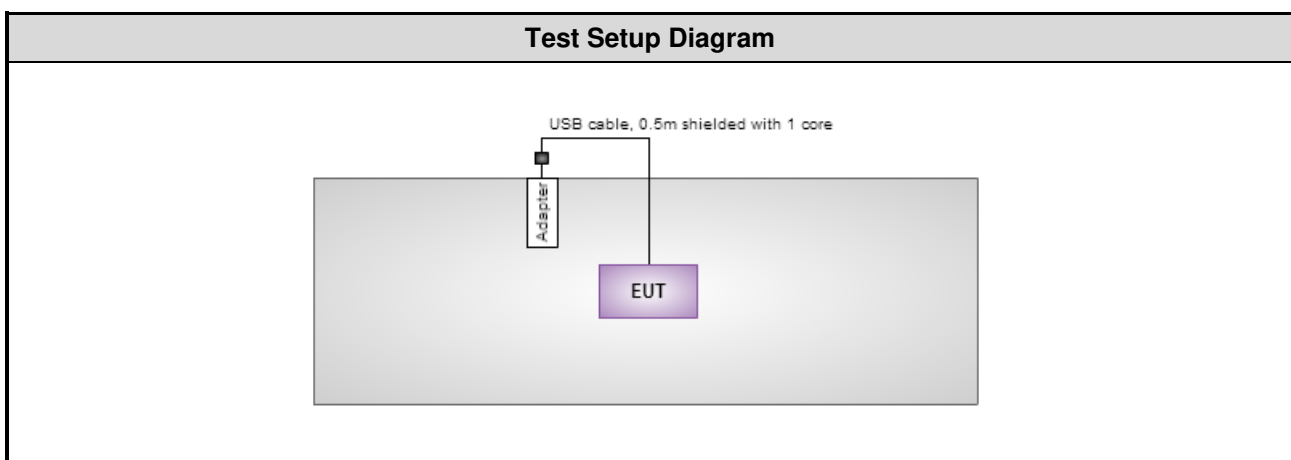

1.3 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emission				
Test Site	966 chamber 2 / (03CH02-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Jan. 12, 2016	Jan. 11, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-523	Nov. 09, 2015	Nov. 08, 2016
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-003	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.4 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.209

ANSI C63.10-2013

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
AC conducted emission	±2.90 dB
Radiated emission	±3.87 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 61%	Howard Huang
Radiated Emissions	03CH02-WS	25°C / 66%	Aska Huang

- FCC site registration No.: 181692
- IC site registration No.: 10807A-2

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (kHz)
AC Conducted Emissions	CW	125
Radiated Emissions	CW	125

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** result was found as the worst case and was shown in this report.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

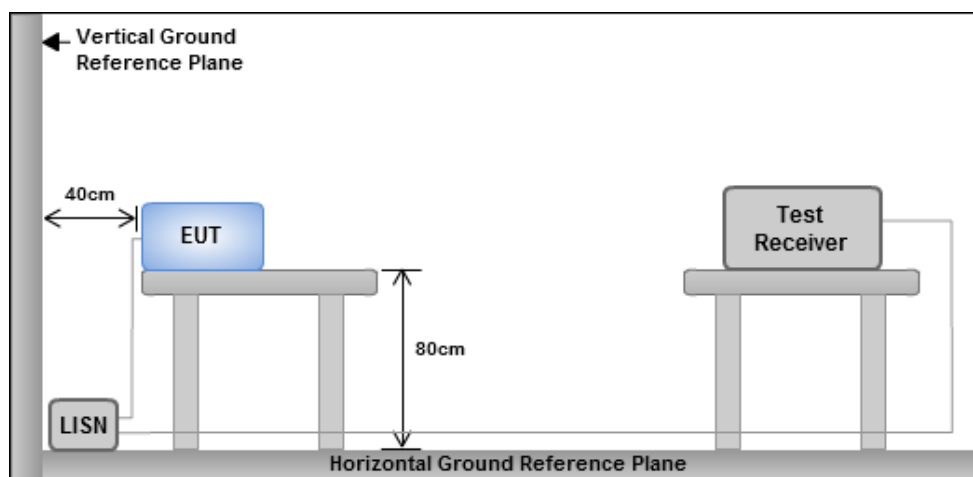


- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

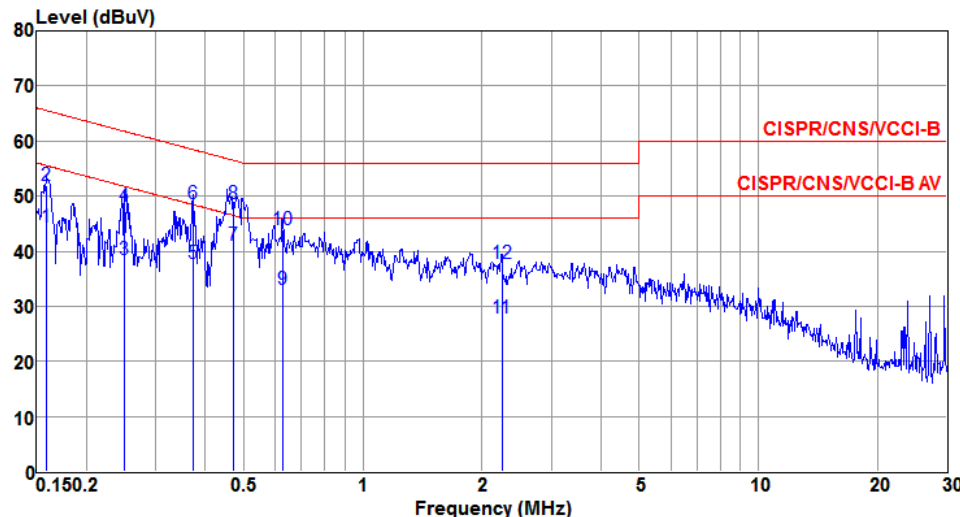Power Phase	Line	Test Freq. (MHz)	1																																																																																																																																							
Level (dBuV)  Frequency (MHz) <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-----</td></tr><tr><td>1</td><td>0.158</td><td>44.35</td><td>55.56</td><td>-11.21</td><td>44.22</td><td>0.11</td><td>0.02</td><td>Average</td></tr><tr><td>2</td><td>0.158</td><td>51.92</td><td>65.56</td><td>-13.64</td><td>51.79</td><td>0.11</td><td>0.02</td><td>QP</td></tr><tr><td>3</td><td>0.249</td><td>38.44</td><td>51.78</td><td>-13.34</td><td>38.30</td><td>0.12</td><td>0.02</td><td>Average</td></tr><tr><td>4</td><td>0.249</td><td>48.09</td><td>61.78</td><td>-13.69</td><td>47.95</td><td>0.12</td><td>0.02</td><td>QP</td></tr><tr><td>5</td><td>0.373</td><td>37.72</td><td>48.43</td><td>-10.71</td><td>37.56</td><td>0.13</td><td>0.03</td><td>Average</td></tr><tr><td>6</td><td>0.373</td><td>48.52</td><td>58.43</td><td>-9.91</td><td>48.36</td><td>0.13</td><td>0.03</td><td>QP</td></tr><tr><td>7@</td><td>0.471</td><td>40.97</td><td>46.49</td><td>-5.52</td><td>40.80</td><td>0.13</td><td>0.04</td><td>Average</td></tr><tr><td>8</td><td>0.471</td><td>48.53</td><td>56.49</td><td>-7.96</td><td>48.36</td><td>0.13</td><td>0.04</td><td>QP</td></tr><tr><td>9</td><td>0.627</td><td>33.14</td><td>46.00</td><td>-12.86</td><td>32.97</td><td>0.13</td><td>0.04</td><td>Average</td></tr><tr><td>10</td><td>0.627</td><td>43.85</td><td>56.00</td><td>-12.15</td><td>43.68</td><td>0.13</td><td>0.04</td><td>QP</td></tr><tr><td>11</td><td>2.249</td><td>27.80</td><td>46.00</td><td>-18.20</td><td>27.54</td><td>0.17</td><td>0.09</td><td>Average</td></tr><tr><td>12</td><td>2.249</td><td>37.71</td><td>56.00</td><td>-18.29</td><td>37.45</td><td>0.17</td><td>0.09</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	Line	Limit	Level	factor	loss	Remark									-----	1	0.158	44.35	55.56	-11.21	44.22	0.11	0.02	Average	2	0.158	51.92	65.56	-13.64	51.79	0.11	0.02	QP	3	0.249	38.44	51.78	-13.34	38.30	0.12	0.02	Average	4	0.249	48.09	61.78	-13.69	47.95	0.12	0.02	QP	5	0.373	37.72	48.43	-10.71	37.56	0.13	0.03	Average	6	0.373	48.52	58.43	-9.91	48.36	0.13	0.03	QP	7@	0.471	40.97	46.49	-5.52	40.80	0.13	0.04	Average	8	0.471	48.53	56.49	-7.96	48.36	0.13	0.04	QP	9	0.627	33.14	46.00	-12.86	32.97	0.13	0.04	Average	10	0.627	43.85	56.00	-12.15	43.68	0.13	0.04	QP	11	2.249	27.80	46.00	-18.20	27.54	0.17	0.09	Average	12	2.249	37.71	56.00	-18.29	37.45	0.17	0.09	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark																																																																																																																																		

1	0.158	44.35	55.56	-11.21	44.22	0.11	0.02	Average																																																																																																																																		
2	0.158	51.92	65.56	-13.64	51.79	0.11	0.02	QP																																																																																																																																		
3	0.249	38.44	51.78	-13.34	38.30	0.12	0.02	Average																																																																																																																																		
4	0.249	48.09	61.78	-13.69	47.95	0.12	0.02	QP																																																																																																																																		
5	0.373	37.72	48.43	-10.71	37.56	0.13	0.03	Average																																																																																																																																		
6	0.373	48.52	58.43	-9.91	48.36	0.13	0.03	QP																																																																																																																																		
7@	0.471	40.97	46.49	-5.52	40.80	0.13	0.04	Average																																																																																																																																		
8	0.471	48.53	56.49	-7.96	48.36	0.13	0.04	QP																																																																																																																																		
9	0.627	33.14	46.00	-12.86	32.97	0.13	0.04	Average																																																																																																																																		
10	0.627	43.85	56.00	-12.15	43.68	0.13	0.04	QP																																																																																																																																		
11	2.249	27.80	46.00	-18.20	27.54	0.17	0.09	Average																																																																																																																																		
12	2.249	37.71	56.00	-18.29	37.45	0.17	0.09	QP																																																																																																																																		
Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV)																																																																																																																																										

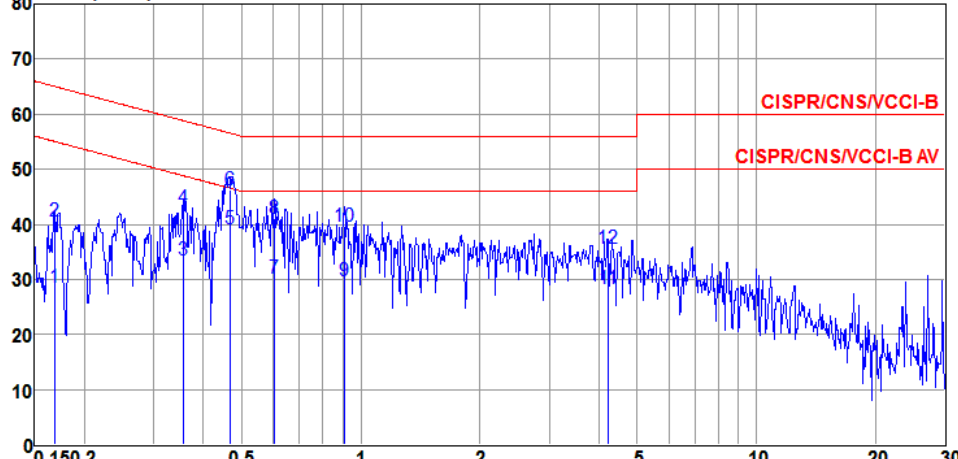Power Phase	Neutral	Test Freq. (MHz)	1																																																																																																																																							
Level (dBuV)  Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>LISN</th><th>cable</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>factor</th><th>loss</th><th>Remark</th></tr><tr><th></th><th></th><th></th><th>dBuV</th><th>dB</th><th>dBuV</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.169</td><td>28.68</td><td>55.03</td><td>-26.35</td><td>28.54</td><td>0.12</td><td>0.02</td><td>Average</td></tr><tr><td>2</td><td>0.169</td><td>40.64</td><td>65.03</td><td>-24.39</td><td>40.50</td><td>0.12</td><td>0.02</td><td>QP</td></tr><tr><td>3</td><td>0.356</td><td>33.44</td><td>48.83</td><td>-15.39</td><td>33.28</td><td>0.13</td><td>0.03</td><td>Average</td></tr><tr><td>4</td><td>0.356</td><td>42.88</td><td>58.83</td><td>-15.95</td><td>42.72</td><td>0.13</td><td>0.03</td><td>QP</td></tr><tr><td>5@</td><td>0.466</td><td>39.26</td><td>46.58</td><td>-7.32</td><td>39.08</td><td>0.14</td><td>0.04</td><td>Average</td></tr><tr><td>6</td><td>0.466</td><td>46.31</td><td>56.58</td><td>-10.27</td><td>46.13</td><td>0.14</td><td>0.04</td><td>QP</td></tr><tr><td>7</td><td>0.604</td><td>30.11</td><td>46.00</td><td>-15.89</td><td>29.93</td><td>0.14</td><td>0.04</td><td>Average</td></tr><tr><td>8</td><td>0.604</td><td>41.04</td><td>56.00</td><td>-14.96</td><td>40.86</td><td>0.14</td><td>0.04</td><td>QP</td></tr><tr><td>9</td><td>0.909</td><td>29.65</td><td>46.00</td><td>-16.35</td><td>29.46</td><td>0.13</td><td>0.06</td><td>Average</td></tr><tr><td>10</td><td>0.909</td><td>39.71</td><td>56.00</td><td>-16.29</td><td>39.52</td><td>0.13</td><td>0.06</td><td>QP</td></tr><tr><td>11</td><td>4.224</td><td>28.36</td><td>46.00</td><td>-17.64</td><td>28.06</td><td>0.18</td><td>0.12</td><td>Average</td></tr><tr><td>12</td><td>4.224</td><td>35.68</td><td>56.00</td><td>-20.32</td><td>35.38</td><td>0.18</td><td>0.12</td><td>QP</td></tr></tbody></table> Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB). Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV)					Freq	Level	Limit	Over	Read	LISN	cable			MHz	dBuV	Line	Limit	Level	factor	loss	Remark				dBuV	dB	dBuV	dB	dB		1	0.169	28.68	55.03	-26.35	28.54	0.12	0.02	Average	2	0.169	40.64	65.03	-24.39	40.50	0.12	0.02	QP	3	0.356	33.44	48.83	-15.39	33.28	0.13	0.03	Average	4	0.356	42.88	58.83	-15.95	42.72	0.13	0.03	QP	5@	0.466	39.26	46.58	-7.32	39.08	0.14	0.04	Average	6	0.466	46.31	56.58	-10.27	46.13	0.14	0.04	QP	7	0.604	30.11	46.00	-15.89	29.93	0.14	0.04	Average	8	0.604	41.04	56.00	-14.96	40.86	0.14	0.04	QP	9	0.909	29.65	46.00	-16.35	29.46	0.13	0.06	Average	10	0.909	39.71	56.00	-16.29	39.52	0.13	0.06	QP	11	4.224	28.36	46.00	-17.64	28.06	0.18	0.12	Average	12	4.224	35.68	56.00	-20.32	35.38	0.18	0.12	QP
	Freq	Level	Limit	Over	Read	LISN	cable																																																																																																																																			
	MHz	dBuV	Line	Limit	Level	factor	loss	Remark																																																																																																																																		
			dBuV	dB	dBuV	dB	dB																																																																																																																																			
1	0.169	28.68	55.03	-26.35	28.54	0.12	0.02	Average																																																																																																																																		
2	0.169	40.64	65.03	-24.39	40.50	0.12	0.02	QP																																																																																																																																		
3	0.356	33.44	48.83	-15.39	33.28	0.13	0.03	Average																																																																																																																																		
4	0.356	42.88	58.83	-15.95	42.72	0.13	0.03	QP																																																																																																																																		
5@	0.466	39.26	46.58	-7.32	39.08	0.14	0.04	Average																																																																																																																																		
6	0.466	46.31	56.58	-10.27	46.13	0.14	0.04	QP																																																																																																																																		
7	0.604	30.11	46.00	-15.89	29.93	0.14	0.04	Average																																																																																																																																		
8	0.604	41.04	56.00	-14.96	40.86	0.14	0.04	QP																																																																																																																																		
9	0.909	29.65	46.00	-16.35	29.46	0.13	0.06	Average																																																																																																																																		
10	0.909	39.71	56.00	-16.29	39.52	0.13	0.06	QP																																																																																																																																		
11	4.224	28.36	46.00	-17.64	28.06	0.18	0.12	Average																																																																																																																																		
12	4.224	35.68	56.00	-20.32	35.38	0.18	0.12	QP																																																																																																																																		

3.2 Radiated Emissions

3.2.1 Limit of Radiated Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29.54	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.

3.2.3 Test Setup

Radiated Emissions below 30MHz

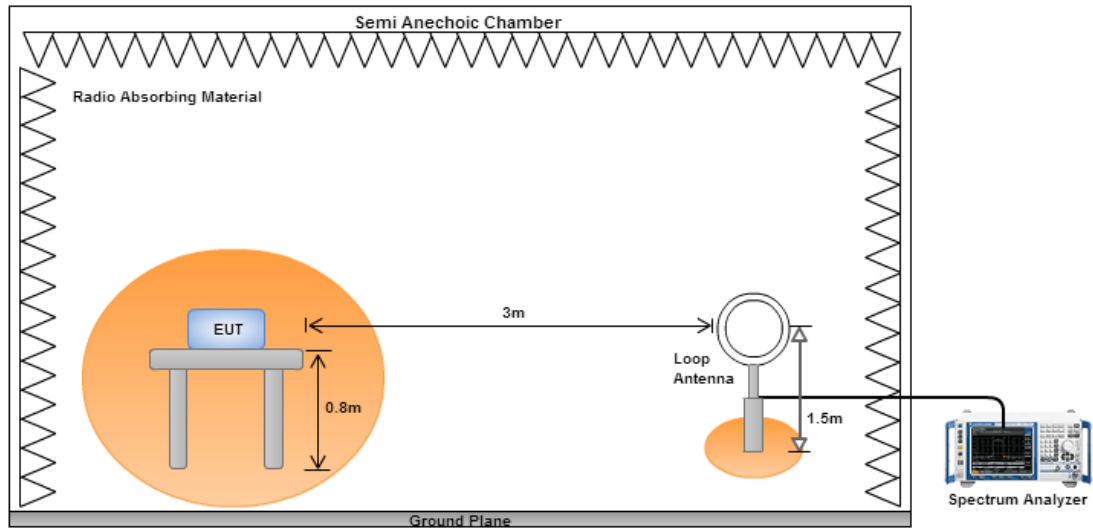

Radiated Emissions below 1GHz

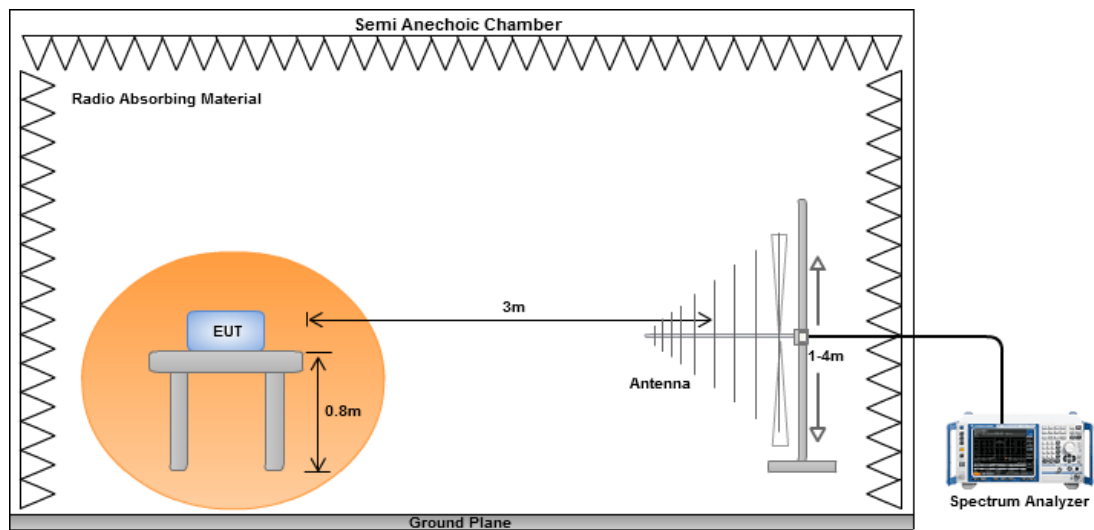

3.2.4 Transmitter Radiated Unwanted Emissions (9kHz ~ 1.705MHz)

Polarization		Loop Open					
Frequency (MHz)		Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	105.37	105.67	-0.30	85.81	19.56	Average
2	0.125	105.49	125.67	-20.18	85.93	19.56	Peak
3	0.375	56.35	96.12	-39.77	36.95	19.40	Average
4	0.375	56.50	116.12	-59.62	37.10	19.40	Peak
5	0.625	46.15	71.69	-25.54	26.69	19.46	QP

Polarization		Loop Close					
Frequency (MHz)		Emission Level dBuV/m	Limit (dBuV/m)	Margin (dB)	SA Reading (dBuV/m)	Factor	Remark
1	0.125	100.06	105.67	-5.61	80.50	19.56	Average
2	0.125	100.18	125.67	-25.49	80.62	19.56	Peak
3	0.375	50.69	96.12	-45.43	31.29	19.40	Average
4	0.375	56.83	116.12	-59.29	37.43	19.40	Peak
5	0.625	41.10	71.69	-30.59	21.64	19.46	QP


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB).

*Factor includes antenna factor and cable loss.

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

Polarization	Loop Open	Test Freq. (kHz)	125
Level (dBuV/m) </			

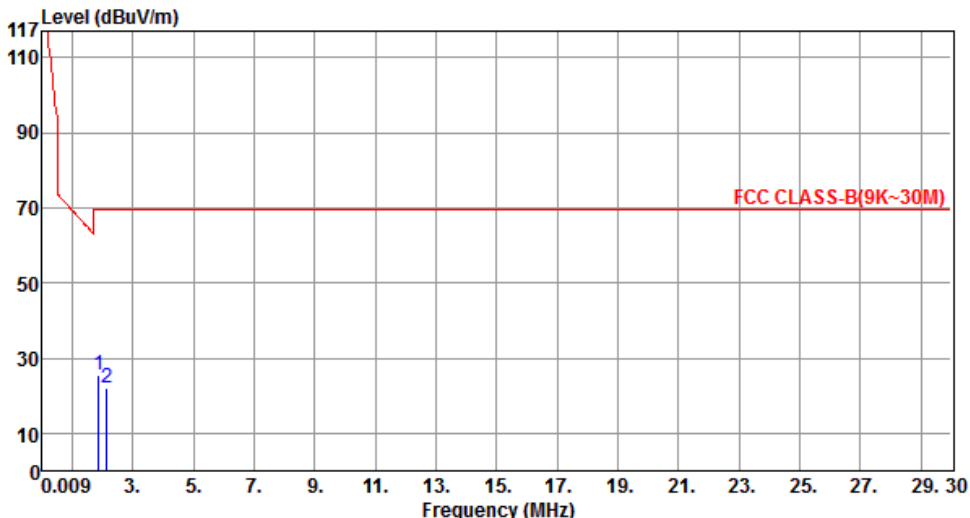Polarization	Loop Close				Test Freq. (kHz)		125																																																				
 <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>1.88</td><td>25.31</td><td>69.54</td><td>-44.23</td><td>6.00</td><td>19.31</td><td>QP</td><td>---</td><td>---</td></tr><tr><td>2</td><td>2.13</td><td>22.02</td><td>69.54</td><td>-47.52</td><td>2.76</td><td>19.26</td><td>QP</td><td>---</td><td>---</td></tr></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB		High	Table			dBuV/m			dBuV			cm	deg	1	1.88	25.31	69.54	-44.23	6.00	19.31	QP	---	---	2	2.13	22.02	69.54	-47.52	2.76	19.26	QP	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																		
	MHz	level	dBuV/m	dB	reading	dB		High	Table																																																		
		dBuV/m			dBuV			cm	deg																																																		
1	1.88	25.31	69.54	-44.23	6.00	19.31	QP	---	---																																																		
2	2.13	22.02	69.54	-47.52	2.76	19.26	QP	---	---																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor (dB) Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m)																																																											

3.2.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

Polarization	Horizontal		Test Freq. (kHz)		125	
Level (dBUV/m) <						

Polarization	Vertical			Test Freq. (kHz)			125		
Level (dBuV/m) <									

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==