

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



() 东莞市金赞智能科技有限公司


产品规格书

PRODUCT SPECIFICATION

客 户:	深圳市倍力奇科技有限公司
CUSTOMER:	Shenzhen Powerqi Technology Co.,Ltd
客户料号:	3-122DX01010AA-094 (MC14/MC15/MC20/MC26专用)
CUST P/N:	
金赞料号:	J30-000143-001
K C P/N:	
产品型号:	20.5*39.5*0.08*80P*11TS-7.7uH±10%
D E S E :	
日 期:	2024.11.20
D A T E :	
版 本:	A.3
VERSION :	

(客户承认受领印) ACCEPTANCE STAMP

严慧琳



2024.11.20

2024.11.20

2024.11.20

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
严慧琳Yan Huilin			

Address: No. 2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114

Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

版本变更履历 Version Change History

[illegible]

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
Yan Huilin	Li Jin

文件编号 FilNo: KC-JZ-09-008


东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification

客户料号: CUST P/N	3-122DX01010AA-094
金赞型号: KC DESE	20.5*39.5*0.08*80P*11TS-7.7 uH $\pm$ 10%

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

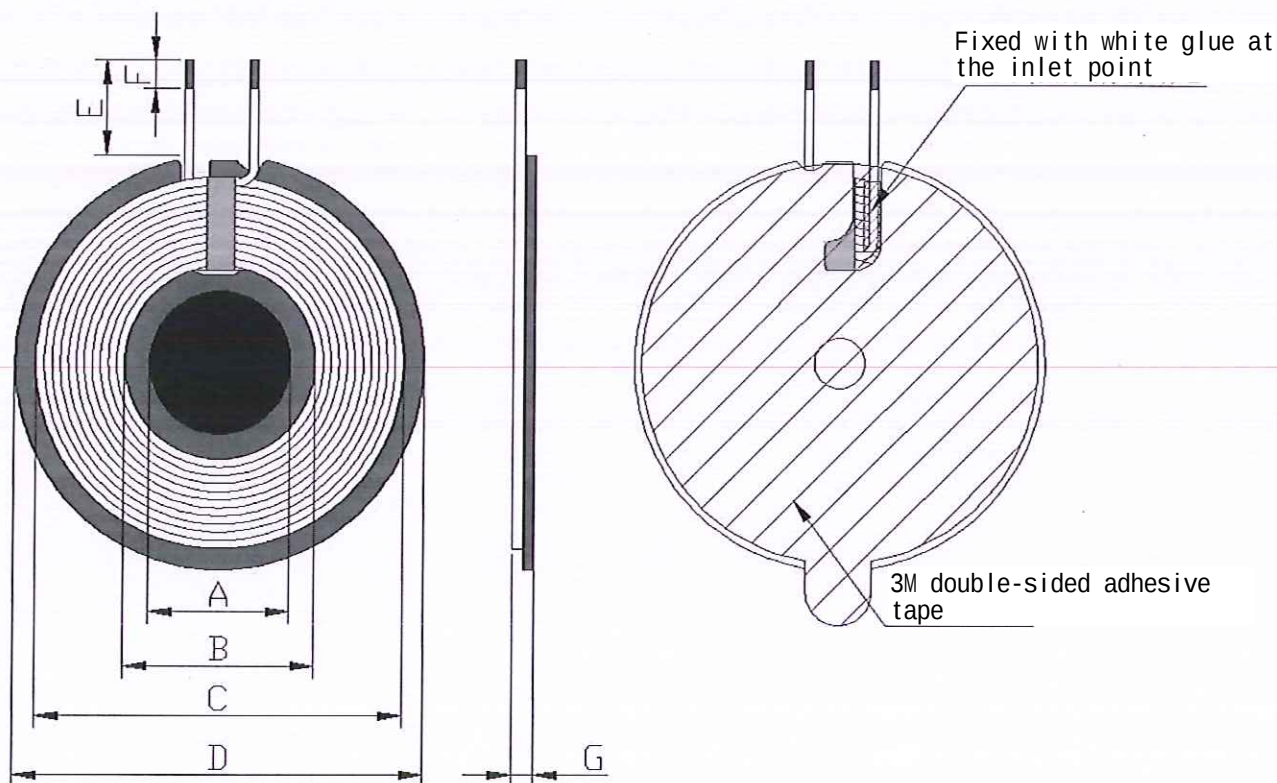

单位(Unit):毫米(mm)

A	B	C	D	E	F	G
15 $\pm$ 1	20.5 $\pm$ 0.5	39.5 $\pm$ 0.5	43.5 $\pm$ 0.5	10 $\pm$ 1	3 $\pm$ 1	2.15 $\pm$ 0.15

PS:1. (E) is the length of the magnetic outer lead; 2. (G) Includes incoming wire, not release paper;
3. Fixed with white glue at the inlet point

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*80P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/Paste)

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
Yan Huilin	Li Jin

Address: No. 2 Xisha Road, Shijie Town, Dongguan City Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-094

金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS-7.7
uH±10%

All materials must comply with ROHS standards

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: 25±10℃, 湿度 RELATIVE HUMIDITY: 65±10%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic plate : 7.7uH±10%	100kHz/1V	LCZ METER 1062
2	DCR	S-F	resistance value 65mΩ MAX	/	LCZ METER 1062
3	Q value	S-F	Q value 60MIN	100kHz/1V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	wire	0.08*80P Hot air twisted wire	JX-2U-F-0008	CX
2	Large magnetic disk	G43.5 ± 0.5 * 5.3 * 0.8 (with holes and double L slots, 3mm small groove in the middle)	GCP-T-00298	HYT
3	Small magnetic disc	Hard magnetic circular 15 * 0.7H without holes or slots	GCP-T-00305	LX
4	Large double-sided adhesive tape	3M double-sided adhesive 9448A42 * 0.12H with hand tear	SMJ-3M-00077	HWD
5	Small double-sided tape	Round ordinary double-sided tape 13 * 0.08H with hand tear	SMJ-T-0082	HWD
6	glue	JS-E7202 (thickened) white glue	E7202W	HZY
7	tin bar	Environmentally friendly lead-free solder bars	Lead free high-temperature tin strip	XC
8	Golden finger adhesive tape	3mm	High temperature adhesive paper 3MM	JRM

拟制
PREPARED BY

Yan Huilin

工程审核
ENGINEER CHECKED BY

Li Jin

Address: No. 2 Xisha Road, Shijie
Town, Dongguan City

Tel: 86-076986018114

Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 File No: KC-JZ-09-008

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED


规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-094

金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS-7.7
uH±10%

4. 包装 (PACKING) :

4.1 包装图片 (PACKING PICTURES) :

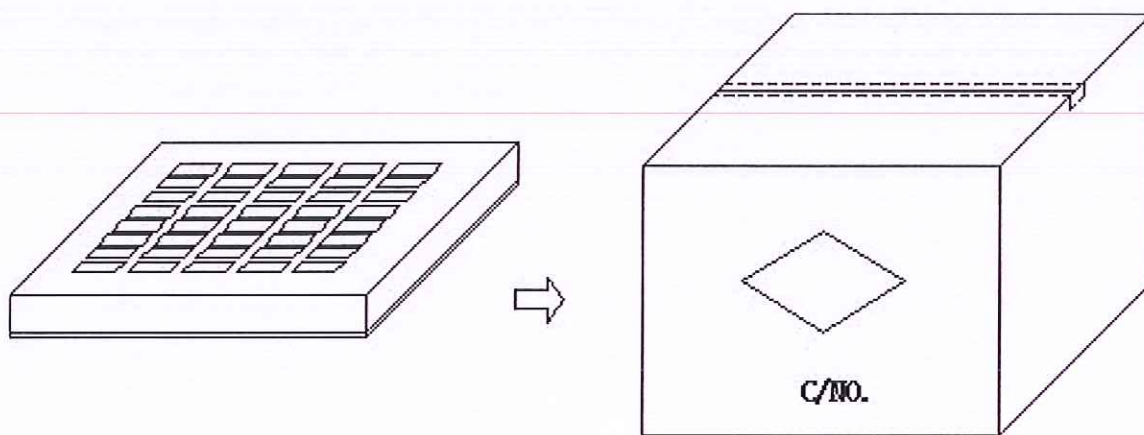

4.2 包装数量及规格 (PACKING QUANTITY) :

项目 Item	数量 Quantity	材料规格 Material
盒 Box	280 Pcs	38*27*6 cm
箱 Big Carton	840 Pcs	40*28*21 cm

拟制
PREPARED BY

Yan Huilin

工程审核
ENGINEER CHECKED BY

Li Jin

Address: No. 2 Xisha Road, Shijie Town
, Dongguan City

Tel: 86-076986018114

Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008