



DONGGUAN KIMCHEN INDUSTRY INTL LIMITED



产品规格书

PRODUCT SPECIFICATION

客 户:	深圳市倍力奇科技有限公司
CUSTOMER:	_____
客户料号:	3-122DX01010AA-168
CUST P/N:	_____
金赞料号:	J30-000986-001
K C P/N:	_____
产品型号:	20.5*39.5*0.08*80P*11TS*17MM
D E S E :	_____
日 期:	2026. 3. 10
D A T E :	_____
版 本:	A. 0
VERSION :	_____

(客户承认受领印) ACCEPTANCE STAMP

拟制 PREPARED BY	跟单员 MERCHANDISER	工程审核 ENGINEER CHECKED BY	批准 APPROVED BY
Huang Zhi			

Address: No. 138, Gaolong West Road, Gaobu Town, Dongguan City, Guangdong Province Tel: 86-076986018114 Fax: 86-076986015646

Http://www.jzcoil.com

文件编号 FilNo: KC-JZ-09-008

版本变更履历 Version Change History

客户料号:
CUST P/N

3-122DX01010AA-168

金 贊 型 号:
KC DESE

20.5*39.5*0.08*80P*11TS*17M

版本 Rev.	变更前 Before Change	变更后内容 DESCRIPTION(Content Or Reason ForChanged)	日期 Date	修订者 Revisor
------------	----------------------	--	------------	----------------

A. 0

变更前
Before Change

变更后内容
DESCRIPTION(Content Or Reason ForChanged)

日期
Date

Revisor

A. 0

新发行 (Initial Release)

2026/3/10

Huang
Zhi

拟制
PREPARED BY

Huang Zhi

工程审核
ENGINEER CHECKED BY

Li jing

东莞市金赞智能科技有限公司


DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-168

金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS*17M
M

1. 产品外形尺寸 (OVERALL DIMENSIONS OF PRODUCTS):

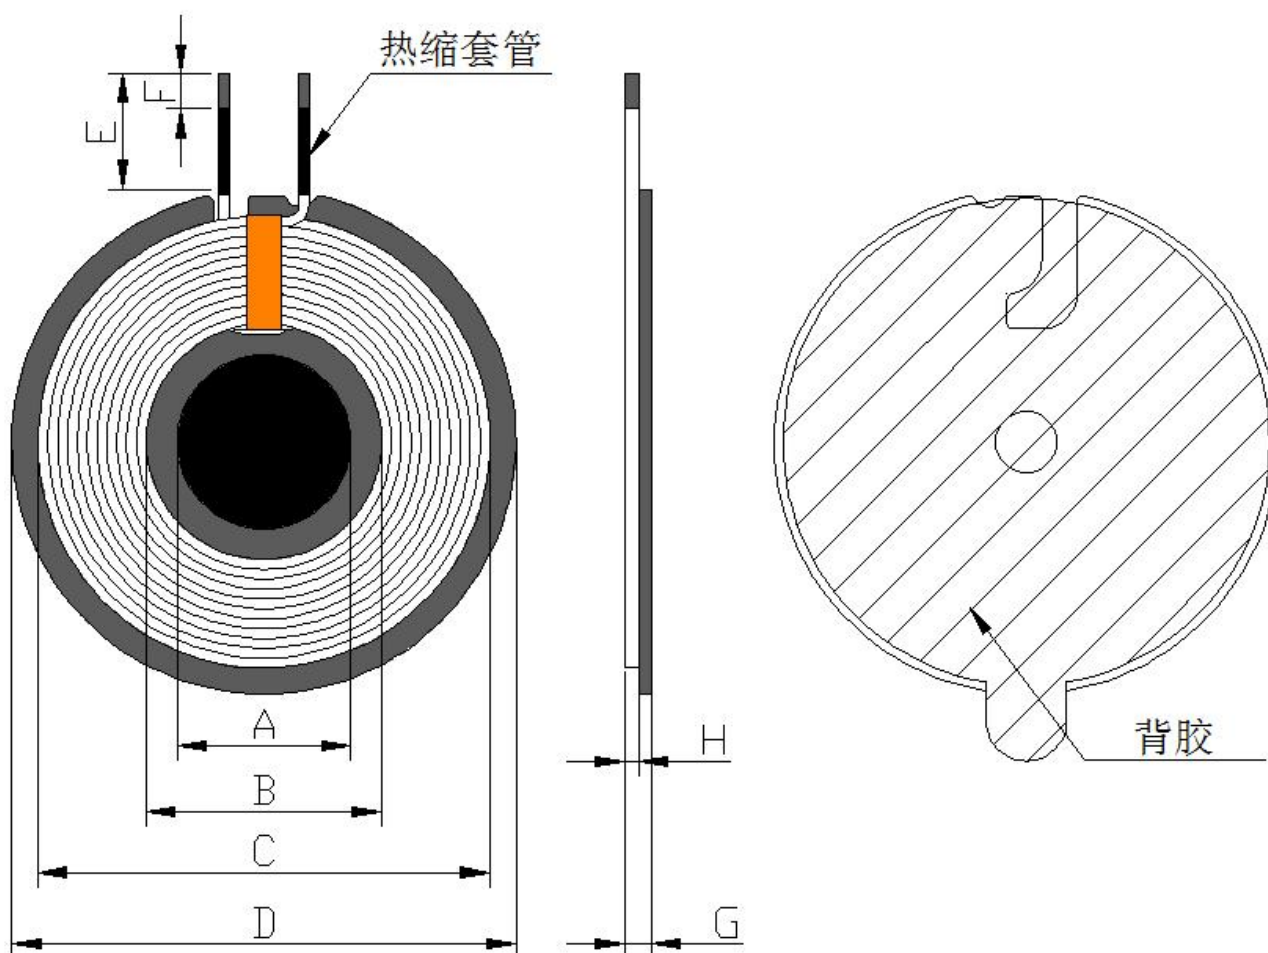

单位(Unit):毫米(mm)

A	B	C	D	E	F	G	H	
15±1	20.5±0.5	39.5±0.5	43.5±0.5	17±1	3±1	2.15±0.15	0.95±0.1	

PS:1. (E) Magnetic external lead length; 2. (G) Includes the inlet but excludes the release paper; 3. The inlet point is fixed with white glue.

拟制
PREPARED BY工程审核
ENGINEER CHECKED BY

Huang Zhi

Li jing

东莞市金赞智能科技有限公司

DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification客户料号:
CUST P/N

3-122DX01010AA-168

金赞型号:
KC DESE20.5*39.5*0.08*80P*11TS*17M
M

圈数 Turns	线径 Wire Dia.	绕线方式 疏/密 Wdg. Type Spred/Close	绕线方向 Wdg. Direction	相交 是/否 Intersect Yes/Not	线圈 正/反贴 Coil Positive/Anti Paste
11TS	0.08*80P 热风绞线 (Stranded wire)	密绕 (Close)	逆时针 (Anticlockwise)	是 (Yes)	反贴 (Anti/Paste)

All materials must meet the ROHS standards.

2. 电气特性 (ELECTRICAL CHARACTERISTICS):

温度 TEMPERATURE: $25 \pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY: $65 \pm 10\%$

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND	S-F	Coil with magnetic sheet: $7.7\mu\text{H} \pm 10\%$	100kHz/1V	LCZ METER 1062
2	DCR	S-F	Resistance: $65\text{m}\Omega$ (Maximum)	/	LCZ METER 1062
3	Q 值	S-F	Q value: 60MIN	100kHz/1V	LCZ METER 1062

3. 材料清单 (BILL OF MATERIALS):

序号 NO.	材料名称 Material name	品名描述 Description	物料代码 Material Code	厂商代码 Vendor code
1	wire rod	0.08 * 80P hot air twisted wire	JX-2U-F-0008	CX
2	Large magnetic disk	G43.5 $\pm$ 0.5 * 5.3 * 0.8 (with holes, with double L-shaped grooves, with a small groove of 3mm in the middle)	GCP-T-00298	HYT
3	Small magnetic disk	Hard magnetic circular shape, 15*0.7H, without holes or grooves	GCP-T-00305	LX
4	Double-sided adhesive tape	3M Double-sided Adhesive Tape 9448A 42*0.12H With Tear-off Handle	SMJ-3M-00077	HWD
5	Small double-sided adhesive tape	Round regular double-sided adhesive tape 13*0.08H with tear-off feature	SMJ-T-0082	HWD

拟制
PREPARED BY

Huang zhi

工程审核
ENGINEER CHECKED BY

Li jing

东莞市金赞智能科技有限公司
DONGGUAN KIMCHEN INDUSTRY INTL LIMITED

规格内容
Specification

客户料号: CUST P/N	3-122DX01010AA-168
金赞型号: KC DESE	20.5*39.5*0.08*80P*11TS*17M M

6	glue	JS-E7202 (Thickened) White Adhesive	E7202W	HZY
7	Tin	Environmentally friendly lead-free solder wire	Lead-free high-temperature solder wire	XC
8	Gold Finger Adhesive Tape	3mm	High-temperature adhesive tape 3MM	JRM
9	heat shrink tubing	ø1.0*14MM	/	/

东莞市金赞智能科技有限公司

拟制 PREPARED BY	工程审核 ENGINEER CHECKED BY
Huang zhi	Li jing