
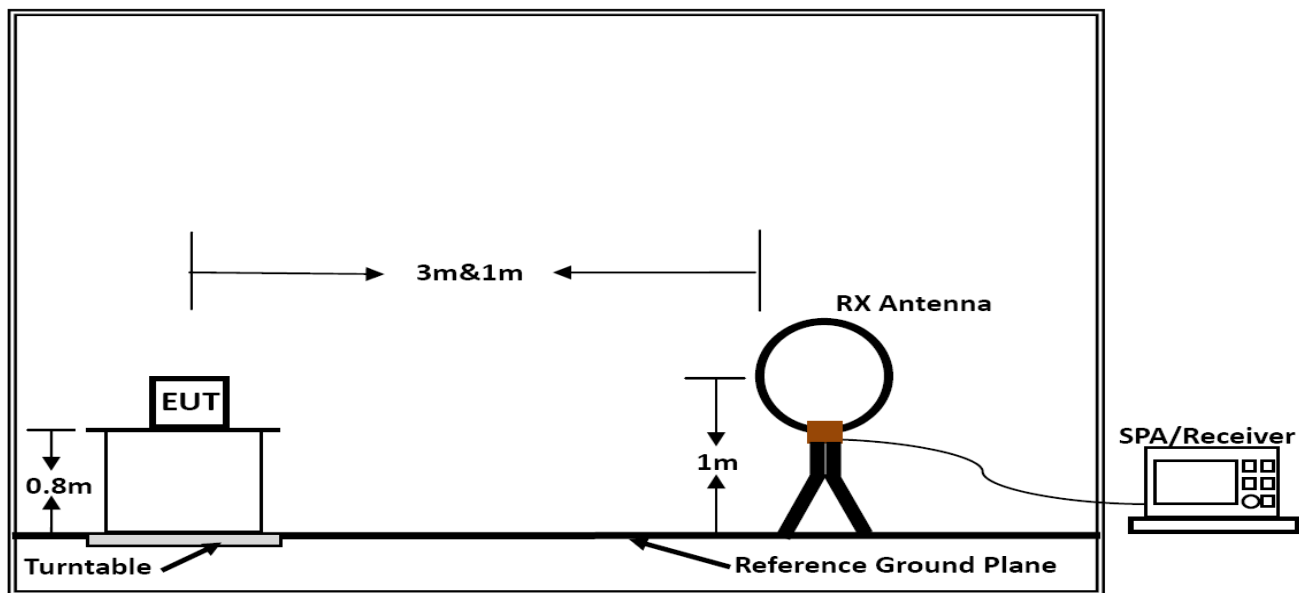
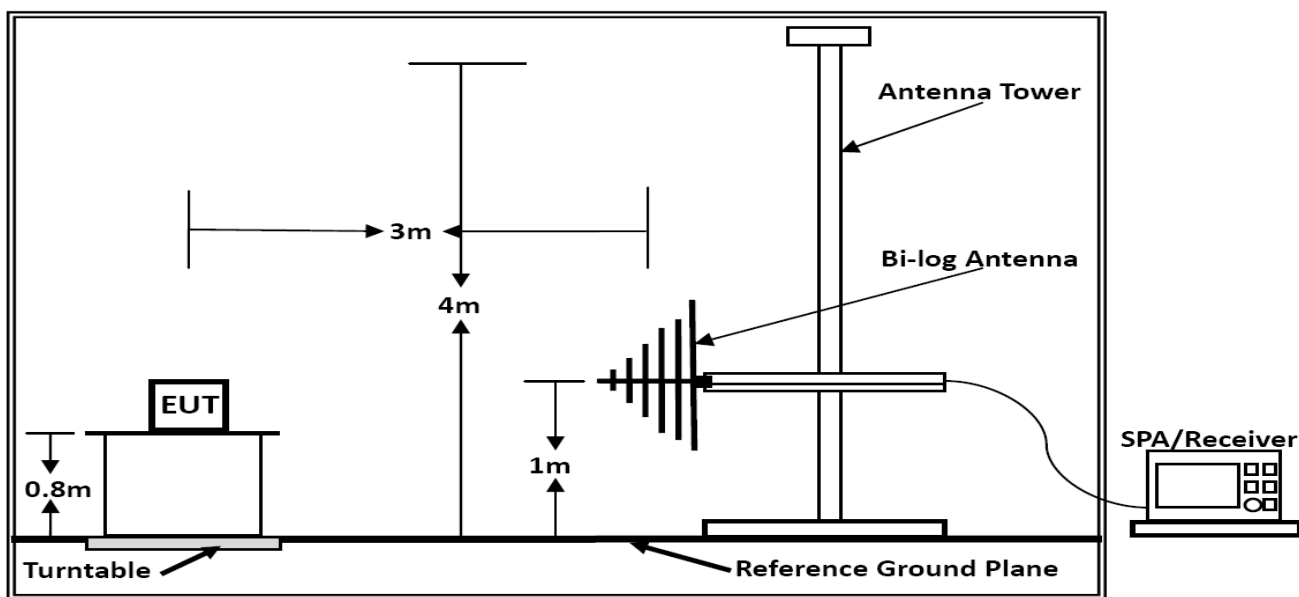


5.4.4. Test Setup Layout

**Below 30MHz****Below 1GHz**

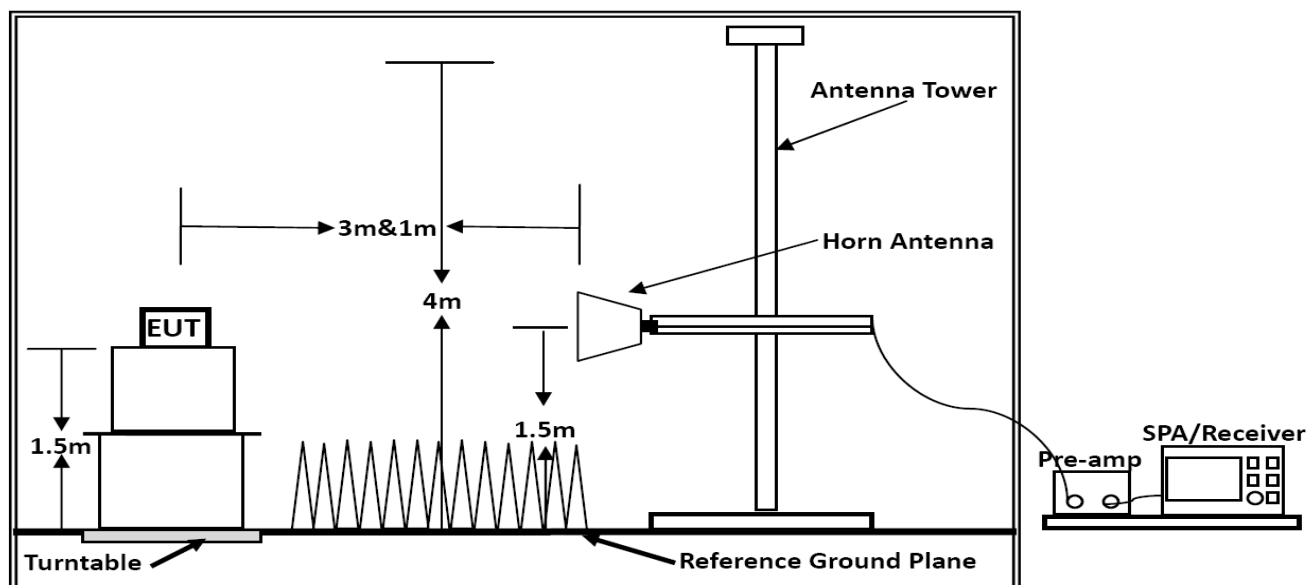

Above 1GHz

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9 kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	BLE 4.0; 802.11b/g/n

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:


The radiated emissions from 9 kHz to 30MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	BLE (Middle Channel) 802.11b(Middle Channel)

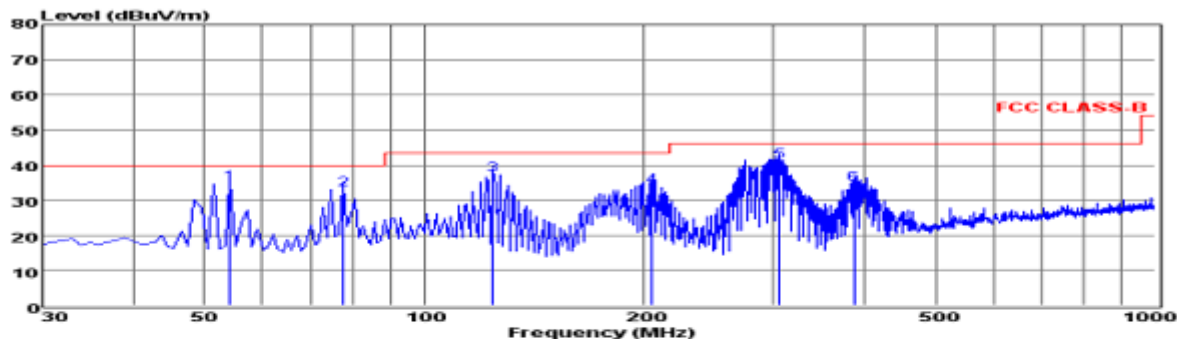

Env./Ins: 24°C/56%
 EUT: SF550
 M/N: AC 120V/60Hz
 Power Rating: TX-Middle Channel
 Test Mode: Leo
 Operator: BLE
 Memo: HORIZONTAL
 pol:

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	54.25	21.17	0.46	13.05	34.68	40.00	-5.32	QP
2	77.53	24.34	0.47	8.17	32.98	40.00	-7.02	QP
3	124.09	26.48	0.71	9.85	37.04	43.50	-6.46	QP
4	204.60	22.25	0.99	10.71	33.95	43.50	-9.55	QP
5	306.45	26.87	1.05	13.15	41.07	46.00	-4.93	QP
6	386.96	18.46	1.32	14.75	34.53	46.00	-11.47	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

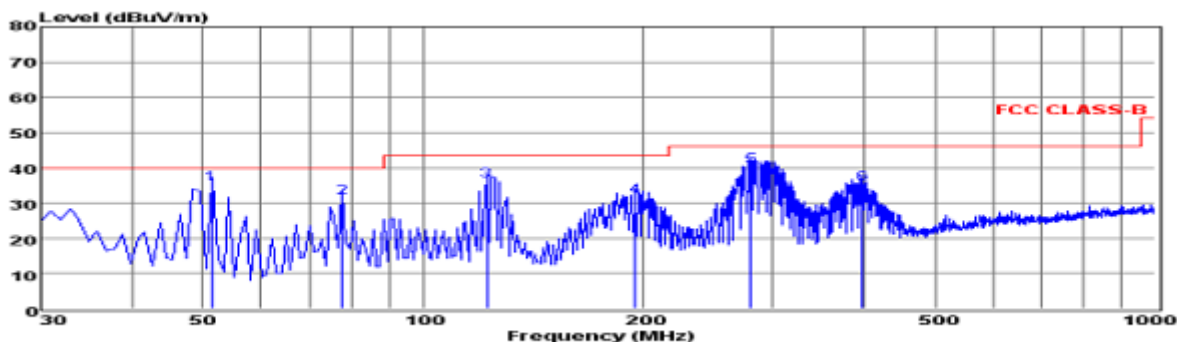

Env./Ins: 24°C/56%
 EUT: SF550
 M/N: AC 120V/60Hz
 Power Rating: TX-Middle Channel
 Test Mode: Leo
 Operator: BLE
 Memo: VERTICAL
 pol:

	Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured dBuV/m	Limit dBuV/m	Over dB	Remark
1	51.34	21.54	0.54	13.19	35.27	40.00	-4.73	QP
2	77.53	22.85	0.47	8.17	31.49	40.00	-8.51	QP
3	122.15	25.29	0.70	10.15	36.14	43.50	-7.36	QP
4	194.90	20.35	0.96	10.56	31.87	43.50	-11.63	QP
5	280.26	26.84	1.01	12.68	40.53	46.00	-5.47	QP
6	398.60	19.08	1.22	15.03	35.33	46.00	-10.67	QP


Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

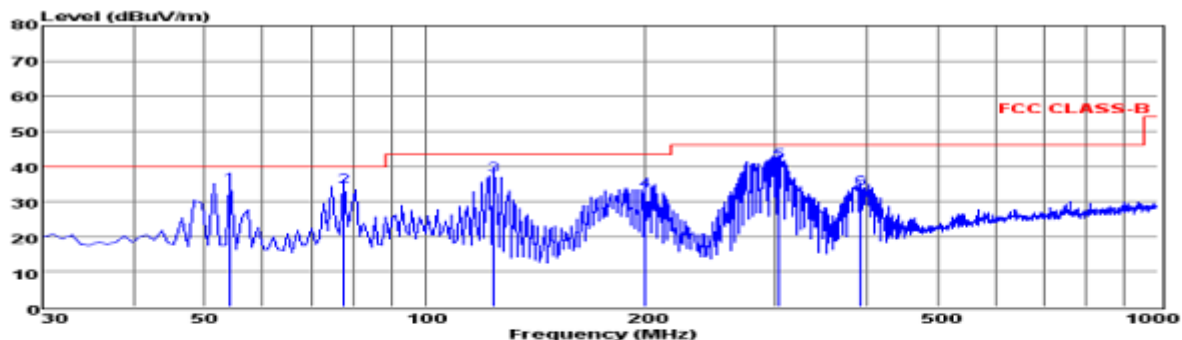

Env./Ins: 24°C/56%
 EUT:
 M/N: SF550
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel(802.11b)
 Operator: Leo
 Memo:
 pol: HORIZONTAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	54.25	21.11	0.46	13.05	34.62	40.00	-5.38	QP
2	77.53	25.58	0.47	8.17	34.22	40.00	-5.78	QP
3	124.09	26.86	0.71	9.85	37.42	43.50	-6.08	QP
4	199.75	21.62	0.84	10.57	33.03	43.50	-10.47	QP
5	304.51	27.23	1.03	13.12	41.38	46.00	-4.62	QP
6	392.78	17.44	1.20	14.89	33.53	46.00	-12.47	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

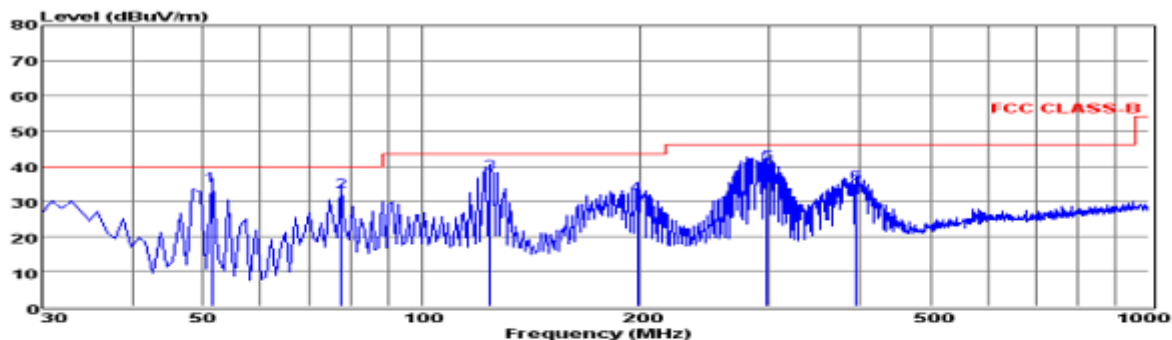

Env./Ins: 24°C/56%
 EUT:
 M/N: SF550
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel(802.11b)
 Operator: Leo
 Memo:
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	51.34	20.83	0.54	13.19	34.56	40.00	-5.44	QP
2	77.53	24.05	0.47	8.17	32.69	40.00	-7.31	QP
3	124.09	27.53	0.71	9.85	38.09	43.50	-5.41	QP
4	197.81	20.31	0.84	10.57	31.72	43.50	-11.78	QP
5	298.69	26.46	1.12	13.03	40.61	46.00	-5.39	QP
6	395.69	18.95	1.30	14.96	35.21	46.00	-10.79	QP

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

***Note:

Pre-scan all modes and recorded the worst case results in this report (802.11b (TX-Low Channel)).
 Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result.

BLE 4.0

TX-Low Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.06	44.37	33.06	35.04	3.94	46.33	74	-27.67	Peak	Horizontal
4804.03	35.72	33.06	35.04	3.94	37.68	54	-17.26	Average	Horizontal
4804.06	45.34	33.06	35.04	3.94	47.30	74	-25.94	Peak	Vertical
4804.03	36.53	33.06	35.04	3.94	38.49	54	-15.35	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.07	43.99	33.16	35.15	3.96	45.42	74	-28.58	Peak	Horizontal
4880.10	34.46	33.16	35.15	3.96	35.82	54	-18.18	Average	Horizontal
4880.07	45.51	33.16	35.15	3.96	47.34	74	-26.66	Peak	Vertical
4880.10	35.72	33.16	35.15	3.96	37.43	54	-16.57	Average	Vertical

TX-High Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.04	44.77	33.26	35.14	3.98	46.87	74	-27.13	Peak	Horizontal
4960.06	34.91	33.26	35.14	3.98	37.01	54	-16.99	Average	Horizontal
4960.04	44.55	33.26	35.14	3.98	46.65	74	-27.35	Peak	Vertical
4960.06	37.45	33.26	35.14	3.98	39.55	54	-14.45	Average	Vertical

802.11b

TX-Low Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.11	48.61	33.06	35.04	3.94	50.57	74	-23.43	Peak	Horizontal
4824.13	38.95	33.06	35.04	3.94	40.91	54	-13.09	Average	Horizontal
4824.11	50.84	33.06	35.04	3.94	52.80	74	-21.20	Peak	Vertical
4824.13	42.81	33.06	35.04	3.94	42.77	54	-9.23	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.14	48.88	33.16	35.15	3.96	50.98	74	-23.02	Peak	Horizontal
4874.17	39.23	33.16	35.15	3.96	41.20	54	-12.80	Average	Horizontal
4874.14	50.78	33.16	35.15	3.96	52.75	74	-21.25	Peak	Vertical
4874.17	41.92	33.16	35.15	3.96	43.89	54	-10.11	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.17	48.84	33.26	35.14	3.98	50.94	74	-23.06	Peak	Horizontal
4924.20	38.34	33.26	35.14	3.98	40.44	54	-13.56	Average	Horizontal
4924.17	50.66	33.26	35.14	3.98	52.76	74	-21.24	Peak	Vertical
4924.20	42.11	33.26	35.14	3.98	44.21	54	-9.79	Average	Vertical

802.11g

TX-Low Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4824.21	48.24	33.06	35.04	3.94	50.20	74	-23.80	Peak	Horizontal
4824.24	39.15	33.06	35.04	3.94	41.11	54	-12.89	Average	Horizontal
4824.24	49.22	33.06	35.04	3.94	51.18	74	-22.82	Peak	Vertical
4824.24	40.51	33.06	35.04	3.94	42.47	54	-11.53	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.17	47.11	33.16	35.15	3.96	49.08	74	-24.92	Peak	Horizontal
4874.20	38.15	33.16	35.15	3.96	40.12	54	-13.88	Average	Horizontal
4874.17	49.08	33.16	35.15	3.96	51.05	74	-22.95	Peak	Vertical
4874.20	38.34	33.16	35.15	3.96	40.31	54	-13.69	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4924.21	47.55	33.26	35.14	3.98	49.65	74	-24.35	Peak	Horizontal
4924.23	37.64	33.26	35.14	3.98	39.74	54	-14.26	Average	Horizontal
4924.21	48.68	33.26	35.14	3.98	50.78	74	-23.22	Peak	Vertical
4924.23	39.13	33.26	35.14	3.98	41.23	54	-12.77	Average	Vertical

802.11n HT20

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4824.15	49.44	33.06	35.04	3.94	51.40	74	-22.80	Peak	Horizontal
4824.17	39.75	33.06	35.04	3.94	41.71	54	-12.29	Average	Horizontal
4824.15	50.33	33.06	35.04	3.94	52.29	74	-21.71	Peak	Vertical
4824.17	40.52	33.06	35.04	3.94	42.48	54	-11.52	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4874.13	41.31	33.16	35.15	3.96	47.28	74	-26.72	Peak	Horizontal
4874.16	36.52	33.16	35.15	3.96	38.49	54	-15.51	Average	Horizontal
4874.13	48.27	33.16	35.15	3.96	50.24	74	-23.76	Peak	Vertical
4874.16	39.27	33.16	35.15	3.96	41.24	54	-12.76	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4924.14	48.11	33.26	35.14	3.98	50.21	74	-23.79	Peak	Horizontal
4924.17	38.43	33.26	35.14	3.98	40.53	54	-13.57	Average	Horizontal
4924.14	49.35	33.26	35.14	3.98	51.45	74	-22.55	Peak	Vertical
4924.17	39.82	33.26	35.14	3.98	41.92	54	-12.08	Average	Vertical

802.11n HT40

TX-Low Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4844.12	47.59	33.06	35.04	3.94	49.55	74	-24.45	Peak	Horizontal
4844.15	37.27	33.06	35.04	3.94	39.23	54	-14.77	Average	Horizontal
4844.12	49.04	33.06	35.04	3.94	51.00	74	-23.00	Peak	Vertical
4844.15	39.01	33.06	35.04	3.94	40.97	54	-13.03	Average	Vertical

TX-Middle Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4874.11	48.12	33.16	35.15	3.96	50.09	74	-23.91	Peak	Horizontal
4874.14	38.78	33.16	35.15	3.96	40.75	54	-13.25	Average	Horizontal
4874.11	48.17	33.16	35.15	3.96	50.14	74	-23.86	Peak	Vertical
4874.14	39.93	33.16	35.15	3.96	41.90	54	-12.10	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuv	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
4904.11	46.66	33.26	35.14	3.98	48.76	74	-25.24	Peak	Horizontal
4904.13	36.92	33.26	35.14	3.98	39.02	54	-14.98	Average	Horizontal
4904.11	47.50	33.26	35.14	3.98	49.60	74	-24.40	Peak	Vertical
4904.13	38.17	33.26	35.14	3.98	40.27	54	-13.73	Average	Vertical

Notes:

1. Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 25GHz are at least 20dB below the official limit and no need to report.

5.4.9. Results of Band Edges Test (Radiated)

Note: Only recorded the worst test result.

BLE 4.0

TX-Low Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.65	43.77	32.89	35.16	3.51	45.01	74	-28.99	Peak	Horizontal
2377.63	34.91	32.90	35.16	3.51	36.16	54	-17.84	Average	Horizontal
2390.00	45.77	32.92	35.16	3.54	47.07	74	-26.93	Peak	Horizontal
2390.00	36.75	32.92	35.16	3.54	38.05	54	-15.95	Average	Horizontal
2400.00	51.59	32.92	35.16	3.54	52.89	74	-21.11	Peak	Horizontal
2400.00	41.87	32.92	35.16	3.54	43.17	54	-10.83	Average	Horizontal
2377.65	43.86	32.89	35.16	3.51	45.10	74	-28.90	Peak	Vertical
2377.63	34.61	32.90	35.16	3.51	35.86	54	-18.14	Average	Vertical
2390.00	45.92	32.92	35.16	3.54	47.22	74	-26.78	Peak	Vertical
2390.00	36.25	32.92	35.16	3.54	37.55	54	-16.45	Average	Vertical
2400.00	51.40	32.92	35.16	3.54	52.70	74	-21.30	Peak	Vertical
2400.00	43.15	32.92	35.16	3.54	44.45	54	-9.55	Average	Vertical

TX-High Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	45.82	33.06	35.18	3.60	47.30	74	-26.70	Peak	Horizontal
2483.50	36.38	33.08	35.18	3.60	37.88	54	-16.12	Average	Horizontal
2487.43	42.90	33.08	35.18	3.62	44.42	74	-29.58	Peak	Horizontal
2487.46	33.31	33.08	35.18	3.62	34.83	54	-19.17	Average	Horizontal
2483.50	46.95	33.06	35.18	3.60	48.43	74	-25.57	Peak	Vertical
2483.53	37.50	33.08	35.18	3.60	39.00	54	-15.00	Average	Vertical
2487.43	44.52	33.08	35.18	3.62	46.04	74	-27.96	Peak	Vertical
2487.46	35.11	33.08	35.18	3.62	36.63	54	-17.37	Average	Vertical

802.11b

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2376.17	44.63	32.89	35.16	3.51	45.87	74	-28.13	Peak	Horizontal
2376.20	35.10	32.90	35.16	3.51	36.35	54	-17.65	Average	Horizontal
2390.00	47.97	32.92	35.16	3.54	49.27	74	-24.73	Peak	Horizontal
2390.00	37.48	32.92	35.16	3.54	38.78	54	-15.22	Average	Horizontal
2400.00	54.11	32.92	35.16	3.54	55.41	74	-18.59	Peak	Horizontal
2400.00	43.63	32.92	35.16	3.54	44.93	54	-9.07	Average	Horizontal
2376.17	45.53	32.89	35.16	3.51	46.77	74	-27.23	Peak	Vertical
2376.20	35.98	32.90	35.16	3.51	37.23	54	-16.77	Average	Vertical
2390.00	48.04	32.92	35.16	3.54	49.34	74	-24.66	Peak	Vertical
2390.00	38.02	32.92	35.16	3.54	39.32	54	-14.68	Average	Vertical
2400.00	56.05	32.92	35.16	3.54	57.35	74	-16.65	Peak	Vertical
2400.00	45.73	32.92	35.16	3.54	47.03	54	-6.97	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	47.37	33.06	35.18	3.60	48.85	74	-25.15	Peak	Horizontal
2483.50	36.49	33.08	35.18	3.60	37.99	54	-16.01	Average	Horizontal
2486.47	45.26	33.08	35.18	3.62	46.78	74	-27.22	Peak	Horizontal
2486.50	34.50	33.08	35.18	3.62	36.02	54	-17.98	Average	Horizontal
2483.50	48.92	33.06	35.18	3.60	50.40	74	-23.60	Peak	Vertical
2483.50	37.63	33.08	35.18	3.60	39.13	54	-14.87	Average	Vertical
2486.47	46.27	33.08	35.18	3.62	47.79	74	-26.21	Peak	Vertical
2486.50	36.85	33.08	35.18	3.62	38.37	54	-15.63	Average	Vertical

802.11g

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.34	45.14	32.89	35.16	3.51	46.38	74	-27.62	Peak	Horizontal
2377.37	34.56	32.90	35.16	3.51	35.81	54	-18.19	Average	Horizontal
2390.00	48.69	32.92	35.16	3.54	49.99	74	-24.01	Peak	Horizontal
2390.00	38.21	32.92	35.16	3.54	39.51	54	-14.49	Average	Horizontal
2400.00	52.52	32.92	35.16	3.54	53.82	74	-20.18	Peak	Horizontal
2400.00	41.87	32.92	35.16	3.54	43.17	54	-10.83	Average	Horizontal
2377.34	46.54	32.89	35.16	3.51	47.78	74	-26.22	Peak	Vertical
2377.37	36.19	32.90	35.16	3.51	37.44	54	-16.56	Average	Vertical
2390.00	50.06	32.92	35.16	3.54	51.36	74	-22.64	Peak	Vertical
2390.00	38.24	32.92	35.16	3.54	39.54	54	-14.46	Average	Vertical
2400.00	54.18	32.92	35.16	3.54	55.48	74	-18.52	Peak	Vertical
2400.00	43.79	32.92	35.16	3.54	45.09	54	-8.91	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	45.94	33.06	35.18	3.60	47.42	74	-26.58	Peak	Horizontal
2483.50	34.84	33.08	35.18	3.60	36.34	54	-17.66	Average	Horizontal
2487.44	47.95	33.08	35.18	3.62	49.47	74	-24.53	Peak	Horizontal
2487.47	35.46	33.08	35.18	3.62	36.98	54	-17.02	Average	Horizontal
2483.50	46.24	33.06	35.18	3.60	47.72	74	-26.28	Peak	Vertical
2483.50	36.01	33.08	35.18	3.60	37.51	54	-16.49	Average	Vertical
2487.44	48.30	33.08	35.18	3.62	49.82	74	-24.18	Peak	Vertical
2487.47	37.31	33.08	35.18	3.62	38.83	54	-15.17	Average	Vertical

802.11n (HT20)

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2377.61	47.14	32.89	35.16	3.51	48.38	74	-25.62	Peak	Horizontal
2377.63	35.55	32.9	35.16	3.51	36.80	54	-17.20	Average	Horizontal
2390.00	49.12	32.92	35.16	3.54	50.42	74	-23.58	Peak	Horizontal
2390.00	37.89	32.92	35.16	3.54	39.19	54	-14.81	Average	Horizontal
2400.00	55.27	32.92	35.16	3.54	56.57	74	-17.43	Peak	Horizontal
2400.00	45.16	32.92	35.16	3.54	46.46	54	-7.54	Average	Horizontal
2377.61	47.67	32.89	35.16	3.51	48.91	74	-25.09	Peak	Vertical
2377.63	36.71	32.9	35.16	3.51	37.96	54	-16.04	Average	Vertical
2390.00	49.50	32.92	35.16	3.54	50.80	74	-23.20	Peak	Vertical
2390.00	39.21	32.92	35.16	3.54	40.51	54	-13.49	Average	Vertical
2400.00	56.83	32.92	35.16	3.54	58.13	74	-15.87	Peak	Vertical
2400.00	45.76	32.92	35.16	3.54	47.06	54	-6.94	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	44.91	33.06	35.18	3.60	46.39	74	-27.61	Peak	Horizontal
2483.50	35.65	33.08	35.18	3.60	37.15	54	-16.85	Average	Horizontal
2488.17	47.37	33.08	35.18	3.62	48.89	74	-25.11	Peak	Horizontal
2488.20	36.06	33.08	35.18	3.62	37.58	54	-16.42	Average	Horizontal
2483.50	42.62	33.06	35.18	3.60	44.10	74	-29.90	Peak	Vertical
2483.50	36.09	33.08	35.18	3.60	37.59	54	-16.41	Average	Vertical
2488.17	47.29	33.08	35.18	3.62	48.81	74	-25.19	Peak	Vertical
2488.20	36.85	33.08	35.18	3.62	38.37	54	-15.63	Average	Vertical

802.11n (HT40)

TX-Low Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2378.37	48.67	32.89	35.16	3.51	49.91	74	-24.09	Peak	Horizontal
2378.40	37.78	32.90	35.16	3.51	39.03	54	-14.97	Average	Horizontal
2390.00	50.61	32.92	35.16	3.54	51.91	74	-22.09	Peak	Horizontal
2390.00	39.58	32.92	35.16	3.54	40.88	54	-13.12	Average	Horizontal
2400.00	51.60	32.92	35.16	3.54	52.90	74	-21.10	Peak	Horizontal
2400.00	41.70	32.92	35.16	3.54	43.00	54	-11.00	Average	Horizontal
2378.37	49.44	32.89	35.16	3.51	50.68	74	-23.32	Peak	Vertical
2378.40	39.85	32.90	35.16	3.51	41.10	54	-12.90	Average	Vertical
2390.00	51.38	32.92	35.16	3.54	52.68	74	-21.32	Peak	Vertical
2390.00	40.85	32.92	35.16	3.54	42.15	54	-11.85	Average	Vertical
2400.00	53.54	32.92	35.16	3.54	54.84	74	-19.16	Peak	Vertical
2400.00	44.58	32.92	35.16	3.54	45.88	54	-8.12	Average	Vertical

TX-High Channel

Freq. MHz	Reading dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
2483.50	48.15	33.06	35.18	3.60	49.63	74	-24.37	Peak	Horizontal
2483.50	38.26	33.08	35.18	3.60	39.76	54	-14.24	Average	Horizontal
2487.71	49.51	33.08	35.18	3.62	51.03	74	-22.97	Peak	Horizontal
2487.74	39.02	33.08	35.18	3.62	40.54	54	-13.46	Average	Horizontal
2483.50	48.88	33.06	35.18	3.60	50.36	74	-23.64	Peak	Vertical
2483.50	38.87	33.08	35.18	3.60	40.37	54	-13.63	Average	Vertical
2487.71	49.55	33.08	35.18	3.62	51.07	74	-22.93	Peak	Vertical
2487.74	39.81	33.08	35.18	3.62	41.33	54	-12.67	Average	Vertical

5.5. Conducted Spurious Emissions and Band Edges Test

5.5.1. Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

5.5.2. Instruments Setting

The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

5.5.4. Test Setup Layout



This test setup layout is the same as that shown in section 5.3.4.


5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.5.6. Test Results of Conducted Spurious Emissions



BLE 4.0

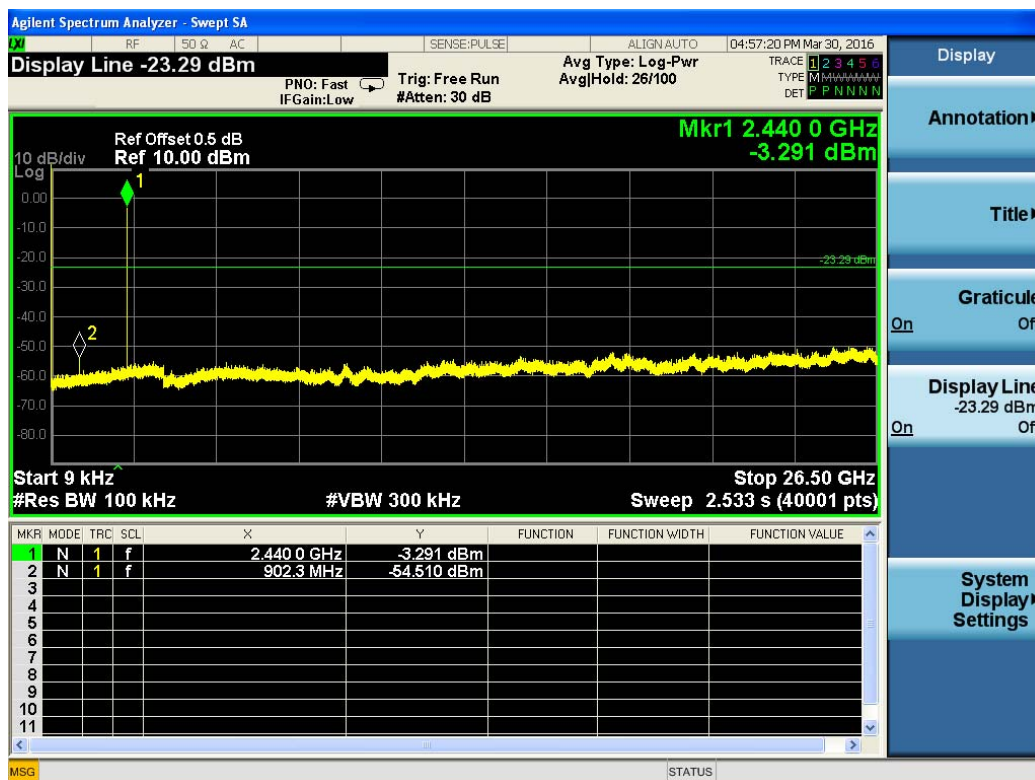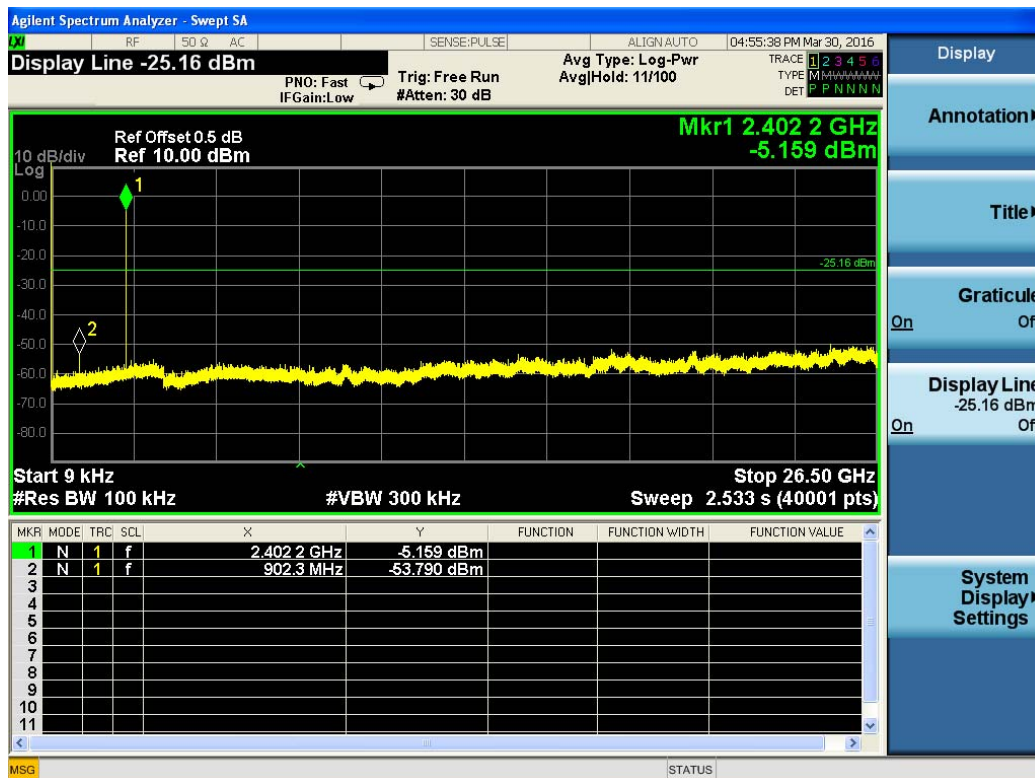


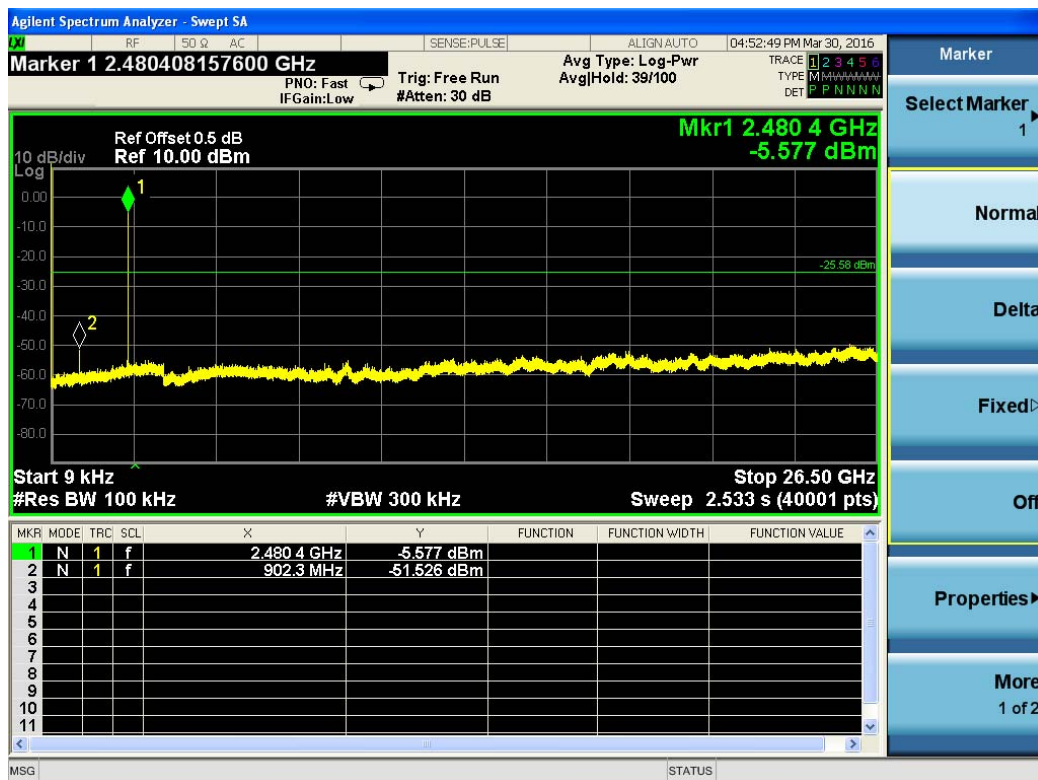



802.11b

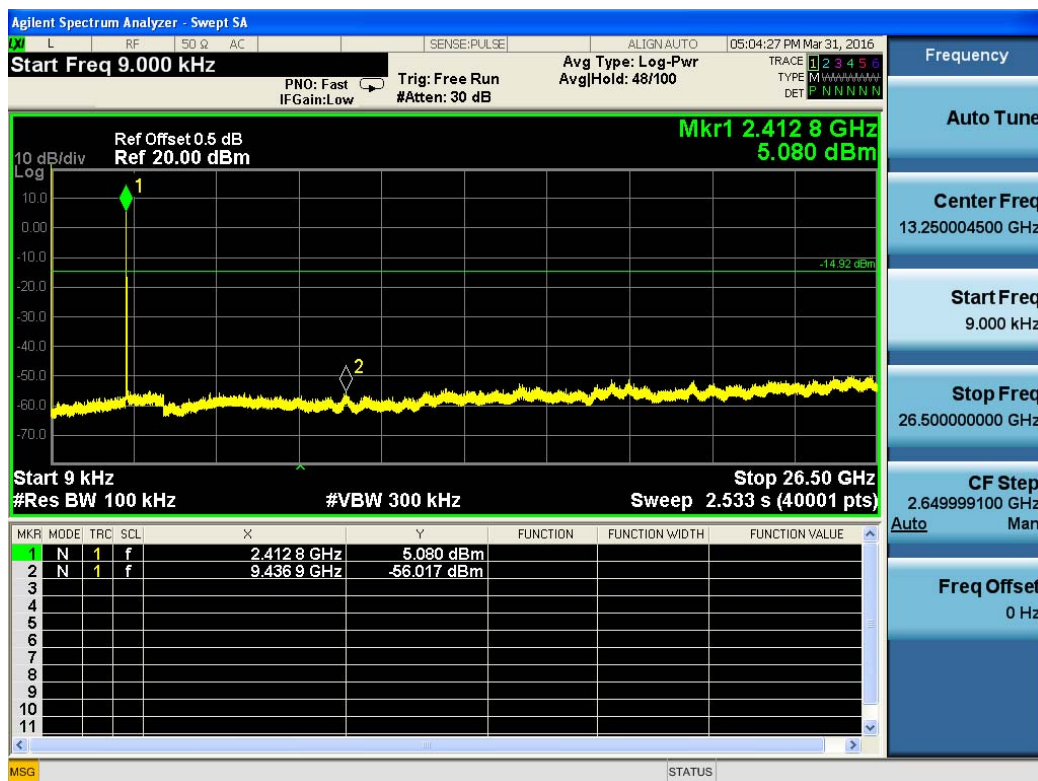

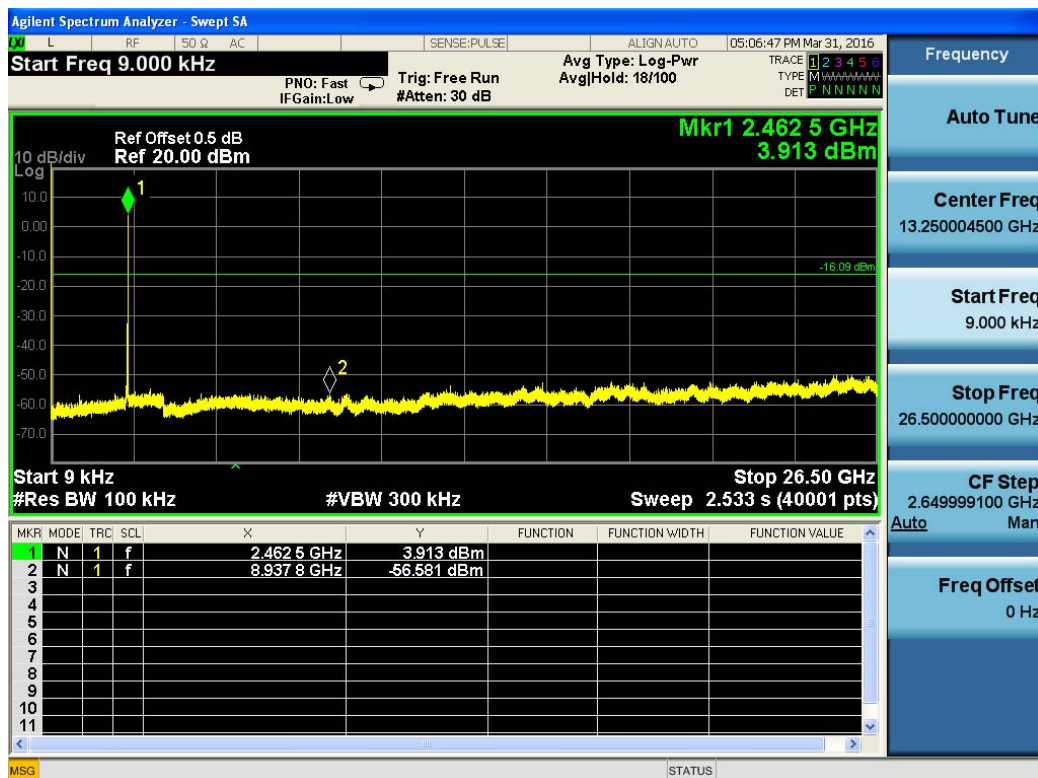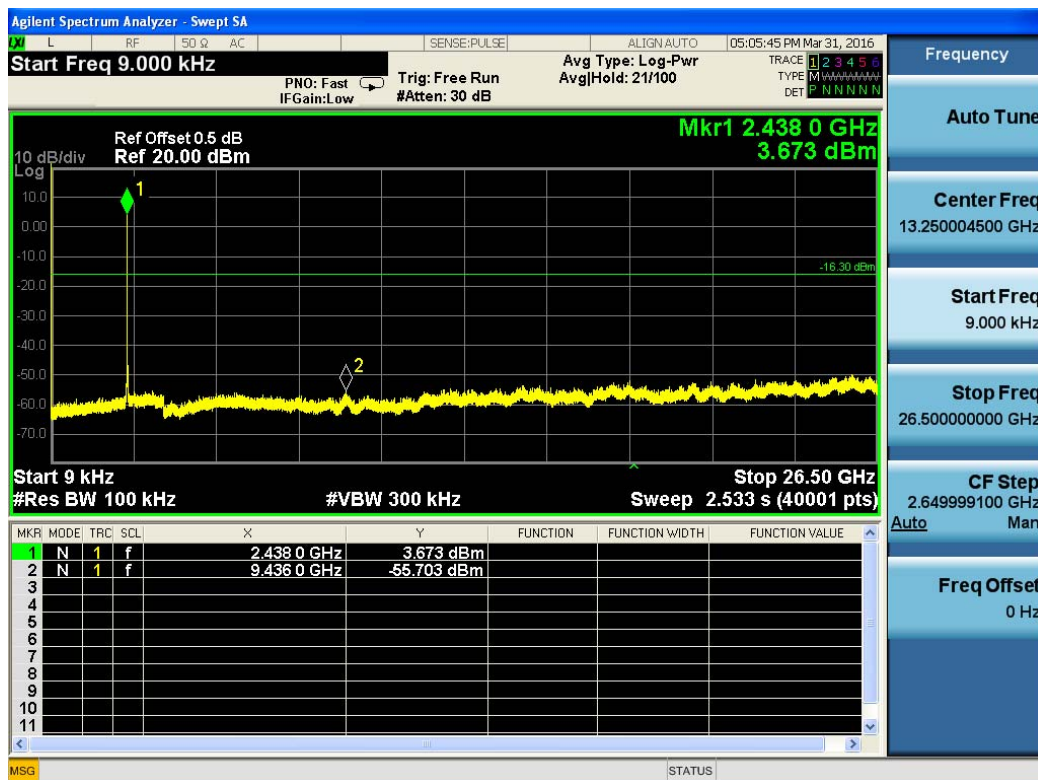




802.11g

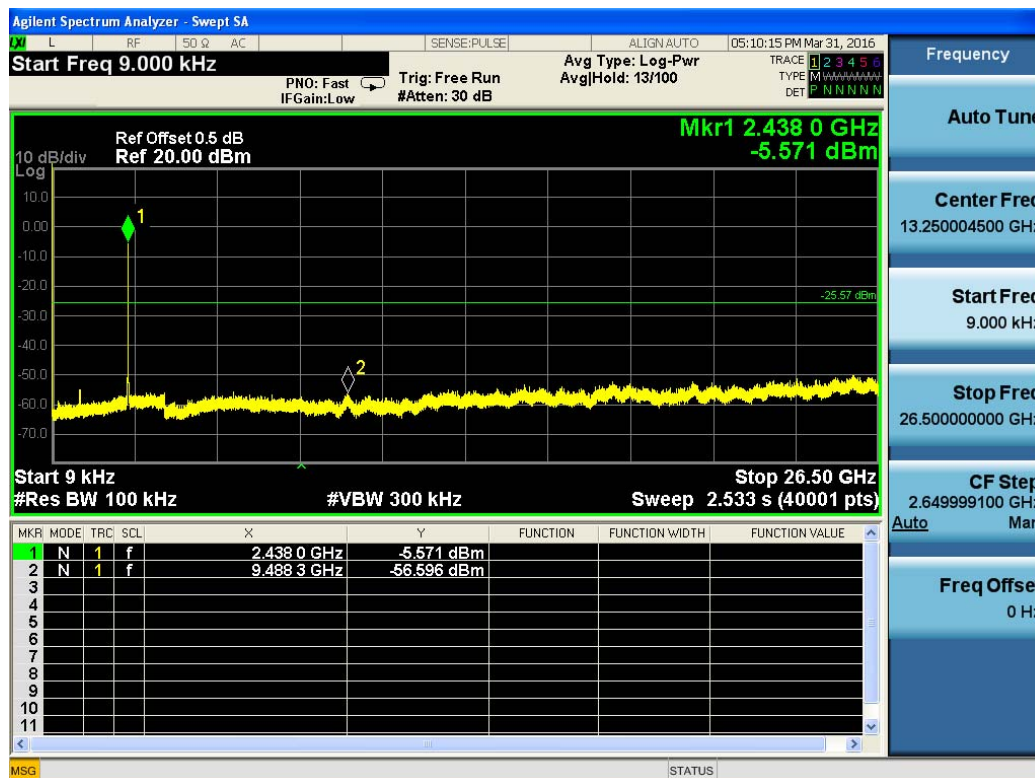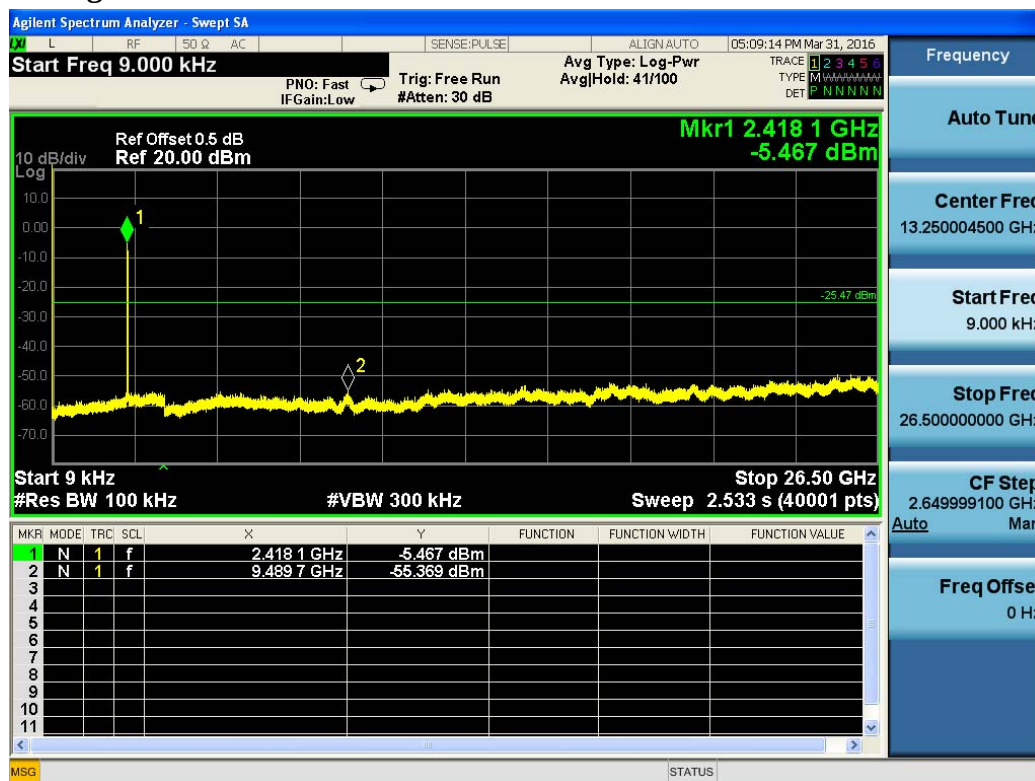


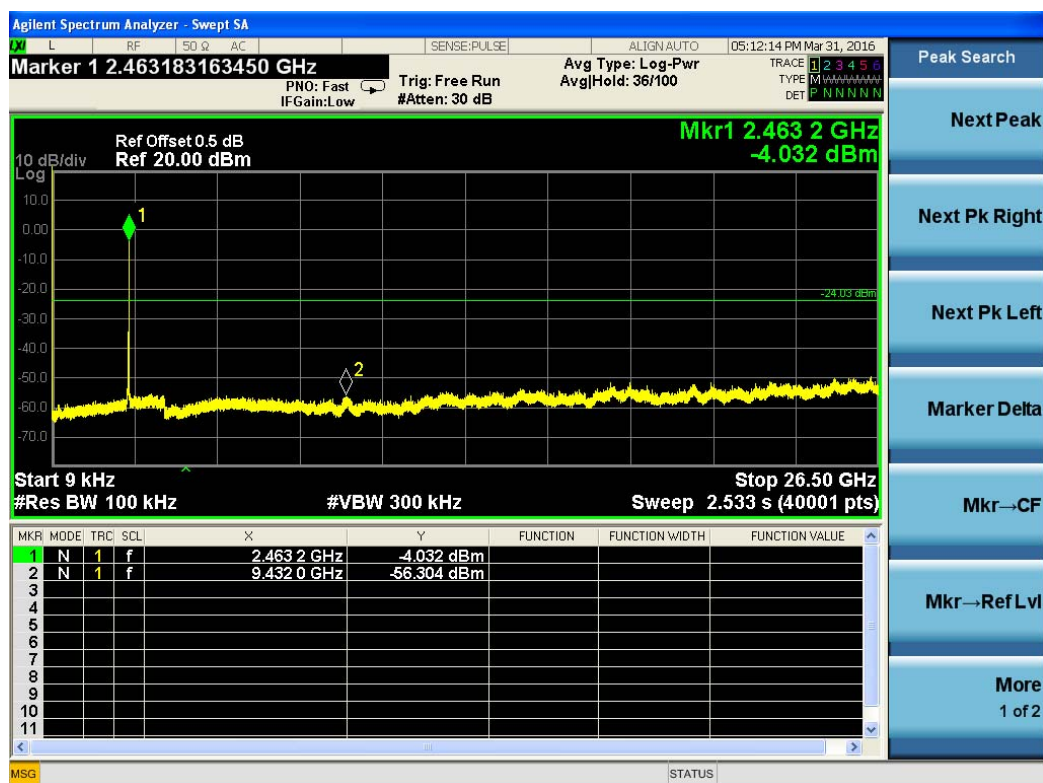



802.11n HT20

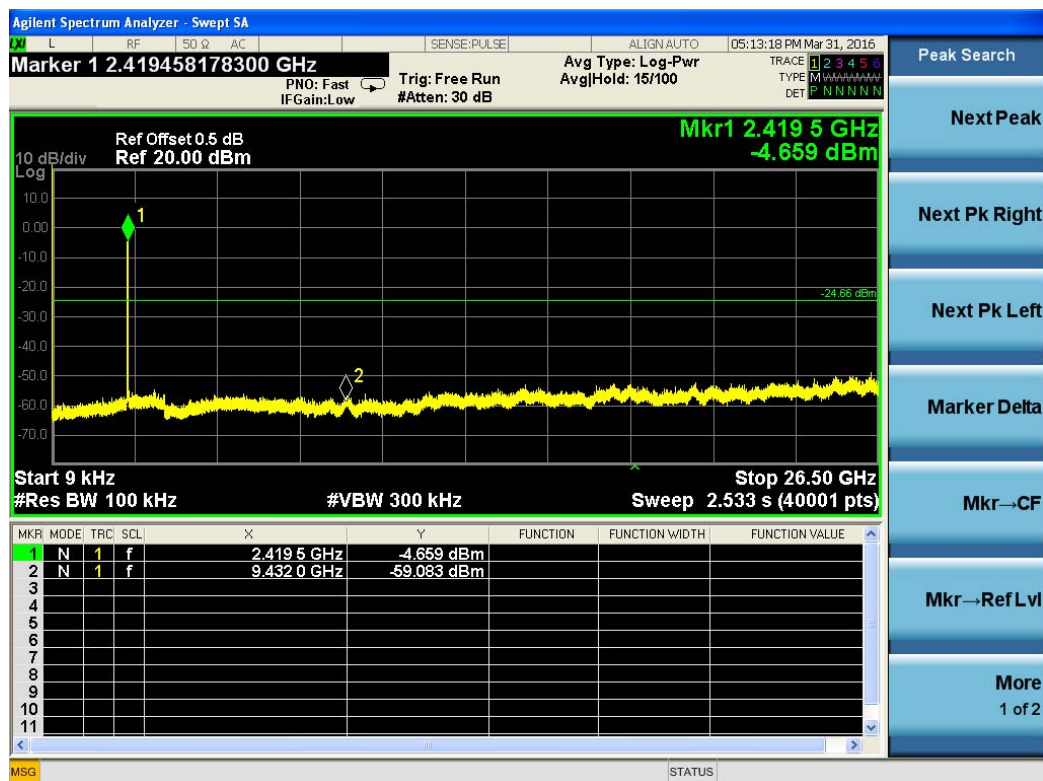

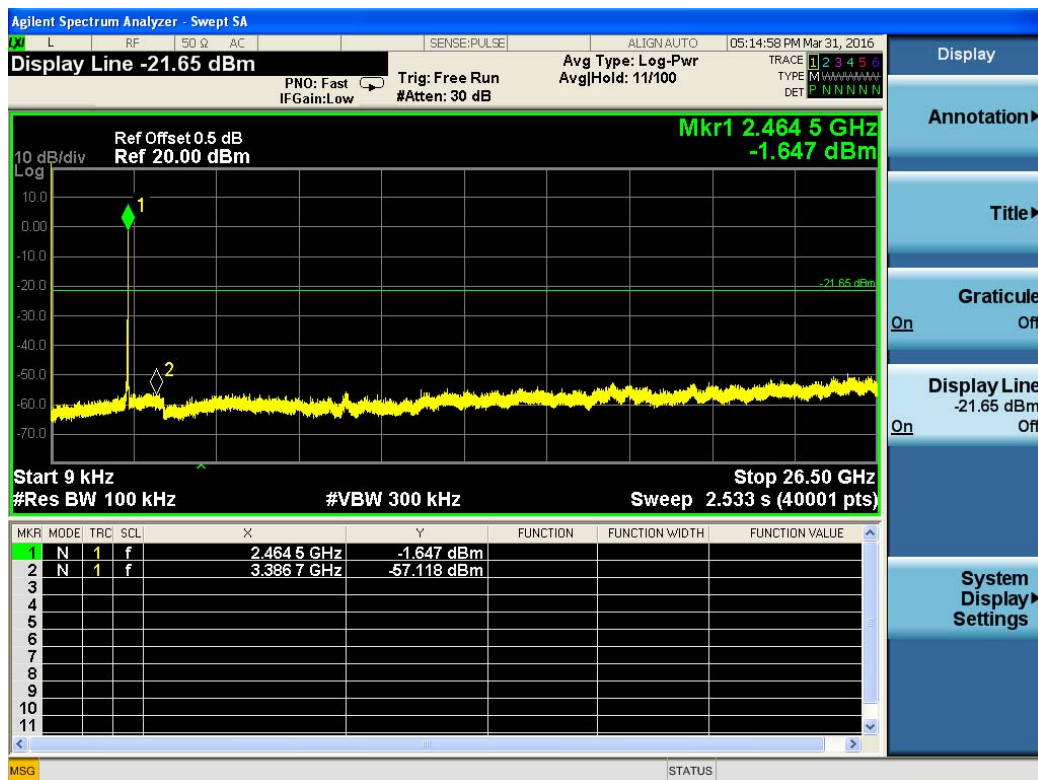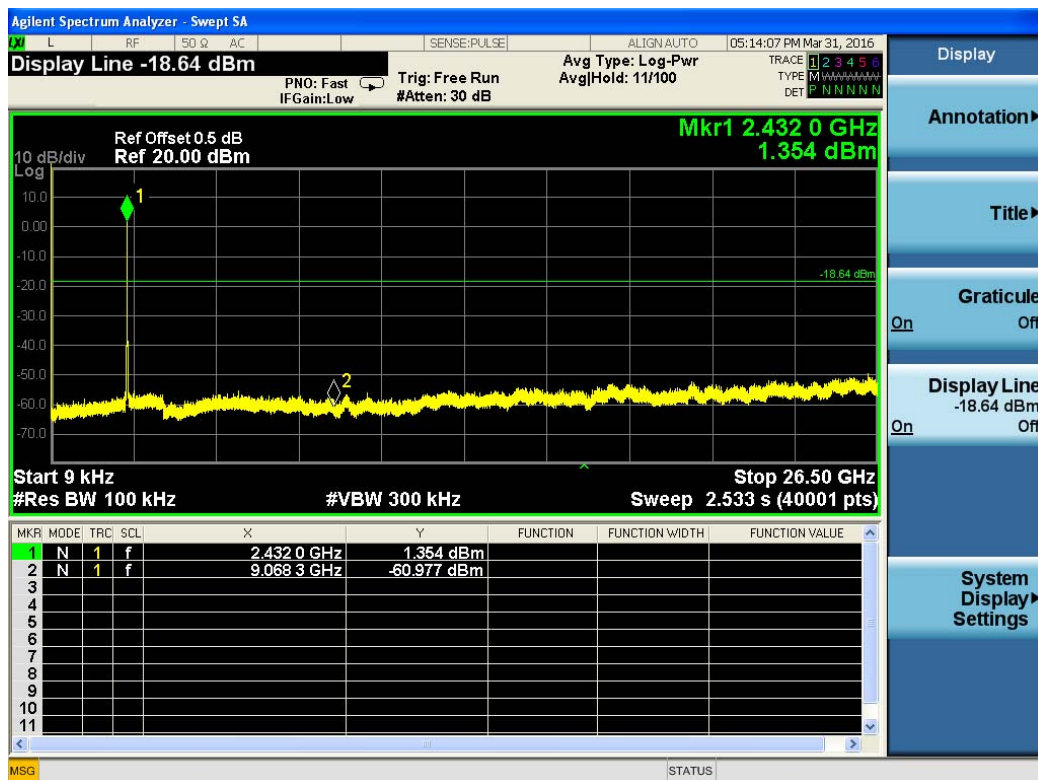


802.11n HT40

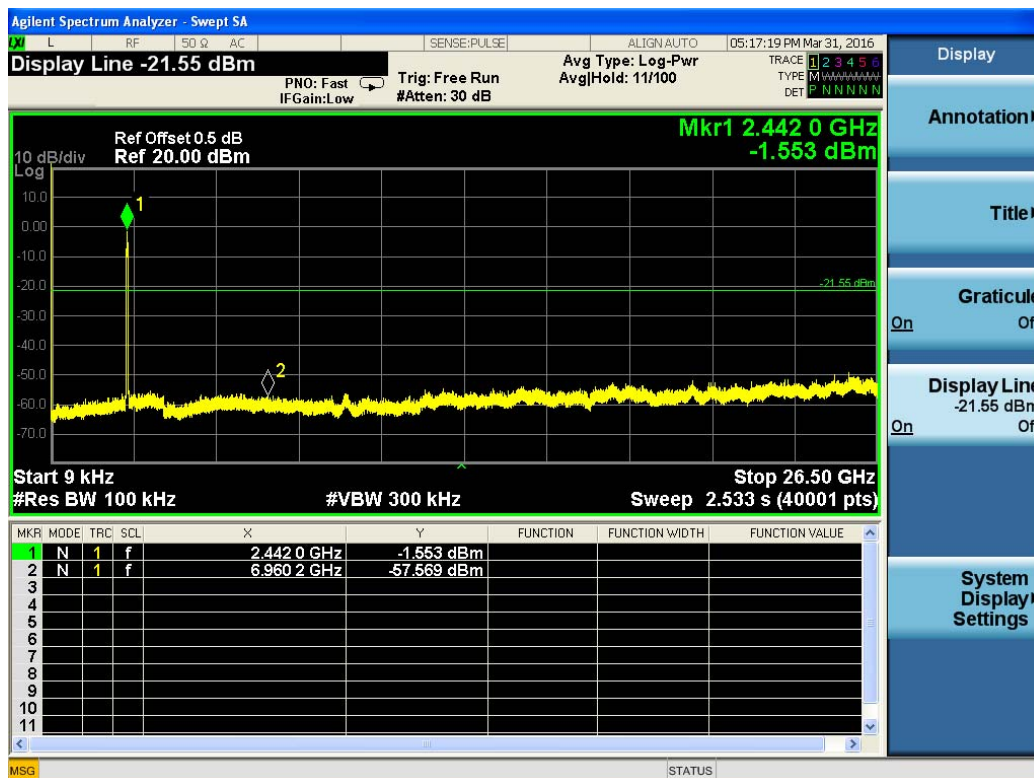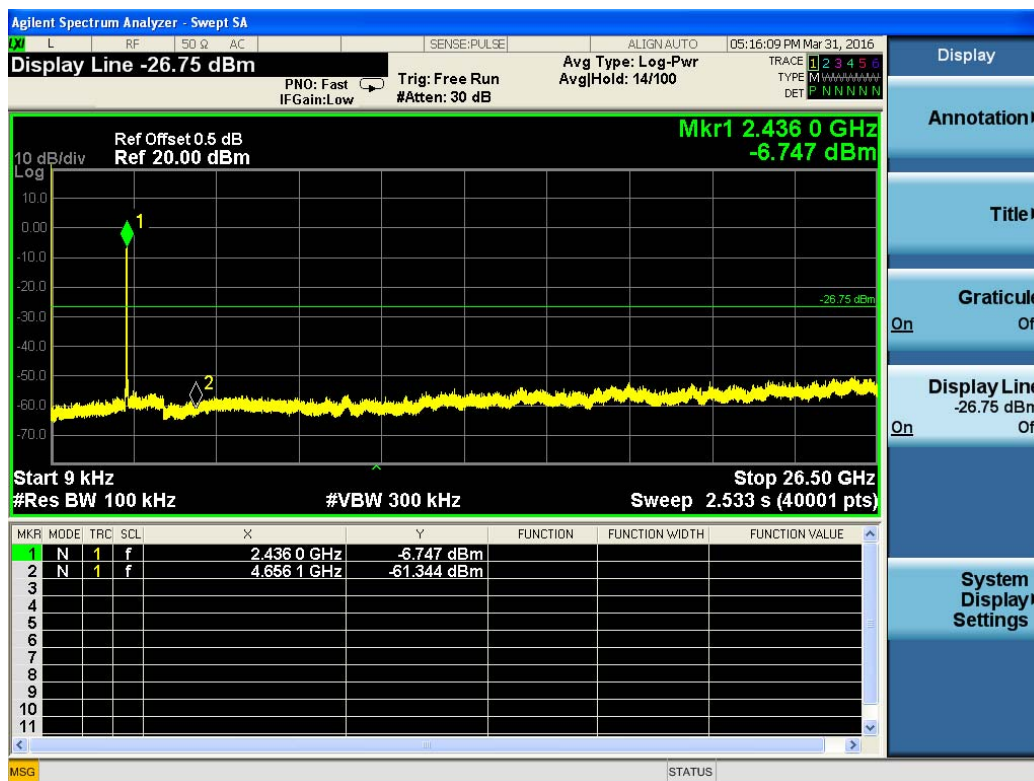

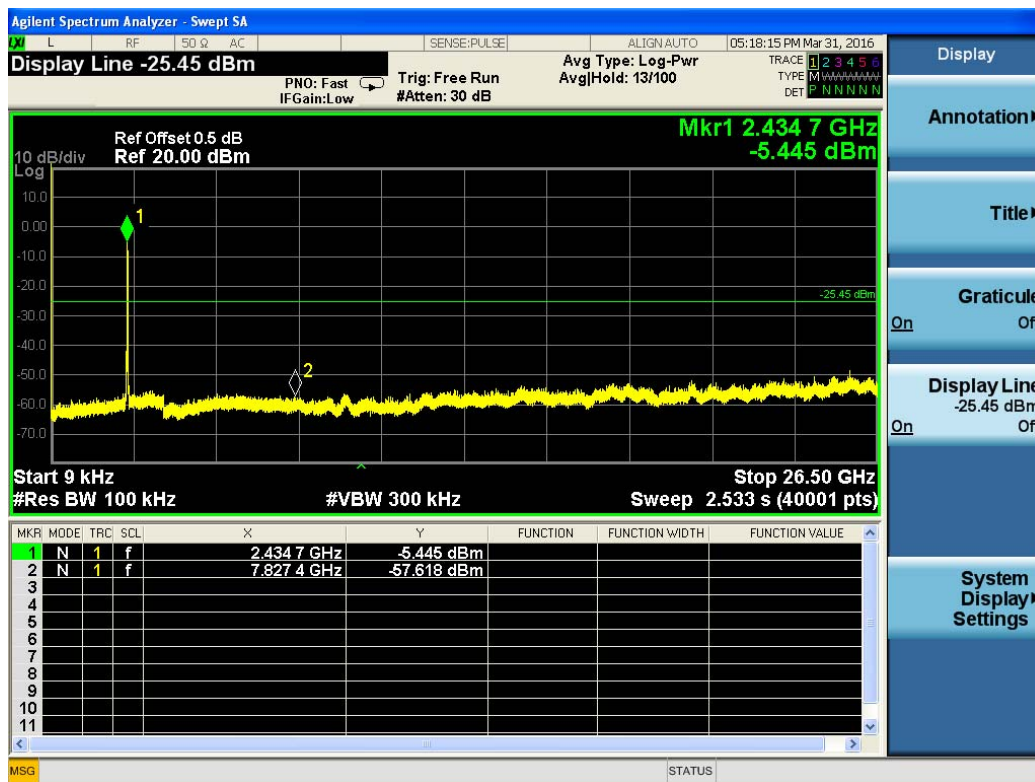

5.5.7. Test Results of Band Edges Test

BLE 4.0

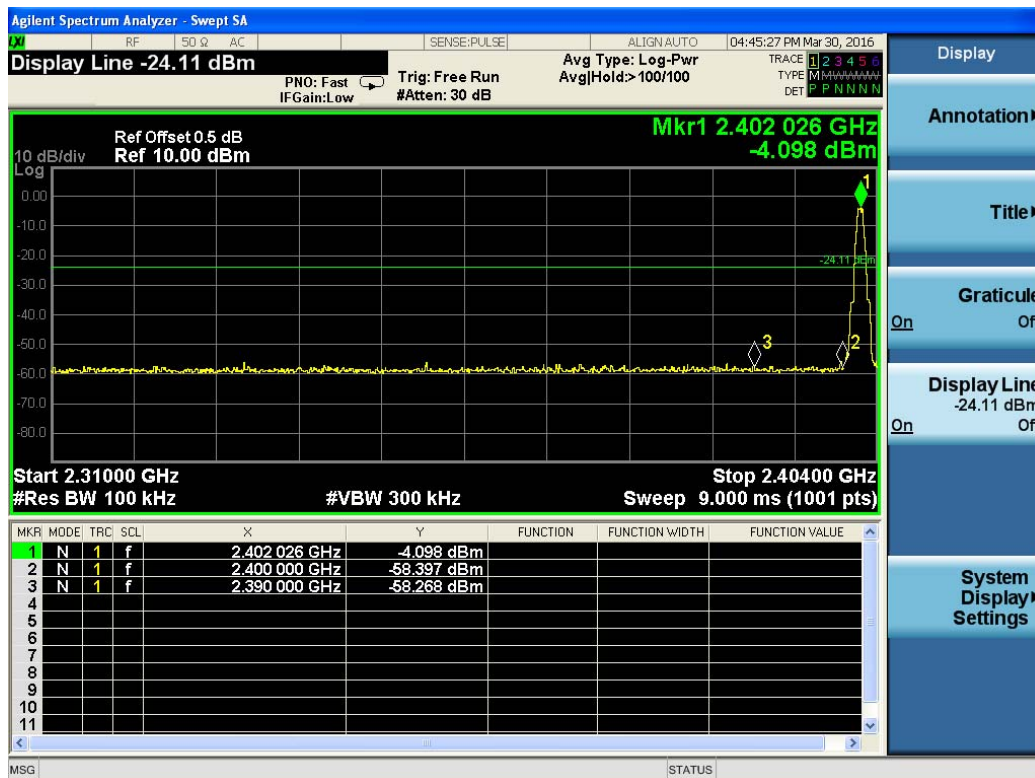



802.11b




802.11g



802.11n HT20

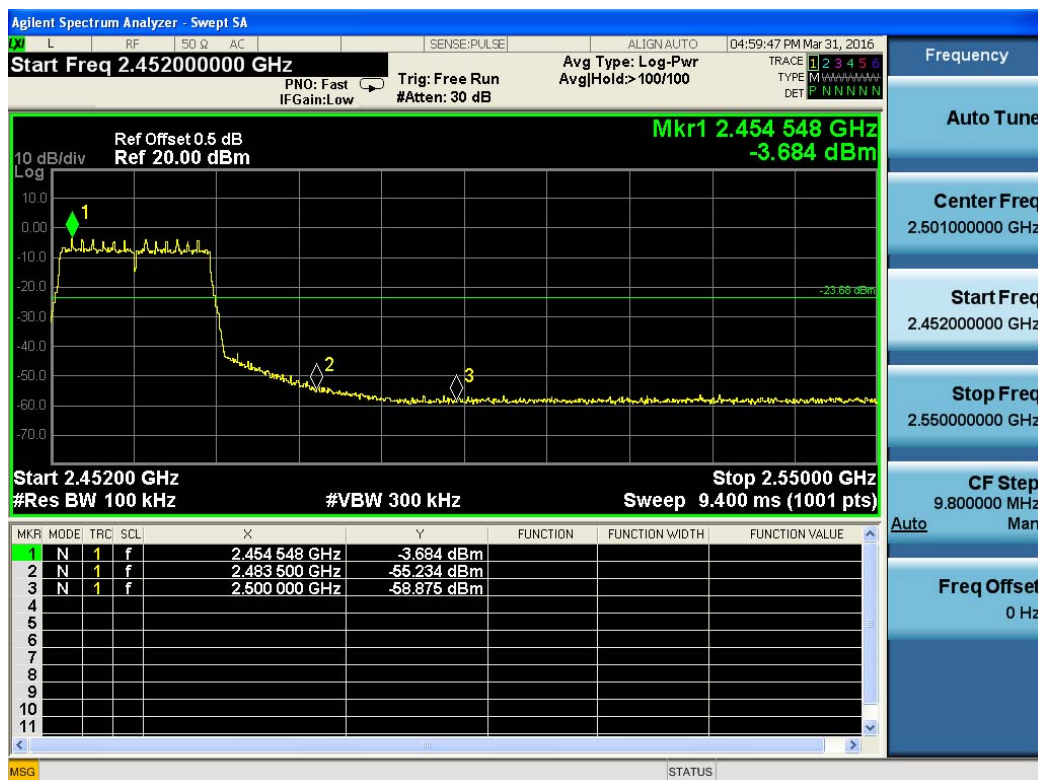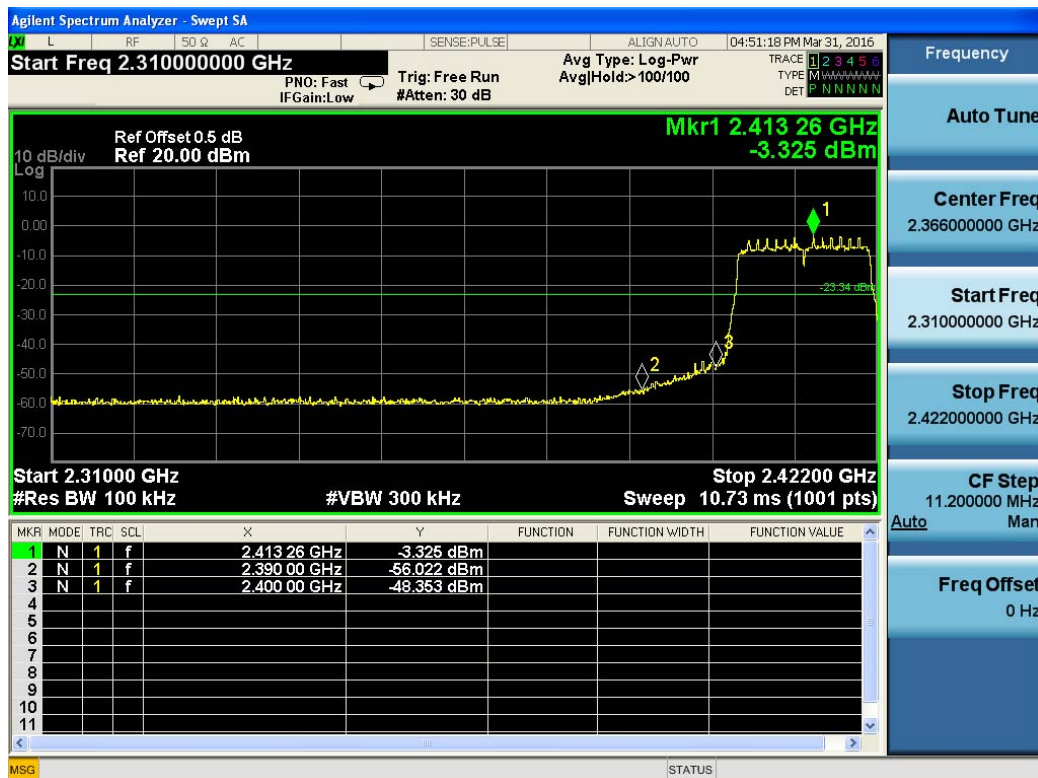

802.11n HT40

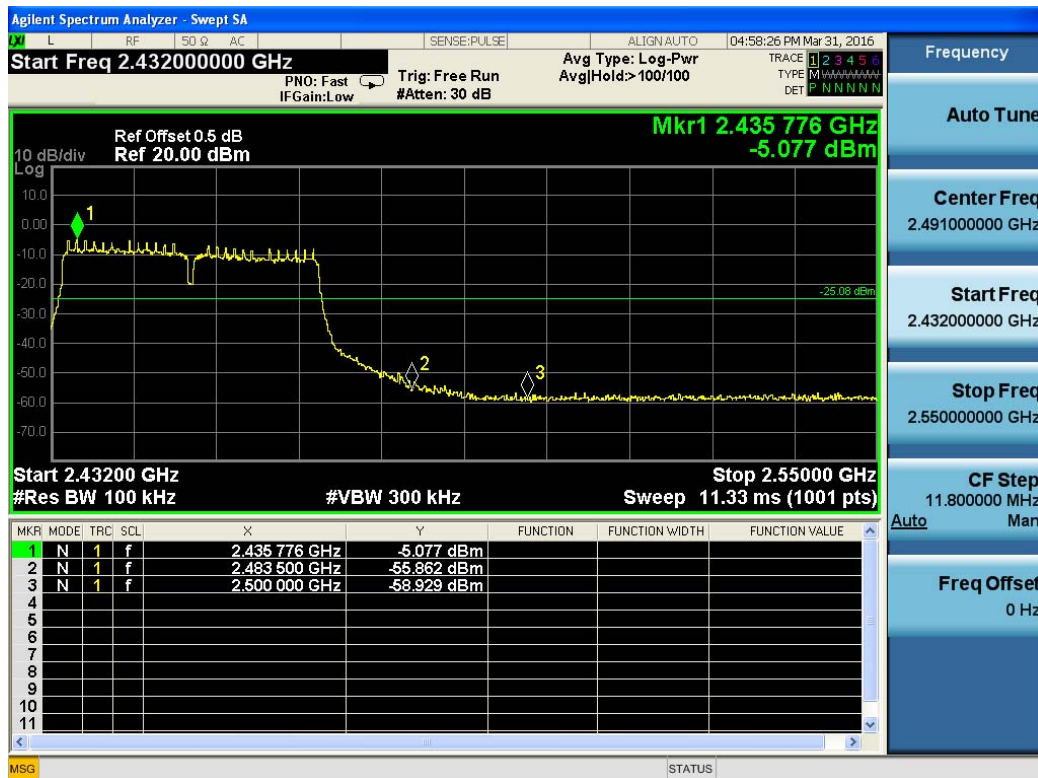


5.6. Power line conducted emissions

5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.6.2 Block Diagram of Test Setup


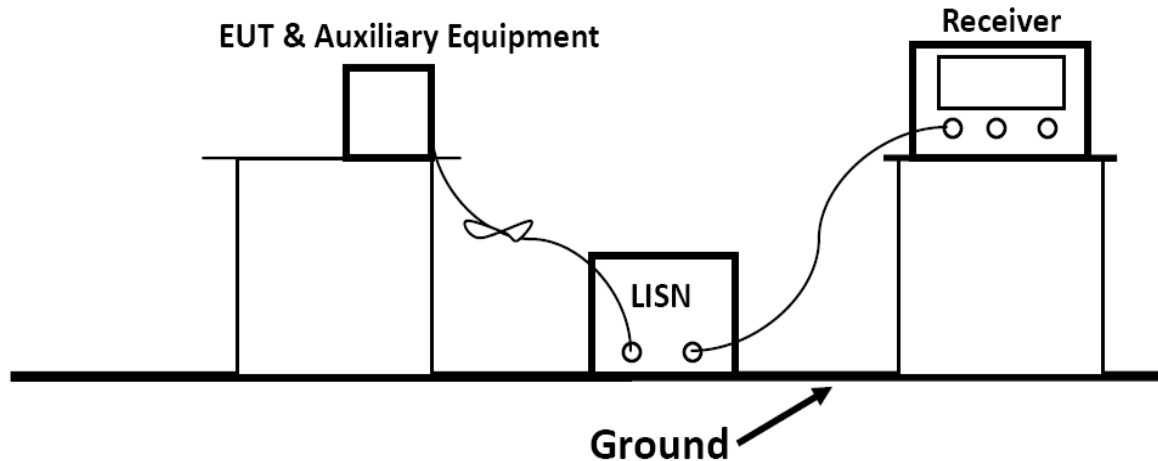


5.6.3 Test Results

PASS.

The test data please refer to following page.

Test Result for Line Power Input AC 120V/60Hz (Worst Case)

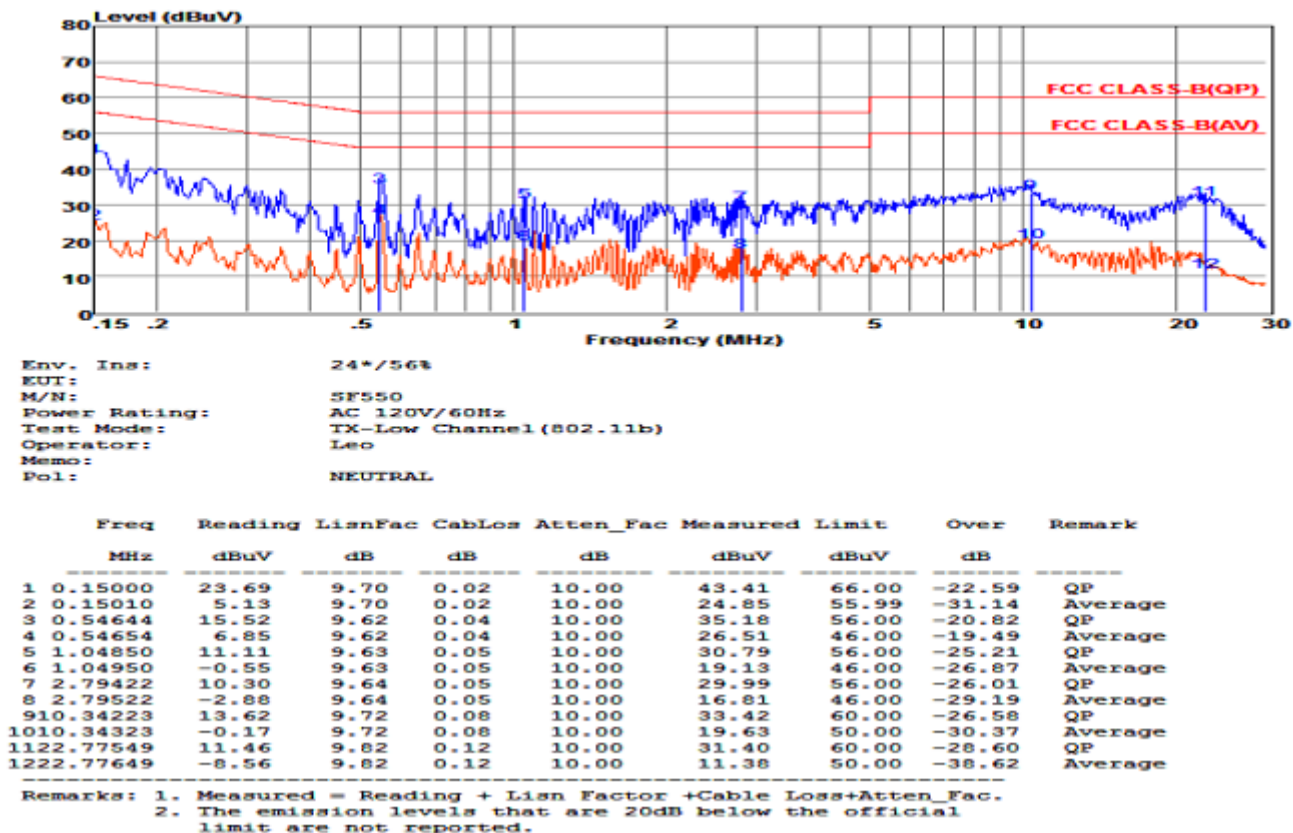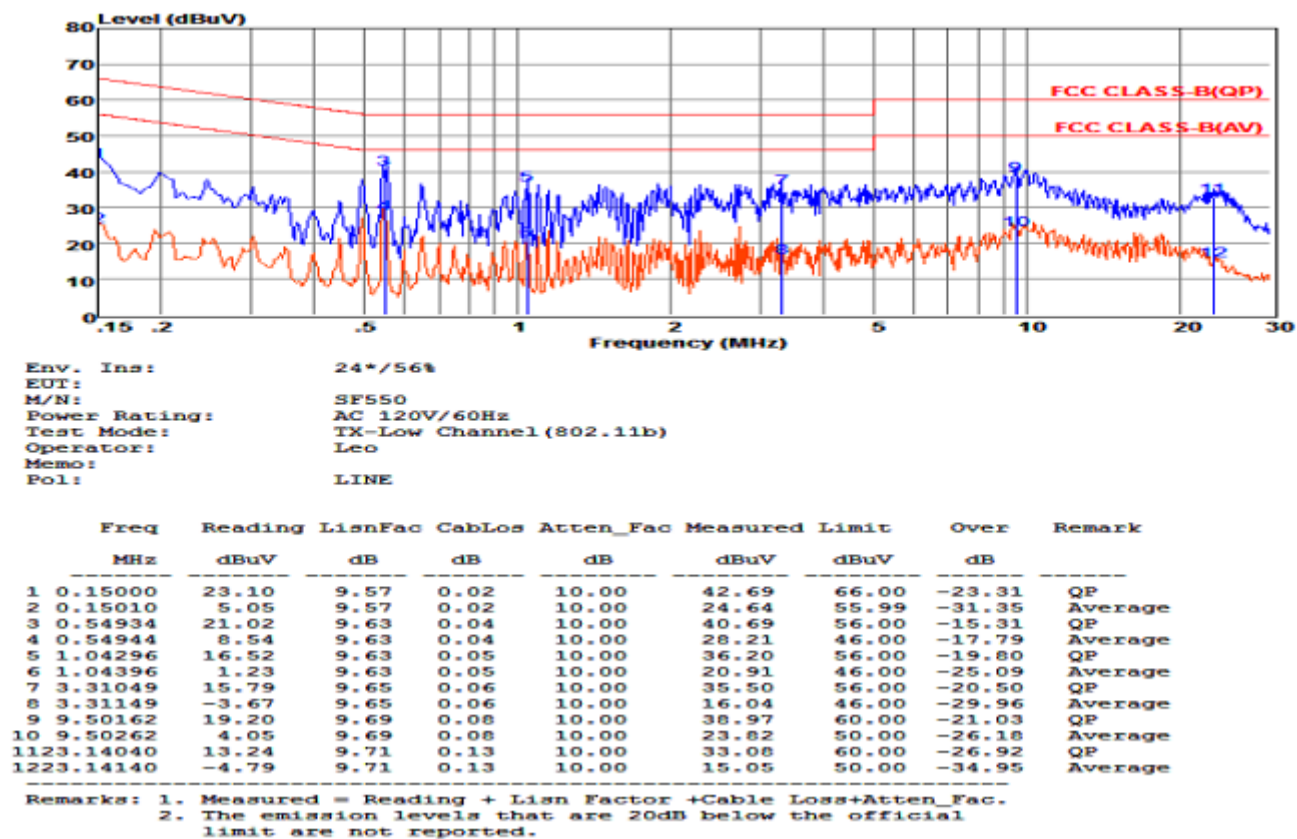

***Note: Pre-scan all mode and recorded the worst case results in this report (802.11b (TX-Middle Channel)).

5.7. Antenna Requirements

5.7.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

5.7.2. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

The BT and WLAN share same PIFA antenna, the maximum gain is 0dBi for BT; more information as follows.

5.7.3. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For WLAN devices, the DSSS mode is used; as lower power Bluetooth use frequency range same as normal Bluetooth, please refer to normal Bluetooth test report for antenna results information.

T _{nom}	V _{nom}	Lowest Channel 2412 MHz	Middle Channel 2437 MHz	Highest Channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		11.55	11.62	11.27
Radiated power [dBm] Measured with DSSS modulation		10.39	11.00	10.14
Gain [dBi] Calculated		-1.16	-0.62	-1.13
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

Result: -/-

-----THE END OF REPORT-----