



FCC RF Test Report

APPLICANT : LugTrack, LLC.
EQUIPMENT : GLOBAL LOCATOR
BRAND NAME : TUMI, SAMSONITE, MONTBLANC
MODEL NAME : 014341D, 110548-1090, 110574-1090,
110620-1090, LTCS1
MARKETING NAME : TUMI Global Locator, Samsonite
Track&Go
FCC ID : 2AFPZ-TGL001
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DSS) Spread Spectrum Transmitter

The product was completed on Jan. 16, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Descriptions of Test Mode	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
3 TEST RESULT	12
3.1 Peak Output Power Measurement	12
3.3 Radiated Band Edges and Spurious Emission Measurement	14
3.4 AC Conducted Emission Measurement.....	20
3.5 Antenna Requirements.....	24
4 LIST OF MEASURING EQUIPMENT.....	25
5 UNCERTAINTY OF EVALUATION.....	26
APPENDIX A. RADIATED TEST RESULTS	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. PRODUCT EQUALITY DECLARATION	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR582403-04A	Rev. 01	Initial issue of report	Jan. 19, 2018
FR582403-04A	Rev. 02	Upgrade the Brand Name and Model Name	Jan. 23, 2018

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
-	15.247(a)(1)	Number of Channels	$\geq 15\text{Chs}$	Not Required	-
-	15.247(a)(1)	Hopping Channel Separation	$\geq 2/3$ of 20dB BW	Not Required	-
-	15.247(a)(1)	Dwell Time of Each Channel	$\leq 0.4\text{sec}$ in 31.6sec period	Not Required	-
-	15.247(a)(1)	20dB Bandwidth	NA	Not Required	-
-	-	99% Bandwidth	-	Not Required	-
3.1	15.247(b)(1)	Peak Output Power	$\leq 125\text{ mW}$	Pass	-
-	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Not Required	-
-	15.247(d)	Conducted Spurious Emission	$\leq 20\text{dBc}$	Not Required	-
3.3	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.24 dB at 299.660 MHz
3.4	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 2.30 dB at 0.540 MHz
3.5	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-
Remark: Not Required means the change does not affect the test result.					



1 General Description

1.1 Applicant

LugTrack, LLC.

225 US Highway 35, Suite #201, Red Bank, New Jersey, 07701 USA

1.2 Manufacturer

LugTrack, LLC.

225 US Highway 35, Suite #201, Red Bank, New Jersey, 07701 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	GLOBAL LOCATOR
Brand Name	TUMI, SAMSONITE, MONTBLANC
Model Name	014341D, 110548-1090, 110574-1090, 110620-1090, LTCS1
Marketing Name	TUMI Global Locator, Samsonite Track&Go
FCC ID	2AFPZ-TGL001
EUT supports Radios application	GPRS/EGPRS/WCDMA/HSPA/ HSPA+(16QAM uplink is not supported)/ WLAN2.4GHz 802.11b/g/n HT20/HT40/ Bluetooth v2.1+EDR/Bluetooth v4.0 LE
IMEI Code	Conducted:N/A Radiation: 014646000016661 Conduction: 014646000032502
HW Version	LGT-001-V1
SW Version	MOLY.WR8.W1315.MD.WG.MP.V35.P4
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. This is a variant report for 014341D, 110548-1090, 110574-1090, 110620-1090, LTCS1. The product equality declaration could be referred to Appendix C. Based on the similarity between current and previous project, only the conducted power, conduction and the worst cases of RSE from original test report (Sporton Report Number FR582403A) were verified for the differences.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	79
Carrier Frequency of Each Channel	2402+n*1 MHz; n=0~78
Maximum Output Power to Antenna	Bluetooth BR(1Mbps) : 0.85 dBm (0.0012 W) Bluetooth EDR (2Mbps) : 0.51 dBm (0.0011 W) Bluetooth EDR (3Mbps) : 0.77 dBm (0.0012 W)
Antenna Type / Gain	PIFA Antenna with gain 1 dBi
Type of Modulation	Bluetooth BR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : π /4-DQPSK Bluetooth EDR (3Mbps) : 8-DPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	TH01-SZ	CO01-SZ	251365
Test Site	Sporton International (Shenzhen) Inc.		
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398		
Test Site No.	Sporton Site No.		FCC Test Firm Registration No.
	03CH03-SZ		577730

Note: The test site complies with ANSI C63.4 2014 requirement.



1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Descriptions of Test Mode

Preliminary tests were performed in different data rates and recorded the RF output power in the following table:

Channel	Frequency	Bluetooth RF Output Power		
		Data Rate / Modulation		
		GFSK	$\pi/4$ -DQPSK	8-DPSK
		1Mbps	2Mbps	3Mbps
Ch00	2402MHz	0.85 dBm	0.51 dBm	0.77 dBm
Ch39	2441MHz	0.35 dBm	0.01 dBm	0.26 dBm
Ch78	2480MHz	-0.36 dBm	-0.72 dBm	-0.47 dBm

Remark:

1. All the test data for each data rate were verified, but only the worst case was reported.
 2. The data rate was set in 1Mbps for all the test items due to the highest RF output power.
- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels, and different data rates were conducted to determine the final configuration (Z plane as worst plane) from all possible combinations, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


2.2 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases			
Test Item	Data Rate / Modulation		
	Bluetooth BR 1Mbps GFSK	Bluetooth EDR 2Mbps π /4-DQPSK	Bluetooth EDR 3Mbps 8-DPSK
Conducted Test Cases	Mode 1: CH00_2402 MHz	Mode 4: CH00_2402 MHz	Mode 7: CH00_2402 MHz
	Mode 2: CH39_2441 MHz	Mode 5: CH39_2441 MHz	Mode 8: CH39_2441 MHz
	Mode 3: CH78_2480 MHz	Mode 6: CH78_2480 MHz	Mode 9: CH78_2480 MHz
Radiated Test Cases	Bluetooth BR 1Mbps GFSK		
	Mode 1: CH00_2402 MHz		
	Mode 2: CH39_2441 MHz		
	Mode 3: CH78_2480 MHz		
AC Conducted Emission	Mode 1 :GPRS850 Idle + Bluetooth Link + WLAN Link + Battery + USB Cable (Charging from Adapter)		
Remark:			
1. For radiated test cases, the worst mode data rate 1Mbps was reported only, because this data rate has the highest RF output power at preliminary tests, and no other significantly frequencies found in conducted spurious emission.			
2. For Radiated Test Cases, The tests were performed with Adapter, Battery and USB Cable.			

2.3 Connection Diagram of Test System

<Bluetooth Tx Mode>

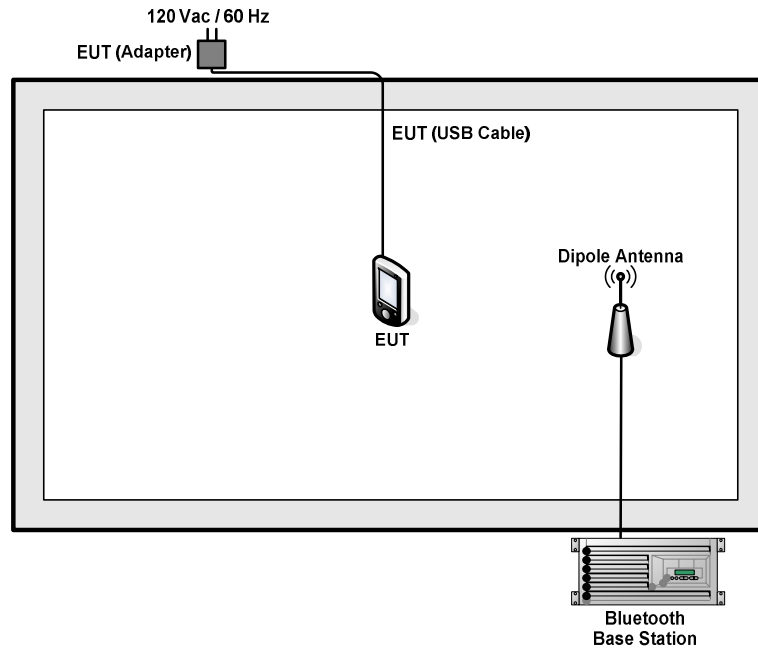

<AC Conducted Emission Mode>

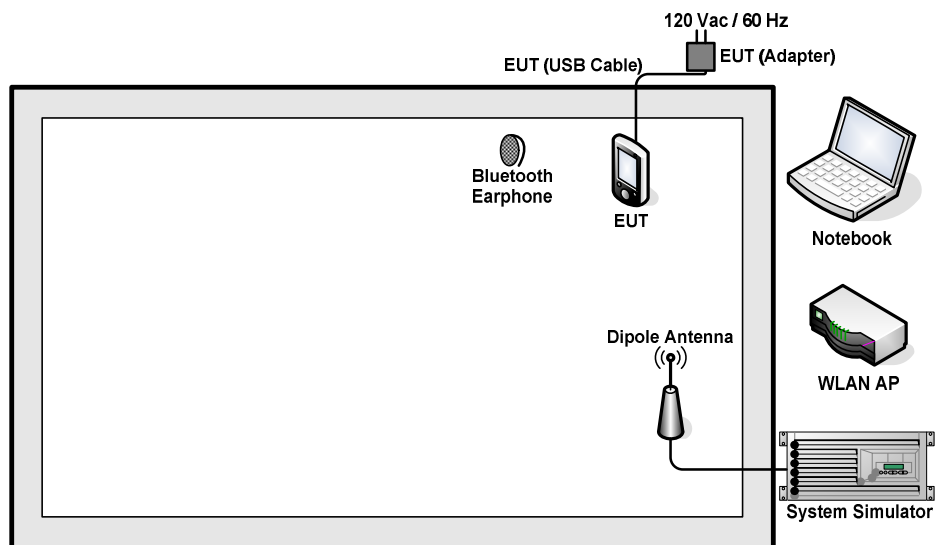

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Bluetooth Base Station	R&S	CBT	N/A	N/A	Unshielded, 1.8 m
3.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	E540	FCC DoC	N/A	shielded cable DC O/P 1.8 m unshielded AC I/P cable 1.2 m
5.	Bluetooth Earphone	Samsung	EO-MG900	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Bluetooth function, the engineering test program was provided and enabled to make EUT connect with Bluetooth base station to continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

3 Test Result

3.1 Peak Output Power Measurement

3.1.1 Limit of Peak Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

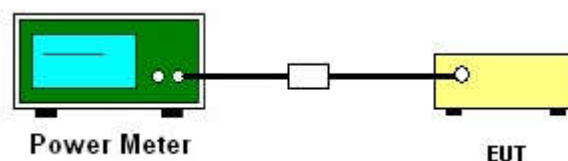

3.1.5 Test Result of Peak Output Power

Test Mode :	1Mbps	Temperature :	21~25°C
Test Engineer :	Sam Zhang	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		GFSK	Max. Limits (dBm)	Pass/Fail
		1 Mbps		
00	2402	0.85	20.97	Pass
39	2441	0.35	20.97	Pass
78	2480	-0.36	20.97	Pass

Test Mode :	2Mbps	Temperature :	21~25°C
Test Engineer :	Sam Zhang	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		$\pi/4$ -DQPSK	Max. Limits (dBm)	Pass/Fail
		2 Mbps		
00	2402	0.51	20.97	Pass
39	2441	0.01	20.97	Pass
78	2480	-0.72	20.97	Pass

Test Mode :	3Mbps	Temperature :	21~25°C
Test Engineer :	Sam Zhang	Relative Humidity :	51~54%

Channel	Frequency (MHz)	RF Power (dBm)		
		8-DPSK	Max. Limits (dBm)	Pass/Fail
		3 Mbps		
00	2402	0.77	20.97	Pass
39	2441	0.26	20.97	Pass
78	2480	-0.47	20.97	Pass

3.3 Radiated Band Edges and Spurious Emission Measurement

3.3.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.3.3 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1 \text{ GHz}$, RBW=1MHz for $f > 1\text{GHz}$; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.82dB) derived from $20\log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.3.4 Test Setup


For radiated emissions below 30MHz

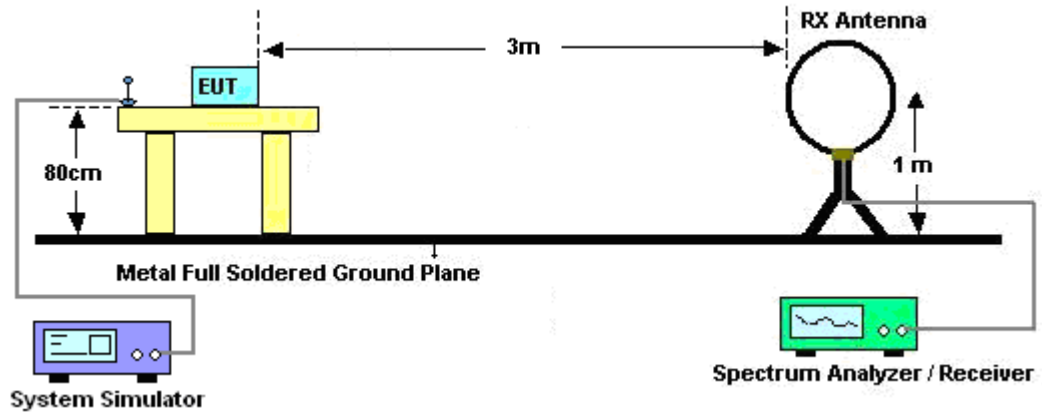

For radiated emissions from 30MHz to 1GHz

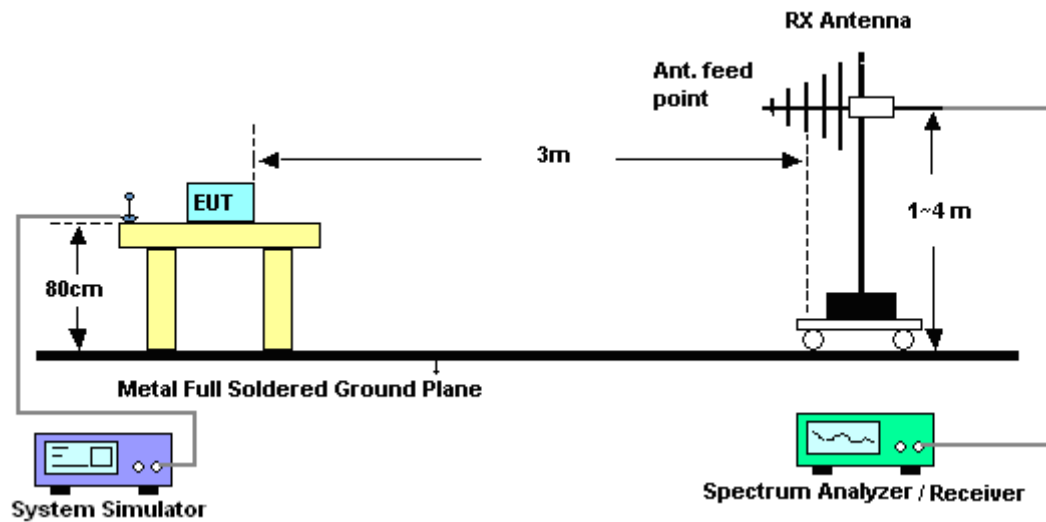

For radiated emissions above 1GHz

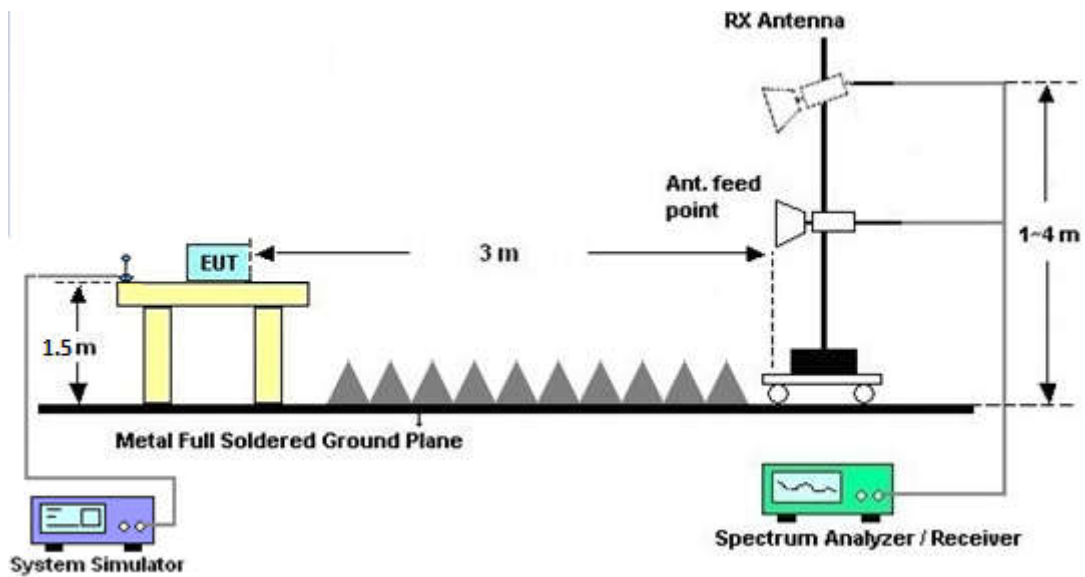


3.3.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.3.6 Duty cycle correction factor for average measurement

DH5 on time (One Pulse) Plot on Channel 39

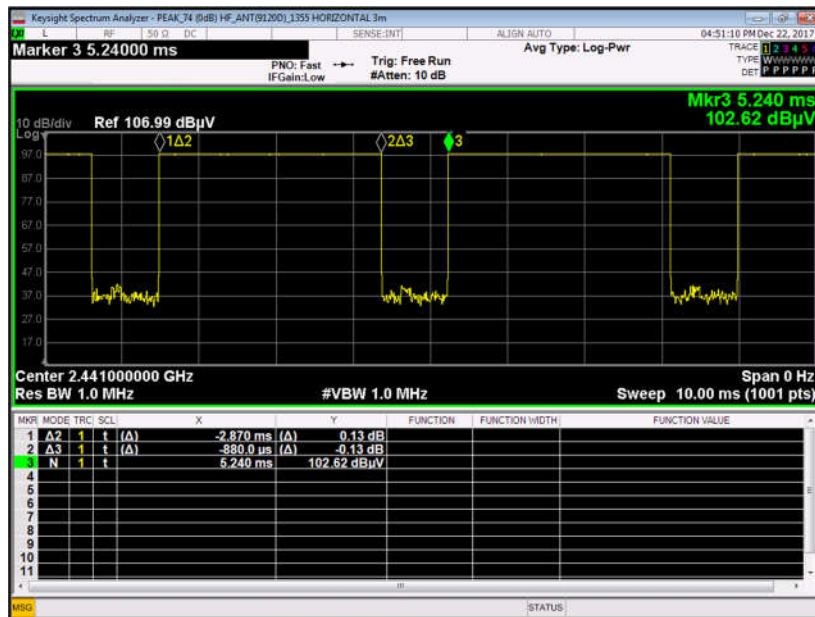

DH5 on time (Count Pulses) Plot on Channel 39



Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the period to have DH5 packet completing one hopping sequence is

$$2.87 \text{ ms} \times 20 \text{ channels} = 57.4 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100\text{ms} / 57.4\text{ms}] = 2 \text{ hops}$

Thus, the maximum possible ON time:

$$2.87 \text{ ms} \times 2 = 5.74 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.74 \text{ ms}/100\text{ms}) = -24.82 \text{ dB}$$

3.3.7 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.3.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.4 AC Conducted Emission Measurement

3.4.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.4.4 Test Setup

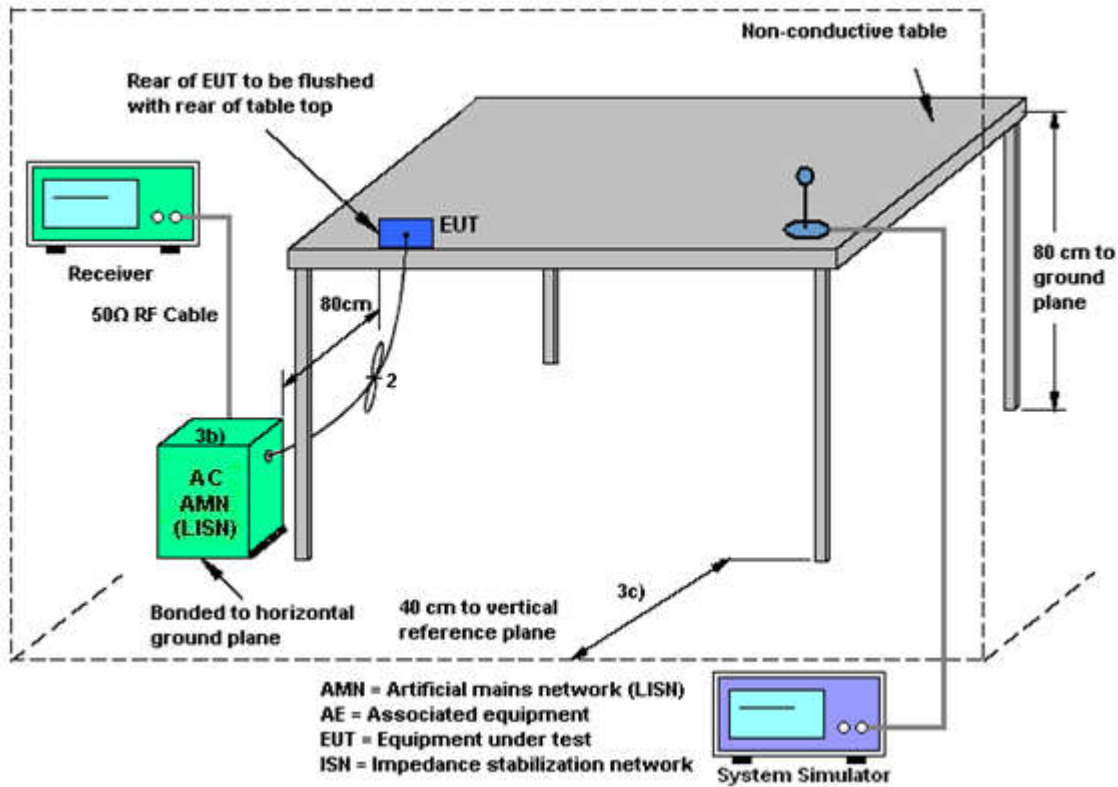



3.4.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	22~25°C
Test Engineer :	Peng Wang	Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Battery + USB Cable (Charging from Adapter)		

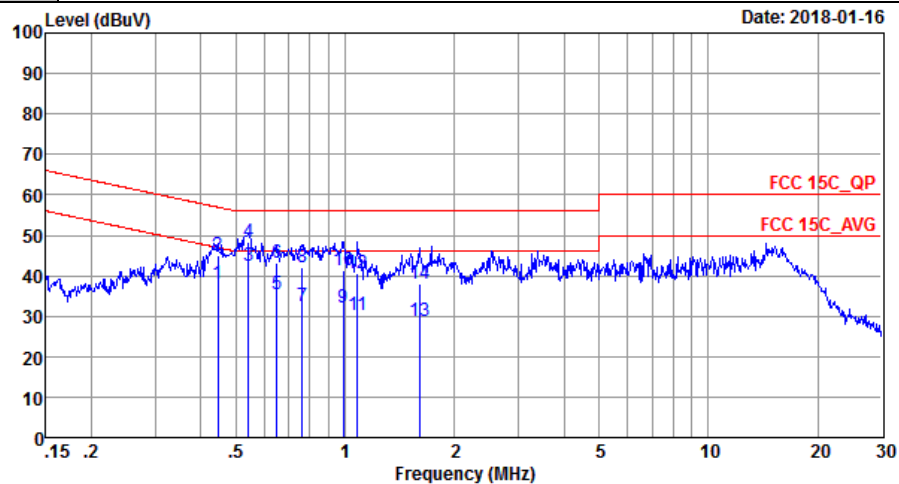


Site : CO01-SZ
Condition: FCC 15C_QP LISN_20170907_L LINE

Mode : Mode 1
IMEI : 014646000032502

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.45	38.01	-8.92	46.93	27.90	0.03	10.08	Average
2	0.45	45.01	-11.92	56.93	34.90	0.03	10.08	QP
3 *	0.54	42.40	-3.60	46.00	32.30	0.02	10.08	Average
4	0.54	48.20	-7.80	56.00	38.10	0.02	10.08	QP
5	0.65	35.60	-10.40	46.00	25.50	0.02	10.08	Average
6	0.65	43.00	-13.00	56.00	32.90	0.02	10.08	QP
7	0.76	32.61	-13.39	46.00	22.50	0.03	10.08	Average
8	0.76	42.01	-13.99	56.00	31.90	0.03	10.08	QP
9	0.99	32.16	-13.84	46.00	22.00	0.07	10.09	Average
10	0.99	41.46	-14.54	56.00	31.30	0.07	10.09	QP
11	1.08	30.27	-15.73	46.00	20.11	0.07	10.09	Average
12	1.08	40.47	-15.53	56.00	30.31	0.07	10.09	QP
13	1.60	28.80	-17.20	46.00	18.60	0.10	10.10	Average
14	1.60	37.90	-18.10	56.00	27.70	0.10	10.10	QP



Test Mode :	Mode 1	Temperature :	22~25℃
Test Engineer :	Peng Wang	Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GPRS850 Idle + Bluetooth Link + WLAN Link + Battery + USB Cable (Charging from Adapter)		

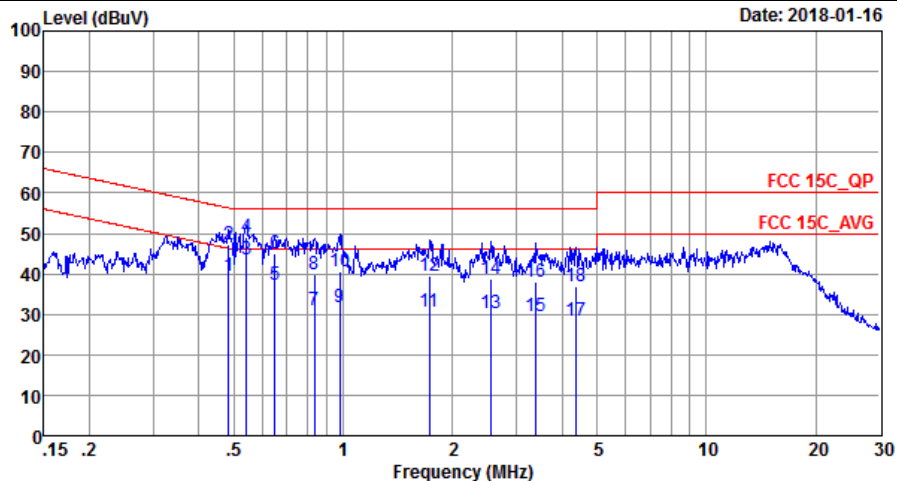

Site : CO01-SZ
Condition: FCC 15C_QP LISN_20170907_N NEUTRAL

Mode : Mode 1
IMEI : 014646000032502

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.48	39.50	-6.77	46.27	29.40	0.02	10.08	Average
2	0.48	47.10	-9.17	56.27	37.00	0.02	10.08	QP
3 *	0.54	43.70	-2.30	46.00	33.60	0.02	10.08	Average
4	0.54	48.90	-7.10	56.00	38.80	0.02	10.08	QP
5	0.65	37.40	-8.60	46.00	27.30	0.02	10.08	Average
6	0.65	44.90	-11.10	56.00	34.80	0.02	10.08	QP
7	0.83	31.12	-14.88	46.00	21.00	0.03	10.09	Average
8	0.83	39.82	-16.18	56.00	29.70	0.03	10.09	QP
9	0.98	31.74	-14.26	46.00	21.60	0.05	10.09	Average
10	0.98	40.54	-15.46	56.00	30.40	0.05	10.09	QP
11	1.73	30.75	-15.25	46.00	20.60	0.05	10.10	Average
12	1.73	39.35	-16.65	56.00	29.20	0.05	10.10	QP
13	2.54	30.36	-15.64	46.00	20.19	0.04	10.13	Average
14	2.54	38.86	-17.14	56.00	28.69	0.04	10.13	QP
15	3.40	29.49	-16.51	46.00	19.30	0.04	10.15	Average
16	3.40	38.19	-17.81	56.00	28.00	0.04	10.15	QP
17	4.36	28.53	-17.47	46.00	18.30	0.06	10.17	Average
18	4.36	36.83	-19.17	56.00	26.60	0.06	10.17	QP



3.5 Antenna Requirements

3.5.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.5.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.5.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Dec. 26, 2017	Jan. 11, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Dec. 26, 2017	Jan. 11, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Dec. 22, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Dec. 22, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 14, 2017	Dec. 22, 2017	May 13, 2018	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 14, 2017	Dec. 22, 2017	May 13, 2018	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Jul. 09, 2017	Dec. 22, 2017	Jul. 08, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 18, 2017	Dec. 22, 2017	Jul. 17, 2018	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Jun. 16, 2017	Dec. 22, 2017	Jun. 15, 2018	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz~3000MHz	Oct. 19, 2017	Dec. 22, 2017	Oct. 18, 2018	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2017	Dec. 22, 2017	Oct. 18, 2018	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 06, 2017	Dec. 22, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Dec. 22, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 22, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 22, 2017	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Dec. 26, 2017	Jan. 16, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Dec. 26, 2017	Jan. 16, 2018	Dec. 25, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Nov. 01, 2017	Jan. 16, 2018	Oct. 31, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 19, 2017	Jan. 16, 2018	Jul. 18, 2018	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
--	-------



Appendix A. Radiated Spurious Emission

15C 2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 39 2441MHz		2365.44	39.07	-34.93	74	41.13	27.14	5.02	34.22	279	39	P	H
		2365.44	14.25	-39.75	54	-	-	-	-	-	-	A	H
	*	2441	100.81	-	-	102.47	27.37	5.12	34.15	279	39	P	H
	*	2441	75.99	-	-	-	-	-	-	-	-	A	H
		2493.07	39.6	-34.4	74	41.02	27.5	5.19	34.11	279	39	P	H
		2493.07	14.78	-39.22	54	-	-	-	-	-	-	A	H
		2389.38	45.8	-28.2	74	47.73	27.23	5.06	34.22	280	174	P	V
		2389.38	20.98	-33.02	54	-	-	-	-	-	-	A	V
	*	2441	99.48	-	-	101.14	27.37	5.12	34.15	280	174	P	V
	*	2441	74.66	-	-	-	-	-	-	-	-	A	V
		2498.6	39.24	-34.76	74	40.66	27.5	5.19	34.11	280	174	P	V
		2498.6	14.42	-39.58	54	-	-	-	-	-	-	A	V



15C 2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 39 2441MHz		4882	57.21	-16.79	74	75.14	31.78	8.62	58.33	150	258	P	H
		4882	32.39	-21.61	54	-	-	-	-	-	-	A	H
		7323	49.46	-24.54	74	62.94	35.69	10.24	59.41	152	309	P	H
		7323	24.64	-29.36	54	-	-	-	-	-	-	A	H
		12205	46.94	-27.06	74	55.73	38.6	12.31	59.7	149	309	P	H
		12205	22.12	-31.88	54	-	-	-	-	-	-	A	H
		4882	56.77	-17.23	74	74.7	31.78	8.62	58.33	150	258	P	V
		4882	31.95	-22.05	54	-	-	-	-	-	-	A	V
		7323	53.34	-20.66	74	66.82	35.69	10.24	59.41	152	309	P	V
		7323	28.52	-25.48	54	-	-	-	-	-	-	A	V
		12205	46.74	-27.26	74	55.53	38.6	12.31	59.7	149	20	P	V
		12205	21.92	-32.08	54	-	-	-	-	-	-	A	V



15C Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		30	24.99	-15.01	40	30.33	26.7	0.56	32.6	-	-	P	H
		88.2	25.23	-18.27	43.5	39.04	17.32	0.97	32.1	-	-	P	H
		163.86	33.54	-9.96	43.5	46.95	17.2	1.33	31.94	-	-	P	H
		199.75	34.28	-9.22	43.5	48.51	15.6	1.47	31.3	-	-	P	H
		299.66	41.76	-4.24	46	52.84	19.1	1.82	32	100	189	P	H
		799.21	31.5	-14.5	46	32.6	27.4	3.1	31.6	-	-	P	H
		40.67	27.09	-12.91	40	37.19	21.94	0.66	32.7	-	-	P	V
		88.2	24.39	-19.11	43.5	38.2	17.32	0.97	32.1	-	-	P	V
		171.62	32.41	-11.09	43.5	46	16.85	1.34	31.78	100	174	P	V
		299.66	30.47	-15.53	46	41.55	19.1	1.82	32	-	-	P	V
		398.6	32.4	-13.6	46	36.29	25.89	2.12	31.9	-	-	P	V
		796.3	32.79	-13.21	46	33.92	27.39	3.09	31.61	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Product Equality Declaration

LugTrack, LLC.

225 US Highway 35, Suite #201, Red Bank, New Jersey, 07701 USA

Date: January 19, 2018

Product Equality Declaration

We, LugTrack, LLC., declare on our sole responsibility for the differences between initially FCC-certified product:

FCC ID: 2AFPZ-TGL001

BRAND NAME: TUMI

MODEL NAME: 014341D

MARKETING NAME: TUMI Global Locator

and the current product:

FCC ID: 2AFPZ-TGL001

BRAND NAME: "TUMI" or "SAMSONITE" or "MONTBLANC"

MODEL NAME: "014341D" or "110548-1090" or "110574-1090" or "110620-1090" or "LTCSI"

MARKETING NAME: "TUMI Global Locator" or "Samsonite Track&Go"

which are listed as below:

1. Change of RAM

Description:

Original component defined and used on the first risk batch production as during certification , namely, ELPIDA with p.n. B4432BAPA-8D-F had to be substituted by the market equivalent component by LEAHKINN with p.n KPN005DS-ZHw1.

The LEAHKINN product is equivalent in terms of layout, performance and electrical specs:

512Mb LP-DDR2

Density: 4G bits

Organization 16M words × 32 bits × 8 banks

Package: 168-ball FBGA

Package size: 12.0mm × 12.0mm

Power supply: VDD1 = 1.70V to 1.95V

Cause:

ELPID Memory failure and relative obsolescence and lack of availability of their market led to the selection of a pin to pin compatible solution which was found in the LEAHKINN RAM.

The new component has been tested internally and as there has not been any PCBA rerouting, no Software adaptation/modification, seen the exact "characteristics" of both components, we can declare the component has no impact in the overall device RF or power management nor electrical safety.

2. Change of ROM

Description:

Longsys FORESEE eMMC NCEFES88-04G eMMC ROM has been substituted with the equivalent component FORESEE NCEMAD7B-08G provided by the same Manufacturer but with upgraded storage capacity from 4GB to 8GB.

Cause:

Shenzhen based Longsys Technology has stopped producing the 04GB eMMC ROM components FORESEE NCEFES86-04G and actually the 4GB eMMC chips in general as the market is requiring a higher minimum storage standard, which is now 8 GB.

To be able to produce our device we had to adapt to market decisions and switch to the upgraded version of the same vendor.

The component does not have any difference in the logic, layout nor electrical characteristics.

The substitution did not impact the PCBA layout nor the SW hence non impact in the overall RF and power management.

3. Change of RF amplifier:

SKY77592 is a transmit and receive Front End Module (FEM) that has the same function and electrical parameters characteristics of the VANCHIP VC7590-21.

Cause:

Limited availability during supply management

4. Visual change of USB daughter board :

slight visual difference and removal of a not used IC.

Cause:

industrialization of a sample used for certification purposes only, gerber files prove the routing is exactly the same.

5. WIFI and main RF antenna change.

Description:

Copper trace modification.

Cause:

the antenna was changed to adapt to 3GPP / ATT&T standard of TRP and TIS, the copper traces are slightly different in shape but the values are inside the parameters as confirmed by the result testing from PTCRB OTA.

Except for those mentioned above, the remaining parts are identical.
Should you have any questions or comments regarding this matter, please have my best
attention.

Sincerely yours,

Davide Fattor
Project Manager
LugTrack, LLC.
dfattor@lugtrack.com

A handwritten signature in black ink, appearing to read 'Davide Fattor', positioned to the right of the typed name and contact information.