Shenzhen Global Test Service Co.,Ltd.
1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....:	**GTSR15080020-WLAN**
FCC ID..... :	**2AFQFYC01**
Compiled by (position+printed name+signature)..:	File administrators Jimmy Wang
Supervised by (position+printed name+signature)..:	Test Engineer Peter Xiao
Approved by (position+printed name+signature)..:	Manager Sam Wang
Date of issue.....:	Aug. 31, 2015
Representative Laboratory Name :	**Shenzhen Global Test Service Co.,Ltd.**
Address .....:	1F, Building No. 13A, Zhonghaixin Science and Technology City, No.12,6 Road, Ganli Industrial Park, Buji Street, Longgang District, Shenzhen, Guangdong
Testing Laboratory Name ..... :	**Shenzhen CTL Testing Technology Co., Ltd**
Address .....:	1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China
Applicant's name.....:	**Shenzhen FuJinYing Electronic Co.,Ltd**
Address .....:	4F-B, Block 3 of Fuda Industrial Park, No.68 YuanLing Ave, ShangWu Community, ShiYan Avenue, BaoAn District, Shenzhen city, GuangDong Prov, China
Test specification ..... :	
Standard .....:	**FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**
TRF Originator.....:	Shenzhen Global Test Service Co.,Ltd.
Master TRF.....:	Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....:	Stick Computer
Trade Mark .....:	/
Manufacturer .....:	**Shenzhen FuJinYing Electronic Co.,Ltd**
Model/Type reference.....:	YC-01
Listed Models .....:	/
Operation Frequency.....:	From 2402MHz to 2480MHz
EUT Type .....:	Production Unit
Rating .....:	DC 5.0V from Adapter AC 120V/60Hz
Result.....:	**PASS**

T E S T R E P O R T

Test Report No. :	GTSR15080020-WLAN	Aug. 31, 2015 Date of issue

Equipment under Test	:	Stick Computer
Model /Type	:	YC-01
Listed Models	:	/
Applicant	:	**Shenzhen FuJinYing Electronic Co.,Ltd**
Address	:	4F-B, Block 3 of Fuda Industrial Park, No.68 YuanLing Ave, ShangWu Community, ShiYan Avenue, BaoAn District, Shenzhen city, GuangDong Prov, China
Manufacturer	:	**Shenzhen FuJinYing Electronic Co.,Ltd**
Address	:	4F-B, Block 3 of Fuda Industrial Park, No.68 YuanLing Ave, ShangWu Community, ShiYan Avenue, BaoAn District, Shenzhen city, GuangDong Prov, China

Test Result:	**PASS**

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

1. TEST STANDARDS 4

2. SUMMARY 5

2.1. General Remarks 5
2.2. Product Description 5
2.3. Equipment Under Test 5
2.4. Short description of the Equipment under Test (EUT) 5
2.5. EUT operation mode 6
2.6. Block Diagram of Test Setup 6
2.7. Related Submittal(s) / Grant (s) 6
2.8. Modifications 6
2.9. NOTE 7

3. TEST ENVIRONMENT 8

3.1. Address of the test laboratory 8
3.2. Test Facility 8
3.3. Environmental conditions 8
3.4. Test Description 9
3.5. Statement of the measurement uncertainty 10
3.6. Equipments Used during the Test 11

4. TEST CONDITIONS AND RESULTS 12

4.1. AC Power Conducted Emission 12
4.2. Radiated Emission 15
4.3. Maximum Peak Output Power 23
4.4. Power Spectral Density 24
4.5. 6dB Bandwidth 27
4.6. Band Edge Compliance of RF Emission 30
4.7. Spurious RF Conducted Emission 35
4.8. Antenna Requirement 60

5. TEST SETUP PHOTOS OF THE EUT 61

6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT 63

1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.
ANSI C63.10-2009: American National Standard for Testing Unlicensed Wireless Devices
KDB558074 D01 V03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Aug. 17, 2015
Testing commenced on	:	Aug. 17, 2015
Testing concluded on	:	Aug. 31, 2015

2.2. Product Description

The **Shenzhen FuJinYing Electronic Co.,Ltd**'s Model: YC-01 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

Name of EUT	Stick Computer
Model Number	YC-01
FCC ID	2AFQFYC01
Antenna Type	Internal
WLAN FCC Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Bluetooth FCC Operation frequency	2402MHz-2480MHz
WLAN Modulation	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Bluetooth Modulation	GFSK (BT 4.0)/GFSK,8DPSK,π/4DQPSK(BT v2.1+EDR)
WLAN	Supported 802.11b/802.11g/802.11n HT20/802.11n HT40
Bluetooth	Supported BT4.0 and BT v2.1+EDR

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	○	230V / 50 Hz	○	120V / 60Hz
		○	12 V DC	○	24 V DC
		●	Other (specified in blank below)		

DC 5.0V from Adapter AC 120V/60Hz

2.4. Short description of the Equipment under Test (EUT)

This is a stick computer.

For more details, refer to the user's manual of the EUT.

2.5. EUT operation mode

The application provider specific test software to control sample in continuous TX and RX (Duty Cycle >98%)

for testing meet KDB558074 test requirement.

IEEE 802.11b/g/n: Thirteen channels are provided to the EUT.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	12	2467
6	2437	13	2472
7	2442		

2.6. Block Diagram of Test Setup

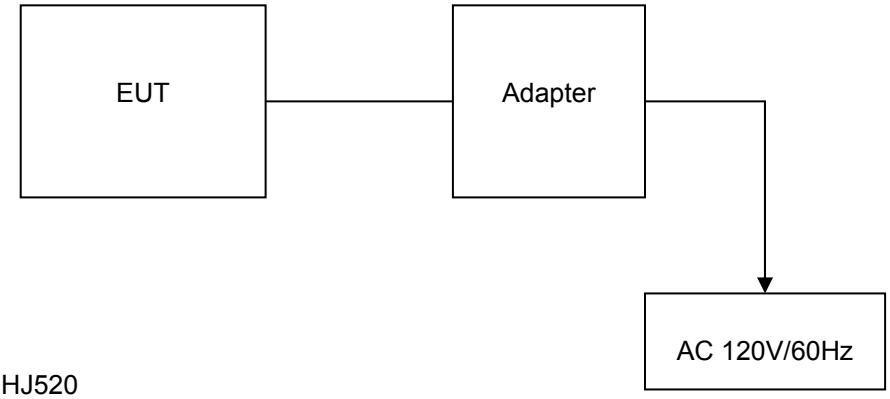

Adapter:

Model: HJ520
Input: 100-240V～50/60Hz 0.25A
Output: 5.0V DC 2A
Power Cable: 150cm
◇ Shielded ◆ Unshielded

2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AFQFYC01** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. Modifications

No modifications were implemented to meet testing criteria.

2.9. NOTE

1. The EUT is a stick computer with WLAN and Bluetooth function,The functions of the EUT listed as below:

	Test Standards	Reference Report
WLAN	FCC Part 15 Subpart C	GTSR15080020-WLAN
Bluetooth-EDR	FCC Part 15 Subpart C	GTSR15080020-EDR
Bluetooth-BLE	FCC Part 15 Subpart C	GTSR15080020- BLE
MPE	FCC Per 47 CFR 2.1093(d)	GTSR15080020-MPE

2. The frequency bands used in this EUT are listed as follows:

Frequency Band(MHz)	2400-2483.5	5150-5350	5470-5725	5725-5850
802.11b	√	—	—	—
802.11g	√	—	—	—
802.11n(20MHz)	√	—	—	—
802.11n(40MHz)	√	—	—	—

3. The EUT incorporates a SISO function,Physically,the EUT provides one completed transmitter and one completed receiver.

Modulation Mode	TX Function
802.11b	1TX
802.11g	1TX
802.11n (20MHz)	1TX
802.11n (40MHz)	1TX

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd
1/F.-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, Guangdong, China

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 964637

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 964637, Jul 24, 2015.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Test Description

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	802.11b	☒ Lowest ☒ Middle ☒ Highest	802.11b	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(a)(1)	Spectrum bandwidth – 6 dB bandwidth	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	802.11b 802.11g 802.11n HT20 802.11n HT40	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☒	☐	☐	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	802.11b	-/-	802.11b	-/-	☒	☐	☐	☐	complies

Remark:
1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Maximum Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	11b/DSSS	1 Mbps	1/6/11
	11g/OFDM	6 Mbps	1/6/11
	11n(20MHz)/OFDM	6.5Mbps	1/6/11
	11n(40MHz)/OFDM	13.5Mbps	3/6/9
Band Edge	11b/DSSS	1 Mbps	1/11
	11g/OFDM	6 Mbps	1/11
	11n(20MHz)/OFDM	6.5Mbps	1/11
	11n(40MHz)/OFDM	13.5Mbps	3/9

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen CTL Testing Technology Co., Ltd laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.20 dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2015/06/02	2016/06/01
LISN	R&S	ESH2-Z5	860014/010	2015/06/02	2016/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	N9020A	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHNER	RG214	N/A	2015/05/20	2016/05/19

Note: 1. The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

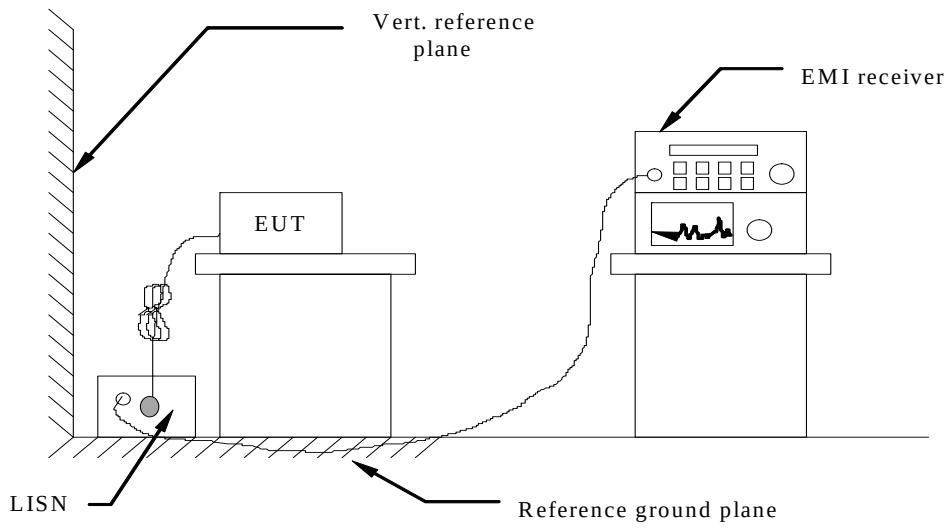

TEST PROCEDURE

1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2009.
2 Support equipment, if needed, was placed as per ANSI C63.10-2009
3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2009
4 The EUT received DC5V power from PC, the adapter of PC received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5 All support equipments received AC power from a second LISN, if any.
6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT.The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following：

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
* Decreases with the logarithm of the frequency.		

TEST RESULTS

Remark:We tested three positions and recorded worst case at WLAN IEEE 802.11b Link mode.

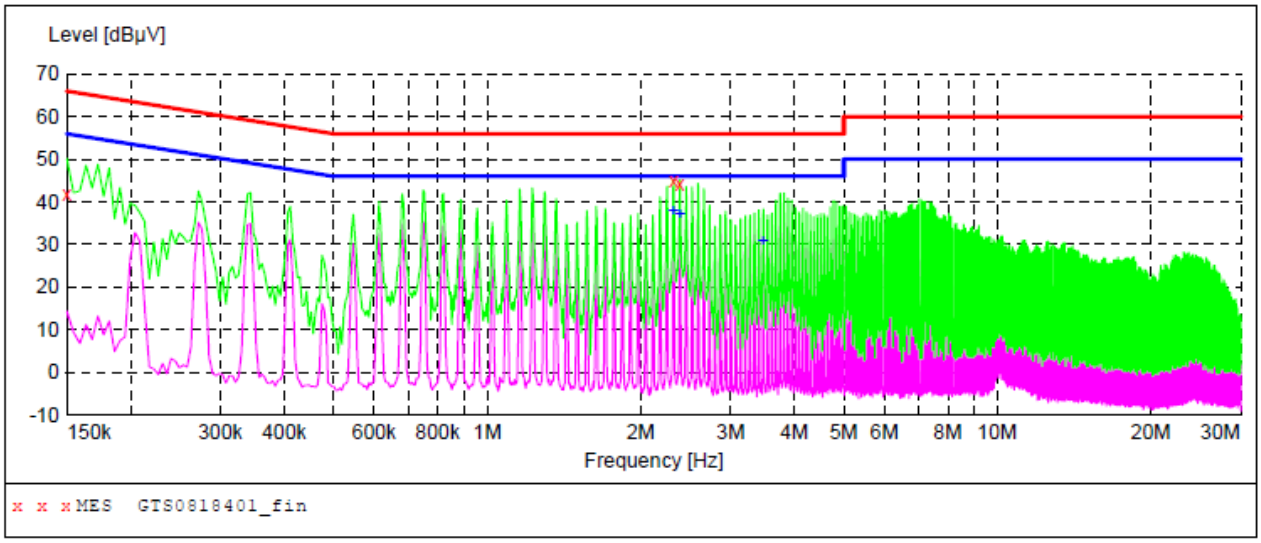

MEASUREMENT RESULT: "GTS0818401_fin"

8/18/2015 6:39PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.150000	41.70	10.1	66	24.3	QP	L1	GND
2.319000	45.00	9.5	56	11.0	QP	L1	GND
2.386500	44.20	9.5	56	11.8	QP	L1	GND

MEASUREMENT RESULT: "GTS0818401_fin2"

8/18/2015 6:39PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.319000	38.10	9.5	46	7.9	AV	L1	GND
2.386500	37.20	9.5	46	8.8	AV	L1	GND
3.475500	30.70	9.4	46	15.3	AV	L1	GND

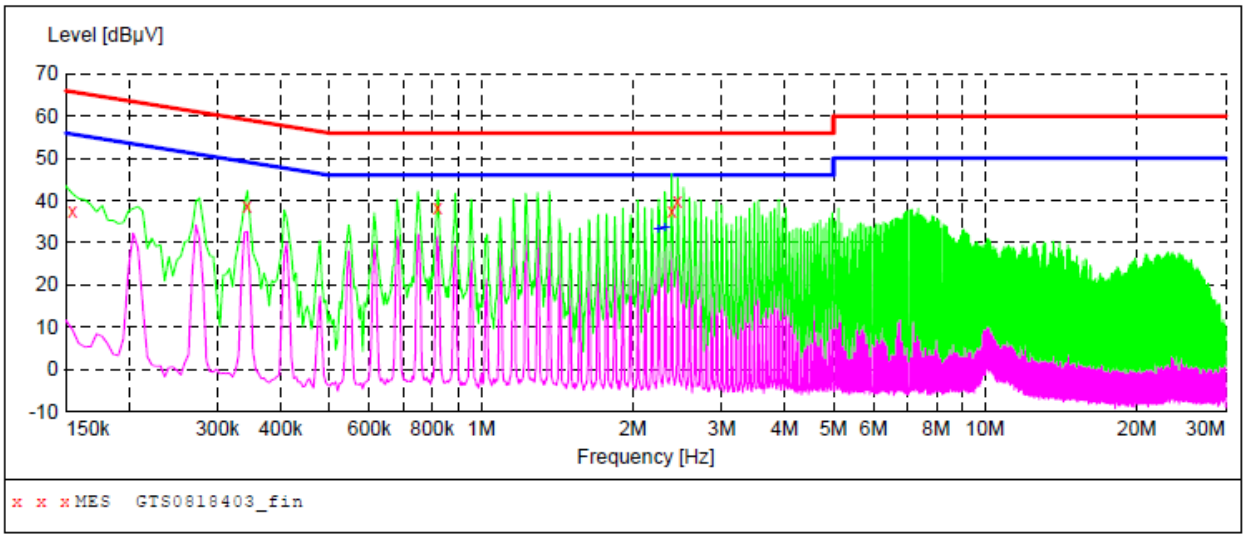

MEASUREMENT RESULT: "GTS0818403_fin"

8/18/2015 6:46PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.154500	37.50	10.1	66	28.3	QP	N	GND
0.343500	38.80	9.9	59	20.3	QP	N	GND
0.820500	38.40	9.7	56	17.6	QP	N	GND
2.391000	37.50	9.5	56	18.5	QP	N	GND
2.454000	39.70	9.5	56	16.3	QP	N	GND

MEASUREMENT RESULT: "GTS0818403_fin2"

8/18/2015 6:46PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.251500	33.30	9.5	46	12.7	AV	N	GND
2.319000	33.40	9.5	46	12.6	AV	N	GND

4.2. Radiated Emission

TEST CONFIGURATION

Frequency range 9 KHz – 30MHz

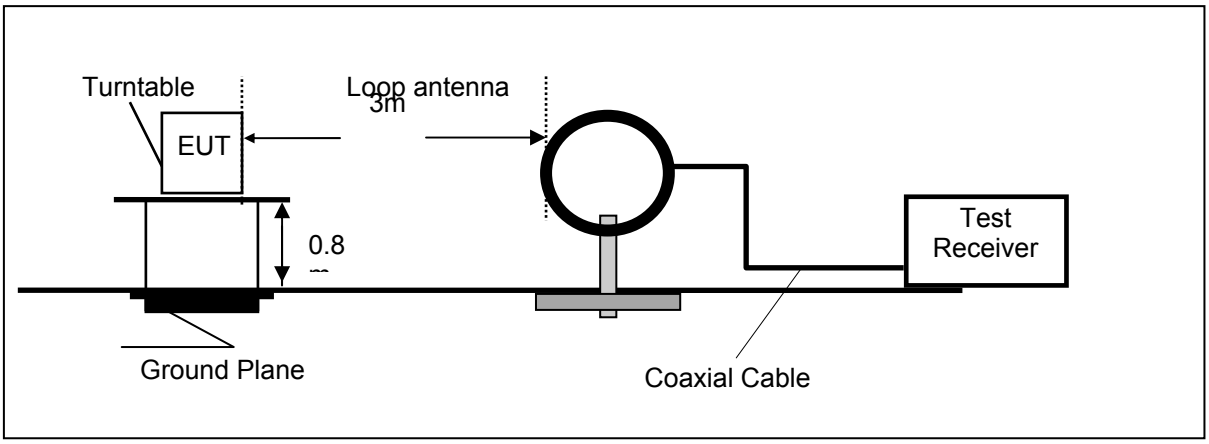

Frequency range 30MHz – 1000MHz

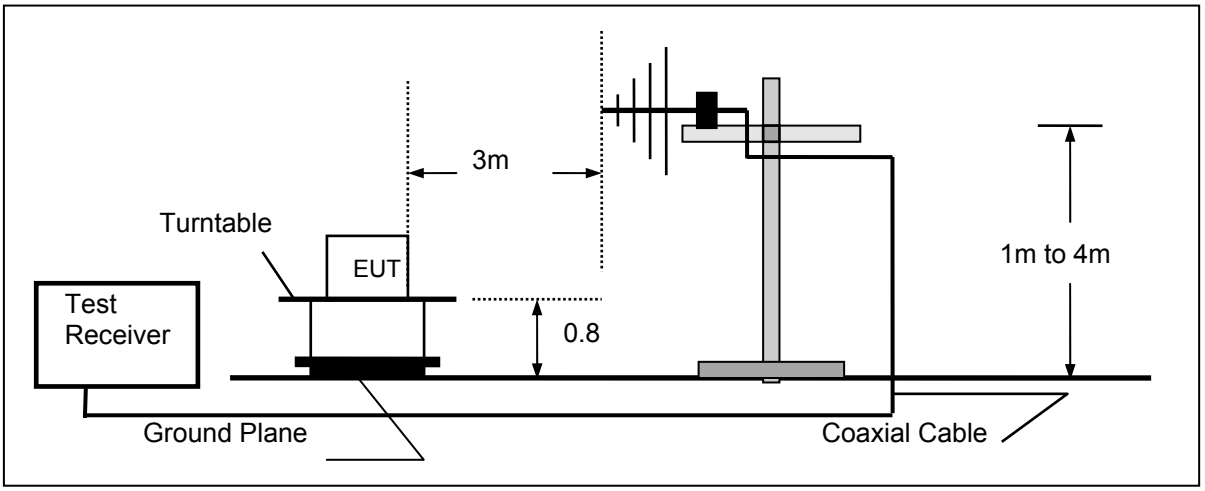

Frequency range above 1GHz-25GHz

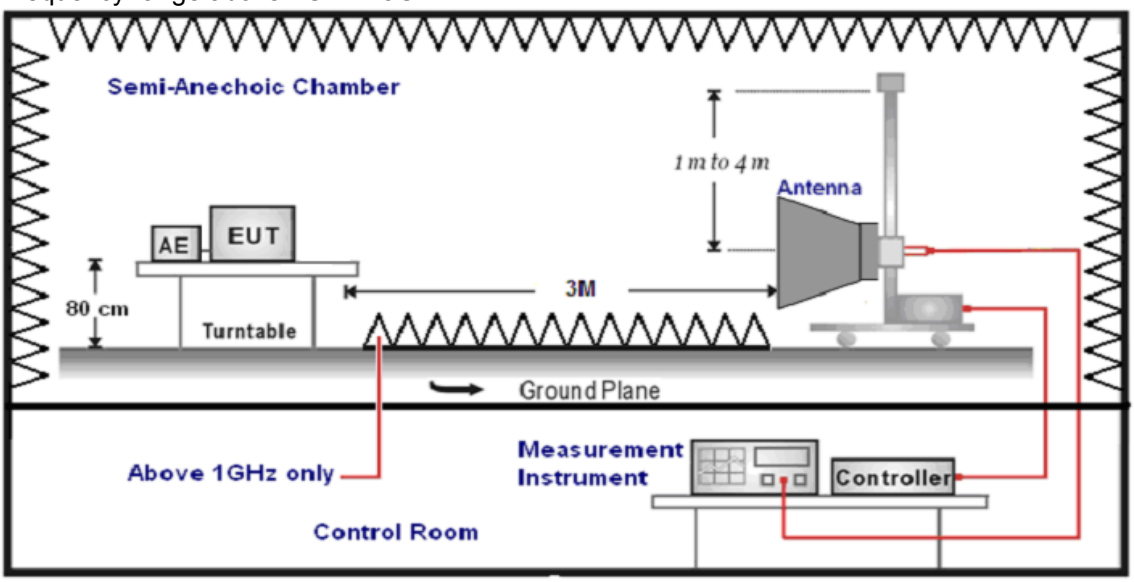

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0℃ to 360℃ to acquire the highest emissions from EUT.

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Anternna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

Transd=AF +CL-AG

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark:We tested three positions and recorded worst case at WLAN IEEE 802.11b Link mode for below 1GHz.

For 9 KHz-30MHz

Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.36	53.69	96.48	42.79	QP	PASS
1.65	42.57	63.25	20.68	QP	PASS
20.51	53.34	69.54	16.20	QP	PASS
25.77	50.78	69.54	18.76	QP	PASS

For 30MHz-1GHz

Horizontal

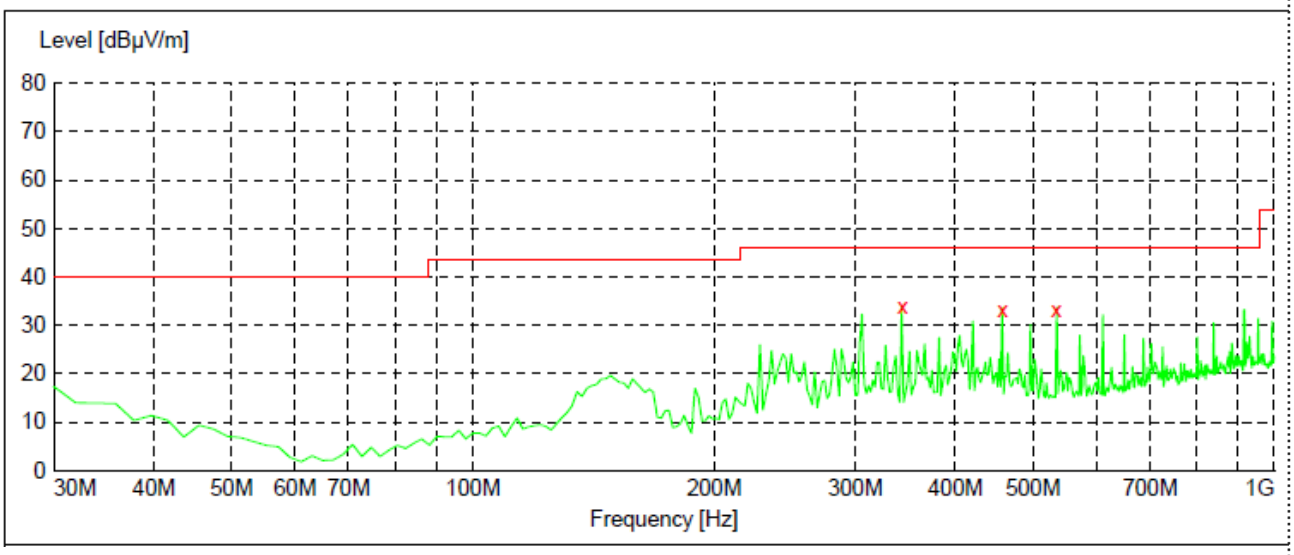

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarizatior
343.680000	33.80	-16.8	46.0	12.2	QP	100.0	133.00	HORIZONTAL
458.220000	33.40	-14.9	46.0	12.6	QP	100.0	67.00	HORIZONTAL
534.600000	33.20	-13.3	46.0	12.8	QP	100.0	286.00	HORIZONTAL

Vertical

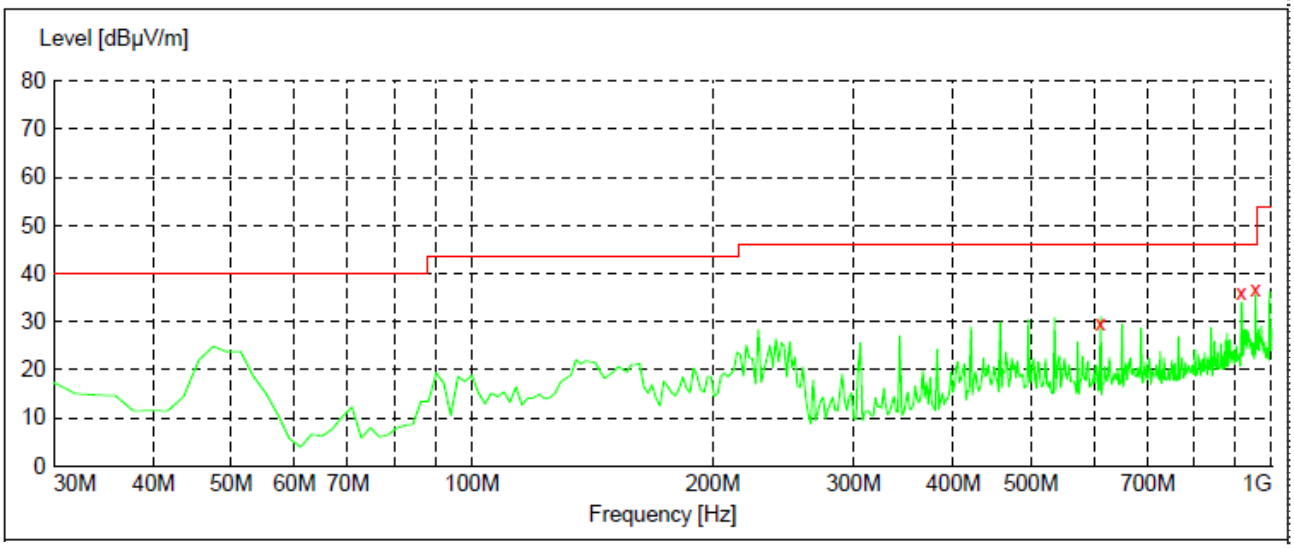

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarizatior
611.040000	29.80	-12.6	46.0	16.2	QP	100.0	208.00	VERTICAL
916.560000	36.10	-6.0	46.0	9.9	QP	114.0	202.00	VERTICAL
954.720000	36.70	-4.9	46.0	9.3	QP	100.0	182.00	VERTICAL

For 1GHz to 25GHz

802.11b Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	66.87	PK	74	7.13	1.00	48	64.77	31.6	7.00	36.5	2.10
1	4824	47.48	AV	54	6.52	1.00	48	45.38	31.6	7.00	36.5	2.10
2	7236	58.69	PK	74	15.31	1.00	110	47.76	37.33	8.90	35.3	10.93
2	7236	39.62	AV	54	14.38	1.00	110	28.69	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	67.98	PK	74	6.02	1.00	120	65.88	31.60	7.00	36.50	2.10
1	4824	46.91	AV	54	7.09	1.00	120	44.81	31.60	7.00	36.50	2.10
2	7236	60.54	PK	74	13.46	1.00	145	49.61	37.33	8.90	35.30	10.93
2	7236	41.52	AV	54	12.48	1.00	145	30.59	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	66.47	PK	74.00	7.53	1.00	110	64.35	31.02	7.60	36.5	2.12
1	4874.00	47.84	AV	54.00	6.16	1.00	110	45.72	31.02	7.60	36.5	2.12
2	7311.00	58.26	PK	74.00	15.74	1.00	181	47.18	37.28	8.60	34.8	11.08
2	7311.00	39.79	AV	54.00	14.21	1.00	181	28.71	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	67.76	PK	74.00	6.24	1.00	105	65.64	31.02	7.60	36.5	2.12
1	4874.00	48.69	AV	54.00	5.31	1.00	105	46.57	31.02	7.60	36.5	2.12
2	7311.00	60.15	PK	74.00	13.85	1.00	75	49.07	37.28	8.60	34.8	11.08
2	7311.00	41.36	AV	54.00	12.64	1.00	75	30.28	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	66.87	PK	74.00	7.13	1.00	130	63.67	31.58	7.82	36.2	3.20
1	4924.00	48.96	AV	54.00	5.04	1.00	130	45.76	31.58	7.82	36.2	3.20
2	7386.00	58.48	PK	74.00	15.52	1.00	120	46.54	38.51	8.73	35.3	11.94
2	7386.00	39.23	AV	54.00	14.77	1.00	120	27.29	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	67.69	PK	74.00	6.31	1.00	25	64.49	31.58	7.82	36.2	3.20
1	4924.00	49.87	AV	54.00	4.13	1.00	25	46.67	31.58	7.82	36.2	3.20
2	7386.00	60.23	PK	74.00	13.77	1.00	78	48.29	38.51	8.73	35.3	11.94
2	7386.00	42.48	AV	54.00	11.52	1.00	78	30.54	38.51	8.73	35.3	11.94

802.11g Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	66.47	PK	74	7.53	1.00	50	64.37	31.6	7.00	36.5	2.10
1	4824	47.50	AV	54	6.50	1.00	50	45.40	31.6	7.00	36.5	2.10
2	7236	57.52	PK	74	16.48	1.00	115	46.59	37.33	8.90	35.3	10.93
2	7236	39.21	AV	54	14.79	1.00	115	28.28	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	66.58	PK	74	7.42	1.00	125	64.48	31.60	7.00	36.50	2.10
1	4824	46.54	AV	54	7.46	1.00	125	44.44	31.60	7.00	36.50	2.10
2	7236	60.34	PK	74	13.66	1.00	140	49.41	37.33	8.90	35.30	10.93
2	7236	41.42	AV	54	12.58	1.00	140	30.49	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	66.40	PK	74.00	7.60	1.00	105	64.28	31.02	7.60	36.5	2.12
1	4874.00	47.80	AV	54.00	6.20	1.00	105	45.68	31.02	7.60	36.5	2.12
2	7311.00	58.10	PK	74.00	15.90	1.00	180	47.02	37.28	8.60	34.8	11.08
2	7311.00	38.74	AV	54.00	15.26	1.00	180	27.66	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	66.47	PK	74.00	7.53	1.00	95	65.64	31.02	7.60	36.5	2.12
1	4874.00	48.41	AV	54.00	5.59	1.00	95	46.57	31.02	7.60	36.5	2.12
2	7311.00	60.32	PK	74.00	13.68	1.00	125	49.07	37.28	8.60	34.8	11.08
2	7311.00	40.14	AV	54.00	13.86	1.00	125	30.28	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	66.85	PK	74.00	7.15	1.00	135	63.65	31.58	7.82	36.2	3.20
1	4924.00	48.90	AV	54.00	5.10	1.00	135	45.70	31.58	7.82	36.2	3.20
2	7386.00	58.47	PK	74.00	15.53	1.00	121	46.53	38.51	8.73	35.3	11.94
2	7386.00	39.10	AV	54.00	14.90	1.00	121	27.16	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	67.20	PK	74.00	6.80	1.00	45	64.00	31.58	7.82	36.2	3.20
1	4924.00	49.11	AV	54.00	4.89	1.00	45	45.91	31.58	7.82	36.2	3.20
2	7386.00	60.10	PK	74.00	13.90	1.00	110	48.16	38.51	8.73	35.3	11.94
2	7386.00	42.08	AV	54.00	11.92	1.00	110	30.14	38.51	8.73	35.3	11.94

802.11n HT20 Mode (above 1GHz)

Frequency(MHz):				2412			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	58.69	PK	74	15.31	1.00	55	56.59	31.6	7.00	36.5	2.10
1	4824	45.25	AV	54	8.75	1.00	55	43.15	31.6	7.00	36.5	2.10
2	7236	55.41	PK	74	18.59	1.00	110	44.48	37.33	8.90	35.3	10.93
2	7236	40.24	AV	54	13.76	1.00	110	29.31	37.33	8.90	35.3	10.93

Frequency(MHz):				2412			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4824	57.87	PK	74	16.13	1.00	135	55.77	31.60	7.00	36.50	2.10
1	4824	46.58	AV	54	7.42	1.00	135	44.48	31.60	7.00	36.50	2.10
2	7236	56.41	PK	74	17.59	1.00	145	45.48	37.33	8.90	35.30	10.93
2	7236	40.25	AV	54	13.75	1.00	145	29.32	37.33	8.90	35.30	10.93

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.15	PK	74.00	15.85	1.00	100	56.03	31.02	7.60	36.5	2.12
1	4874.00	46.36	AV	54.00	7.64	1.00	100	44.24	31.02	7.60	36.5	2.12
2	7311.00	56.40	PK	74.00	17.60	1.00	175	45.32	37.28	8.60	34.8	11.08
2	7311.00	40.26	AV	54.00	13.74	1.00	175	29.18	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.11	PK	74.00	15.89	1.00	100	55.99	31.02	7.60	36.5	2.12
1	4874.00	46.26	AV	54.00	7.74	1.00	100	44.14	31.02	7.60	36.5	2.12
2	7311.00	56.41	PK	74.00	17.59	1.00	120	45.33	37.28	8.60	34.8	11.08
2	7311.00	40.69	AV	54.00	13.31	1.00	120	29.61	37.28	8.60	34.8	11.08

Frequency(MHz):				2462			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	57.41	PK	74.00	16.59	1.00	125	54.21	31.58	7.82	36.2	3.20
1	4924.00	46.15	AV	54.00	7.85	1.00	125	42.95	31.58	7.82	36.2	3.20
2	7386.00	55.69	PK	74.00	18.31	1.00	120	43.75	38.51	8.73	35.3	11.94
2	7386.00	41.50	AV	54.00	12.50	1.00	120	29.56	38.51	8.73	35.3	11.94

Frequency(MHz):				2462			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4924.00	53.20	PK	74.00	20.80	1.00	95	50.00	31.58	7.82	36.2	3.20
1	4924.00	46.36	AV	54.00	7.64	1.00	95	43.16	31.58	7.82	36.2	3.20
2	7386.00	56.39	PK	74.00	17.61	1.00	115	44.45	38.51	8.73	35.3	11.94
2	7386.00	38.54	AV	54.00	15.46	1.00	115	26.60	38.51	8.73	35.3	11.94

802.11n HT40 Mode (above 1GHz)

Frequency(MHz):				2422			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844	58.47	PK	74	15.53	1.00	48	56.33	31.62	7.02	36.5	2.14
1	4844	45.66	AV	54	8.34	1.00	48	43.52	31.62	7.02	36.5	2.14
2	7266	55.36	PK	74	18.64	1.00	132	44.38	37.35	8.93	35.3	10.98
2	7266	40.98	AV	54	13.02	1.00	132	30.00	37.35	8.93	35.3	10.98

Frequency(MHz):				2422			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4844	57.74	PK	74	16.26	1.00	130	55.60	31.62	7.02	36.50	2.14
1	4844	46.26	AV	54	7.74	1.00	130	44.12	31.62	7.02	36.50	2.14
2	7266	56.36	PK	74	17.64	1.00	175	45.38	37.35	8.93	35.30	10.98
2	7266	40.72	AV	54	13.28	1.00	175	29.74	37.35	8.93	35.30	10.98

Frequency(MHz):				2437			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.30	PK	74.00	15.70	1.00	105	56.18	31.02	7.60	36.5	2.12
1	4874.00	46.20	AV	54.00	7.80	1.00	105	44.08	31.02	7.60	36.5	2.12
2	7311.00	56.35	PK	74.00	17.65	1.00	180	45.27	37.28	8.60	34.8	11.08
2	7311.00	40.24	AV	54.00	13.76	1.00	180	29.16	37.28	8.60	34.8	11.08

Frequency(MHz):				2437			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4874.00	58.15	PK	74.00	15.85	1.00	120	56.03	31.02	7.60	36.5	2.12
1	4874.00	46.29	AV	54.00	7.71	1.00	120	44.17	31.02	7.60	36.5	2.12
2	7311.00	56.40	PK	74.00	17.60	1.00	125	45.32	37.28	8.60	34.8	11.08
2	7311.00	40.57	AV	54.00	13.43	1.00	125	29.49	37.28	8.60	34.8	11.08

Frequency(MHz):				2452			Polarity:			HORIZONTAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	57.48	PK	74.00	16.52	1.00	137	54.33	31.55	7.80	36.2	3.15
1	4904.00	46.19	AV	54.00	7.81	1.00	137	43.04	31.55	7.80	36.2	3.15
2	7356.00	55.70	PK	74.00	18.30	1.00	129	43.84	38.47	8.69	35.3	11.86
2	7356.00	41.54	AV	54.00	12.46	1.00	129	29.68	38.47	8.69	35.3	11.86

Frequency(MHz):				2452			Polarity:			VERTICAL		
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
1	4904.00	53.25	PK	74.00	20.75	1.00	110	50.10	31.55	7.80	36.2	3.15
1	4904.00	46.39	AV	54.00	7.61	1.00	110	43.24	31.55	7.80	36.2	3.15
2	7356.00	56.45	PK	74.00	17.55	1.00	185	44.59	38.47	8.69	35.3	11.86
2	7356.00	38.53	AV	54.00	15.47	1.00	185	26.67	38.47	8.69	35.3	11.86

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power,9.1.1. The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Type	Channel	Output power PK (dBm)	Output power AV (dBm)	Limit (dBm)	Result
802.11b	01	22.45	17.54	30.00	Pass
	06	22.50	17.64		
	11	22.15	17.41		
802.11g	01	23.54	15.34	30.00	Pass
	06	23.65	15.65		
	11	23.15	15.62		
802.11nH20	01	23.24	14.21	30.00	Pass
	06	23.34	14.34		
	11	23.10	14.11		
802.11nH40	03	21.15	13.12	30.00	Pass
	06	21.32	13.32		
	09	21.26	13.20		

Note: 1.The test results including the cable lose.

4.4. Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.
1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz ≤ RBW ≤ 100 kHz.
4. Set the VBW ≥ 3 RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

Type	Channel	Power Spectral Density (dBm/100KHz)	Limit (dBm/3KHz)	Result
802.11b	01	2.218	8.00	Pass
	06	1.591		
	11	0.839		
802.11g	01	-4.857	8.00	Pass
	06	-3.510		
	11	-5.462		
802.11n(HT20)	01	-5.467	8.00	Pass
	06	-3.826		
	11	-6.713		
802.11n(HT40)	03	-9.410	8.00	Pass
	06	-7.294		
	09	-10.165		

802.11b

802.11g

CH01

CH01

CH06

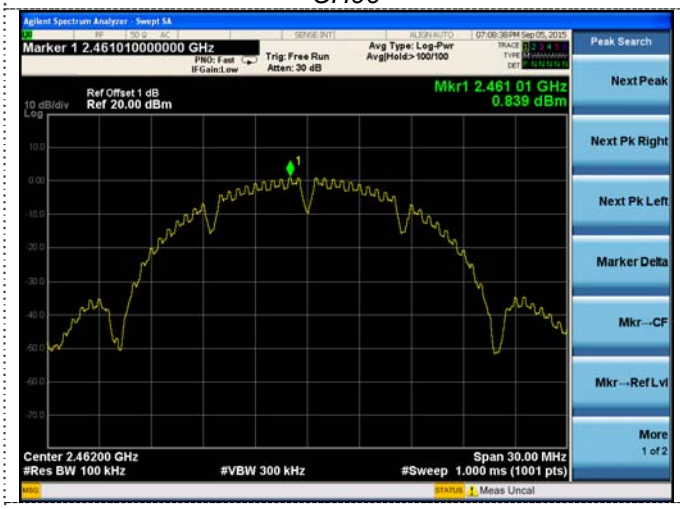

CH06

CH11

CH11

802.11nHT20

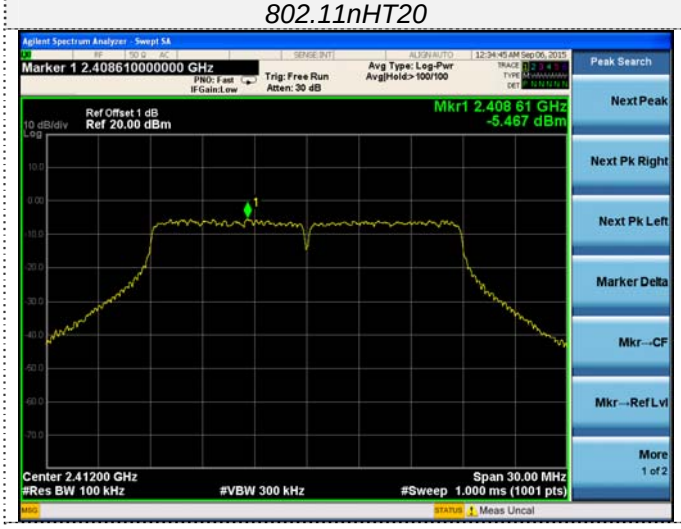

CH01

802.11nHT40

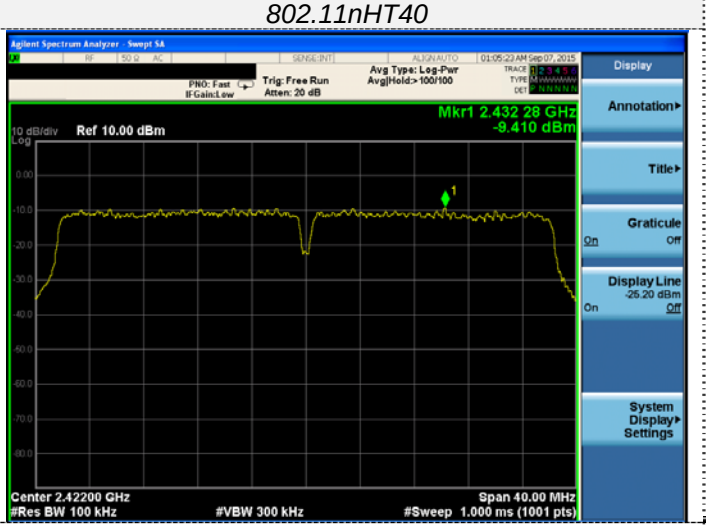

CH03

CH06

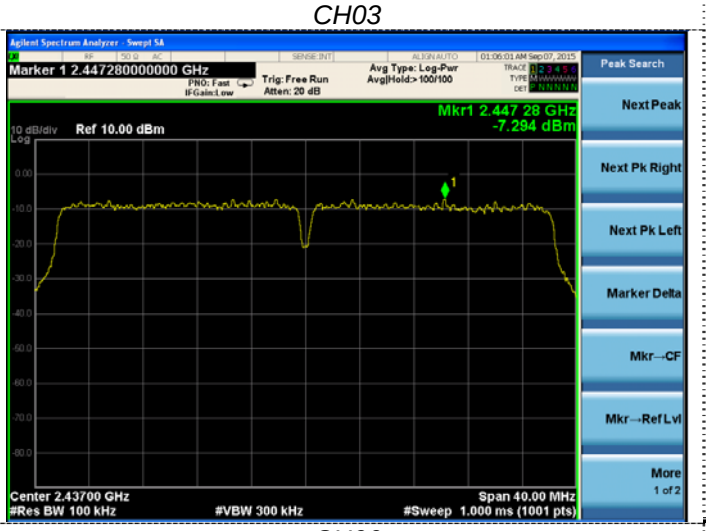

CH06

CH11

CH09

4.5. 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz.
The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.
According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.
1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

TEST RESULTS

Type	Channel	6dB Bandwidth (MHz)	Limit (KHz)	Result
802.11b	01	10.06	≥500	Pass
	06	10.06		
	11	10.06		
802.11g	01	16.57	≥500	Pass
	06	16.57		
	11	16.58		
802.11nHT20	01	17.81	≥500	Pass
	06	17.81		
	11	17.81		
802.11nHT40	03	36.46	≥500	Pass
	06	36.46		
	09	36.46		

802.11b

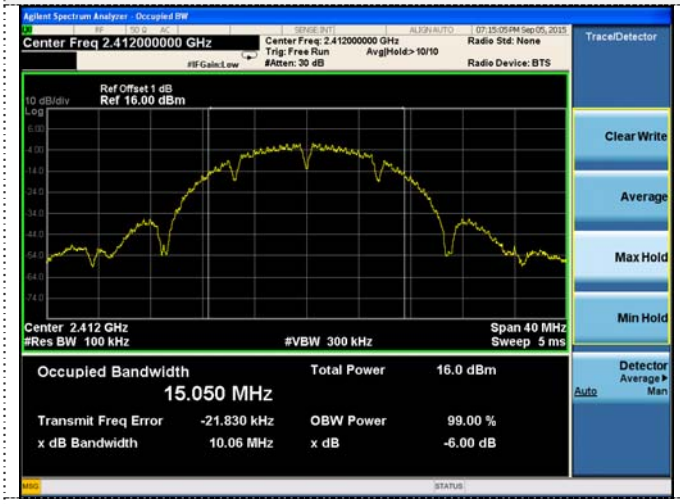

802.11g

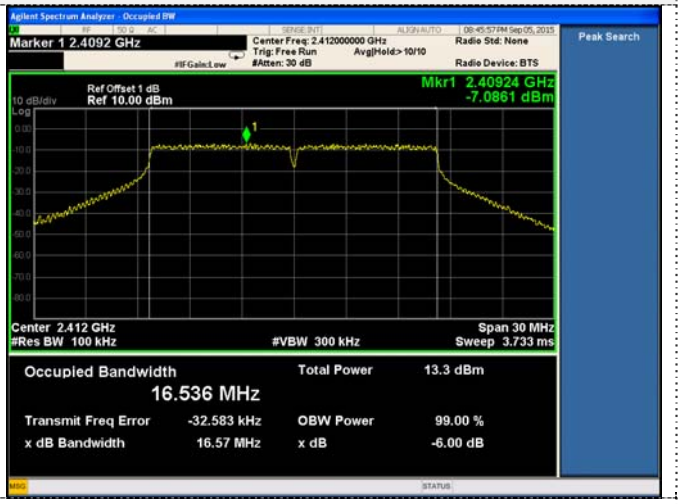

CH01

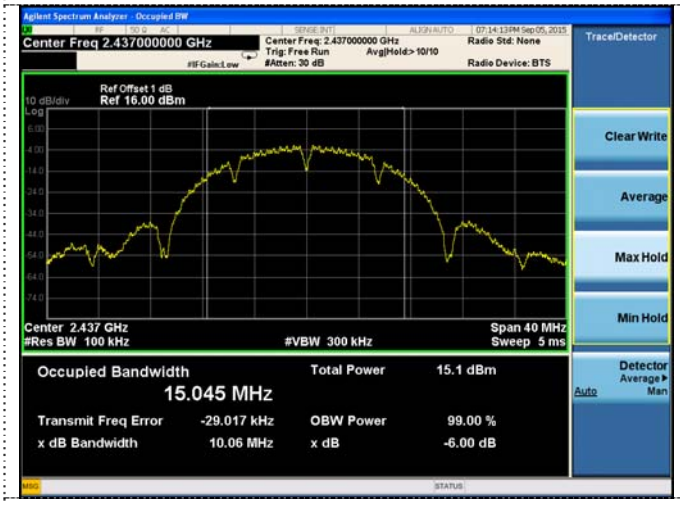

CH01

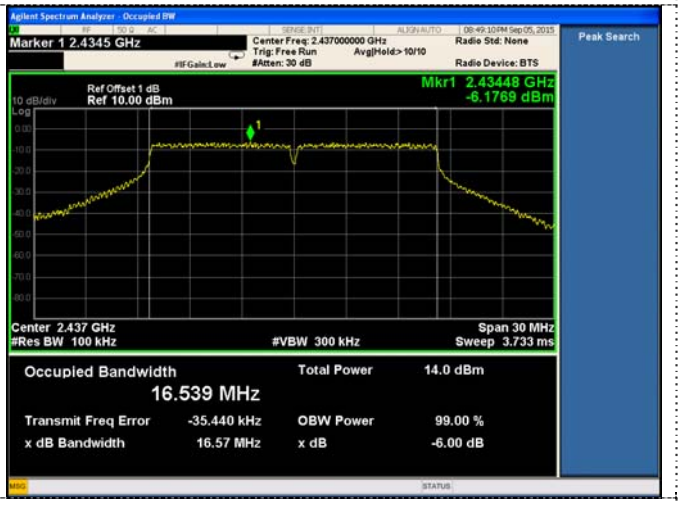

CH06

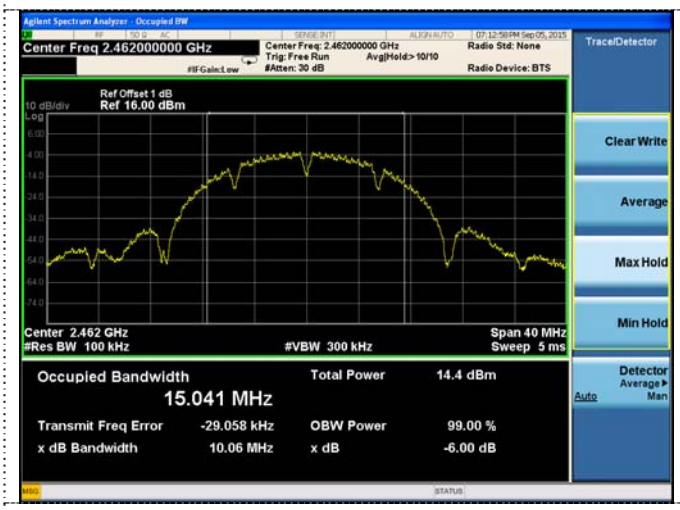

CH06

CH11

CH11

802.11n HT20

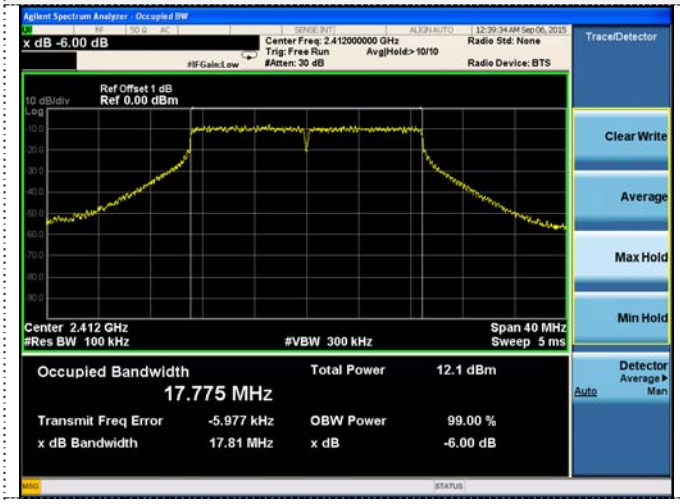

802.11n HT40

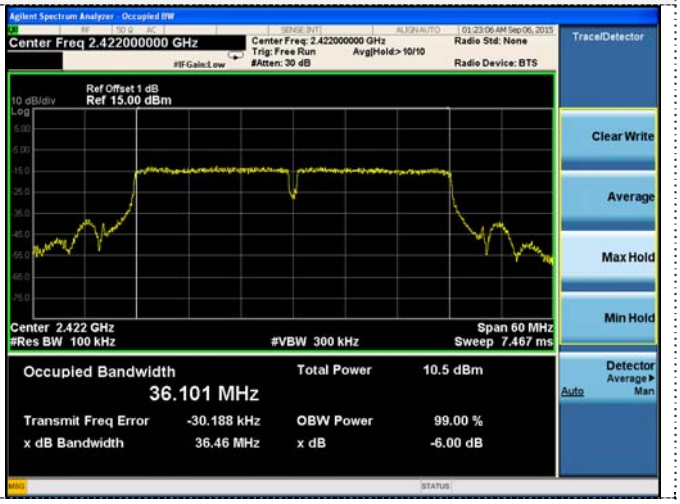

CH01

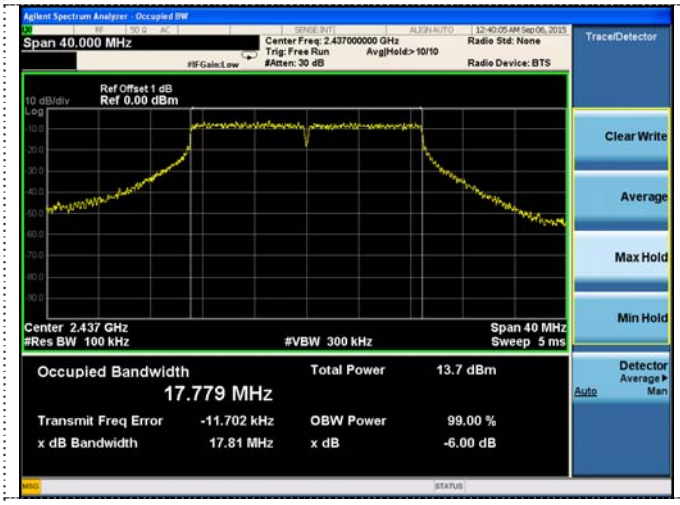

CH00

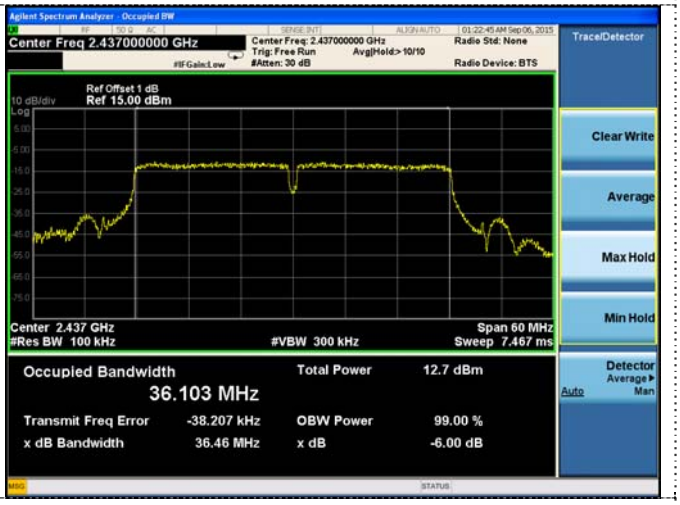

CH06

CH06

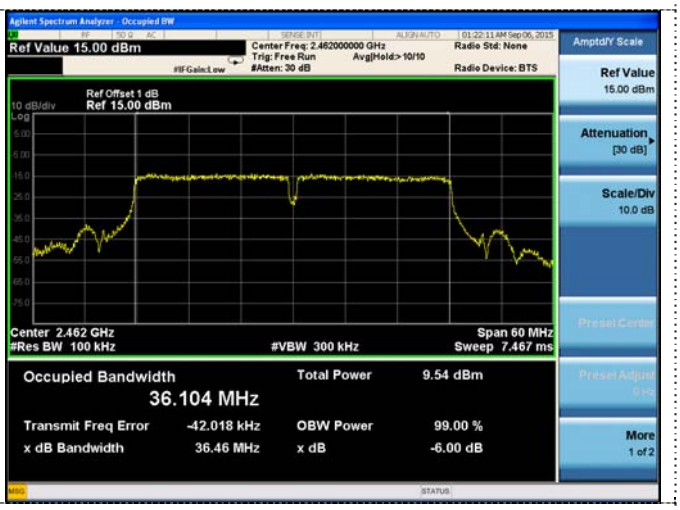

CH11

CH09

4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE

According to KDB 558074 D01 V03 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=10Hz for average detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:
    $E = EIRP – 20\log D + 104.8$

where:
E = electric field strength in dBμV/m,
EIRP = equivalent isotropic radiated power in dBm
D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test dures until all measured frequencies were complete.

LIMIT

Below -20dB of the highest emission level in operating band.
Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

4.6.1 For Radiated Bandedge Measurement

802.11b

Frequency(MHz):			**2412**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	63.65	PK	74.00	10.35	1.00	135	68.96	27.49	3.32	36.12	-5.31
2390.00	45.87	AV	54.00	8.13	1.00	135	51.18	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2412**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.55	PK	74.00	9.45	1.00	50	69.86	27.49	3.32	36.12	-5.31
2390.00	47.36	AV	54.00	6.64	1.00	50	52.67	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2462**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	65.63	PK	74.00	8.37	1.00	175	71.35	27.45	3.38	36.55	-5.72
2483.50	46.47	AV	54.00	7.53	1.00	175	52.19	27.45	3.38	36.55	-5.72
Frequency(MHz):			**2462**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	63.64	PK	74.00	10.36	1.00	138	69.36	27.45	3.38	36.55	-5.72
2483.50	47.48	AV	54.00	6.52	1.00	138	53.20	27.45	3.38	36.55	-5.72

802.11g

Frequency(MHz):			**2412**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	65.68	PK	74.00	8.32	1.00	140	70.99	27.49	3.32	36.12	-5.31
2390.00	48.41	AV	54.00	5.59	1.00	140	53.72	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2412**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	66.98	PK	74.00	7.02	1.00	33	72.29	27.49	3.32	36.12	-5.31
2390.00	49.21	AV	54.00	4.79	1.00	33	54.52	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2462**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	66.98	PK	74.00	7.02	1.00	48	72.70	27.45	3.38	36.55	-5.72
2483.50	51.36	AV	54.00	2.64	1.00	48	57.08	27.45	3.38	36.55	-5.72
Frequency(MHz):			**2462**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	65.42	PK	74.00	8.58	1.00	121	71.14	27.45	3.38	36.55	-5.72
2483.50	50.24	AV	54.00	3.76	1.00	121	55.96	27.45	3.38	36.55	-5.72

802.11n20

Frequency(MHz):			2412			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.33	PK	74.00	9.67	1.00	140	69.64	27.49	3.32	36.12	-5.31
2390.00	49.36	AV	54.00	4.64	1.00	140	54.67	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2412**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	65.63	PK	74.00	8.37	1.00	55	70.94	27.49	3.32	36.12	-5.31
2390.00	50.14	AV	54.00	3.86	1.00	55	55.45	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2462**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	66.41	PK	74.00	7.59	1.00	125	72.13	27.45	3.38	36.55	-5.72
2483.50	50.21	AV	54.00	3.79	1.00	125	55.93	27.45	3.38	36.55	-5.72
Frequency(MHz):			**2462**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	65.54	PK	74.00	8.46	1.00	78	71.26	27.45	3.38	36.55	-5.72
2483.50	50.32	AV	54.00	3.68	1.00	78	56.04	27.45	3.38	36.55	-5.72

802.11n40

Frequency(MHz):			2422			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	64.54	PK	74.00	9.46	1.00	131	69.85	27.49	3.32	36.12	-5.31
2390.00	48.31	AV	54.00	5.69	1.00	131	53.62	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2422**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390.00	66.74	PK	74.00	7.26	1.00	125	72.05	27.49	3.32	36.12	-5.31
2390.00	48.98	AV	54.00	5.02	1.00	125	54.29	27.49	3.32	36.12	-5.31
Frequency(MHz):			**2452**			**Polarity:**			**HORIZONTAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	66.36	PK	74.00	7.64	1.00	45	72.08	27.45	3.38	36.55	-5.72
2483.50	47.14	AV	54.00	6.86	1.00	45	52.86	27.45	3.38	36.55	-5.72
Frequency(MHz):			**2452**			**Polarity:**			**VERTICAL**		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.50	66.74	PK	74.00	7.26	1.00	130	72.46	27.45	3.38	36.55	-5.72
2483.50	47.64	AV	54.00	6.36	1.00	130	53.36	27.45	3.38	36.55	-5.72

4.6.2 For Conducted Bandedge Measurement

802.11b			
Frequency (MHz)	**Delta Peak to Band emission (dBc)**	**Limit (dBc)**	**Verdict**
2390.00	-50.13	-20	PASS
2483.50	-48.03	-20	PASS

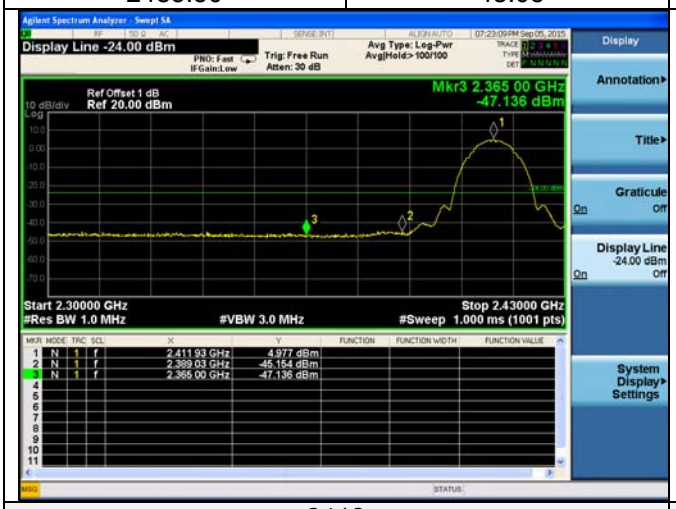

2412

2462

802.11g			
Frequency (MHz)	**Delta Peak to Band emission (dBc)**	**Limit (dBc)**	**Verdict**
2390.00	-48.53	-20	PASS
2486.05	-45.57	-20	PASS

2412

2462

802.11n HT20			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	-40.75	-20	PASS
2483.50	-46.35	-20	PASS

2412

2462

802.11n HT40			
Frequency (MHz)	Delta Peak to Band emission (dBc)	Limit (dBc)	Verdict
2400.00	-38.25	-20	PASS
2490.46	-35.54	-20	PASS

2422

2452

4.7. Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength , and mwasure frequeny range from 9KHz to 25GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 9KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.

Test Mode:	802.11b	Test channel :	01

Channel 01

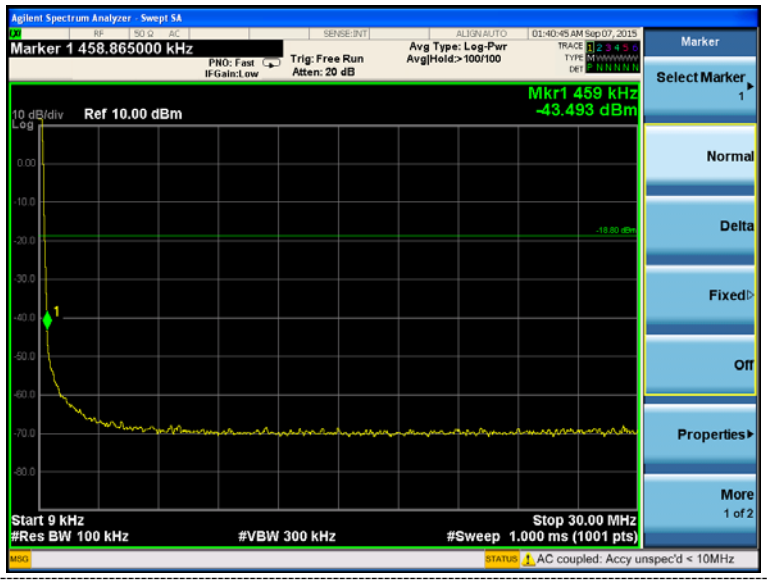

9KHz~30MHz

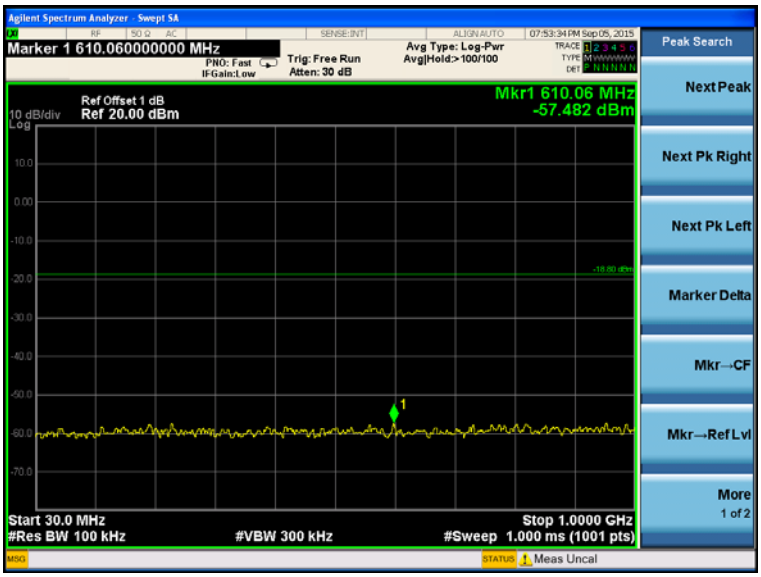

30M Hz~1GHz

Test Mode:	802.11b	Test channel :	01

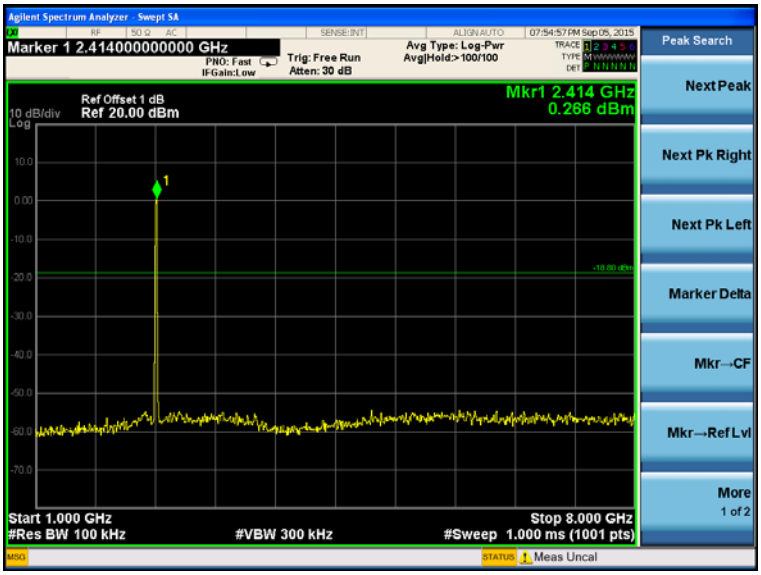

1GHz~8GHz

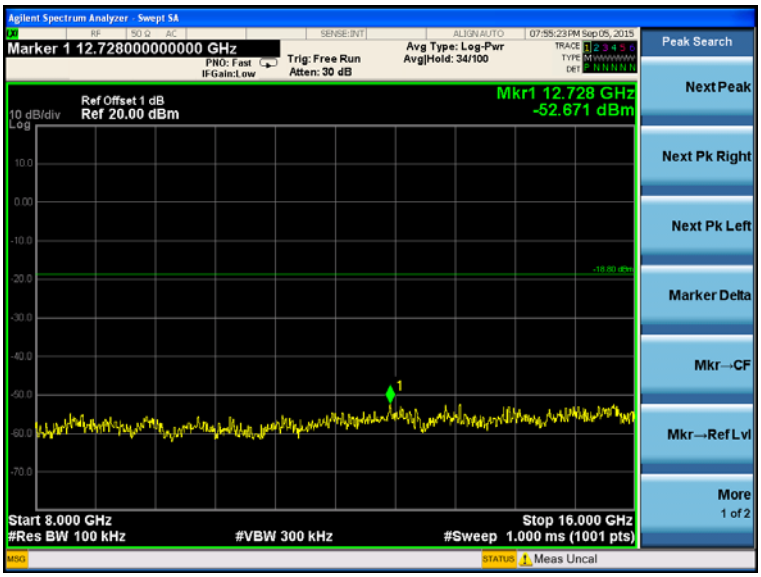

8GHz~16GHz

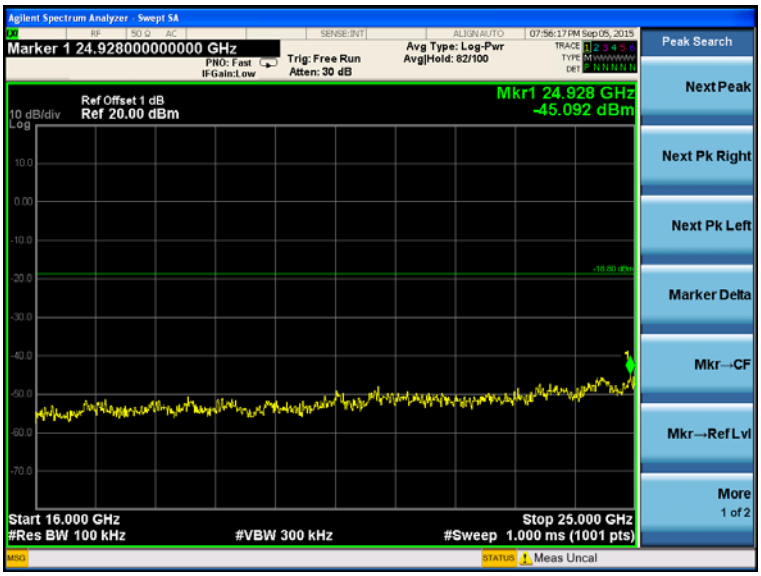

16GHz~25GHz

Test Mode:	802.11b	Test channel :	06

Channel 06

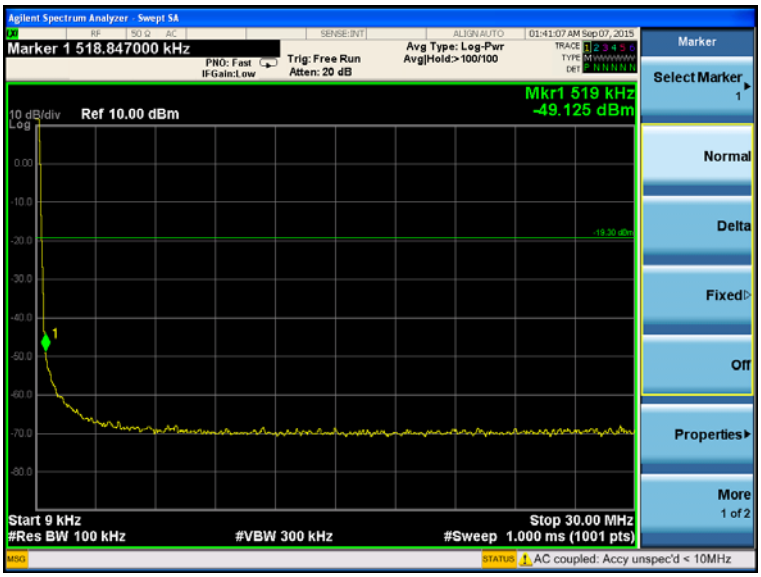

9KHz~30MHz

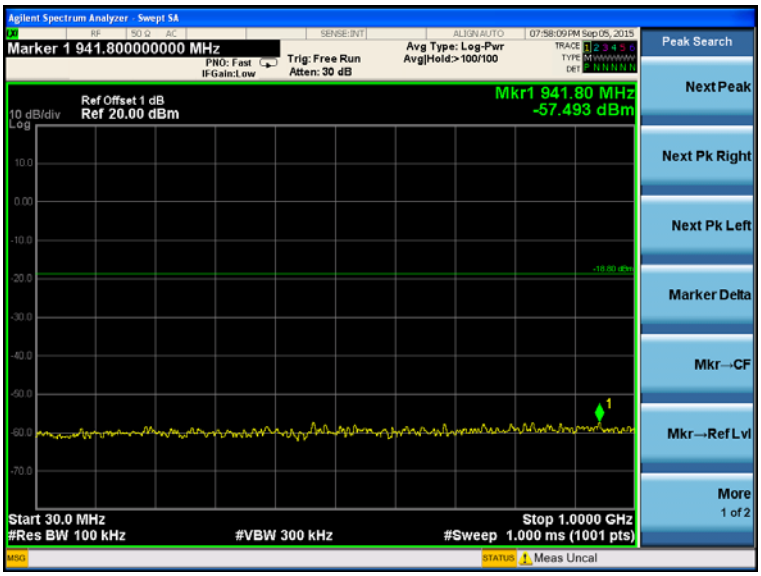

30M Hz~1GHz

Test Mode:	802.11b	Test channel :	06

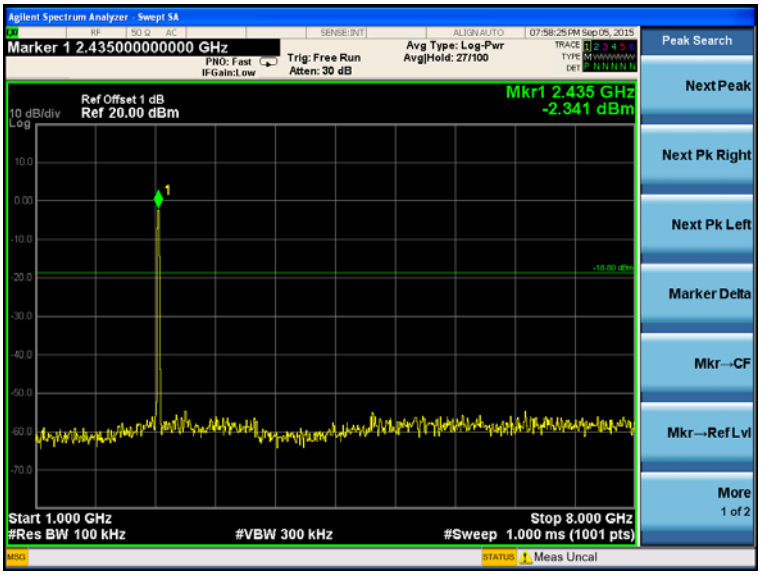

1GHz~8GHz

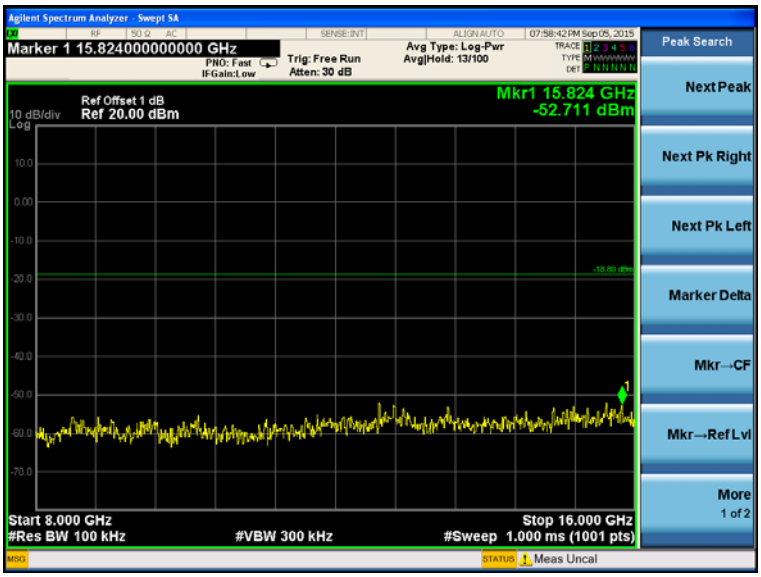

8GHz~16GHz

16GHz~25GHz

Test Mode:	802.11b	Test channel :	11

Channel 11

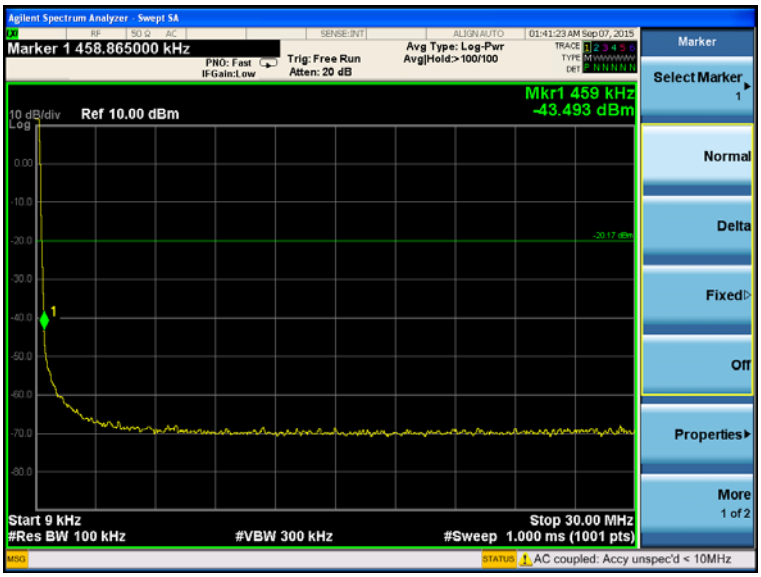

9KHz~30MHz

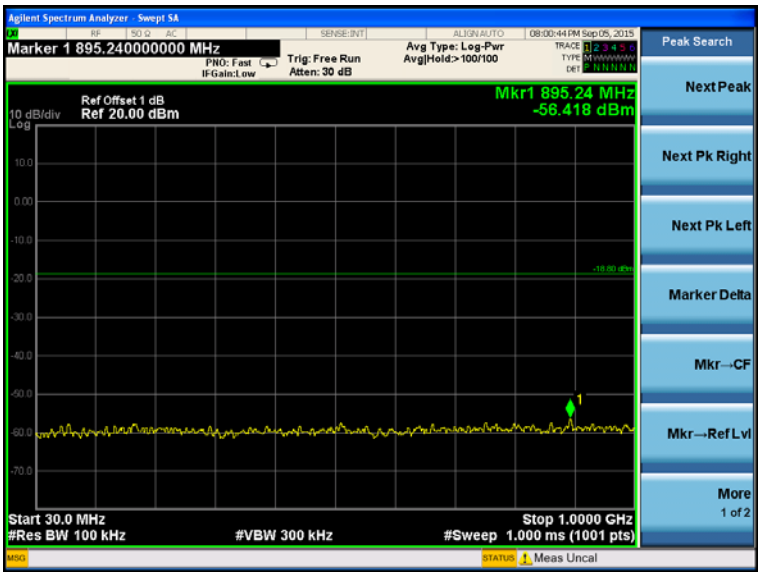

30M Hz~1GHz

Test Mode:	802.11b	Test channel :	11

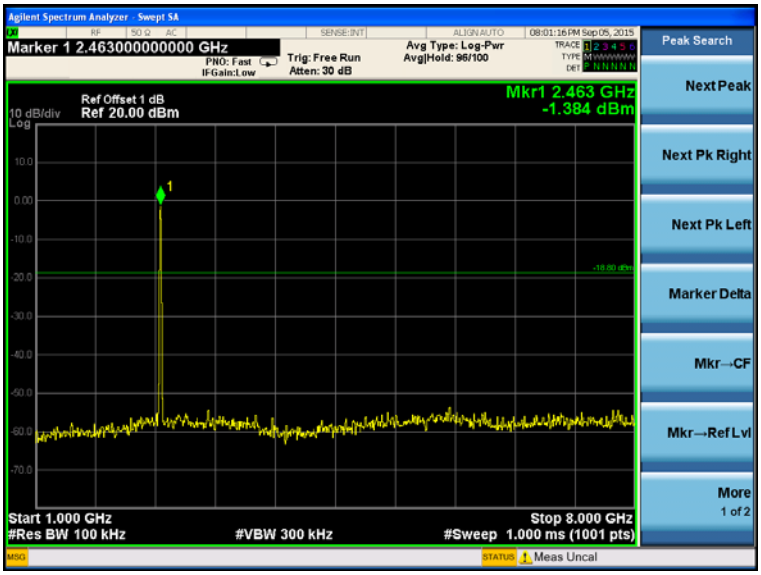

1GHz~8GHz

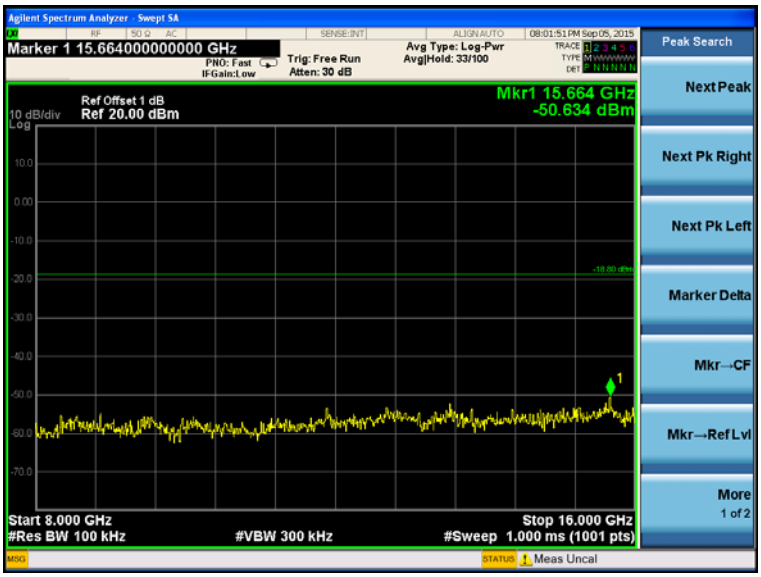

8GHz~16GHz

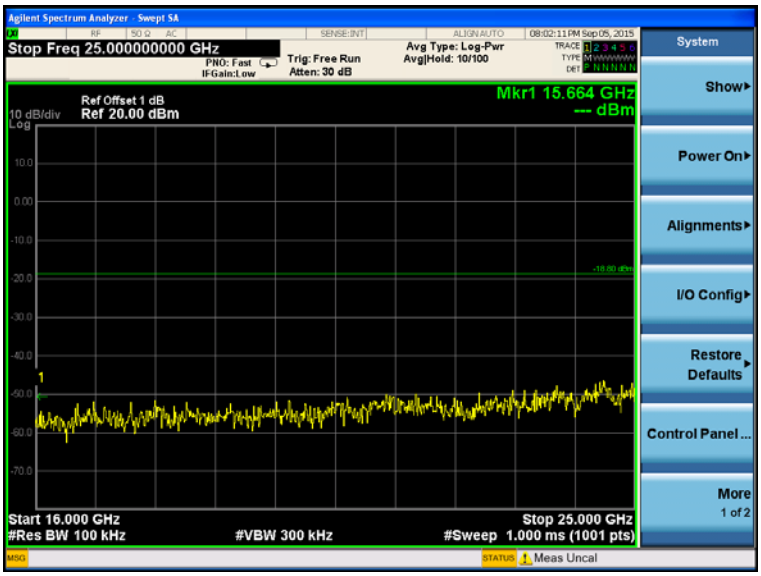

16GHz~25GHz

Test Mode:	802.11g	Test channel :	01

Channel 01

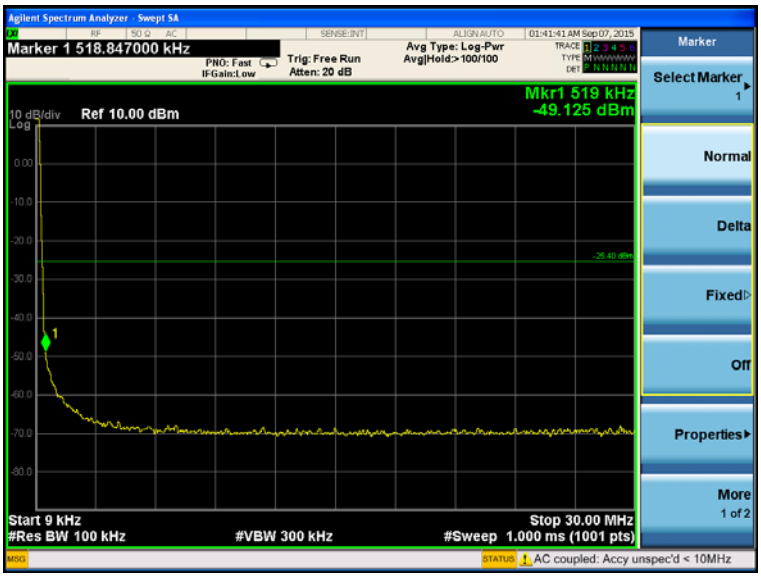

9KHz~30MHz

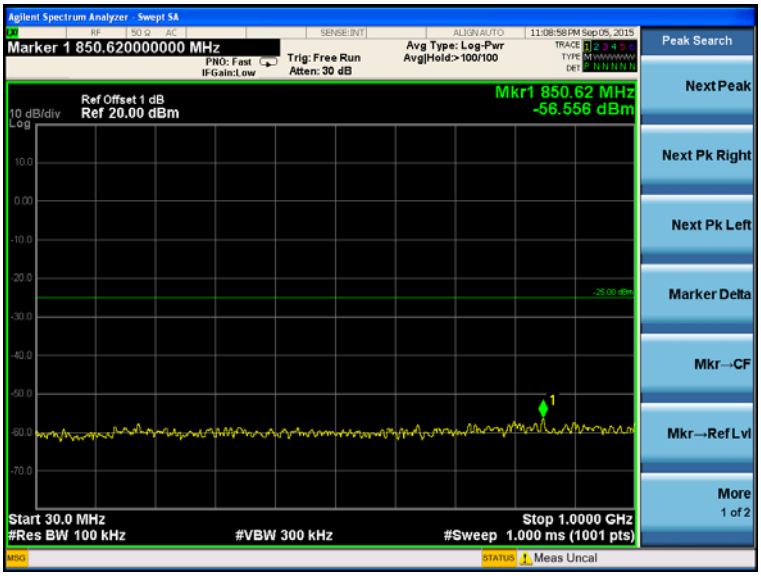

30M Hz~1GHz

Test Mode:	802.11g	Test channel :	01

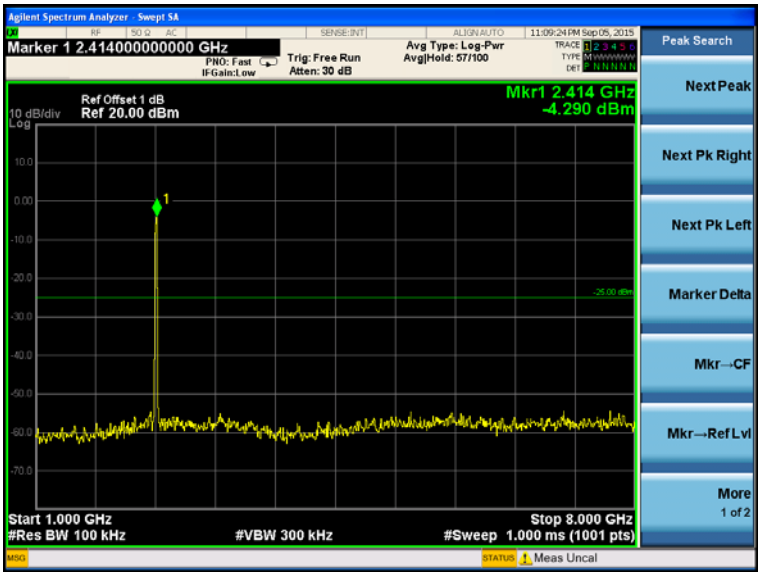

1GHz~8GHz

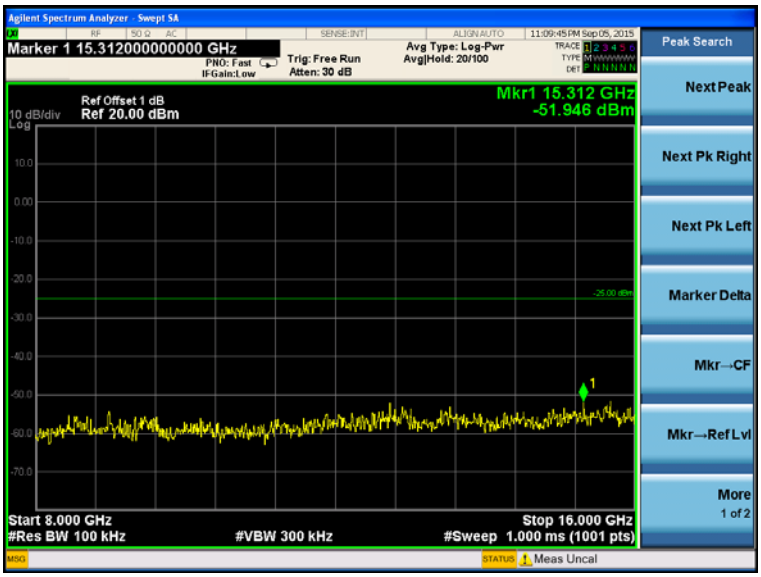

8GHz~16GHz

16GHz~25GHz

Test Mode:	802.11g	Test channel :	06

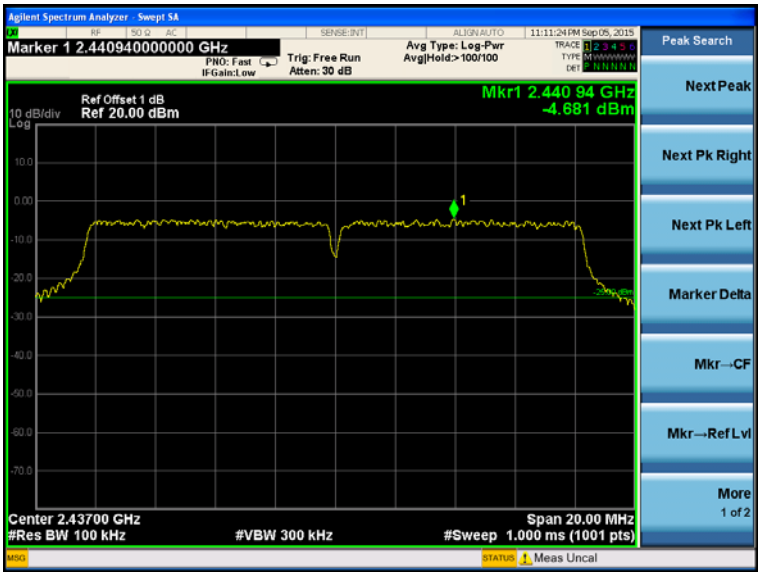

Channel 06

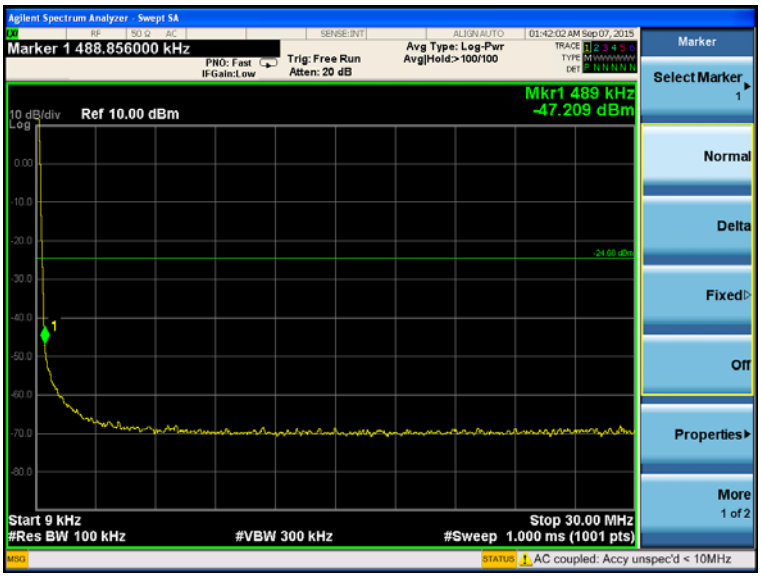

9KHz~30MHz

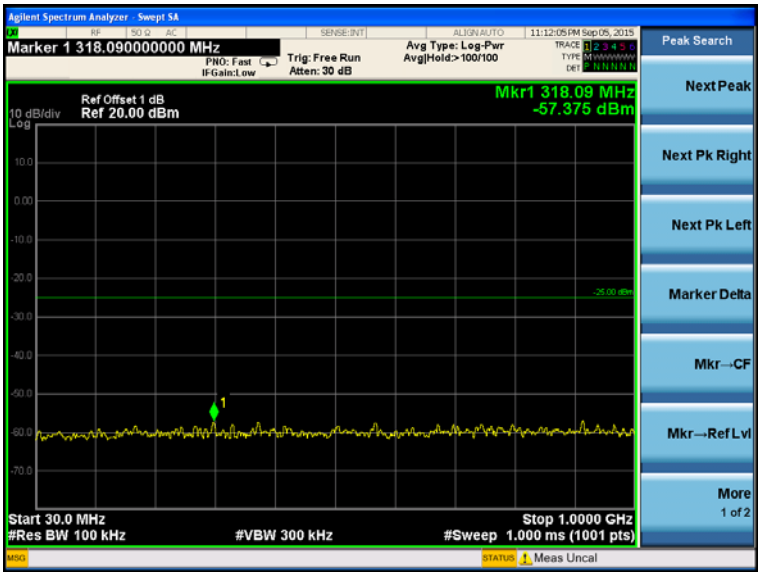

30M Hz~1GHz