



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

November 14, 2018

InVue
9201 Baybrook Lane
Charlotte, North Carolina 28277

Dear Adam Krause,

Enclosed is the EMC test report for limited compliance testing of the InVue, Crown Charger Vertical Unit and Crown Charger Horizontal Unit, for Class B device, tested to the requirements of Title 47 of the CFR, Ch. 1 Part 18 for Industrial, Scientific, and Medical (ISM) Equipment, Ultrasonic Devices..

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely,

Joel Huna
Documentation Department
MET Laboratories, Inc.

Reference: (\InVue\EMC99782-FCC18 Rev. 4)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.





Electromagnetic Compatibility Test Report

for

**InVue
Crown Charger Vertical Unit and Crown Charger Horizontal Unit**

Tested under

**Title 47 of the CFR, Part 18 for Industrial, Scientific, and Medical (ISM) Equipment,
Ultrasonic Devices**

MET Report: EMC99782-FCC18 Rev. 4

November 14, 2018

Bradley Jones
Test Engineer, EMC Lab

Joel Huna
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 18 for a Class B Digital Device under normal use and maintenance.

John Mason
Director, Electromagnetic Compatibility Lab



Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	August 7, 2018	Initial Issue.
1	August 17, 2018	Updated Company Name to “InVue”
2	October 26, 2018	Customer Corrections.
3	November 8, 2018	TCB Corrections.
4	November 14, 2018	TCB Corrections.



Table of Contents

1.0 Testing Summary	7
2.0 Equipment Configuration	8
2.1 Overview.....	8
2.2 Test Site	9
2.3 Measurement Uncertainty	9
2.4 Description of Test Sample	9
2.5 Equipment Configuration.....	9
2.6 Support Equipment	10
2.7 Ports and Cabling Information	10
2.8 Mode of Operation.....	12
2.9 Method of Monitoring EUT Operation	12
2.10 Modifications	12
2.10.1 Modifications to EUT	12
2.10.2 Modifications to Test Standard.....	12
2.11 Disposition of EUT	12
2.12 Test Software Used	12
3.0 Electromagnetic Compatibility Emission Criteria	13
3.1 Conducted Emission Limits	13
3.2 Radiated Emission: Limits of Electromagnetic Radiation Disturbance	17
4.0 Test Equipment	22



List of Tables

Table 1: Testing Summary	7
Table 2: EUT Overview	8
Table 3: Uncertainty Calculations Summary	9
Table 4: Equipment Configuration.....	9
Table 5: Support Equipment	10
Table 6: Ports and Cabling Information	10
Table 7: Conducted Limits for ISM (Ultrasonic Equipment) calculated from FCC Part 18 Section 18.307(a).....	13
Table 8: Conducted Emissions at the Mains Terminal (120 VAC/60 Hz), Vertical Unit, Phase Test Results	14
Table 9: Conducted Emissions at the Mains Terminal (120 VAC/60 Hz), Vertical Unit, Neutral Test Results	14
Table 10: Test Equipment List.....	22

List of Figures

Figure 1. Block Diagram of Test Configuration	11
---	----



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
d	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
ESD	Electrostatic Discharge
EUT	Equipment Under Test
f	Frequency
CISPR	Comite International Special des Perturbations Radioelectriques (International Special Committee on Radio Interference)
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μF	microfarad
μs	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
V/m	Volts per meter
VCP	Vertical Coupling Plane

1.0 Testing Summary

The following tests specified below were performed with the following results.

Reference and Test Description	Results	Comments
Title 47 of the CFR, Part 18 - 18.307 (a) Conducted Emission Limits for Industrial, Scientific, and Medical (ISM) Equipment, Ultrasonic Devices	Compliant	Measured emissions were within applicable limits.
Title 47 of the CFR, Part 18 - 18.305 (b) Radiated Emission Limits for Industrial, Scientific, and Medical (ISM) Equipment, Ultrasonic Devices	Compliant	Measured emissions were within applicable limits.

Table 1: Testing Summary



2.0 Equipment Configuration

2.1 Overview

MET Laboratories, Inc. was contracted by InVue to perform testing on the Crown Charger Vertical Unit and Crown Charger Horizontal Unit, under InVue purchase order number 57874.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the InVue, Crown Charger Vertical Unit and Crown Charger Horizontal Unit.

In accordance with §2.955(a) (3), the following data is presented in support of the verification of the InVue, Crown Charger Vertical Unit and Crown Charger Horizontal Unit. InVue should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Crown Charger Vertical Unit and Crown Charger Horizontal Unit has been **permanently** discontinued, as per §2.955(b).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Crown Charger Vertical Unit and Crown Charger Horizontal Unit
Model(s) Covered:	Crown Charger Vertical Unit and Crown Charger Horizontal Unit
FCC ID:	2AFR8F1703A
Primary Power as Tested:	5 VDC
Equipment Emissions Class:	B
Highest Clock Frequency:	16MHz
Evaluated by:	Bradley Jones
Report Date:	November 14, 2018

Table 2. EUT Overview



2.2 Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA, Baltimore #0591.01.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

2.3 Measurement Uncertainty

Test Method	Typical Expanded Uncertainty	K	Confidence Level
RF Frequencies	± 4.52 Hz	2	95%
RF Power Conducted Emissions	± 2.32 dB	2	95%
RF Power Conducted Spurious Emissions	± 2.25 dB	2	95%
RF Power Radiated Emissions	± 3.01 dB	2	95%

Table 3. Uncertainty Calculations Summary

2.4 Description of Test Sample

The InVue Crown Charger Vertical Unit and Crown Charger Horizontal Unit, Equipment Under Test (EUT), is a wireless charger for a stylus. It is intended to use in retail store environment. Its main functions are to charge the stylus and secure the EUT from thefts.

2.5 Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
A	Vertical Stylus Holder	F1703	F1703110	N/A	05
C	Power Injection Cable	F1703	F1703102	N/A	00

Table 4. Equipment Configuration



2.6 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	Power Supply	InVue	PS515-US	Not available
D	Stylus	Confidential	Confidential	Not Available
F	InVue Alarm Unit	InVue	ZA2600-W	Not available

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

Table 5. Support Equipment

2.7 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	Vin	2 conductor, 24 awg,	1	1	1.020	No	B.Vout
2	Vstylus	2 conductor, 24 awg 1 conductor, 28 awg	1	1	1.020	No	C.Vpass
3	RFout	Wireless, no cables	1	1	N/A	No	D.RFin

Table 6. Ports and Cabling Information

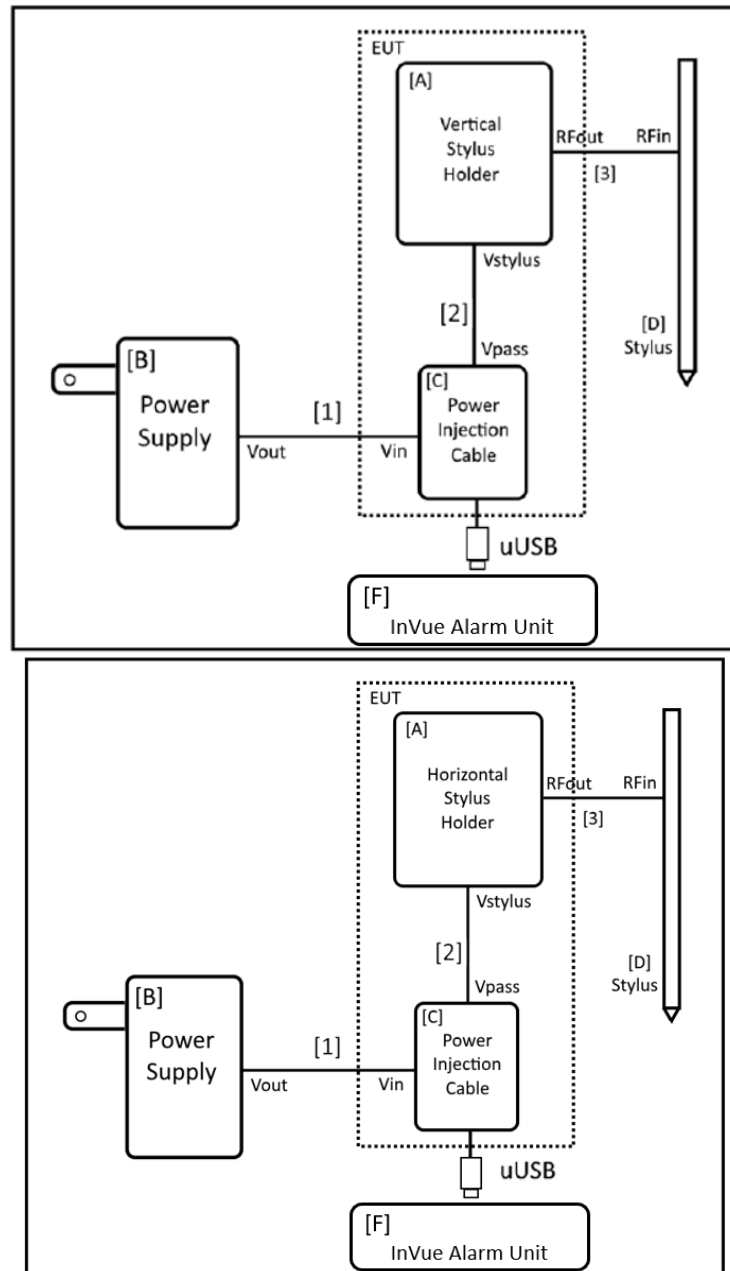


Figure 1. Block Diagram of Test Configuration



2.8 Mode of Operation

The EUT is simulated normal operation by inserting (for a vertical unit) the stylus or putting on top (for a horizontal unit) stylus. Other normal operation is to remove the stylus from the EUT.

2.9 Method of Monitoring EUT Operation

Measure voltage of the stylus. If the EUT is charging, the voltage will stay at maximum charged voltage around 2.5V.

2.10 Modifications

2.10.1 Modifications to the EUT

No modifications were made to the EUT.

2.10.2 Modifications to the Test Standard

No modifications were made to the test standard.

2.11 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned to InVue upon completion of testing.

2.12 Test Software Used

Conducted Emissions - Trace Data Grabber version 01/26/2016

Radiated Emissions- EMC-REG-TDS-11, Radiated Emissions Prescan.xls version 06/29/11

3.0 Electromagnetic Compatibility Emission Criteria

3.1 Conducted Emission Limits

Test Requirement(s): **18.307** For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 Ohms Line Impedance Stabilization Network (LISN).

(b) All other part 18 consumer devices:

Frequency of Emission (MHz)	18.307(a) ISM Conducted Limits (dB μ V)	
	Quasi-Peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5	56	46
5 - 30	60	50
Note 1 — The lower limit shall apply at the transition frequencies.		
Note 2 — *The limit decreases linearly with the logarithm if the frequency in the range 0.05 MHz to 0.5 MHz.		

Table 7. Conducted Limits for ISM (Ultrasonic Equipment) calculated from FCC Part 18 Section 18.307(a)

18.311 The measurement techniques which will be used by the FCC to determine compliance with the technical requirements of this part are set out in FCC Measurement Procedure MP-5, “Methods of Measurements of Radio Noise Emissions from ISM equipment”. Although the procedures in MP-5 are not mandated, manufacturers are encouraged to follow the same techniques which will be used by the FCC.

Test Procedure:

The EUT was setup on a wooden table, 80cm above the ground plane. The method of testing, test conditions, and test procedures of CISPR 22 were used. The EUT was powered through a 50 Ω /50 μ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 20 dB of the limit, six highest peaks were re-measured using a quasi-peak and average detector.



Environmental Conditions for Conducted Emissions	
Ambient Temperature (°C)	23.7
Relative Humidity (%)	38

Test Results: The EUT was **compliant** with the of this section. Measured emissions were within applicable limits.

Test Technician(s): Donald Salguero

Test Date(s): July 30, 2018


Conducted Emissions at the Mains Terminal Test Data:

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.153	46.58	0	46.58	65.84	-19.26	27.68	0	27.68	55.84	-28.16
0.375	42.45	0	42.45	58.39	-15.94	33.3	0	33.3	48.39	-15.09
0.5125	28.21	0	28.21	56	-27.79	21.12	0	21.12	46	-24.88
0.67	29.03	0	29.03	56	-26.97	19.65	0	19.65	46	-26.35
3.258	18.89	0	18.89	56	-37.11	11.77	0	11.77	46	-34.23
5.357	28.82	0	28.82	60	-31.18	16.65	0	16.65	50	-33.35


Table 8: Conducted Emissions at the Mains Terminal (120 VAC/60 Hz), Vertical Unit, Phase Test Results

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.154	49.08	0	49.08	65.78	-16.7	29.36	0	29.36	55.78	-26.42
0.41	35.05	0	35.05	57.65	-22.6	28.75	0	28.75	47.65	-18.9
0.675	28.05	0	28.05	56	-27.95	22.91	0	22.91	46	-23.09
4.93	25.24	0	25.24	56	-30.76	19.92	0	19.92	46	-26.08
5.188	26.53	0	26.53	60	-33.47	20.79	0	20.79	50	-29.21
12.81	14.02	0.1	14.12	60	-45.88	5.052	0.1	5.152	50	-44.848


Table 9: Conducted Emissions at the Mains Terminal (120 VAC/60 Hz), Vertical Unit, Neutral Test Results

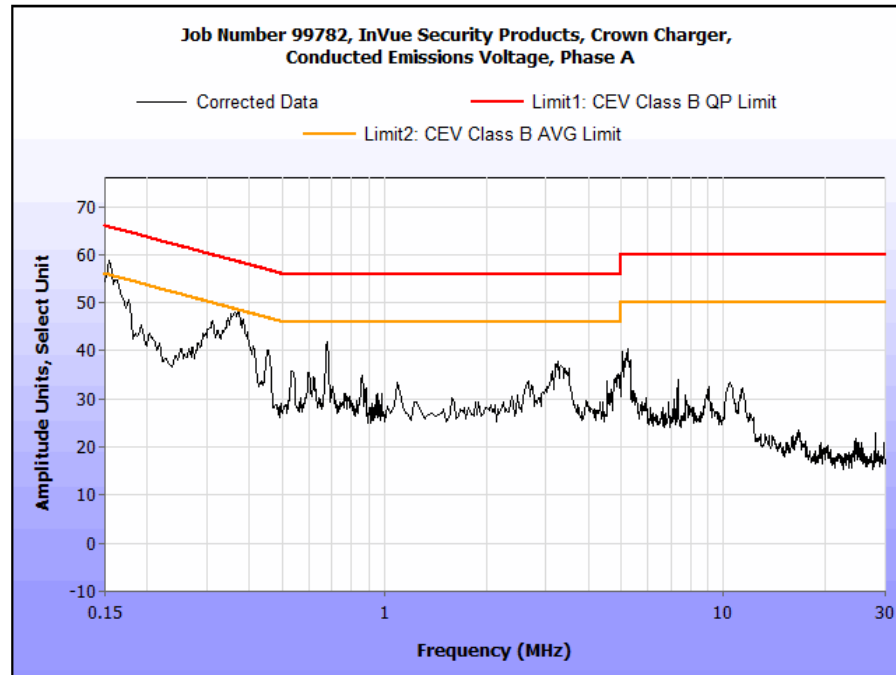


Plot 1. Conducted Emissions at the Mains Terminal Test Data, Vertical Unit – Phase Plot

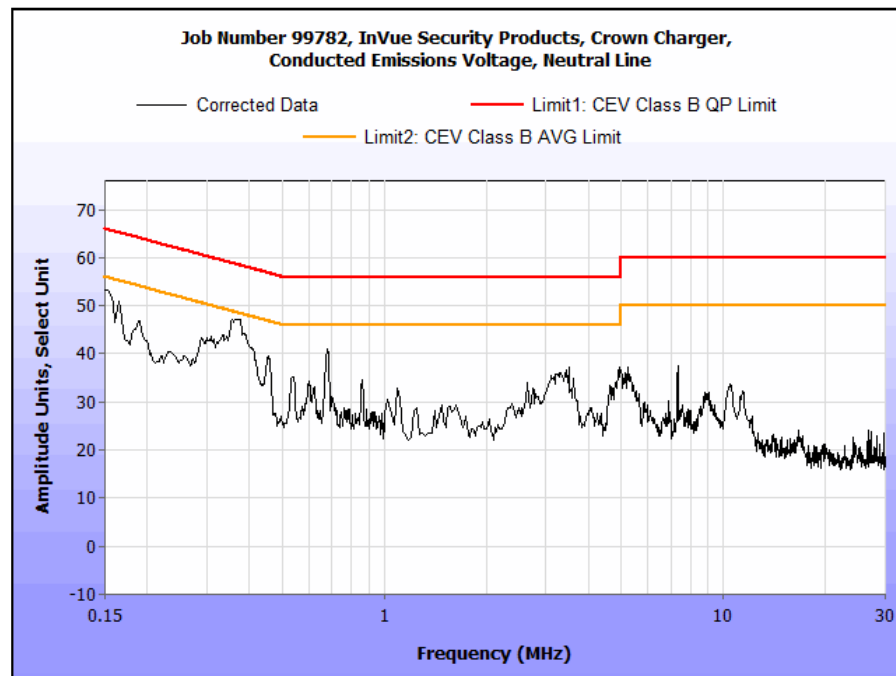

Plot 2. Conducted Emissions at the Mains Terminal Test Data, Vertical Unit – Neutral Plot

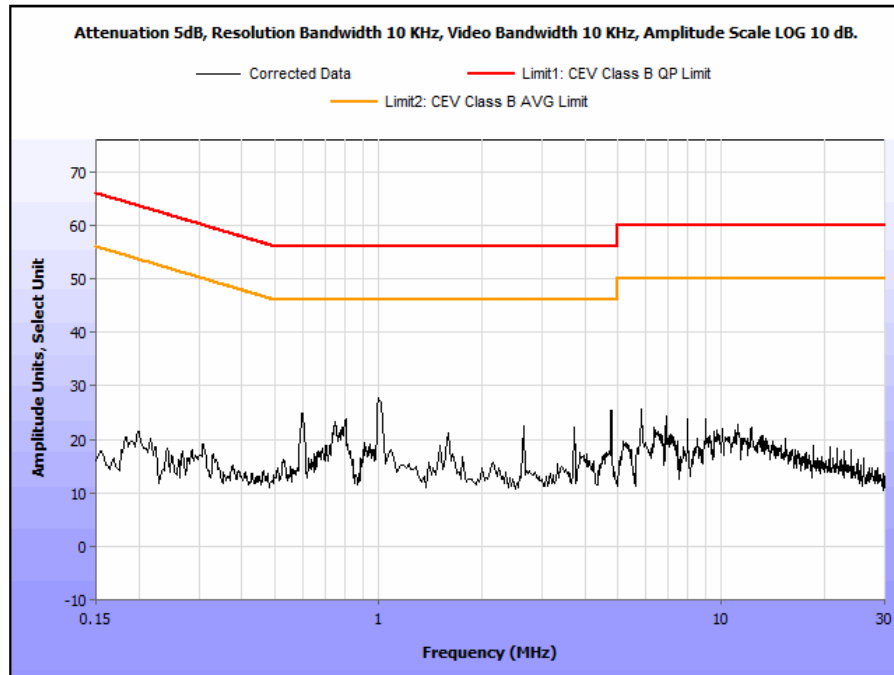

Plot 3. Conducted Emissions at the Mains Terminal Test Data, Horizontal Unit – Phase Plot

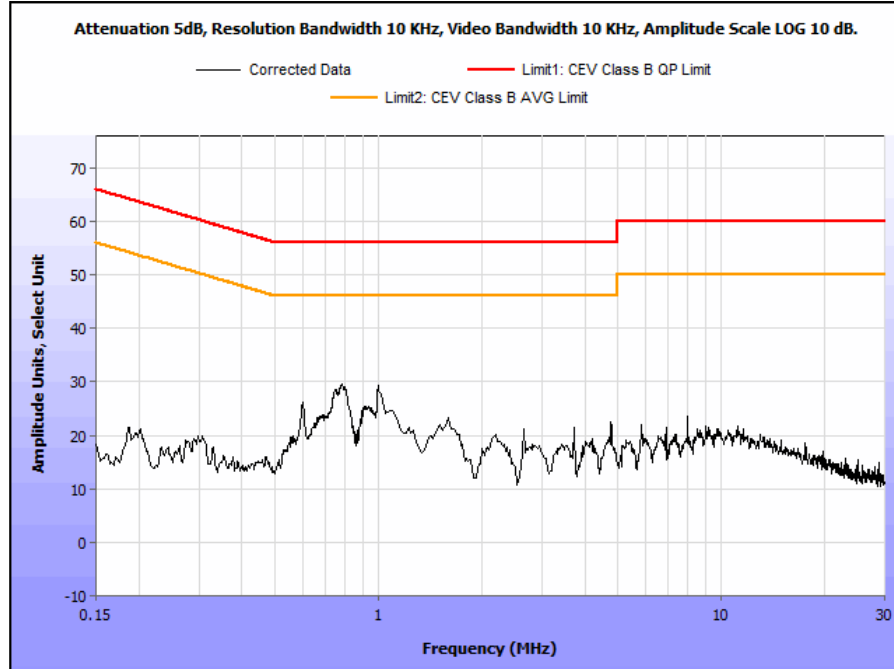

Plot 4. Conducted Emissions at the Mains Terminal Test Data, Horizontal Unit – Neutral Plot



3.2 Radiated Emission: Limits of Electromagnetic Radiation Disturbance

Test Method: ANSI C63.4- American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

Test Standard: Title 47 of the Code of Federal Regulations (CFR), Part 18 Subpart C

Test Requirement(s): 18.305 Field strength limits:
(a) ISM equipment operating on a frequency specified in § 18.301 is permitted unlimited radiated energy in the band specified for that frequency.
(b) The field strength levels of emissions which lie outside the bands specified in § 18.301, unless otherwise indicated, shall not exceed the following:

Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)
Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 ¹ 300
Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (²)	1,600 (²)
Medical diathermy	Any ISM frequency Any non-ISM frequency	Any Any	25 15	300 300
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/\text{F}(\text{kHz})$ $2,400/\text{F}(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300
	490 to 1,600 kHz Above 1,600 kHz	Any Any	$24,000/\text{F}(\text{kHz})$ 15	30 30
Induction cooking ranges	Below 90 kHz On or above 90 kHz	Any Any	1,500 300	⁴ 30 ⁴ 30

¹ Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment operating below 1000 MHz is not permitted the increase in field strength otherwise permitted here for power over 500 watts.

² Reduced to the greatest extent possible.

³ Field strength may not exceed 10 µV/m at 1600 meters. Consumer equipment is not permitted the increase in field strength otherwise permitted here for over 500 watts.

⁴ Induction cooking ranges manufactured prior to February 1, 1980, shall be subject to the field strength limits for miscellaneous ISM equipment.



18.311 The measurement techniques which will be used by the FCC to determine compliance with the technical requirements of this part are set out in FCC Measurement Procedure MP-5, "Methods of Measurements of Radio Noise Emissions from ISM equipment". Although the procedures in MP-5 are not mandated, manufacturers are encouraged to follow the same techniques which will be used by the FCC.

Test Procedures:

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. Measurements were made with a loop antenna.

Radiated Emission measurements were made in accordance with the general procedures of ANSI C63.4-1992 "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz" as well as the procedures delineated in FCC Measurement Procedure MP-5, "Methods of Measurements of Radio Noise Emissions from ISM equipment".

For each point of measurement, the turntable was rotated, the positions of the interface cables were varied, and the antenna height was varied in order to find the maximum radiated emissions.

Measurements were made at 3m. The limit line was corrected for 3m using $40 \log(d_1/d_2)$.

Environmental Conditions for Radiated Emissions	
Ambient Temperature (°C)	23.5
Relative Humidity (%)	35

Test Results:


The EUT was **compliant** with the requirements of this section. Measured emissions were within applicable limits.

Test Technician(s):


Bradley Jones

Test Date(s):


July 30, 2018

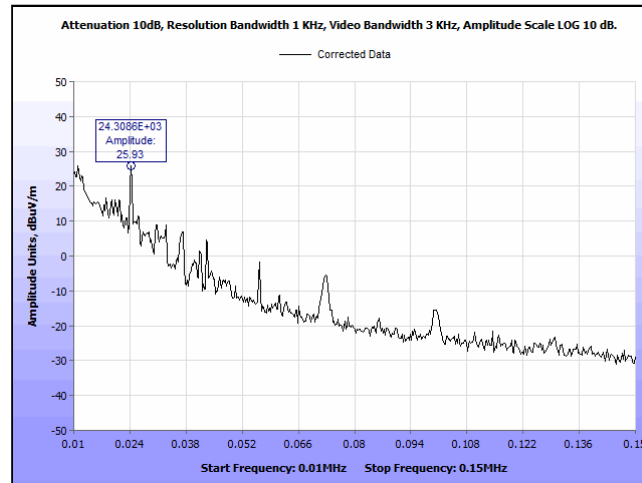


Plot 5. Radiated Emission – (10 – 150 kHz), Vertical Unit, Pen Charging Plot

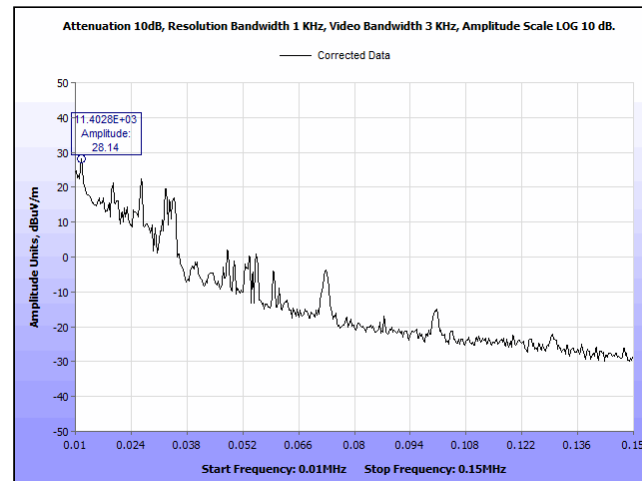


Plot 6. Radiated Emission – (10 – 150 kHz), Vertical Unit, Pen not Charging Plot

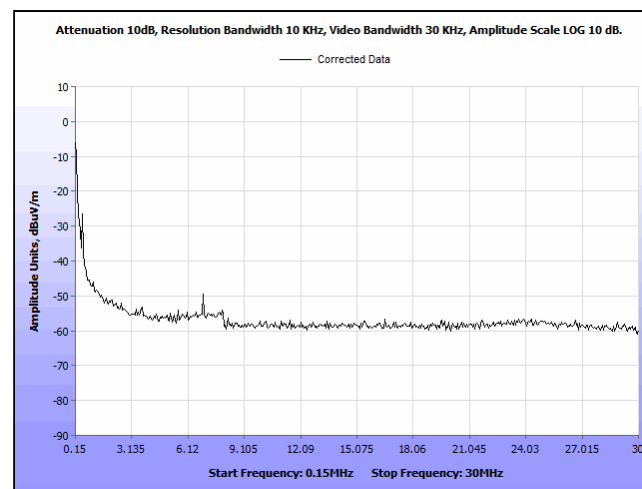


Plot 7. Radiated Emission – (150 kHz – 30 MHz), Vertical Unit, Pen Charging Plot

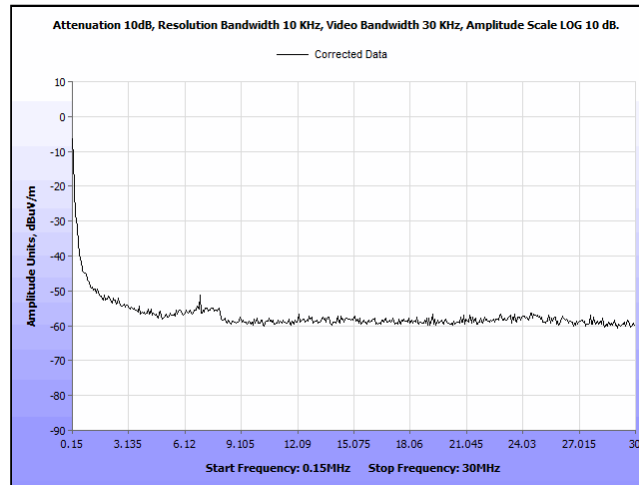


Plot 8. Radiated Emission – (150 kHz – 30 MHz), Vertical Unit, Pen not Charging Plot

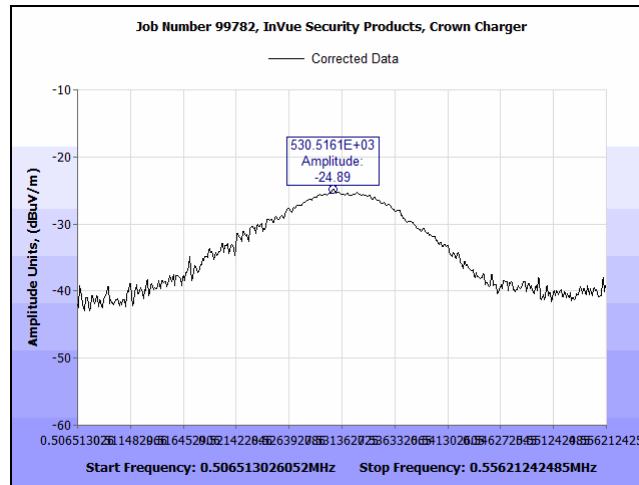


Plot 9. Radiated Emission – Fundamental, Vertical Unit, Plot

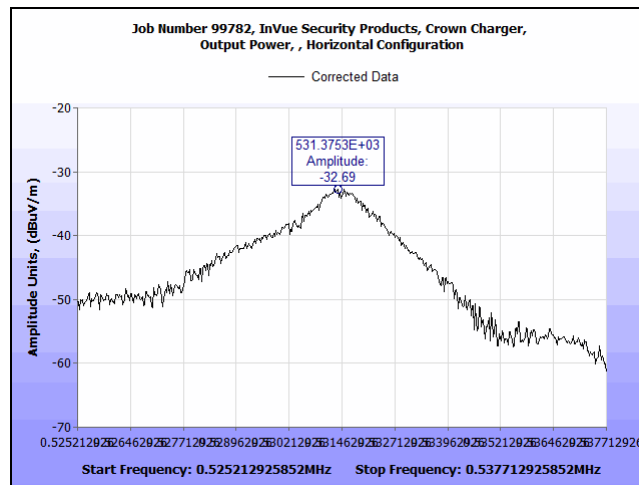

Plot 10. Radiated Emission – Fundamental, Horizontal Unit, Plot

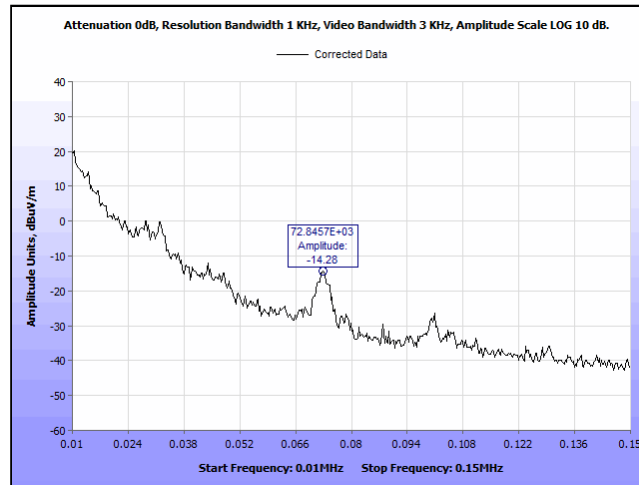

Plot 11. Radiated Emission – (10 - 150 kHz), Horizontal Unit, Plot

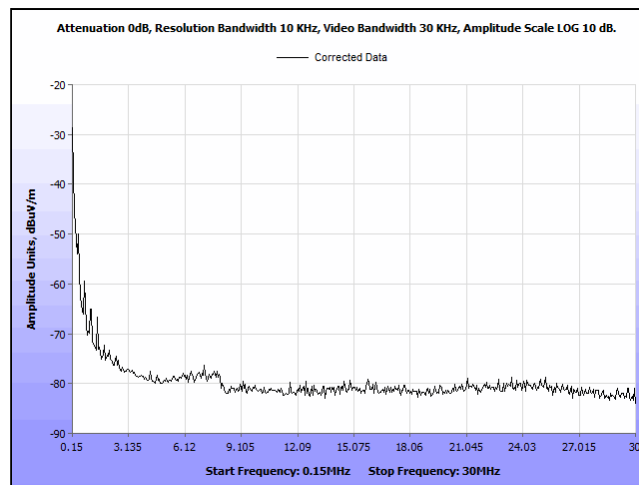

Plot 12. Radiated Emission – (150kHz – 30MHz), Horizontal Unit, Plot



4.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

Test Name: Conducted Emissions (AC Power)				Test Date(s): July 30, 2018	
Asset	Equipment	Manufacturer	Model	Calibration Date	Calibration Due Date
1T4563	LISN (10 AMP)	Solar Electronics Company	9322-50-R-10-BNC	03/13/2017	09/13/2018
1T4612	Spectrum Analyzer	Agilent Technologies	E4407B	05/15/2018	11/15/2019
1T4503	Shielded Room	Universal Shielding Corp	N/A	Not Required	
Test Name: Radiated Emissions				Test Date(s): July 30, 2018	
Asset	Equipment	Manufacturer	Model	Calibration Date	Calibration Due Date
1T4800	Antenna, Loop	EMCO	6512	04/12/2017	10/12/2018
1U0150	EMI Test Receiver	Rohde & Schwarz	ESIB7	06/29/2018	07/14/2018
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	01/31/2016	01/31/2019
Note: Functionally verified test equipment is verified using calibrated instrumentation at the time of testing.					

Table 10: Test Equipment List