




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (50) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

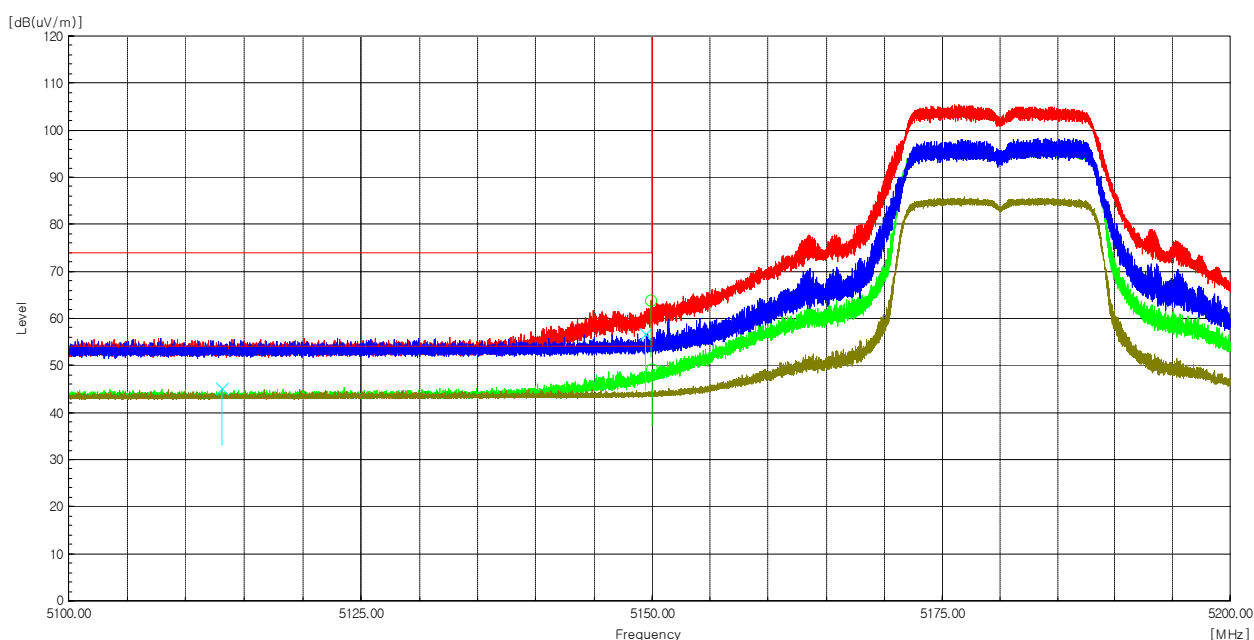

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 113.1	V	41.2	3.9	-----	45.1	-----	54.0	-----	8.9	Average
5 149.5	V	52.9	3.9	56.8	-----	74.0	-----	17.2	-----	Peak
5 149.9	H	59.8	3.9	63.7	-----	74.0	-----	10.3	-----	Peak
5 150.0	H	45.2	3.9	-----	49.1	-----	54.0	-----	4.9	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (51) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

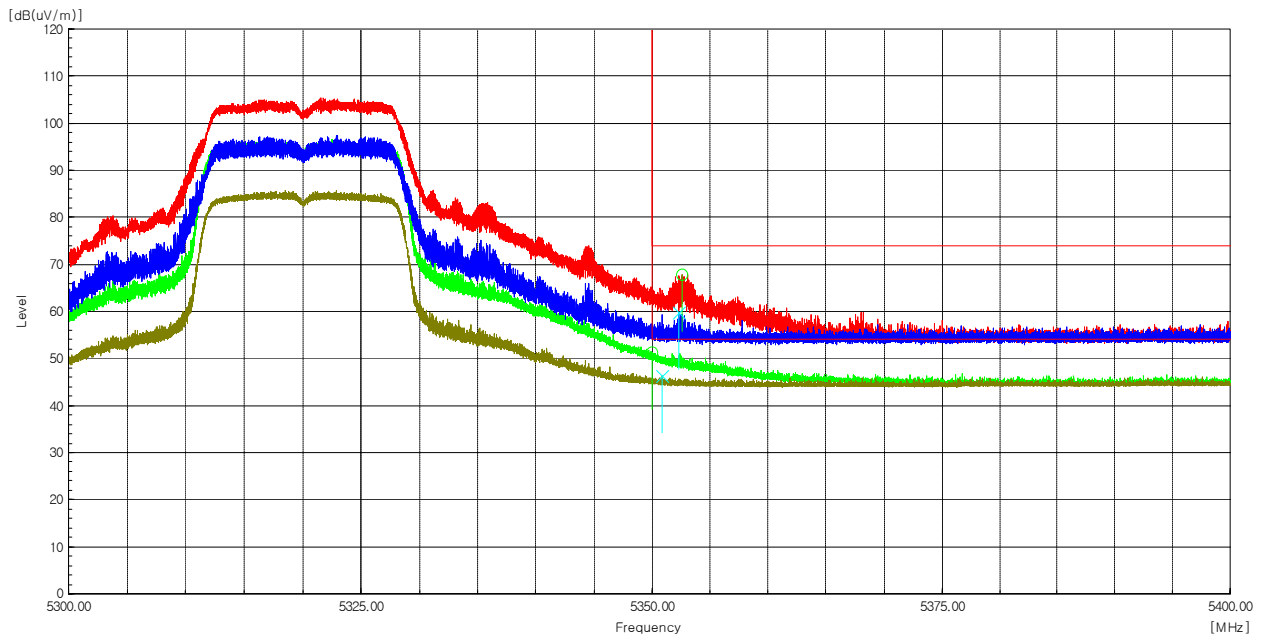

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 350.0	H	47.0	4.3	-----	51.3	-----	54.0	-----	2.7	Average
5 350.9	V	41.9	4.3	-----	46.2	-----	54.0	-----	7.8	Average
5 352.3	V	55.4	4.3	59.7	-----	74.0	-----	14.3	-----	Peak
5 352.6	H	63.5	4.3	67.8	-----	74.0	-----	6.2	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (52) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

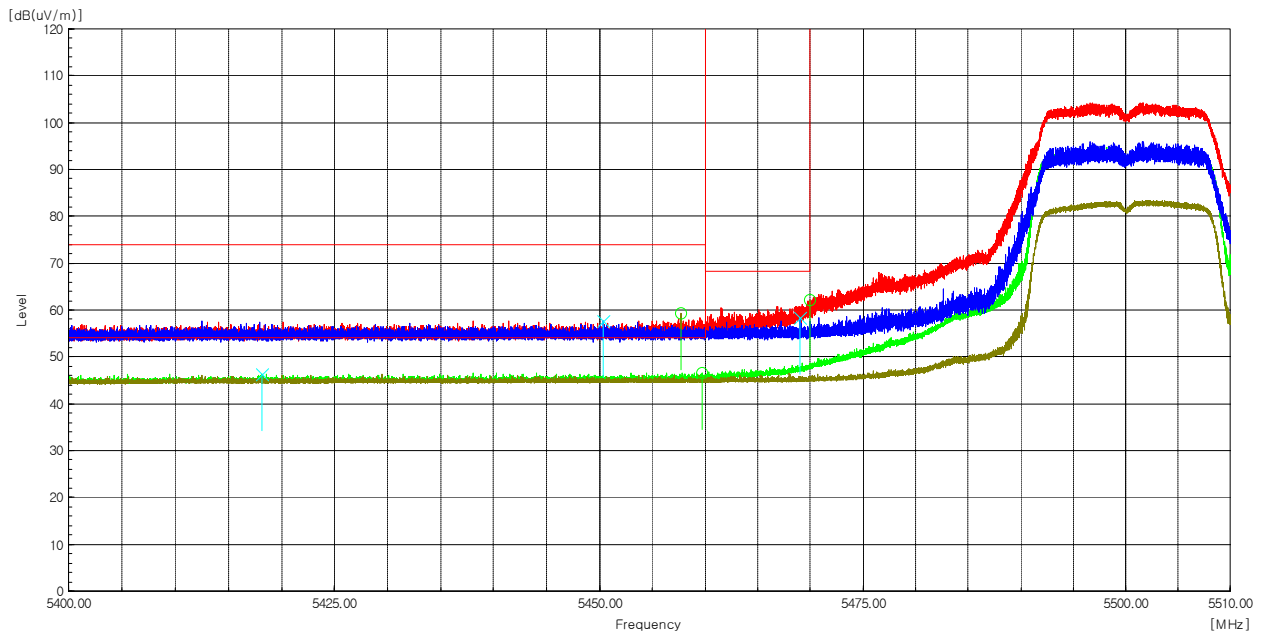

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 418.2	V	41.6	4.7	----	46.3	----	54.0	----	7.7	Average
5 450.4	V	52.7	4.9	57.6	----	74.0	----	16.4	----	Peak
5 457.7	H	54.4	4.9	59.3	----	74.0	----	14.7	----	Peak
5 459.8	H	41.6	4.9	----	46.5	----	54.0	----	7.5	Average
5 469.0	V	53.4	5.0	58.4	----	68.2	----	9.8	----	Peak
5 470.0	H	57.2	5.0	62.2	----	68.2	----	6.0	----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (53) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

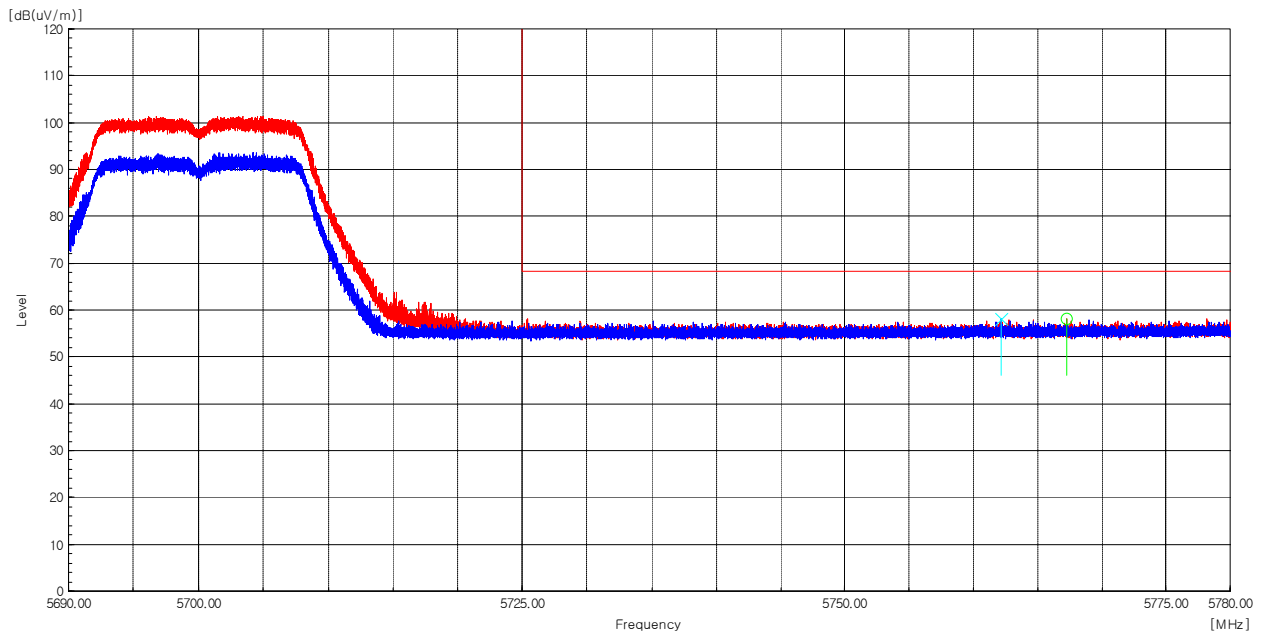

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5762.1	V	52.5	5.6	58.1	-	68.2	-	10.1	-	Peak
5767.3	H	52.6	5.6	58.2	-	68.2	-	10.0	-	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (54) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

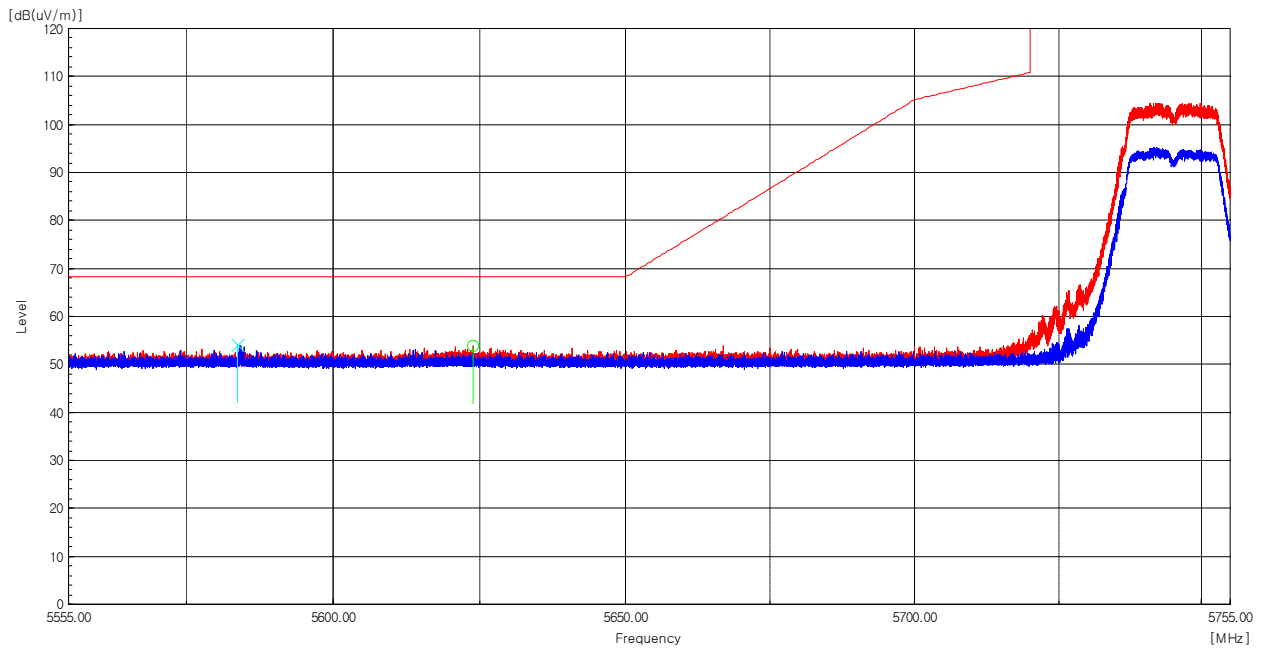

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 583.7	V	49.0	5.2	54.2	-	68.2	-	14.0	-	Peak
5 623.8	H	48.5	5.3	53.8	-	68.2	-	14.4	-	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (55) / (67) pages

Worst Case Mode :	802.11a
Worst Case Transfer Rate :	6 Mbps
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

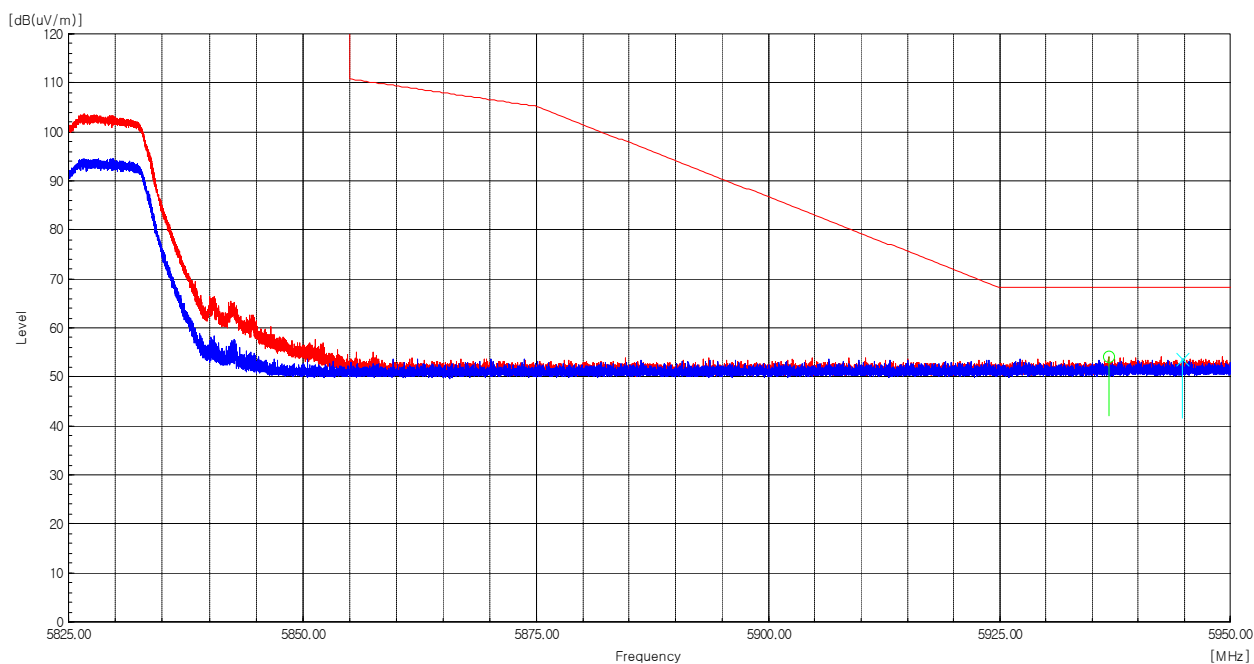

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 936.8	H	47.7	6.4	54.1	-	68.2	-	14.1	-	Peak
5 944.8	V	47.1	6.5	53.6	-	68.2	-	14.6	-	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (56) / (67) pages

Test mode : Transmitter, 802.11n_HT20

The requirements are:

☒ Complies

Test Data

Ch.36(5 180 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 357.9	V	50.7	12.7	-----	63.4	-----	74	-----	10.6	-----	Peak
10 357.9	V	36.9	12.7	-----	-----	49.6	-----	54	-----	4.4	Average
10 360.6	H	38.1	12.7	-----	-----	50.8	-----	54	-----	3.2	Average
10 366.7	H	51.2	12.7	-----	63.9	-----	74	-----	10.1	-----	Peak

Ch.40(5 200 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 389.1	V	49.6	12.6	-----	62.2	-----	74	-----	11.8	-----	Peak
10 393.9	H	51.8	12.6	-----	64.4	-----	74	-----	9.6	-----	Peak
10 397.3	V	37.1	12.6	-----	-----	50	-----	54.0	-----	4.3	Average
10 401.4	H	38.2	12.7	-----	-----	51	-----	54.0	-----	3.1	Average

Ch.48(5 240 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 476.2	V	51.4	12.8	-----	64.2	-----	74.0	-----	9.8	-----	Peak
10 476.9	H	51.6	12.8	-----	64.4	-----	74.0	-----	9.6	-----	Peak
10 480.9	H	38.2	12.8	-----	-----	51.0	-----	54.0	-----	3.0	Average
10 480.9	V	38.2	12.8	-----	-----	51.0	-----	54.0	-----	3.0	Average

Ch.52(5 260 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 511.5	H	50.9	12.9	-----	63.8	-----	74.0	-----	10.2	-----	Peak
10 517.7	H	37.8	12.9	-----	-----	50.7	-----	54.0	-----	3.3	Average
10 521.1	V	37.3	12.9	-----	-----	50.2	-----	54.0	-----	3.8	Average
10 521.7	V	50.1	12.9	-----	63.0	-----	74.0	-----	11.0	-----	Peak

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (57) / (67) pages

Ch.60(5 300 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 600.6	V	37.1	13.3	-----	-----	50.4	-----	54.0	-----	3.6	Average
10 601.3	H	50.5	13.3	-----	63.8	-----	74.0	-----	10.2	-----	Peak
10 603.3	H	37.2	13.3	-----	-----	50.5	-----	54.0	-----	3.5	Average
10 603.3	V	48.7	13.3	-----	62.0	-----	74.0	-----	12.0	-----	Peak

Ch.64(5 320 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
10 633.9	H	51.9	13.4	-----	65.3	-----	74.0	-----	8.7	-----	Peak
10 640.1	H	37.3	13.5	-----	-----	50.8	-----	54.0	-----	3.2	Average
10 641.4	V	37.3	13.5	-----	-----	50.8	-----	54.0	-----	3.2	Average
10 644.1	V	50.5	13.5	-----	64.0	-----	74.0	-----	10.0	-----	Peak

Ch.100(5 500 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.120(5 600 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.140(5 700 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.144(5 720 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
-----------------	-----	----------------	---------------	------------------------	---------------------	---------------------	---------------------	---------------------	----------------	----------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (58) / (67) pages

Ch.149(5 745 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	------------------------	------------------------	------------------------	------------------------	-------------------	-------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.157(5 785 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	------------------------	------------------------	------------------------	------------------------	-------------------	-------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Ch.165(5 825 MHz)

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Duty Cycle Factor [dB]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
--------------------	-----	-------------------	------------------	------------------------------	------------------------	------------------------	------------------------	------------------------	-------------------	-------------------	------

The emissions above 1 GHz were 20 dB lower than the limit.

Remarks

1. The unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Y axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain
4. Radiated Emission measured at 100 % duty cycle.




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (59) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 180 MHz
Channel :	36

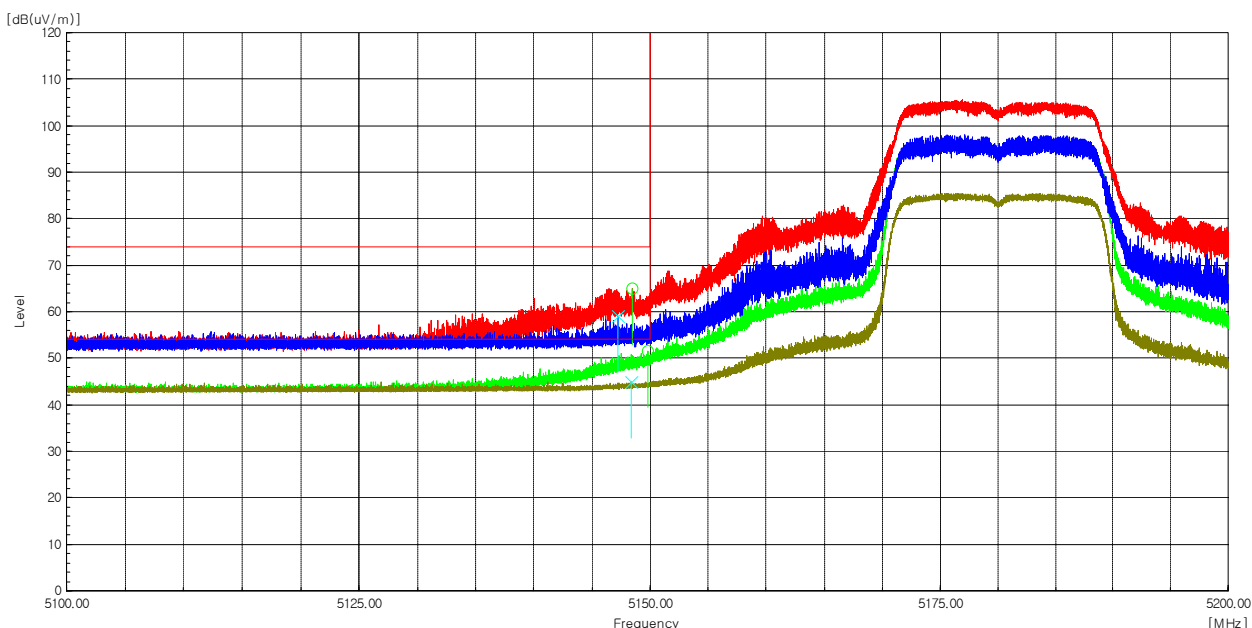

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 147.3	V	55.1	3.9	59.0	-----	74.0	-----	15.0	-----	Peak
5 148.4	V	41.1	3.9	-----	45.0	-----	54.0	-----	9.0	Average
5 148.5	H	61.1	3.9	65.0	-----	74.0	-----	9.0	-----	Peak
5 149.8	H	47.7	3.9	-----	51.6	-----	54.0	-----	2.4	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (60) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 320 MHz
Channel :	64

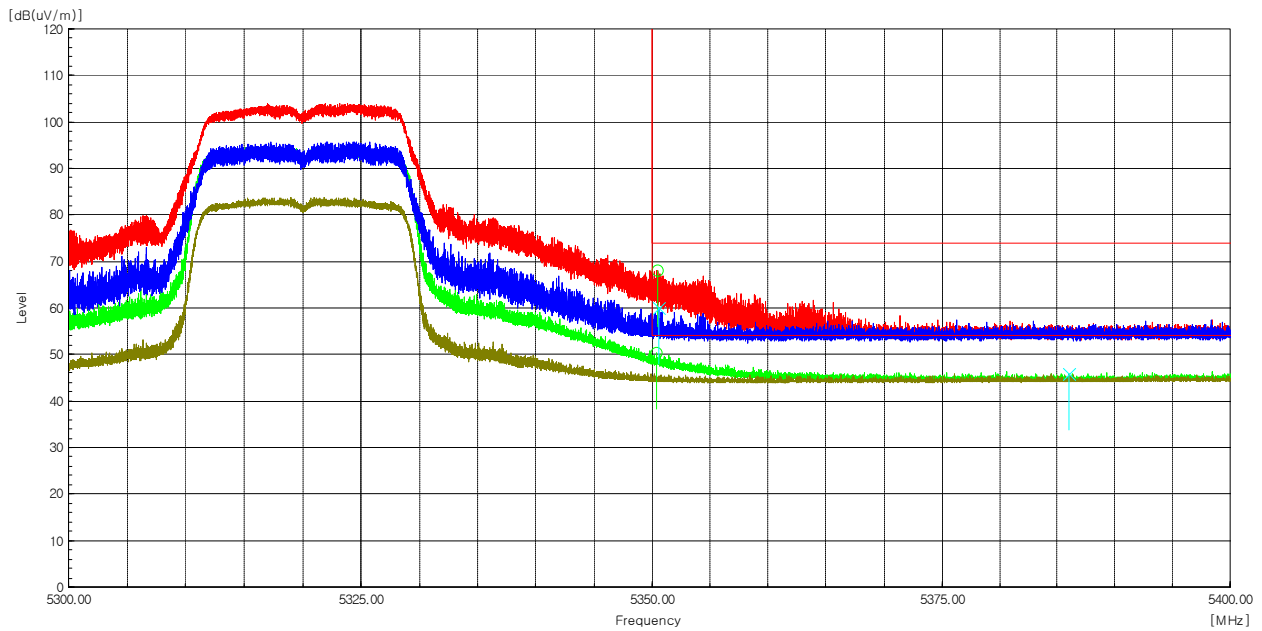

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 350.4	H	45.9	4.3	-----	50.2	-----	54.0	-----	3.8	Average
5 350.5	H	63.8	4.3	68.1	-----	74.0	-----	5.9	-----	Peak
5 350.6	V	55.8	4.3	60.1	-----	74.0	-----	13.9	-----	Peak
5 386.0	V	41.4	4.5	-----	45.9	-----	54.0	-----	8.1	Average

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (61) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 500 MHz
Channel :	100

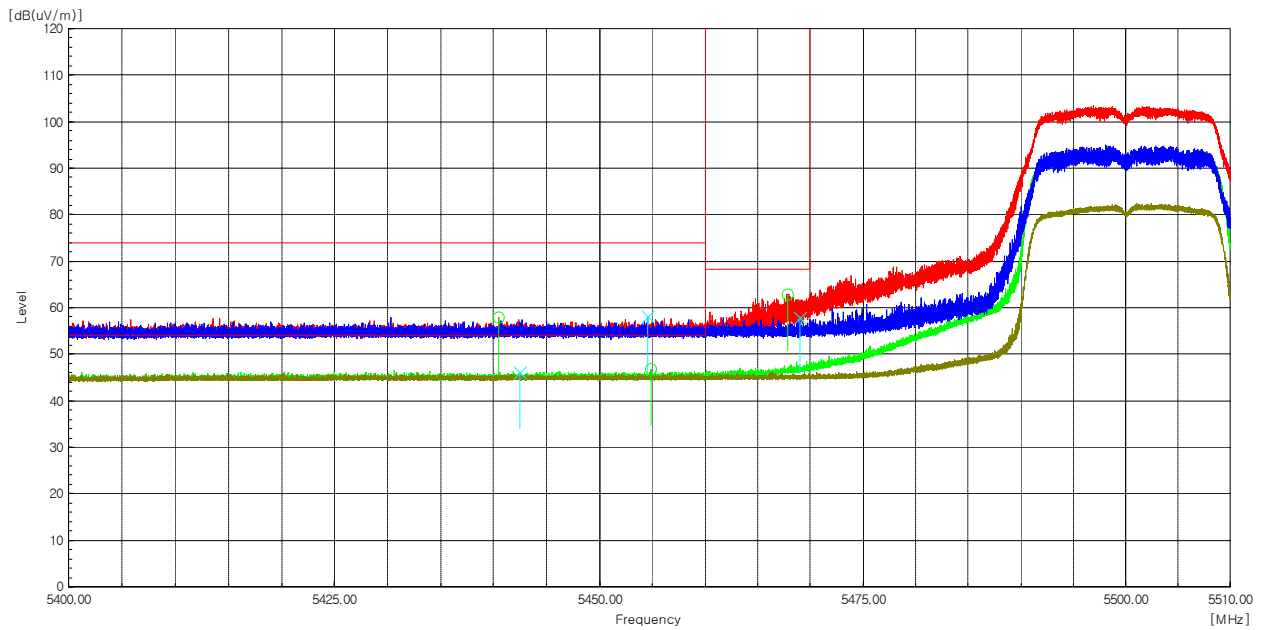

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 440.5	H	53.0	4.9	57.9	-----	74.0	-----	16.1	-----	Peak
5 442.5	V	41.2	4.9	-----	46.1	-----	54.0	-----	7.9	Average
5 454.6	V	53.1	4.9	58.0	-----	74.0	-----	16.0	-----	Peak
5 454.9	H	41.8	4.9	-----	46.7	-----	54.0	-----	7.3	Average
5 467.9	H	57.9	5.0	62.9	-----	68.2	-----	5.3	-----	Peak
5 469.0	V	52.9	5.0	57.9	-----	68.2	-----	10.3	-----	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (62) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 700 MHz
Channel :	140

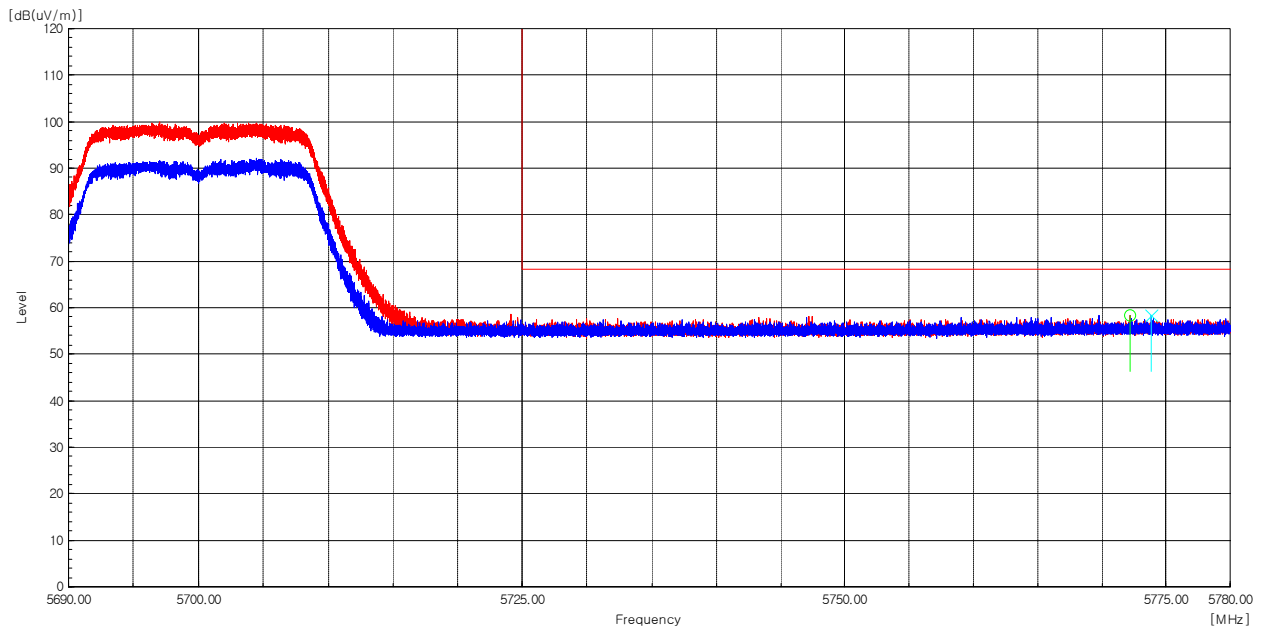

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 772.2	H	52.8	5.6	58.4	-	68.2	-	9.8	-	Peak
5 773.9	V	52.9	5.6	58.5	-	68.2	-	9.7	-	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (63) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 745 MHz
Channel :	149

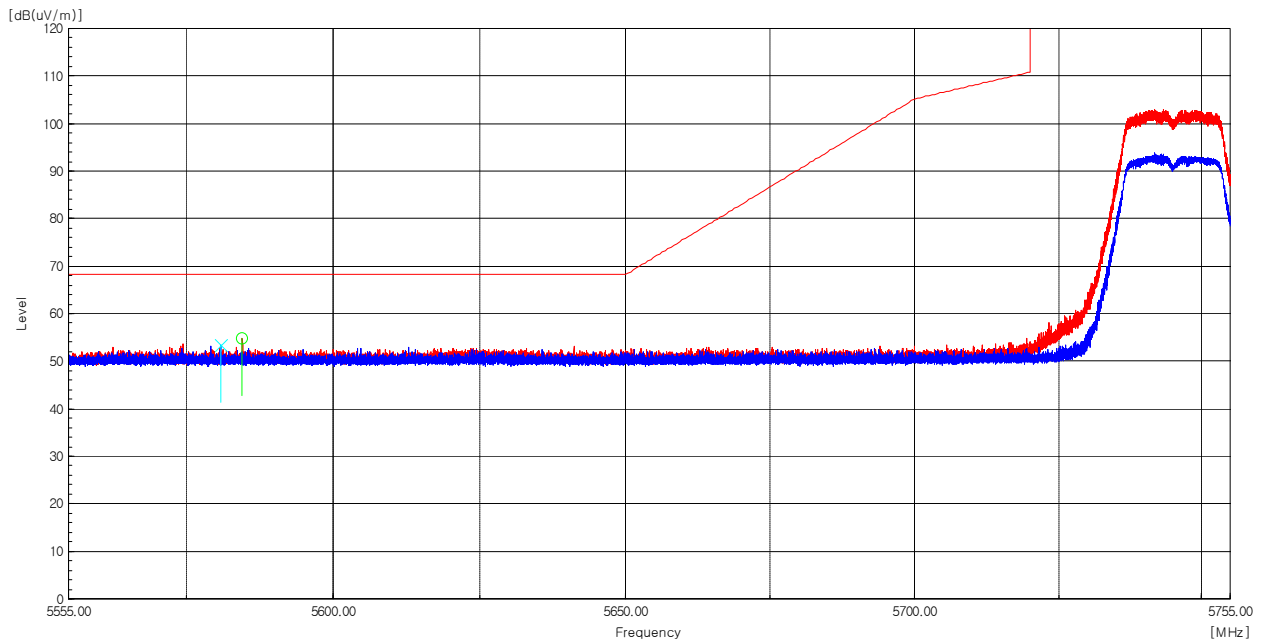

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 584.5	H	49.6	5.2	54.8	-	68.2	-	13.4	-	Peak
5 580.7	V	48.1	5.2	53.3	-	68.2	-	14.9	-	Peak

Radiated Restricted Band Edge Plot




CTK Co., Ltd.

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (64) / (67) pages

Worst Case Mode :	802.11n20
Worst Case Transfer Rate :	MCS 0
Distance of Measurements :	3 Meters
Operating Frequency :	5 825 MHz
Channel :	165

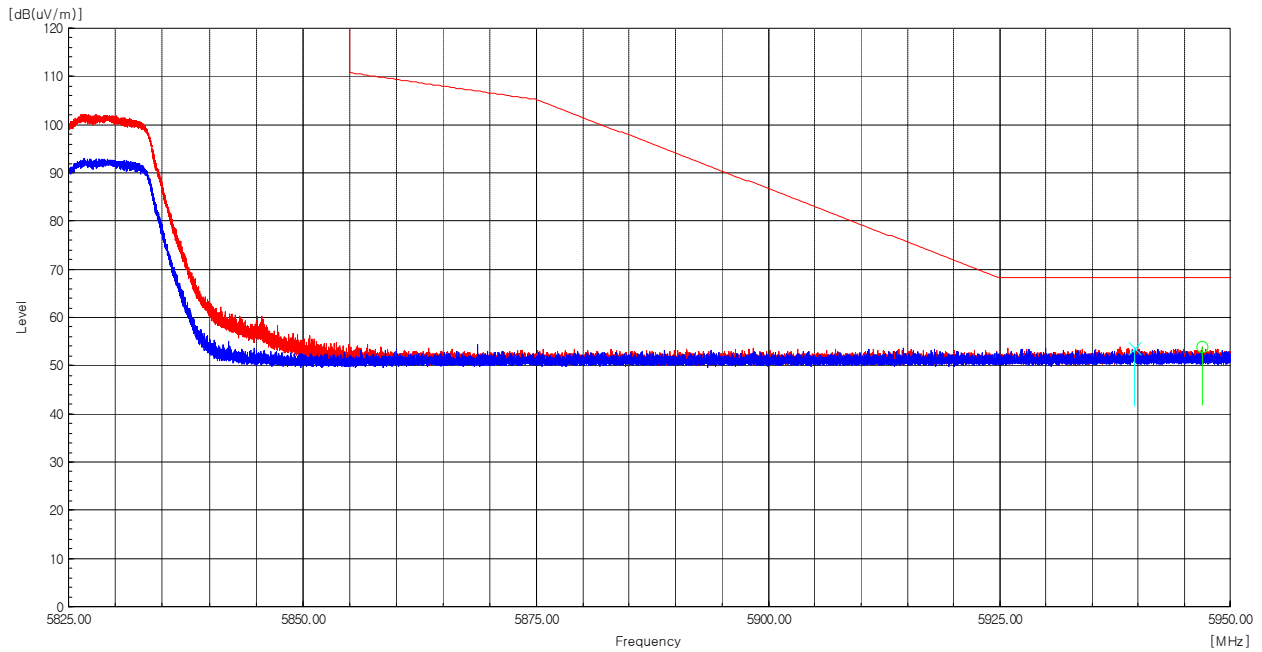

Frequency [MHz]	(P)	Reading [dBuV]	c.f [dB(1/m)]	Level PK [dB(uV/m)]	Level AV [dB(uV/m)]	Limit PK [dB(uV/m)]	Limit AV [dB(uV/m)]	Margin PK [dB]	Margin AV [dB]	Note
5 939.6	V	47.2	6.5	53.7	-	68.2	-	14.5	-	Peak
5 946.9	H	47.3	6.5	53.8	-	68.2	-	14.4	-	Peak

Radiated Restricted Band Edge Plot

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (65) / (67) pages

4.6 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

ANSI C63.10-2020 - Section 6.2

RSS-Gen - Section 8.8

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average**
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* The level decreases linearly with the logarithm of the frequency.

** A linear average detector is required.

Test Results

The requirements are:

☒ Complies



CTK Co., Ltd.


(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (66) / (67) pages

Test Data

Test mode : Transmit, 802.11a (Worst case)

Full Spectrum

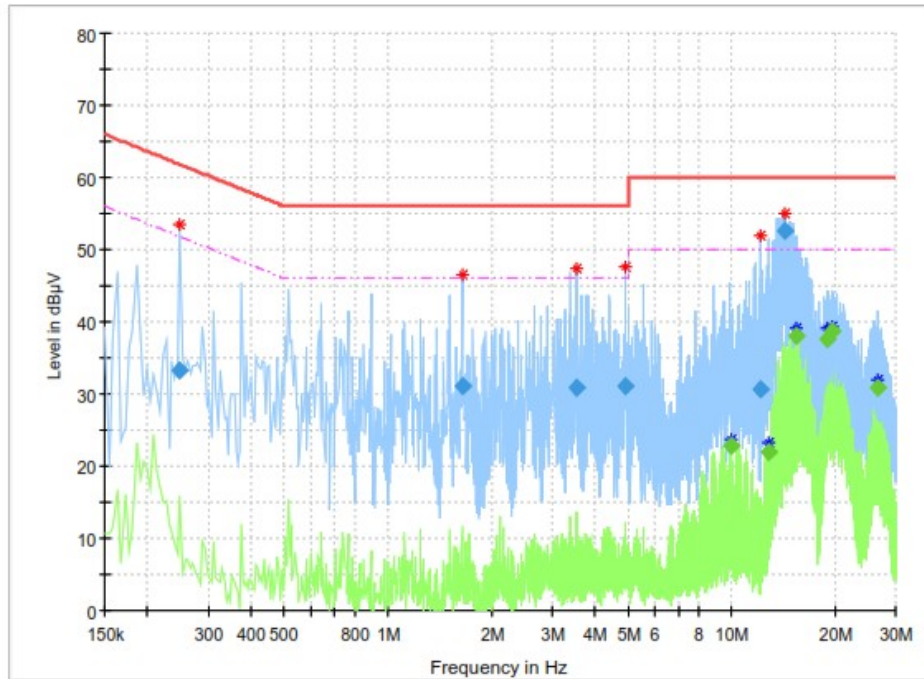

Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.249000	33.15	---	61.79	28.64	15000.0	9.000	L1	ON	10.0
1.644000	31.12	---	56.00	24.88	15000.0	9.000	L1	ON	10.0
3.534000	30.87	---	56.00	25.13	15000.0	9.000	N	ON	10.0
4.929000	31.09	---	56.00	24.91	15000.0	9.000	N	ON	10.1
9.960000	---	22.93	50.00	27.07	15000.0	9.000	L1	ON	10.3
12.129000	30.54	---	60.00	29.46	15000.0	9.000	N	ON	10.6
12.759000	---	21.87	50.00	28.13	15000.0	9.000	N	ON	10.7
14.320500	52.50	---	60.00	7.50	15000.0	9.000	L1	ON	10.6
15.400500	---	38.13	50.00	11.87	15000.0	9.000	N	ON	10.9
19.000500	---	37.53	50.00	12.47	15000.0	9.000	L1	ON	10.8
19.639500	---	38.65	50.00	11.35	15000.0	9.000	N	ON	11.1
26.560500	---	30.85	50.00	19.15	15000.0	9.000	N	ON	11.0

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si,
Gyeonggi-do, 17142, Korea
Tel: +82-1551-9871
Fax: +82-31-624-9501

REPORT No.:
CTK-2026-02453
Page (67) / (67) pages

APPENDIX A – Test Equipment Used For Tests

No.	Name of Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	Signal Analyzer	Agilent	N9020A	MY50510324	2025-11-25	2026-11-25
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2026-03-12	2027-03-12
3	EMI TEST RECEIVER	Rohde & Schwarz	ESW44	102039	2025-04-28	2026-04-28
4	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2027-03-25	2028-03-25
5	Bilog Antenna	TESEQ	CBL6111D	60654	2025-08-21	2027-08-21
6	AMPLIFIER	SONOMA INSTRUMENT	310N	411011	2026-07-20	2027-07-20
7	ATTENUATOR	PASTERNAK	PE7AP006-06	L20210504000023	2026-07-20	2027-07-20
8	ATTENUATOR	NONE	6dB	190557	2025-09-18	2026-09-18
9	Preamplifier	Agilent	8449B	3008A00620	2026-03-11	2027-03-11
10	Double Ridged Guide Antenna	ETS-Lindgren	3115	00078895	2026-03-13	2027-03-13
11	Horn Antenna	SCHWARZBECK	BBHA9170	01153	2025-09-30	2026-09-30
12	Low Noise Amplifier	TESTEK	TK-PA1840H	210124-L	2025-09-30	2026-09-30
13	Band Reject Filter	Micro Tronics	BRM50702	G233	2025-11-25	2026-11-25
14	Band Reject Filter	Micro Tronics	BRM50716	G184	2025-11-25	2026-11-25
14	Spectrum Analyzer	Rohde & Schwarz	FSV40	101574	2026-01-13	2027-01-13
15	DC Power Supply	Agilent	E3632A	MY50370042	2026-07-03	2027-07-03
16	LISN	Rohde & Schwarz	ENV216	102698	2026-04-27	2027-04-27
17	EMI TEST RECEIVER	Rohde & Schwarz	ESR3	102826	2026-04-27	2027-04-27

No.	Cable	Manufacturer	Model No.	Serial No.	Check Date
1	RF Cable (Conducted)	Junkosha Inc.	MWX221	2008S252	2026-04-17
2	RF Cable (Line Conducted)	Canare Corporation	L-5D2W	N/A	2026-04-16
3	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	SUCOFLEX 104	MY27558/4	2026-04-16
4	RF Cable (9 kHz - 1 GHz Radiated)	HUBER+SUHNER	L-5D2W	N/A	2026-04-16
5	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	2008S246	2025-02-21-
6	RF Cable (1 GHz - 18 GHz Radiated)	Junkosha Inc.	MWX221	J0970749	2025-02-21-
7	RF Cable (1 GHz - 18 GHz Radiated)	Sensorview Co., LTD	13A26	TPC2204060007	2025-02-21-
8	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9S40	TPC2204060009	2025-02-21-
9	RF Cable (18 GHz - 40 GHz Radiated)	Sensorview Co., LTD	9A40	TP210713-001	2025-02-21-

-END-