

Test Report

Applicant : Shenzhen FeelStorm Technology Co.,Ltd.
Address : Floor 5th, Building C, Huawan Industrial Park, Gushu,
Xixiang Street, Bao'an District, Shenzhen.
Product Name : Video Baby Monitor
Brand Mark : N/A
Model : BM933
Series model : N/A
FCC ID : 2AFX2BM933-1
Report Number : BLA-EMC-202604-A8301
Date of Receipt : May 08, 2026
Date of Test : May 08, 2026 to May 22, 2026
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by: Mark Chen Review by: Xavier

Approved by: Bao Zheng

Issued Date: Jun. 05, 2026

BlueAsia Technical Services(Shenzhen) Co.,Ltd.

Address: No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	7
3 Test Configuration	8
3.1 Test mode	8
3.2 Operation Frequency each of channel	8
3.3 Test channel	9
3.4 Auxiliary equipment	10
3.5 Test environment	10
4 Laboratory information	11
4.1 Laboratory and accreditations	11
4.2 Measurement uncertainty	11
5 Test equipment	12
6 Test result	15
6.1 Antenna requirement	15
6.2 Conducted emissions at AC power line (150 kHz-30 MHz)	16
6.3 Conducted peak output Power	20
6.4 20dB Bandwidth	21
6.5 Conducted Band Edges Measurement	22
6.6 Conducted spurious emissions	23
6.7 Carrier Frequencies Separation	24
6.8 Hopping Channel Number	25
6.9 Dwell Time	26
6.10 Radiated spurious emissions	27
6.11 Radiated emissions which fall in the restricted bands	38
7 Appendix A	45
7.1 Maximum Conducted Output Power	45
7.2 -20dB Bandwidth	48
7.3 Occupied Channel Bandwidth	51

7.4 Band Edge	54
7.5 Band Edge(Hopping)	57
7.6 Conducted RF Spurious Emission	60
7.7 Carrier Frequencies Separation	64
7.8 Number of Hopping Channel	65
7.9 Dwell Time	66
Appendix B: photographs of test setup	68
Appendix C: photographs of EUT	70

Revise Record

Version No.	Date	Description
01	Jun. 05, 2026	Original

BlueAsia

1 General information

1.1 General information

Applicant	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.
Manufacturer	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.
Factory	Shenzhen FeelStorm Technology Co.,Ltd.
Address	Floor 5th, Building C, Huawan Industrial Park, Gushu, Xixiang Street, Bao'an District, Shenzhen.

1.2 General description of EUT

Product name	Video Baby Monitor	
Model no.	BM933	
Operation Frequency	2408MHz-2468MHz	
Modulation Type	GFSK	
Modulation Technique	Frequency Hopping Spread Spectrum(FHSS)	
Channel Spacing	4MHz	
Number of Channels	16	
Antenna Type	Wire antenna	
Antenna Gain	2.47dBi(Provided by customer)	
Power supply	Adapter	MODEL: KA06E-0501000US INPUT: AC 100-240V, 50/60Hz 0.25A Max OUTPUT: DC 5V, 1000mA
	Battery DC 3.8V	
Test Voltage	DC 3.8V	
Hardware Version	V1.0	
Software Version	V1.0	
Note: For a more detailed description, please refer to Specification or User's Manual supplied by		

the applicant and/or manufacturer.

BlueAsia

2 Test summary

No.	Test item	FCC standard	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 6.2	Pass
3	Conducted Peak Output Power	§ 15.247 (b)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 7.8.5	Pass
4	20dB Bandwidth	§ 15.247 (a)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 6.9.2	Pass
5	Conducted Band Edges Measurement	§ 15.247 (d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 6.10	Pass
6	Conducted Spurious Emissions	§ 15.247 (d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 7.8.7	Pass
7	Carrier Frequencies Separation	§ 15.247 (a)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 7.8.2	Pass
8	Hopping Channel Number	§ 15.247 (a)(1) (iii)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 7.8.3	Pass
9	Dwell Time	§ 15.247 (a)(1) (iii)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 7.8.4	Pass
10	Radiated Spurious Emissions	§ 15.247 (d) § 15209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 6.4,6.5,6.6	Pass
11	Radiated Emissions which fall in the restricted bands	§ 15.247 (d) § 15.205	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Clause 6.10.5, 7.8.8	Pass

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non-hopping mode all have been tested)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use; the EUT was operated in the engineering mode ^{Note 2} to fix the TX or Rx frequency that was for the purpose of the measurements.

Note 2: Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

Power level setup in software			
Test Software Name	Default		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK	CH1	2408	TX level : Default
	CH8	2436	
	CH16	2468	

3.2 Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2408MHz	8	2436MHz	15	2464MHz
2	2412MHz	9	2440MHz	16	2468MHz
3	2416MHz	10	2444MHz	---	---
4	2420MHz	11	2448MHz	---	---
5	2424MHz	12	2452MHz	---	---

6	2428MHz	13	2456MHz	---	---
7	2432MHz	14	2460MHz	---	---

3.3 Test channel

Channel	Frequency
The lowest channel	2408MHz
The middle channel	2436MHz
The Highest channel	2468MHz

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	Lenovo	E460C	N/A	From lab (No.BLA-ZC-BS-2022005)
--	--	--	--	--

Note:

--" mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 3.8V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia Technical Services (Shenzhen) Co.,Ltd.
Address:	No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
Test Firm Registration No.:	923526
ISED CAB identifier No.:	CN0028
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2025/06/09	2026/06/08
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2025/11/12	2026/11/11
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2025/08/05	2026/08/04
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2025/08/05	2026/08/04
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01 G-30	SKET	SK2021060801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40 G-50dB	SKET	SK2022071301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

Conducted Emissions

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-001	Shield room	8*3*3	SKET	N/A	2025/11/12	2026/11/11
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-011	LISN	ENV216	R&S	101372	2025/08/05	2026/08/04
BLA-EMC-033	Impedance transformer	DC-2GHz	DFXP	N/A	2025/06/09	2026/06/08
BLA-EMC-041	LISN	AT166-2	ATTEN	AKK180600003	2025/08/05	2026/08/04
BLA-EMC-045	Impedance stable network	ISNT8-cat 6	TESEQ	53580	2025/08/05	2026/08/04
BLA-EMC-095	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01045	2025/06/09	2026/06/08
BLA-EMC-096	Single-channel vehicle artificial power network	NNBM 8124	Schwarzbeck	01075	2025/06/09	2026/06/08
BLA-XC-05	Coaxial Cable	N/A	BlueAsia	V05	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2025/11/12	2026/11/11
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2025/08/05	2026/08/04
BLA-EMC-042	Power sensor	RPR3006W	DARE	14I00889SN042	2025/08/05	2026/08/04
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2025/08/05	2026/08/04
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2025/06/09	2026/06/08

BLA-EMC-079	Spectrum	N9020A	Agilent	MY544201 61	2025/08/05	2026/08/04
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS14109 4	2025/06/09	2026/06/08

Test Software Record:

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S003	EZ-EMC	EZ	EEMC-3A1+	CE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement


Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is Wire antenna. The best case gain of the antenna is 2.47dBi.

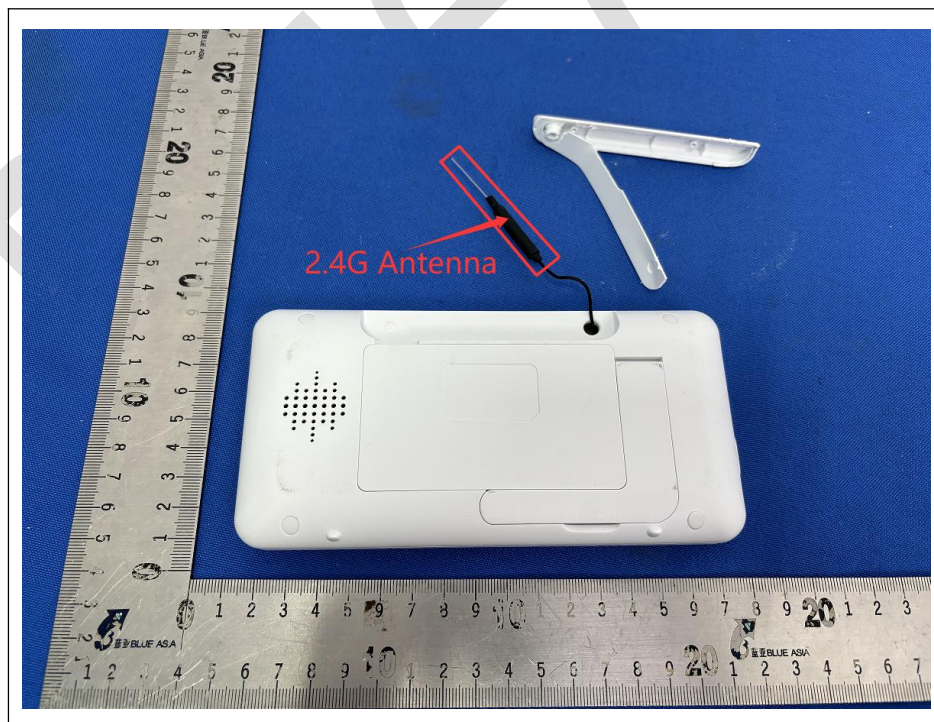

6.2 Conducted emissions at AC power line (150 kHz-30 MHz)


Test Standard	47 CFR Part 15, Subpart C 15.207
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.2
Test Mode (Pre-Scan)	TX lowest, middle, highest channel
Test Mode (Final Test)	TX lowest channel

6.2.1 Limit

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

6.2.2 Test setup

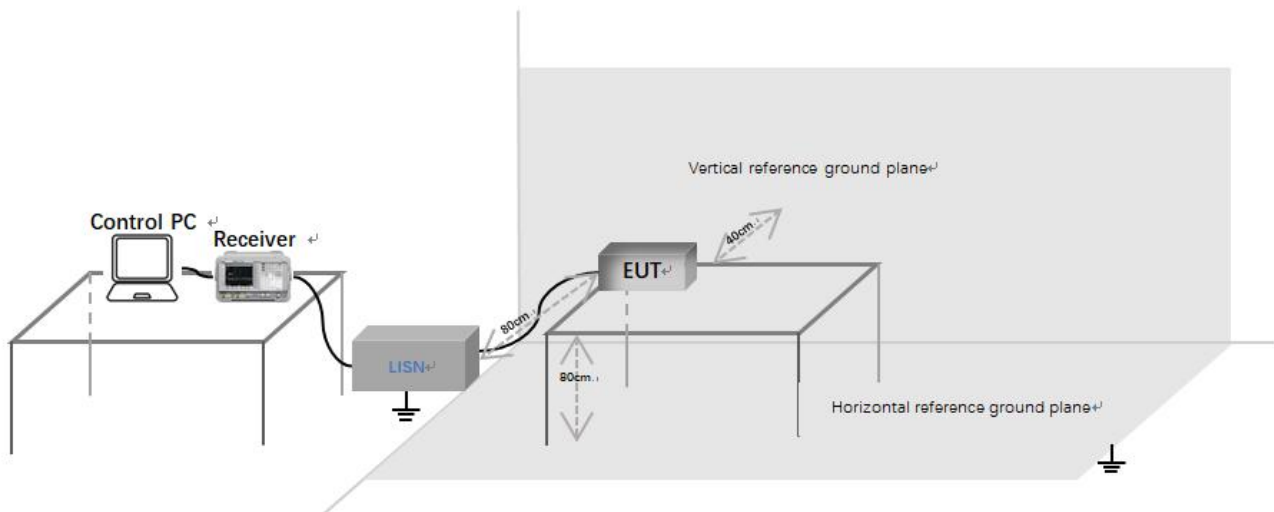

Description of test setup connection:

- Connect the control PC to the receiver through a USB to GPIB cable;
- The receiver is connected to the LISN through a coaxial line;
- Connect the power port of LISN to the EUT.


6.2.3 Procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

LISN=Read Level+ Cable Loss+ LISN Factor

6.2.4 Test data


[Test Mode: TX-2408MHz]; [Line: Line];[Voltage:AC 120V/60Hz]

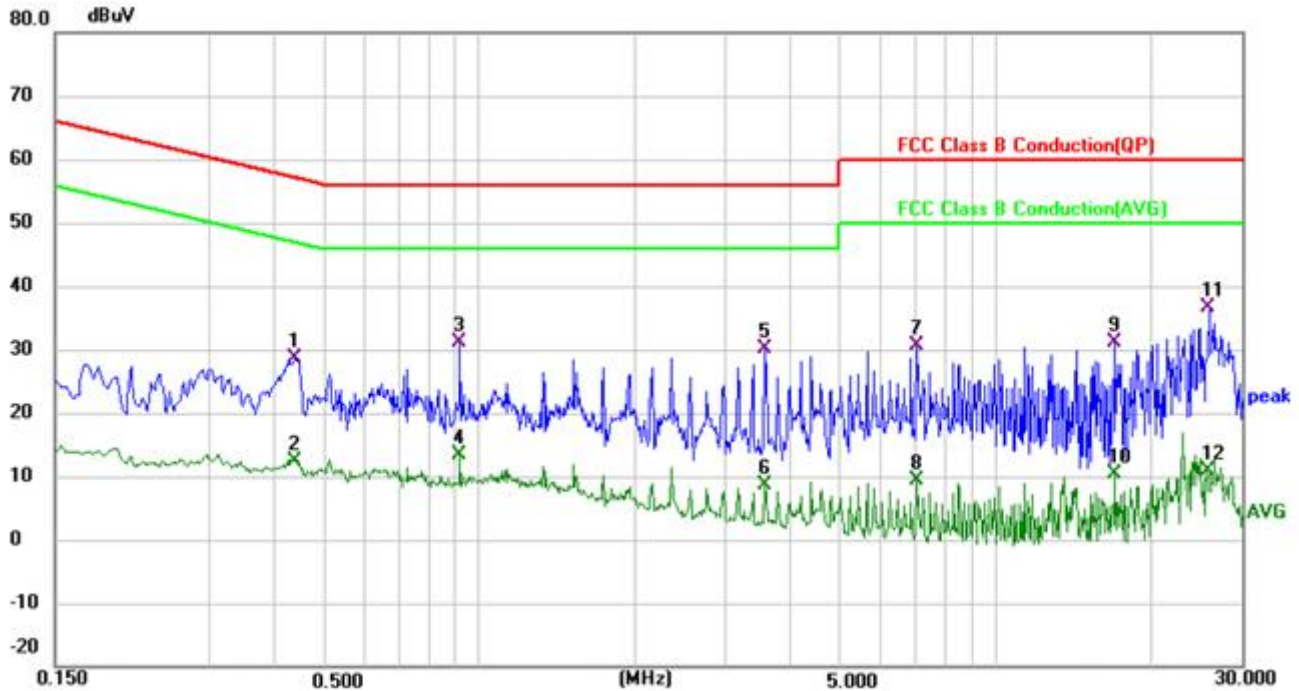

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.4380	18.97	9.62	28.59	57.10	-28.51	QP
2		0.4380	2.74	9.62	12.36	47.10	-34.74	AVG
3		0.9180	21.46	9.68	31.14	56.00	-24.86	QP
4		0.9180	3.81	9.68	13.49	46.00	-32.51	AVG
5		3.5780	20.43	9.73	30.16	56.00	-25.84	QP
6		3.5780	-1.01	9.73	8.72	46.00	-37.28	AVG
7		7.0620	20.80	9.82	30.62	60.00	-29.38	QP
8		7.0620	-0.44	9.82	9.38	50.00	-40.62	AVG
9		17.0860	21.16	9.93	31.09	60.00	-28.91	QP
10		17.0860	0.44	9.93	10.37	50.00	-39.63	AVG
11	*	25.8779	26.55	9.97	36.52	60.00	-23.48	QP
12		25.8779	0.98	9.97	10.95	50.00	-39.05	AVG

Test Result: Pass

[Test Mode: TX-2408MHz]; [Line: Neutral] ;[Voltage:AC 120V/60Hz]

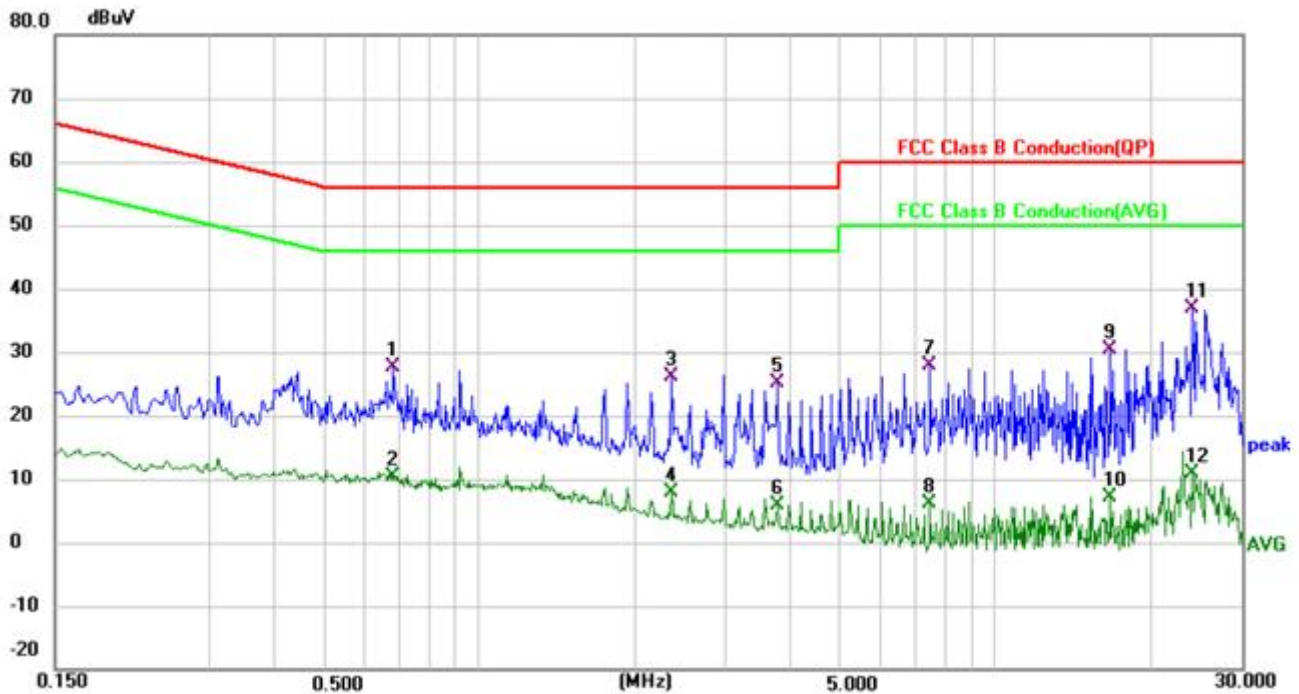

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.6820	17.90	9.63	27.53	56.00	-28.47	QP
2		0.6820	0.67	9.63	10.30	46.00	-35.70	AVG
3		2.3460	16.48	9.69	26.17	56.00	-29.83	QP
4		2.3460	-1.78	9.69	7.91	46.00	-38.09	AVG
5		3.7780	15.41	9.73	25.14	56.00	-30.86	QP
6		3.7780	-3.95	9.73	5.78	46.00	-40.22	AVG
7		7.4700	18.10	9.83	27.93	60.00	-32.07	QP
8		7.4700	-3.68	9.83	6.15	50.00	-43.85	AVG
9		16.6700	20.36	9.95	30.31	60.00	-29.69	QP
10		16.6700	-2.79	9.95	7.16	50.00	-42.84	AVG
11	*	24.0540	26.83	9.97	36.80	60.00	-23.20	QP
12		24.0540	0.79	9.97	10.76	50.00	-39.24	AVG

Test Result: Pass


6.3 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 11.9.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.3.2 Test setup

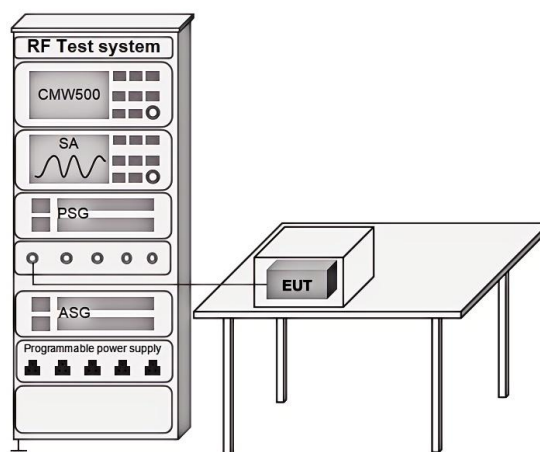


6.3.3 Test data

Pass: Please refer to appendix A for details

6.4 20dB Bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247 (a)(1)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.9.2& 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Test setup

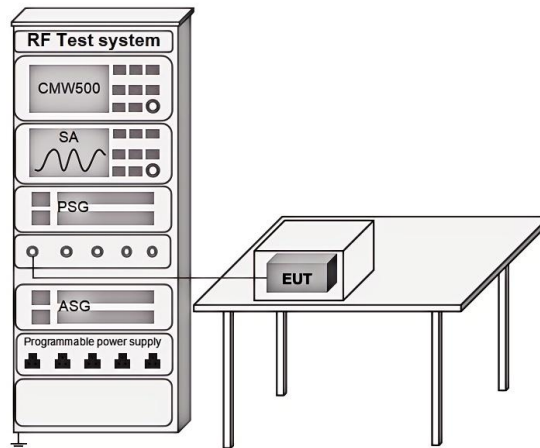

6.4.2 Test data

Pass: Please refer to appendix A for details

6.5 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247 (d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.10.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.5.2 Test setup

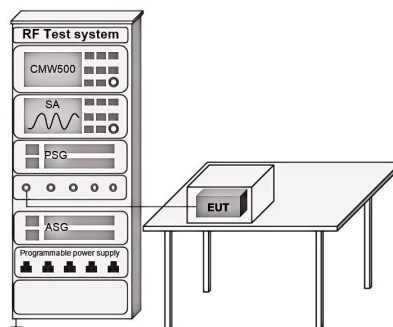

6.5.3 Test data

Pass: Please refer to appendix A for details

6.6 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247 (d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.6.2 Test setup

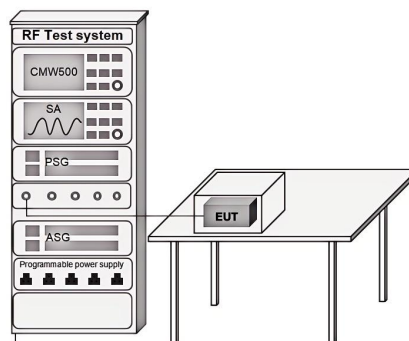

6.6.3 Test data

Pass: Please refer to appendix A for details


6.7 Carrier Frequencies Separation

Test Standard	47 CFR Part 15, Subpart C 15.247 (a)(1)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.7.1 Limit

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

6.7.2 Test setup

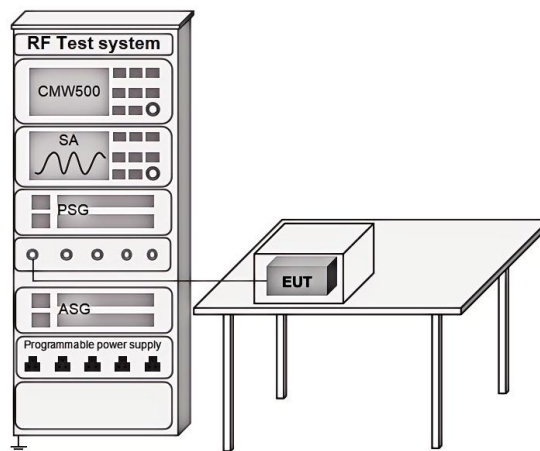

6.7.3 Test data

Pass: Please refer to appendix A for details


6.8 Hopping Channel Number

Test Standard	47 CFR Part 15, Subpart C 15.247 (a)(1) (iii)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.8.1 Limit

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

6.8.2 Test setup

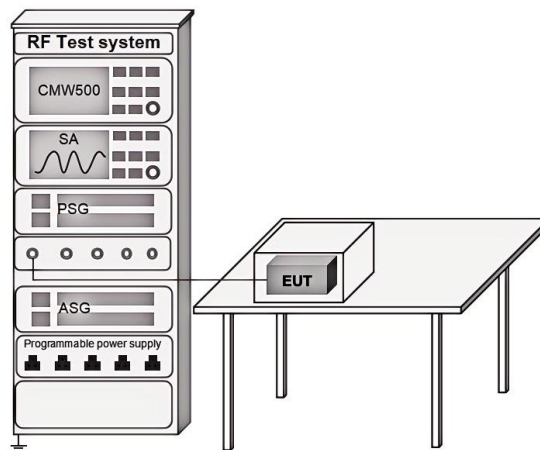

6.8.3 Test data

Pass: Please refer to appendix A for details


6.9 Dwell Time

Test Standard	47 CFR Part 15, Subpart C 15.247(a)(1) (iii)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.9.1 Limit

Frequency(MHz)	Limit
902-928	0.4s within a 20s period(20dB bandwidth<250kHz)
	0.4s within a 10s period(20dB bandwidth≥250kHz)
2400-2483.5	0.4s within a period of 0.4s multiplied by the number of hopping channels
5725-5850	0.4s within a 30s period

6.9.2 Test setup

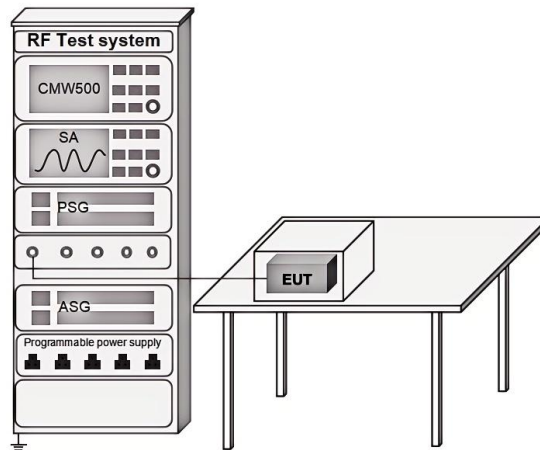

6.9.3 Test data

Pass: Please refer to appendix A for details

6.10 Radiated spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247(d) 47 CFR Part 15, Subpart C 15.209
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.3,6.4,6.5,6.6
Test Mode (Pre-Scan)	TX lowest, middle, highest channel
Test Mode (Final Test)	TX lowest, middle, highest channel


6.10.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.10.2 Test setup


Below 1GHz:

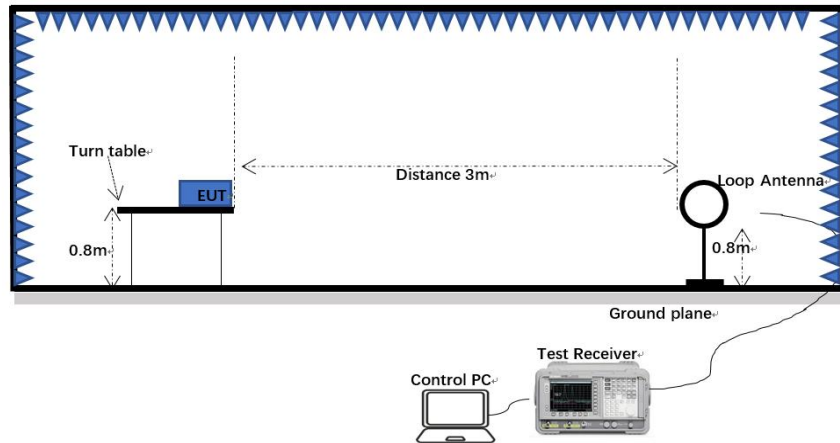

30MHz-1GHz:

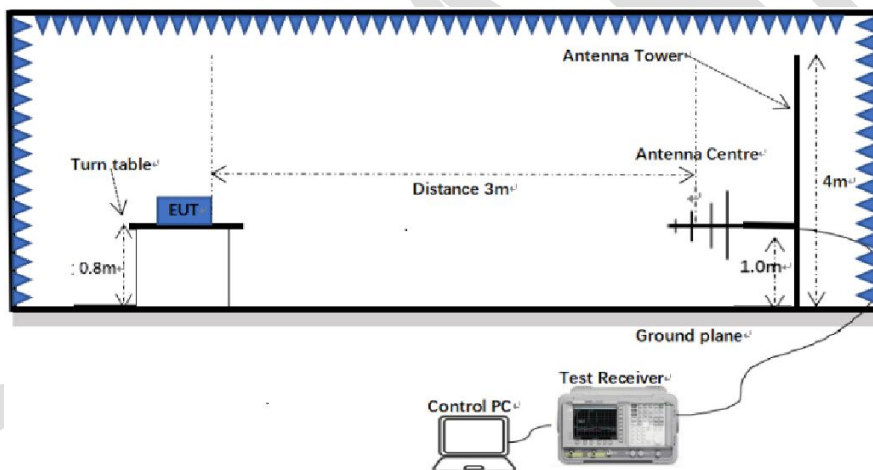

Above 1GHz:

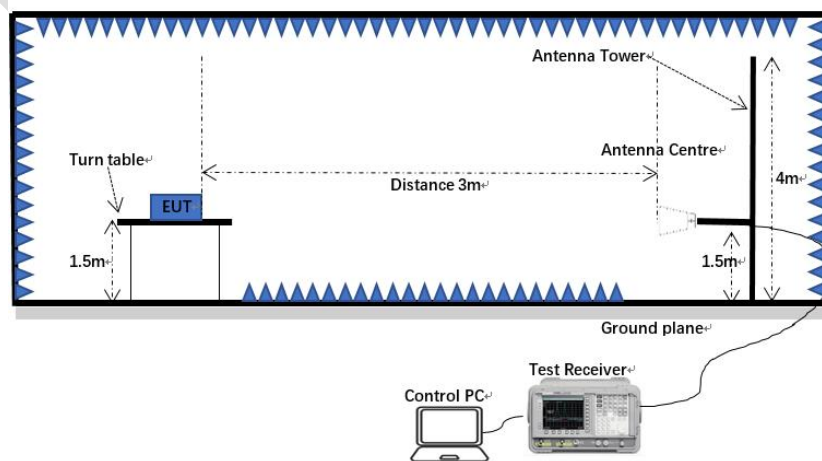

6.10.3 Procedure

- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Scan from 9 kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Note 3: The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Level (dBuV)} = \text{Reading (dBuV)} + \text{Factor (dB/m)}$$

6.10.4 Test data

Below 1GHz

Remark: During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes, only the worst case lowest channel for GFSK was recorded in the report.

[Test mode: TX-2408MHz]; [Polarity: Horizontal]



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	56.0007	32.57	-19.24	13.33	40.00	-26.67	QP
2	78.4133	32.77	-22.77	10.00	40.00	-30.00	QP
3	105.6415	31.20	-22.13	9.07	43.50	-34.43	QP
4	216.0239	41.52	-22.88	18.64	46.00	-27.36	QP
5	392.0950	33.71	-16.60	17.11	46.00	-28.89	QP
6	586.8436	30.21	-12.35	17.86	46.00	-28.14	QP

Test Result: Pass

[Test mode: TX-2408MHz]; [Polarity: Vertical]




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.8535	39.88	-19.63	20.25	40.00	-19.75	QP
2	56.3948	42.33	-19.28	23.05	40.00	-16.95	QP
3 *	76.2442	47.00	-22.58	24.42	40.00	-15.58	QP
4	106.3850	47.19	-22.10	25.09	43.50	-18.41	QP
5	216.0240	44.12	-22.88	21.24	46.00	-24.76	QP
6	457.5073	33.64	-14.65	18.99	46.00	-27.01	QP

Test Result: Pass

Above 1GHz:


[Test mode: TX low channel]; [Polarity: Horizontal]

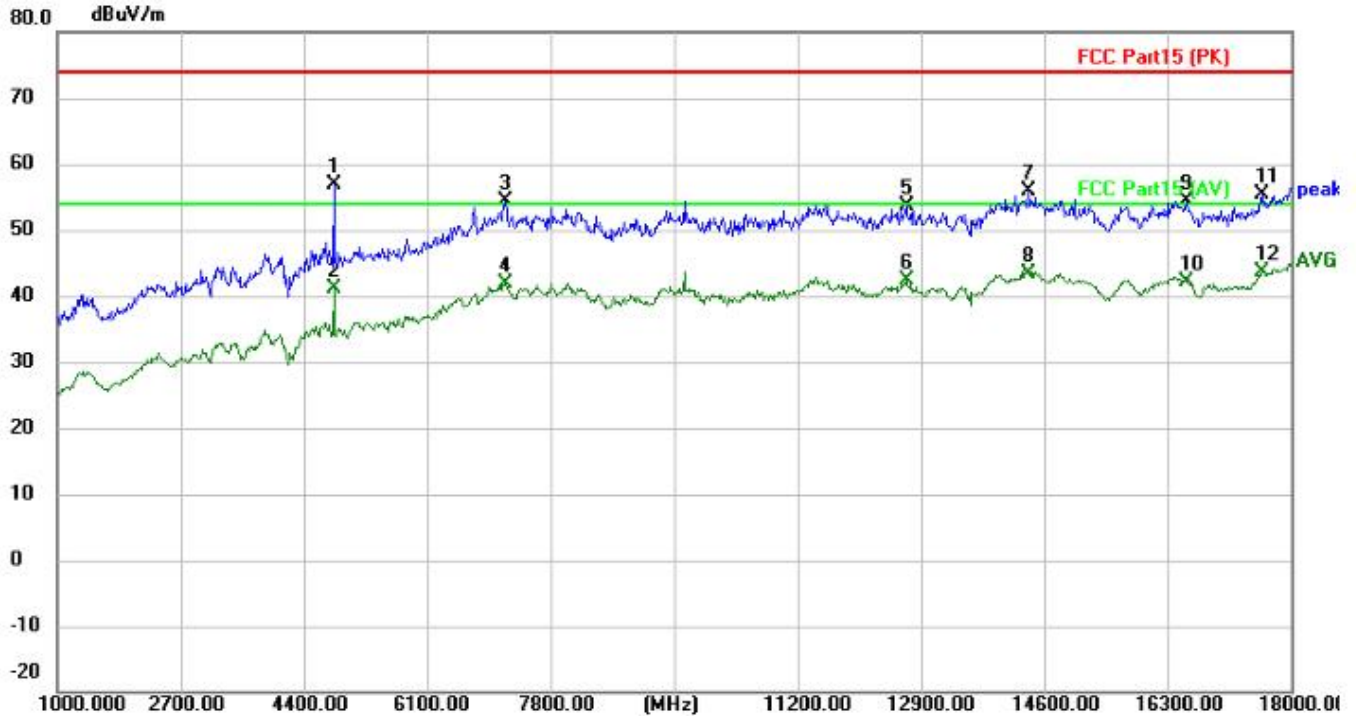

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dBuV/m	dB	
1		4808.000	57.53	-0.74	56.79	74.00	-17.21	peak
2		4808.000	41.96	-0.74	41.22	54.00	-12.78	AVG
3		7171.000	47.27	7.03	54.30	74.00	-19.70	peak
4		7171.000	34.77	7.03	41.80	54.00	-12.20	AVG
5		12696.00	43.88	9.74	53.62	74.00	-20.38	peak
6		12696.00	32.55	9.74	42.29	54.00	-11.71	AVG
7		14379.00	45.95	9.81	55.76	74.00	-18.24	peak
8		14379.00	33.52	9.81	43.33	54.00	-10.67	AVG
9		16555.00	44.73	9.57	54.30	74.00	-19.70	peak
10		16555.00	32.68	9.57	42.25	54.00	-11.75	AVG
11		17609.00	45.17	10.33	55.50	74.00	-18.50	peak
12	*	17609.00	33.27	10.33	43.60	54.00	-10.40	AVG

Test Result: Pass


[Test mode: TX low channel]; [Polarity: Vertical];

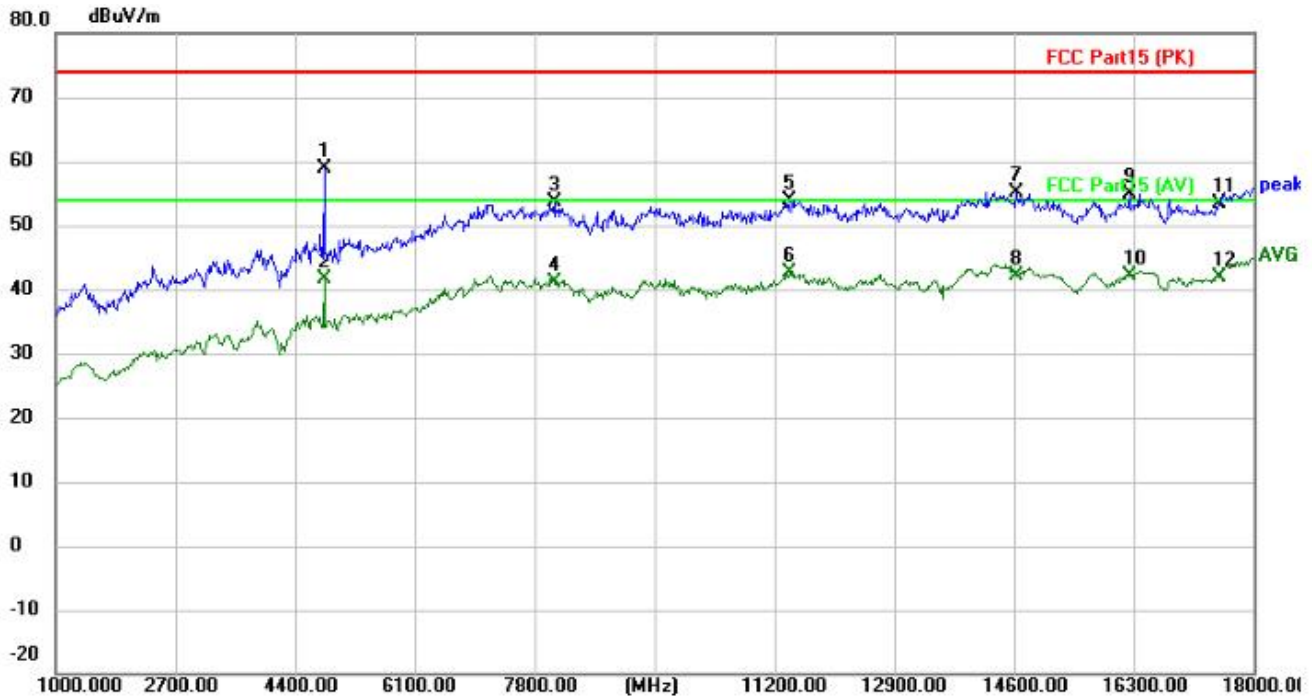

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4808.000	59.68	-0.74	58.94	74.00	-15.06	peak
2		4808.000	42.34	-0.74	41.60	54.00	-12.40	AVG
3		8072.000	46.91	6.68	53.59	74.00	-20.41	peak
4		8072.000	34.56	6.68	41.24	54.00	-12.76	AVG
5		11404.00	44.29	9.62	53.91	74.00	-20.09	peak
6	*	11404.00	32.96	9.62	42.58	54.00	-11.42	AVG
7		14634.00	45.94	9.27	55.21	74.00	-18.79	peak
8		14634.00	32.95	9.27	42.22	54.00	-11.78	AVG
9		16232.00	45.83	9.04	54.87	74.00	-19.13	peak
10		16232.00	33.07	9.04	42.11	54.00	-11.89	AVG
11		17507.00	43.74	9.59	53.33	74.00	-20.67	peak
12		17507.00	32.32	9.59	41.91	54.00	-12.09	AVG

Test Result: Pass


[Test mode: TX middle channel]; [Polarity: Horizontal];

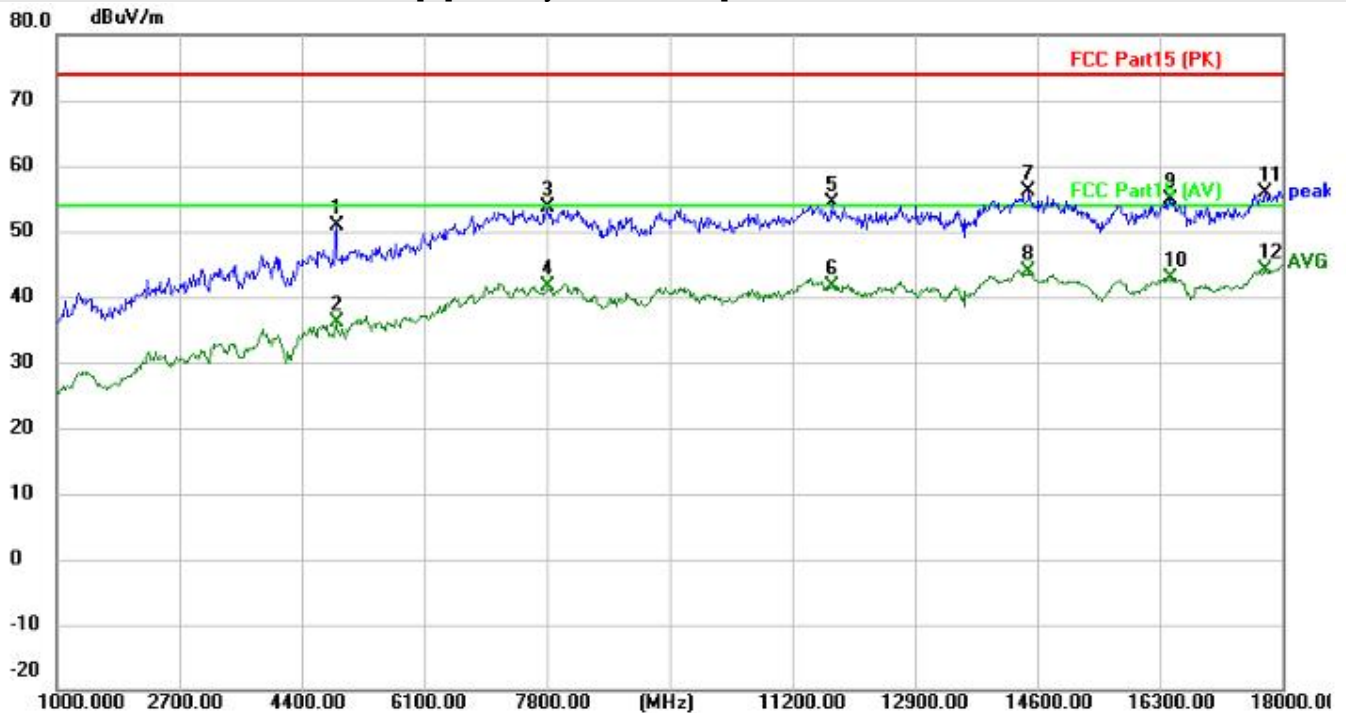

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4876.000	51.45	-0.64	50.81	74.00	-23.19	peak
2		4876.000	36.86	-0.64	36.22	54.00	-17.78	AVG
3		7817.000	47.51	6.08	53.59	74.00	-20.41	peak
4		7817.000	35.50	6.08	41.58	54.00	-12.42	AVG
5		11744.00	45.68	8.59	54.27	74.00	-19.73	peak
6		11744.00	32.96	8.59	41.55	54.00	-12.45	AVG
7		14481.00	46.65	9.57	56.22	74.00	-17.78	peak
8		14481.00	34.29	9.57	43.86	54.00	-10.14	AVG
9		16436.00	45.71	9.20	54.91	74.00	-19.09	peak
10		16436.00	33.58	9.20	42.78	54.00	-11.22	AVG
11		17762.00	45.00	10.90	55.90	74.00	-18.10	peak
12	*	17762.00	33.24	10.90	44.14	54.00	-9.86	AVG

Test Result: Pass


[Test mode: TX middle channel]; [Polarity: Vertical];

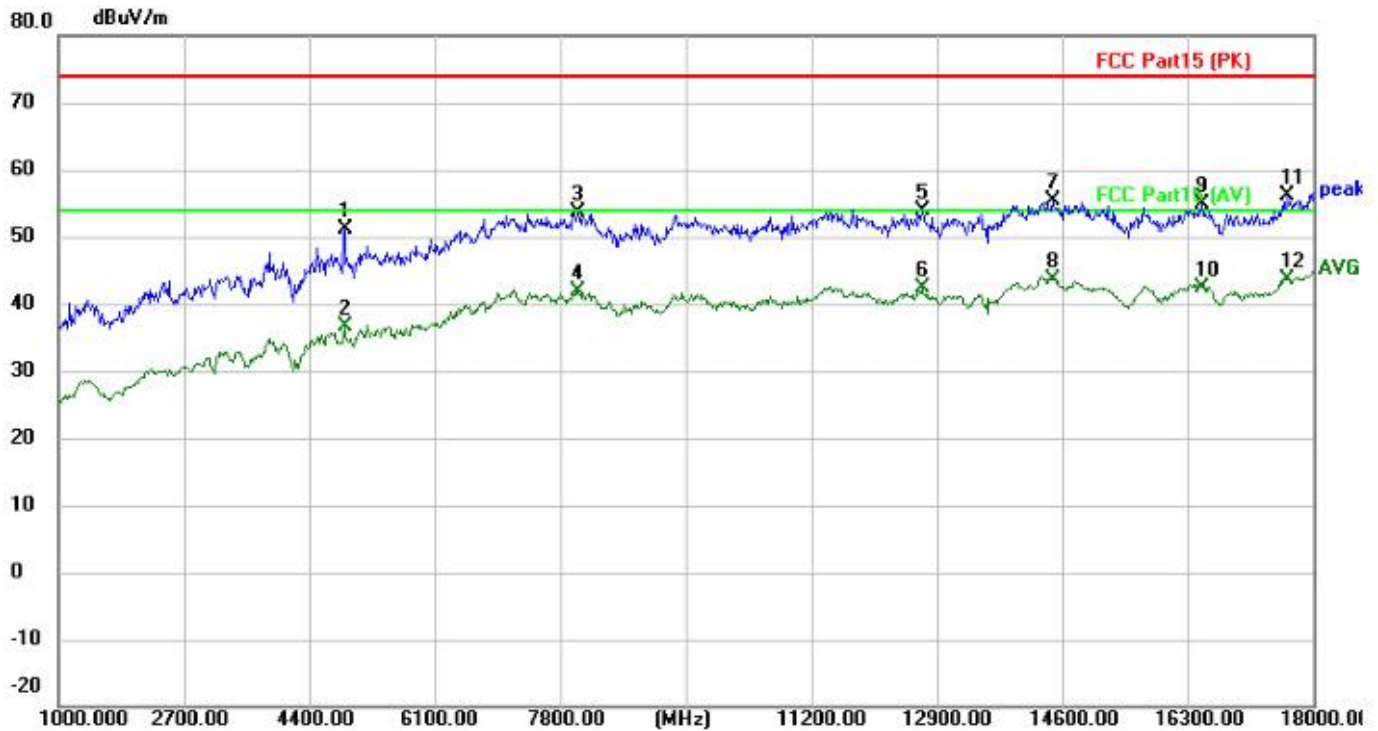

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4876.000	51.76	-0.64	51.12	74.00	-22.88	peak
2		4876.000	37.38	-0.64	36.74	54.00	-17.26	AVG
3		8038.000	46.98	6.68	53.66	74.00	-20.34	peak
4		8038.000	35.28	6.68	41.96	54.00	-12.04	AVG
5		12696.00	44.04	9.74	53.78	74.00	-20.22	peak
6		12696.00	32.64	9.74	42.38	54.00	-11.62	AVG
7		14464.00	45.82	9.60	55.42	74.00	-18.58	peak
8	*	14464.00	33.94	9.60	43.54	54.00	-10.46	AVG
9		16487.00	45.36	9.50	54.86	74.00	-19.14	peak
10		16487.00	33.00	9.50	42.50	54.00	-11.50	AVG
11		17643.00	45.72	10.42	56.14	74.00	-17.86	peak
12		17643.00	33.11	10.42	43.53	54.00	-10.47	AVG

Test Result: Pass


[Test mode: TX High channel]; [Polarity: Horizontal];

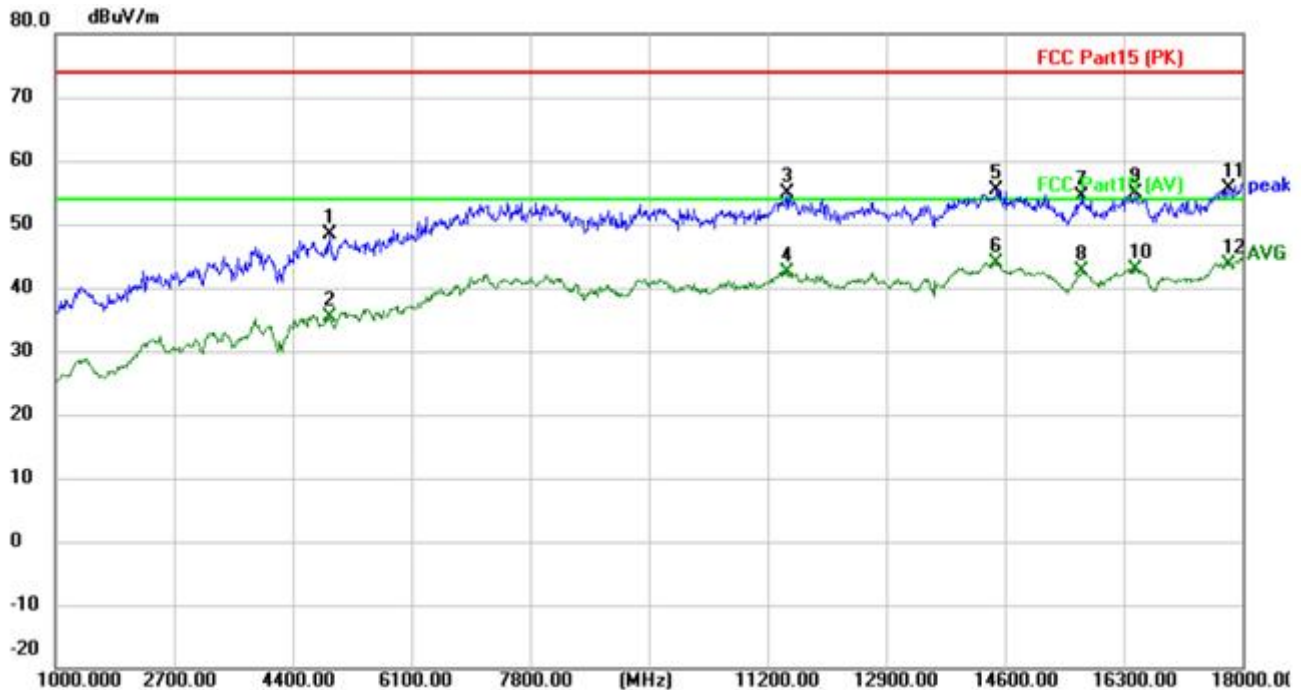

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4927.000	48.71	-0.44	48.27	74.00	-25.73	peak
2		4927.000	35.85	-0.44	35.41	54.00	-18.59	AVG
3		11472.00	44.91	9.98	54.89	74.00	-19.11	peak
4		11472.00	32.37	9.98	42.35	54.00	-11.65	AVG
5		14481.00	45.76	9.57	55.33	74.00	-18.67	peak
6	*	14481.00	34.22	9.57	43.79	54.00	-10.21	AVG
7		15705.00	45.99	8.37	54.36	74.00	-19.64	peak
8		15705.00	34.16	8.37	42.53	54.00	-11.47	AVG
9		16470.00	45.60	9.39	54.99	74.00	-19.01	peak
10		16470.00	33.49	9.39	42.88	54.00	-11.12	AVG
11		17796.00	44.42	11.10	55.52	74.00	-18.48	peak
12		17796.00	32.45	11.10	43.55	54.00	-10.45	AVG

Test Result: Pass

[Test mode: TX High channel]; [Polarity: Vertical];

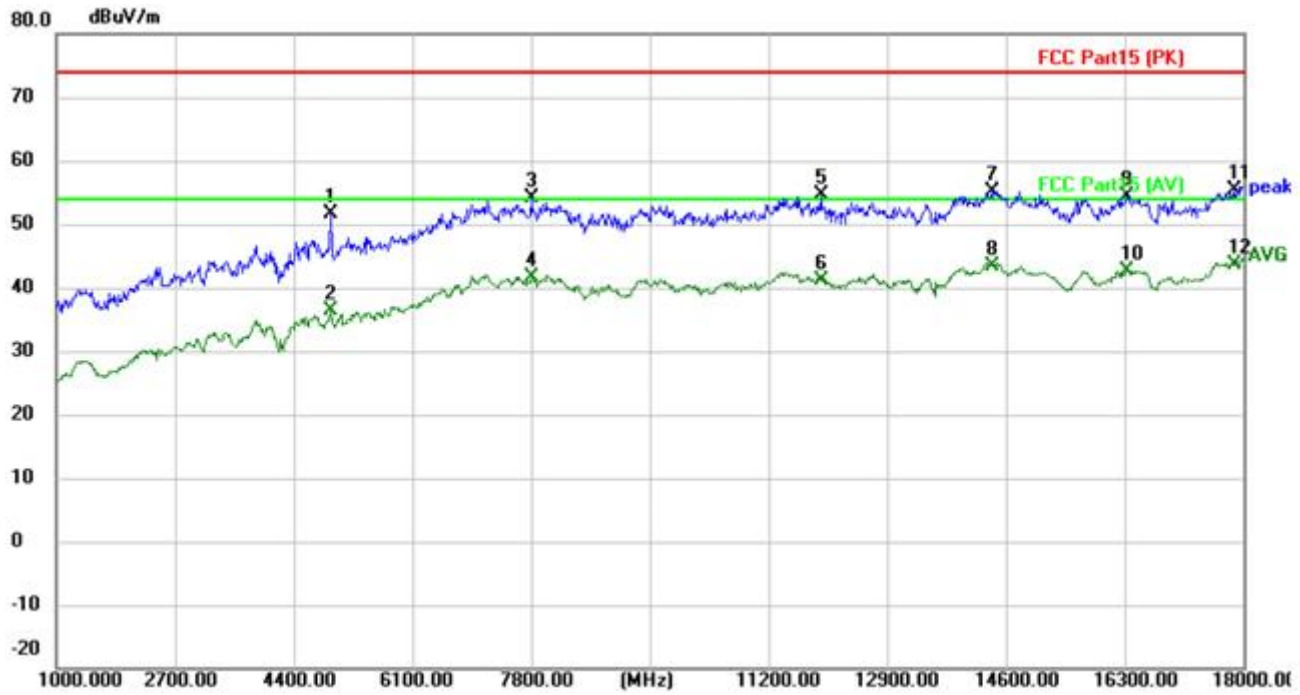

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		4927.000	52.04	-0.44	51.60	74.00	-22.40	peak
2		4927.000	36.93	-0.44	36.49	54.00	-17.51	AVG
3		7800.000	48.03	6.18	54.21	74.00	-19.79	peak
4		7800.000	35.47	6.18	41.65	54.00	-12.35	AVG
5		11948.00	45.65	8.90	54.55	74.00	-19.45	peak
6		11948.00	32.20	8.90	41.10	54.00	-12.90	AVG
7		14396.00	45.47	9.75	55.22	74.00	-18.78	peak
8		14396.00	33.63	9.75	43.38	54.00	-10.62	AVG
9		16334.00	45.42	8.95	54.37	74.00	-19.63	peak
10		16334.00	33.60	8.95	42.55	54.00	-11.45	AVG
11		17864.00	43.87	11.41	55.28	74.00	-18.72	peak
12	*	17864.00	32.18	11.41	43.59	54.00	-10.41	AVG

Test Result: Pass

6.11 Radiated emissions which fall in the restricted bands

Test Standard	47 CFR Part 15, Subpart C 15.247(d) 47 CFR Part 15, Subpart C 15.205
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024+Errata to C63.10a-2024 Section 6.10.5, 7.8.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX


6.11.1 Limit

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.11.2 Test setup


Below 1GHz:

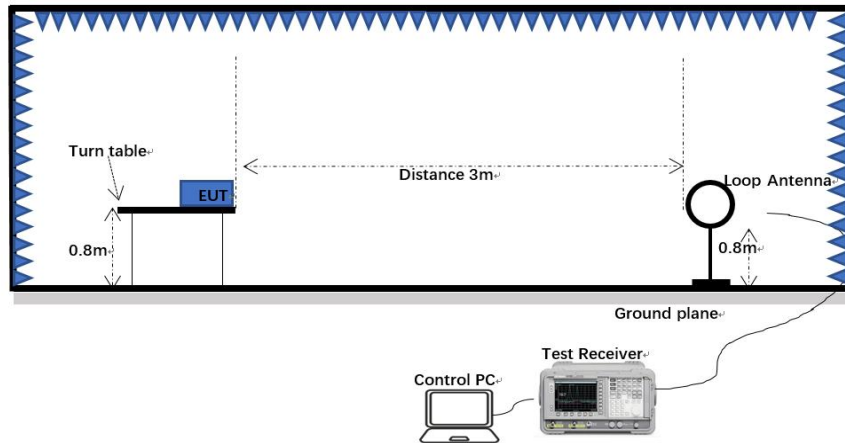

30MHz-1GHz:

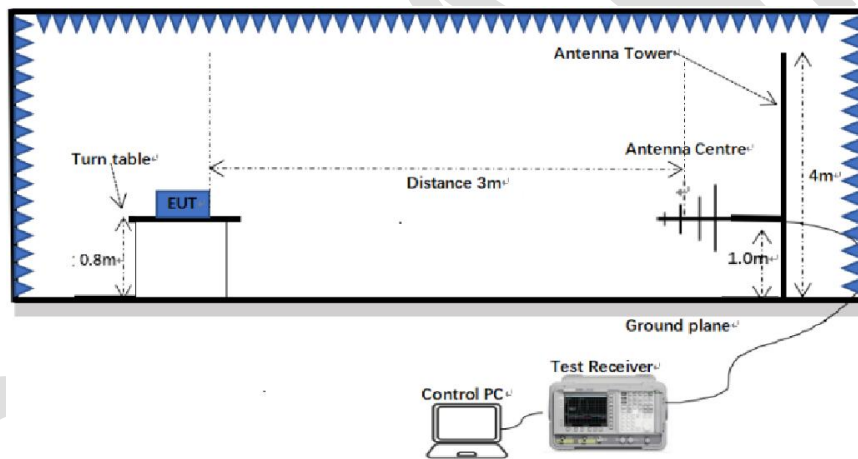

Above 1GHz:

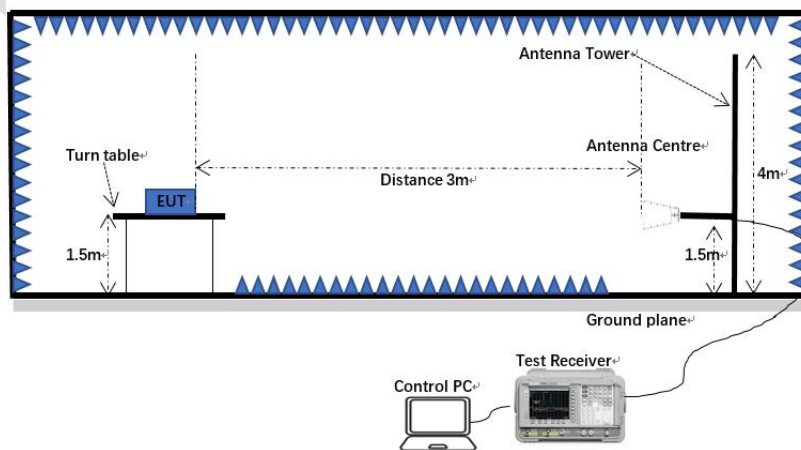

6.11.3 Procedure


- a) For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c) The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d) The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g) If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h) Test the EUT in the lowest channel, the middle channel, the highest channel.
- i) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j) Repeat above procedures until all frequencies measured was complete.

Note 1: Level (dBuV) = Reading (dBuV) + Factor (dB/m)

Note 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.11.4 Test data


[Test mode: TX low channel]; [Polarity: Horizontal]

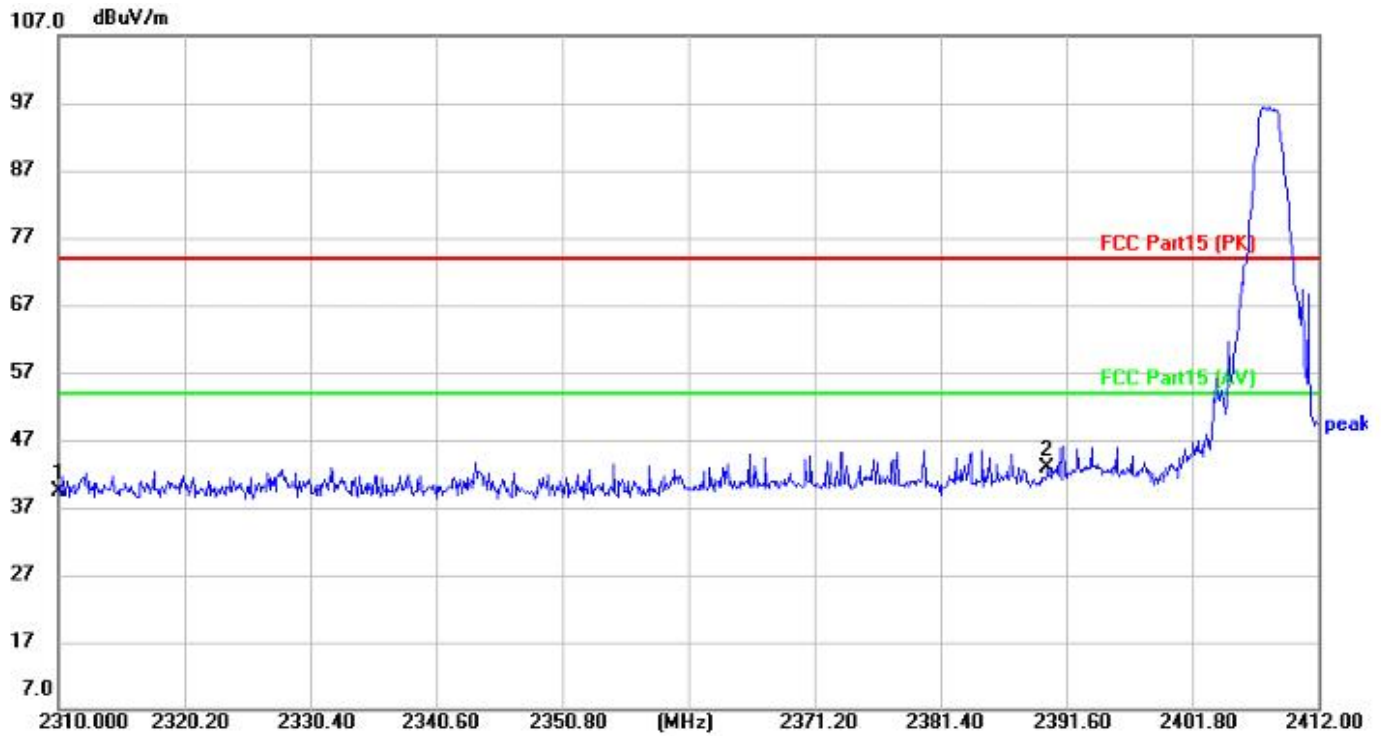

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	48.85	-9.51	39.34	74.00	-34.66	peak
2	*	2390.000	52.16	-9.19	42.97	74.00	-31.03	peak

Test Result: Pass


[Test mode:TX low channel]; [Polarity: Vertical]

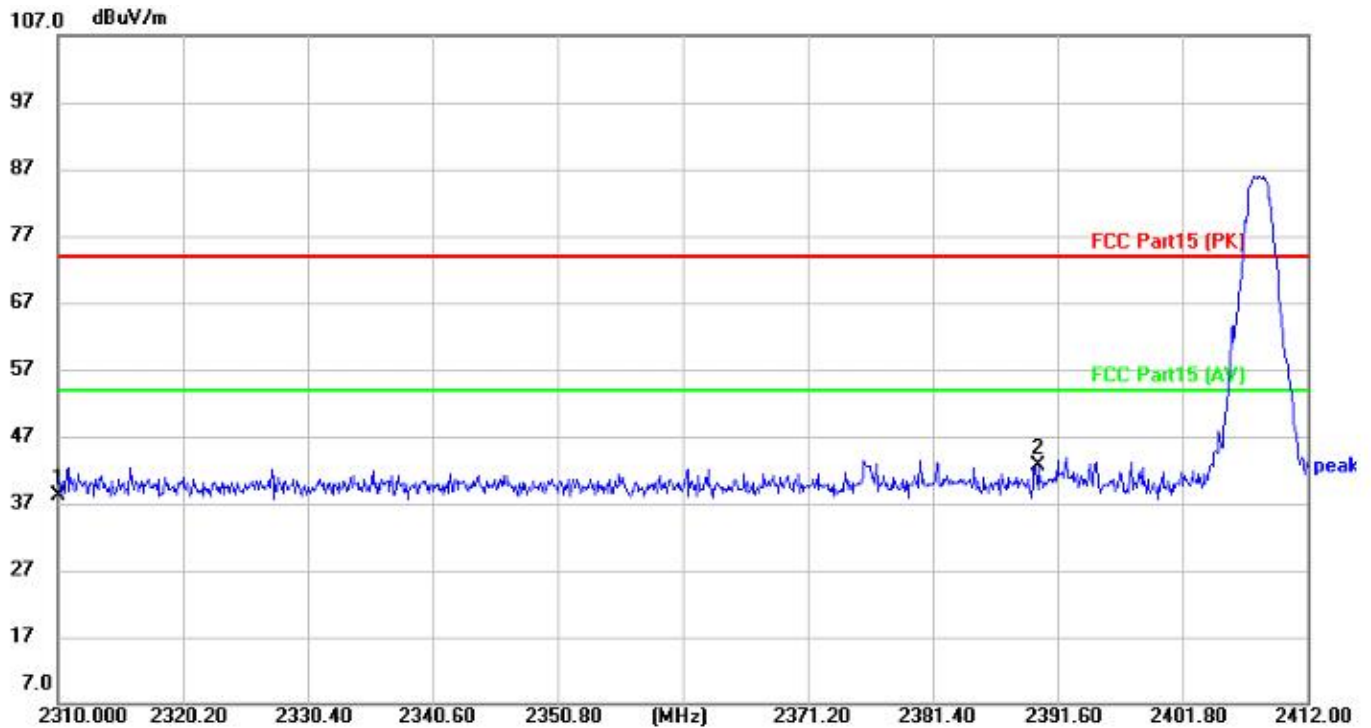

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		2310.000	47.76	-9.51	38.25	74.00	-35.75	peak
2	*	2390.000	51.82	-9.19	42.63	74.00	-31.37	peak

Test Result: Pass


[Test mode: TX High channel]; [Polarity: Horizontal]

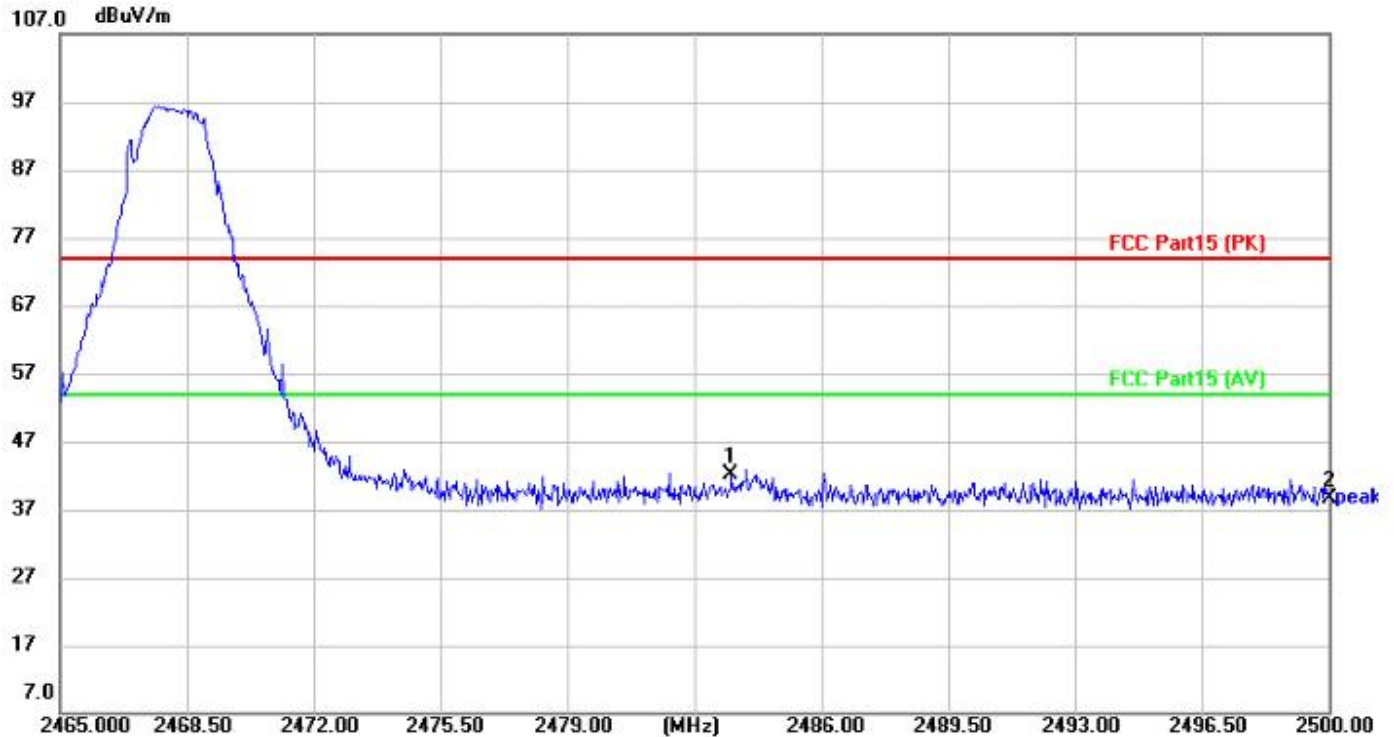

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	2483.500	51.21	-9.14	42.07	74.00	-31.93	peak
2		2500.000	47.79	-9.11	38.68	74.00	-35.32	peak

Test Result: Pass

[Test mode:TX High channel]; [Polarity: Vertical]

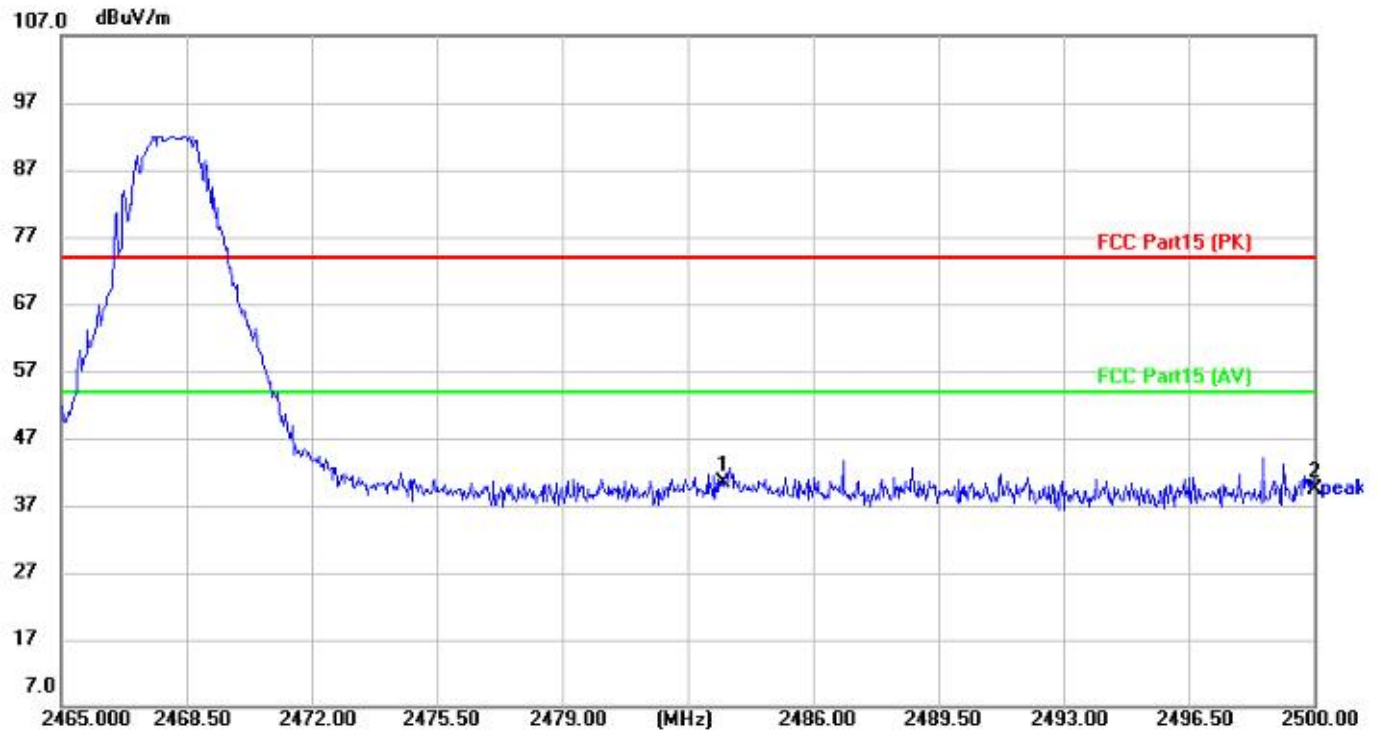

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	2483.500	49.53	-9.14	40.39	74.00	-33.61	peak
2		2500.000	48.41	-9.11	39.30	74.00	-34.70	peak


Test Result: Pass

7 Appendix A


7.1 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	2.4G	2408	Ant1	15.140	21	Pass
NVNT	2.4G	2436	Ant1	14.720	21	Pass
NVNT	2.4G	2468	Ant1	14.435	21	Pass


Power NVNT 2.4G 2408MHz Ant1

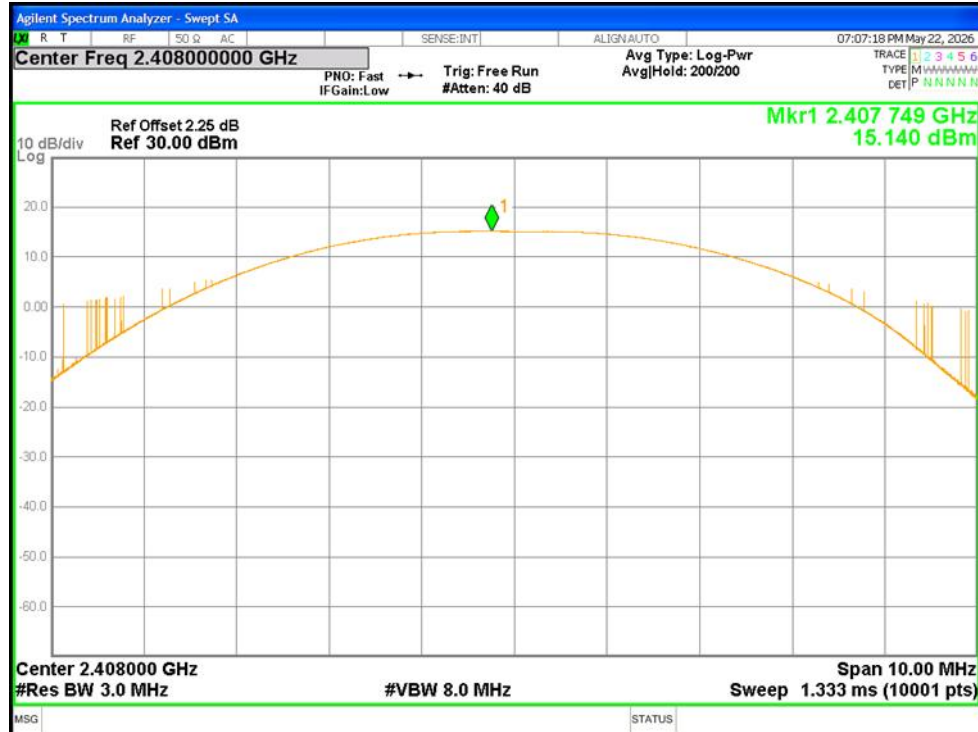

Power NVNT 2.4G 2436MHz Ant1

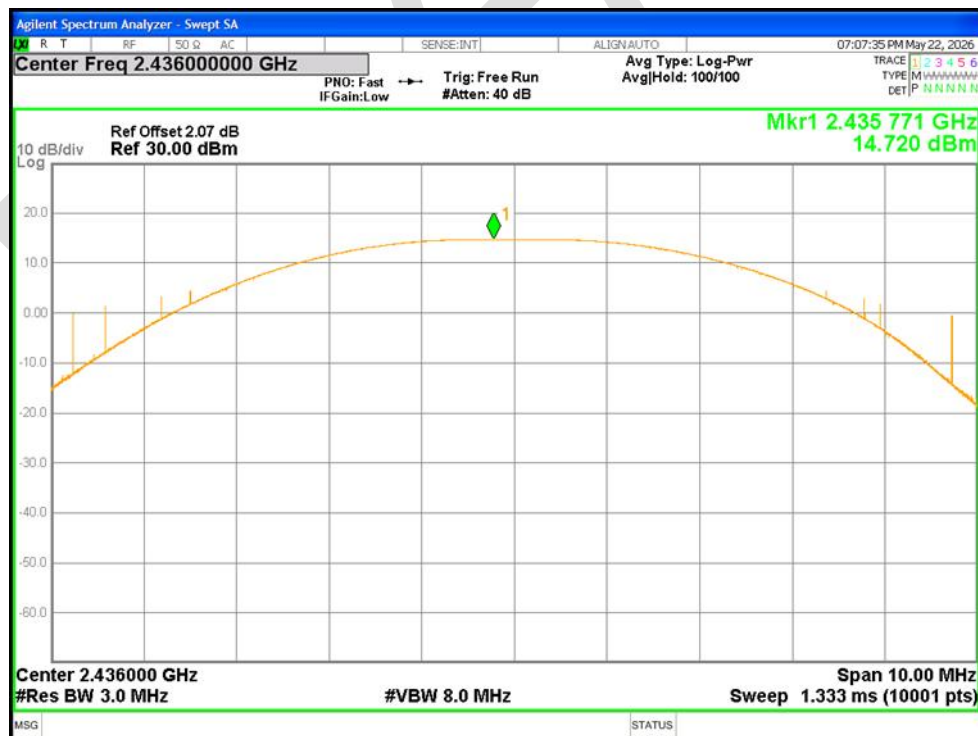

Power NVNT 2.4G 2468MHz Ant1

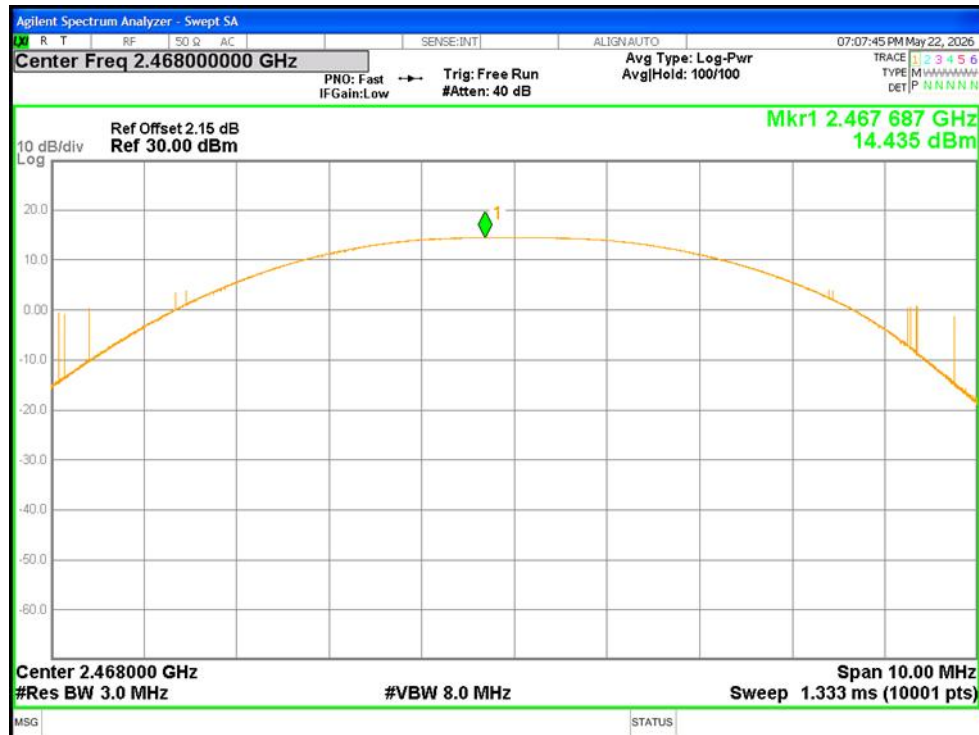

7.2 -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	2.4G	2408	Ant1	2.082	N/A	Pass
NVNT	2.4G	2436	Ant1	2.086	N/A	Pass
NVNT	2.4G	2468	Ant1	2.103	N/A	Pass

-20dB Bandwidth NVNT 2.4G 2408MHz Ant1



-20dB Bandwidth NVNT 2.4G 2436MHz Ant1




-20dB Bandwidth NVNT 2.4G 2468MHz Ant1




7.3 Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	2.4G	2408	Ant1	2.0571
NVNT	2.4G	2436	Ant1	2.0584
NVNT	2.4G	2468	Ant1	2.0481


OBW NVNT 2.4G 2408MHz Ant1

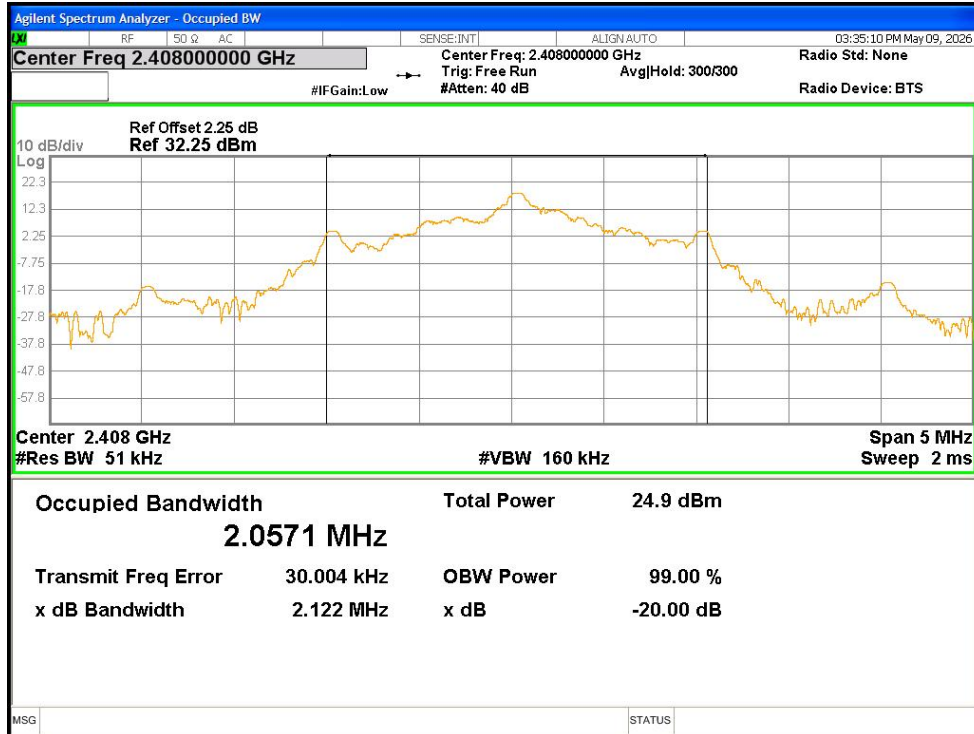

OBW NVNT 2.4G 2436MHz Ant1

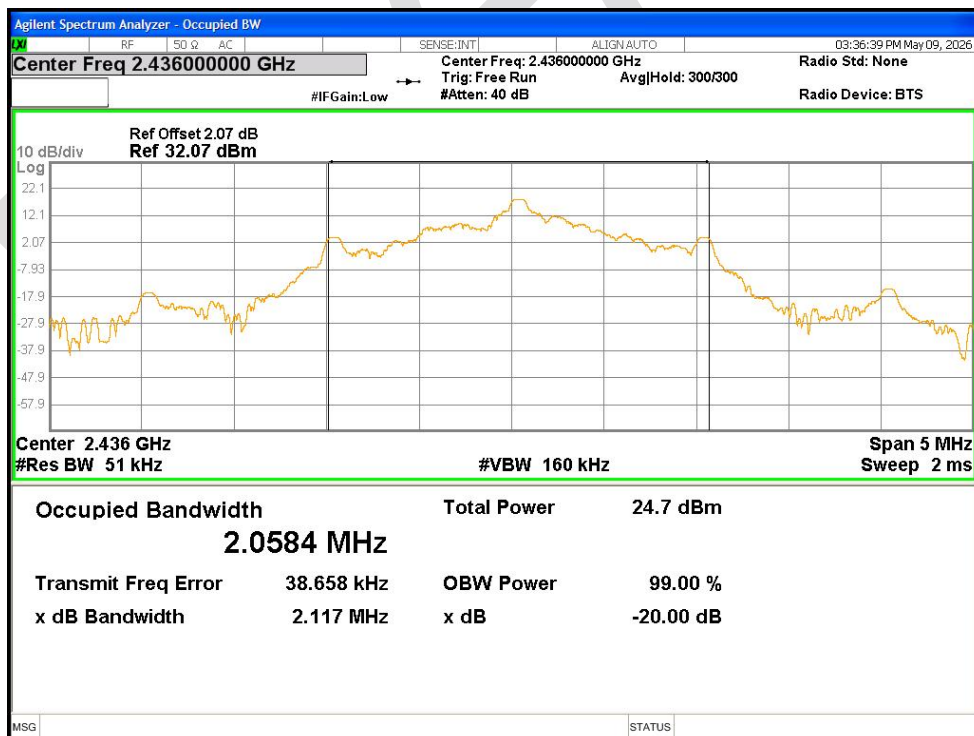

OBW NVNT 2.4G 2468MHz Ant1

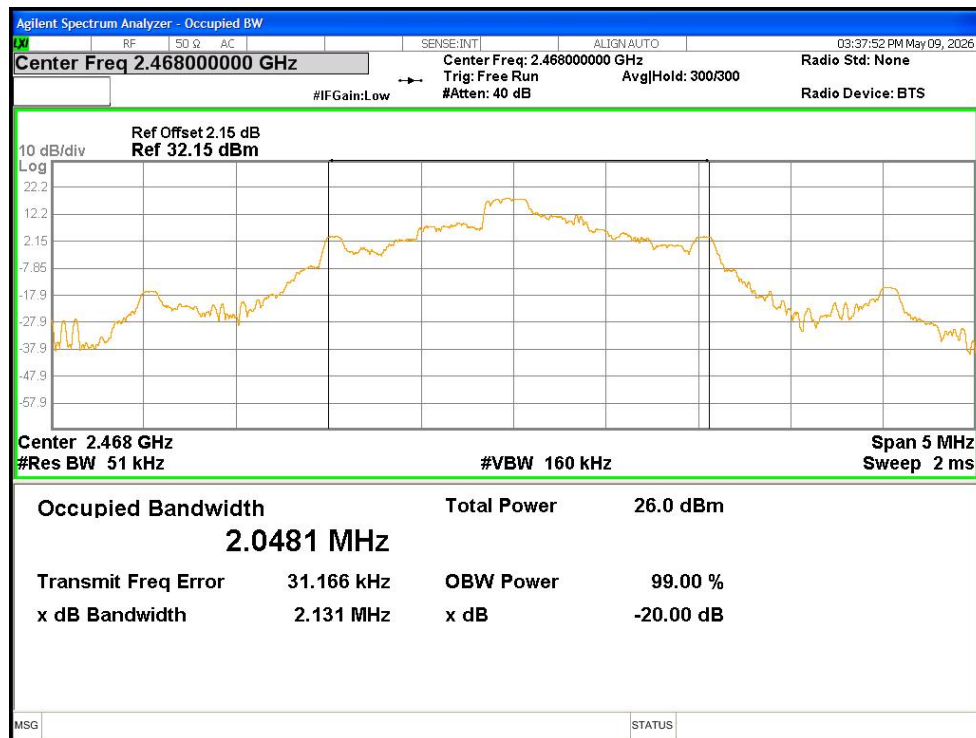


7.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2408	Ant1	No-Hopping	-53.97	-20	Pass
NVNT	2.4G	2468	Ant1	No-Hopping	-53.82	-20	Pass

Band Edge NVNT 2.4G 2408MHz Ant1 No-Hopping Ref




Band Edge NVNT 2.4G 2408MHz Ant1 No-Hopping Emission

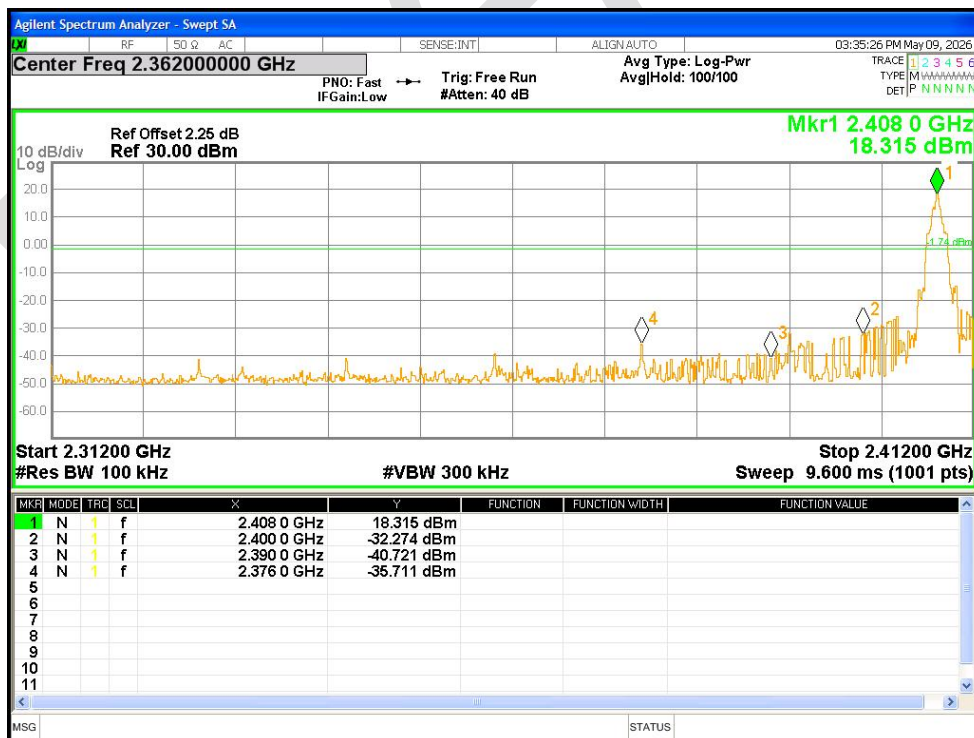

Band Edge NVNT 2.4G 2468MHz Ant1 No-Hopping Ref



Band Edge NVNT 2.4G 2468MHz Ant1 No-Hopping Emission

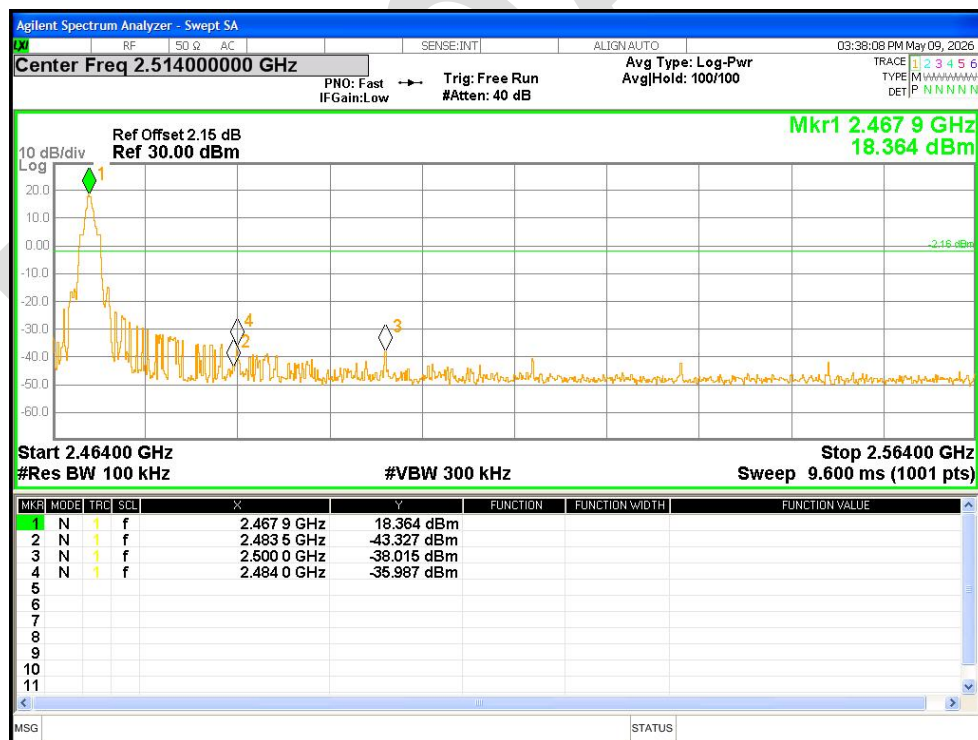


7.5 Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2408	Ant1	Hopping	-56.21	-20	Pass
NVNT	2.4G	2468	Ant1	Hopping	-55.17	-20	Pass

Band Edge(Hopping) NVNT 2.4G 2408MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2.4G 2408MHz Ant1 Hopping Emission

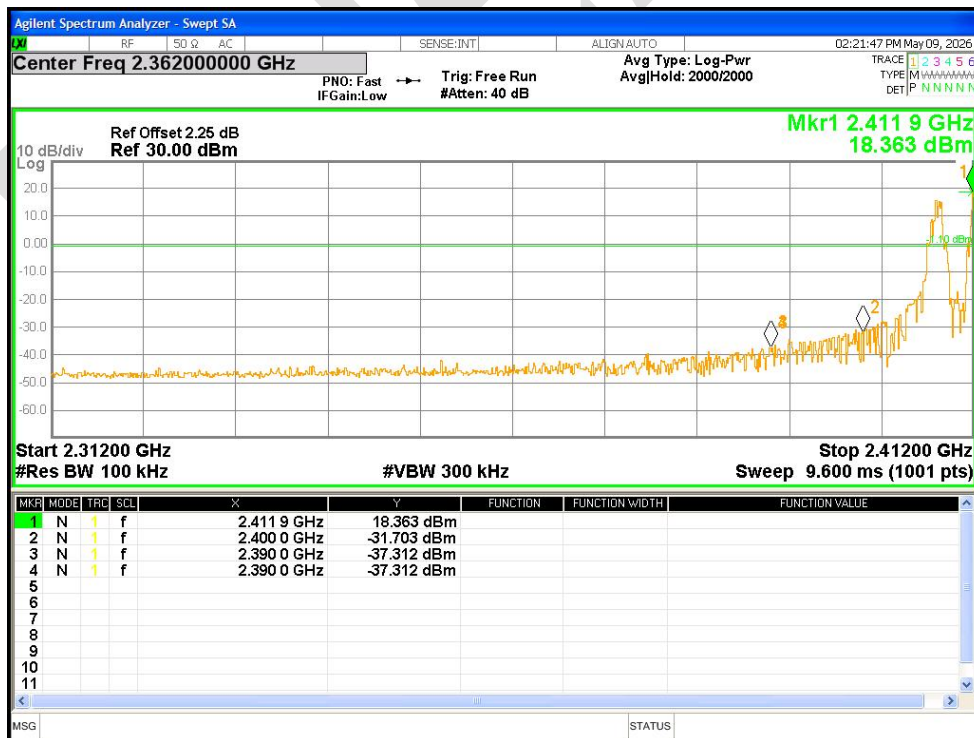

Band Edge(Hopping) NVNT 2.4G 2468MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 2.4G 2468MHz Ant1 Hopping Emission

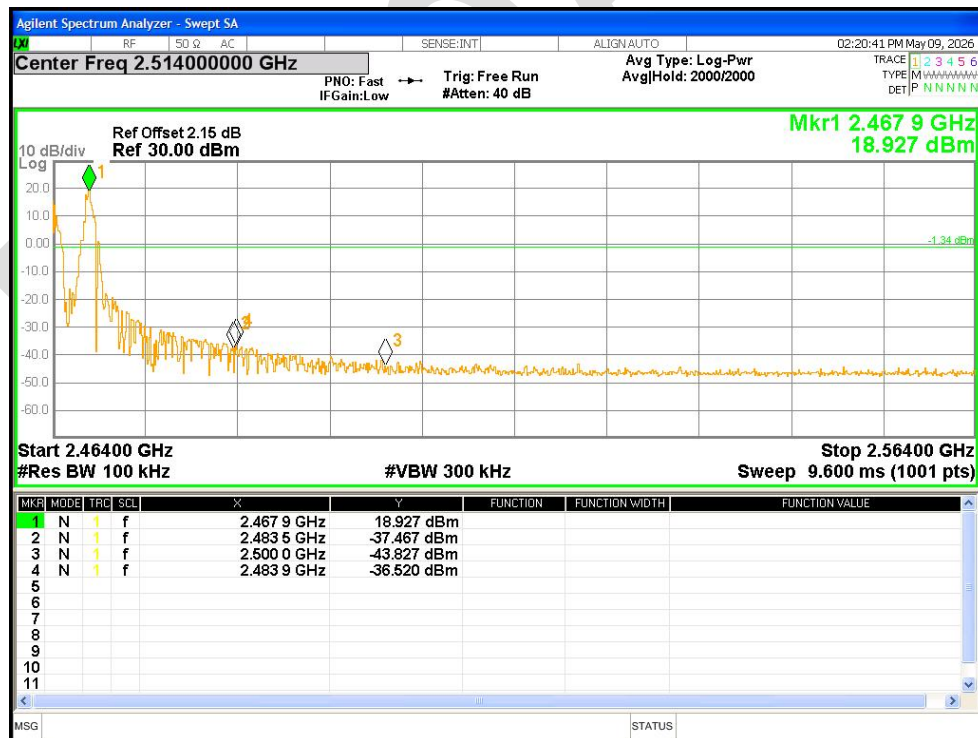


7.6 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	2.4G	2408	Ant1	-49.45	-20	Pass
NVNT	2.4G	2436	Ant1	-52.57	-20	Pass
NVNT	2.4G	2468	Ant1	-52.85	-20	Pass


Tx. Spurious NVNT 2.4G 2408MHz Ant1 Ref

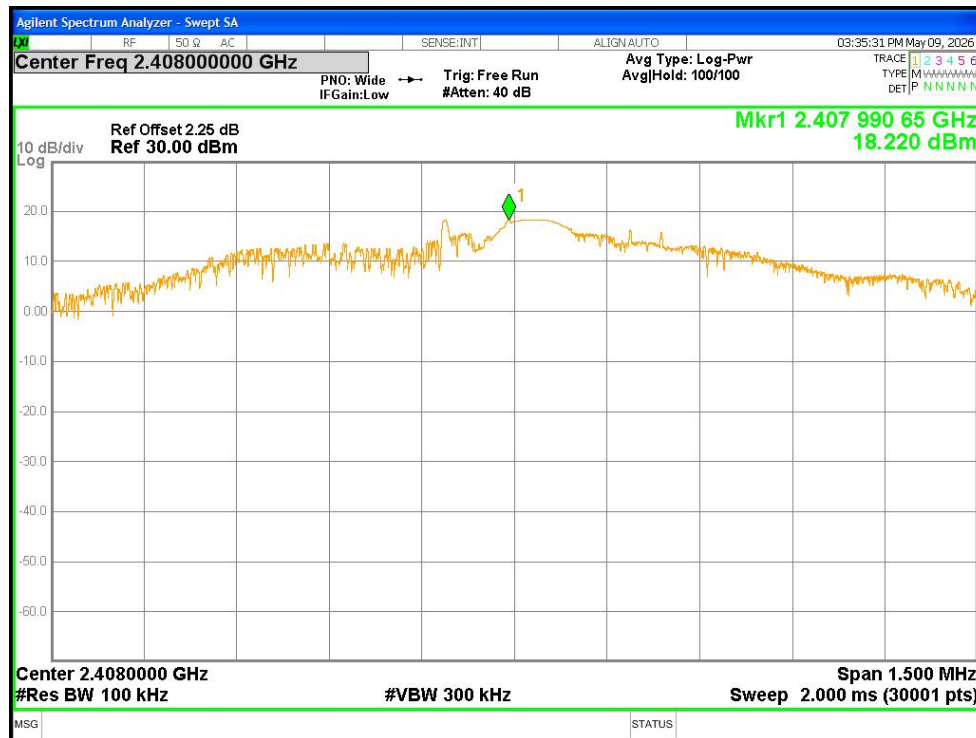


Tx. Spurious NVNT 2.4G 2408MHz Ant1 Emission

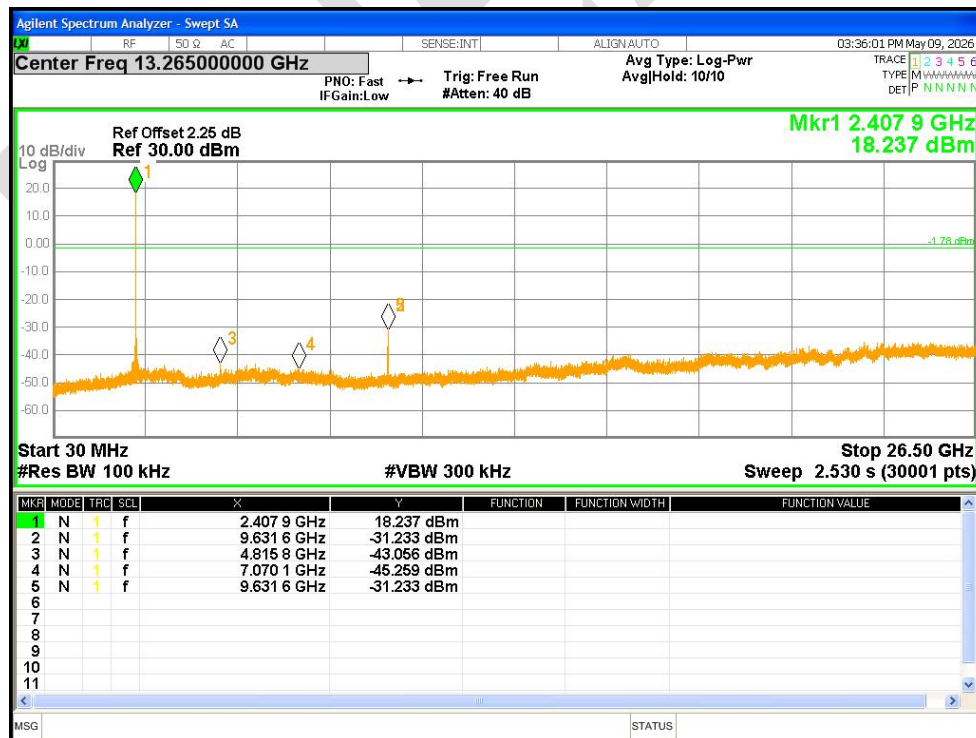

Tx. Spurious NVNT 2.4G 2436MHz Ant1 Ref

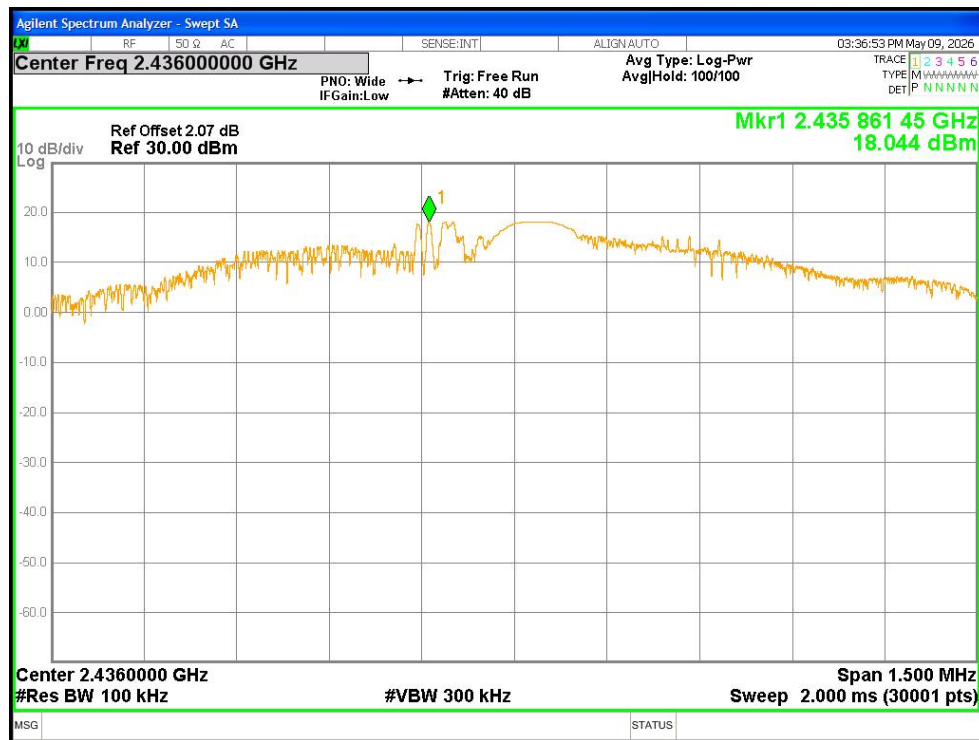

Tx. Spurious NVNT 2.4G 2436MHz Ant1 Emission

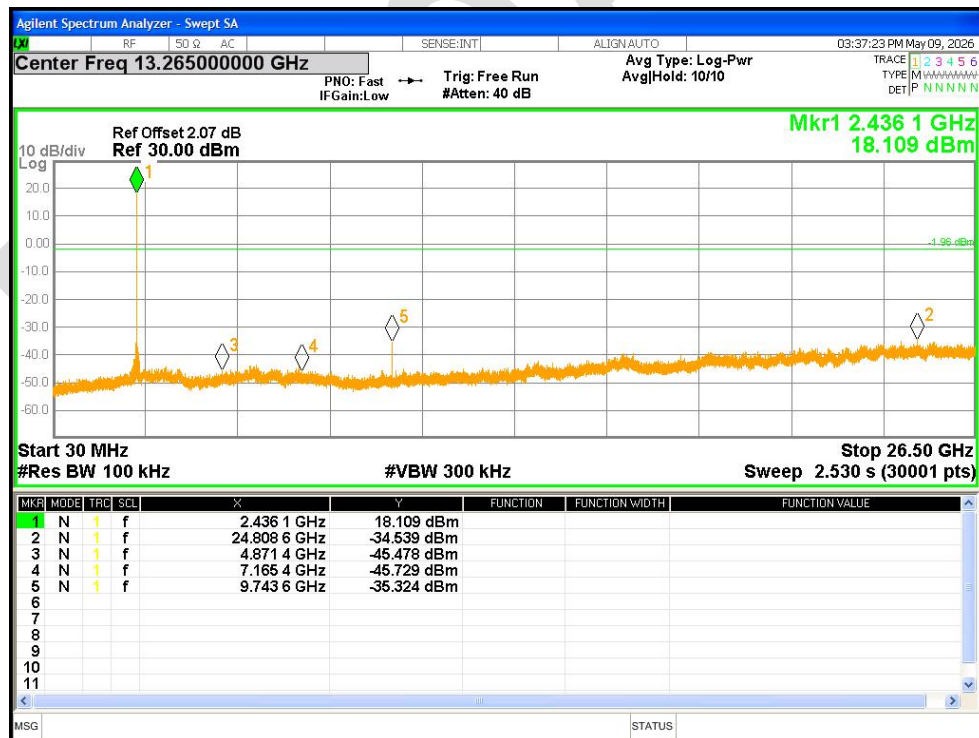

Tx. Spurious NVNT 2.4G 2468MHz Ant1 Ref