

Test Report

Applicant : FengShun Peiying Electro-Acoustic Co., Ltd
NO.8 FENGDA ROAD, ECONOMIC
Address : DEVELOPMENT ZONE INDUSTRIAL AREA,
FENGSHUN, GUANGDONG, CHINA
Product Name : Car Multimedia Receiver
Brand Mark : DUAL
Model : DCPA724W
Series model : XDPA73W / DCPA726W / CAR726W / CAR724W /
DCA76W / J6CA7W / 2316U / DCA73W / J3CA7W
Report Number : BLA-EMC-202601-A6902
FCC ID : 2AFXA-DCPA724W
Date of Receipt : Jan. 14,2026
Date of Test : Jan. 14,2026 to Mar. 13,2026
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Compiled by:

charlie

Review by:

Xavier

Approved by:

Blue Zheng

Issued Date:

Mar. 16,2026



BlueAsia Technical Services (Shenzhen) Co., Ltd

Address: No.41, South of Beihuan Road, Shangwu Community, Shiyan
Subdistrict, Bao'an District, Shenzhen, Guangdong, China



The test report is effective only with both signature and specialized stamp and The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full. The results described in this report do not represent the quality or characteristics of the sampled batch, nor do they represent any similar or identical products that are not explicitly stated.

Table of Contents

1 General information	5
1.1 General information	5
1.2 General description of EUT	5
2 Test summary	6
3 Test Configuration	7
3.1 Test mode	7
3.2 Operation Frequency each of channel	8
3.3 Test channel	8
3.4 Auxiliary equipment	9
3.5 Test environment	9
4 Laboratory information	9
4.1 Laboratory and accreditations	9
4.2 Measurement uncertainty	10
5 Test equipment	11
6 Test result	13
6.1 Antenna requirement	13
6.2 Conducted peak output Power	14
6.3 20dB Bandwidth	15
6.4 Conducted Band Edges Measurement	16
6.5 Conducted spurious emissions	18
6.6 Carrier Frequencies Separation	20
6.7 Hopping Channel Number	21
6.8 Dwell Time	22
6.9 Radiated spurious emissions	23
6.10 Radiated emissions which fall in the restricted bands	34
7 Appendix A	41
7.1 Maximum PK Conducted Output Power	41
7.2 -20dB Bandwidth	46
7.3 Occupied Channel Bandwidth	51
7.4 Band Edge	56

7.5 Band Edge(Hopping)	63
7.6 Conducted RF Spurious Emission	70
7.7 Carrier Frequencies Separation	80
7.8 Number of Hopping Channel	82
7.9 Dwell Time	84
Appendix B: photographs of test setup	94
Appendix C: photographs of EUT	96

Revise Record

Version No.	Date	Description
01	Mar. 16,2026	Original

1 General information

1.1 General information

Applicant	FengShun Peiying Electro-Acoustic Co., Ltd
Address	NO.8 FENGDA ROAD, ECONOMIC DEVELOPMENT ZONE INDUSTRIAL AREA, FENGSHUN, GUANGDONG, CHINA
Manufacturer	FengShun Peiying Electro-Acoustic Co., Ltd
Address	NO.8 FENGDA ROAD, ECONOMIC DEVELOPMENT ZONE INDUSTRIAL AREA, FENGSHUN, GUANGDONG, CHINA
Factory	FengShun Peiying Electro-Acoustic Co., Ltd
Address	NO.8 FENGDA ROAD, ECONOMIC DEVELOPMENT ZONE INDUSTRIAL AREA, FENGSHUN, GUANGDONG, CHINA

1.2 General description of EUT

Product name	Car Multimedia Receiver
Model no.	D CPA724W
Series model	XDCPA73W / D CPA726W / CAR726W / CAR724W / DCA76W / J6CA7W / 2316U / DCA73W / J3CA7W
Differences of Series model	Due to the different sales channels, the names are different, but the rest are the same.
Operation Frequency	2402MHz-2480MHz
Modulation Type	GFSK, π /4DQPSK, 8DPSK
Channel Spacing	1MHz
Number of Channels	79
Antenna Type	FPC antenna
Antenna Gain	-11.84dBi(Provided by customer)
Power supply or adapter information	DC12V
Hardware version	V01
Software version	PY-DUAL-251212
Engineer sample no.	BLA-EMC-202601-A69

Note: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2 Test summary

No.	Test item	FCC Part Section(s)	Test Method(Clause)	Result
1	Antenna Requirement	§15.203	N/A	Pass
2	Conducted Emissions at AC Power Line (150kHz-30MHz)	§15.207	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.2	N/A
3	Conducted Peak Output Power	§ 15.247 (b)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.5	Pass
4	20dB Bandwidth	§ 15.247 (a)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.9.2	Pass
5	Conducted Band Edges Measurement	§ 15.247 (d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.6	Pass
6	Conducted Spurious Emissions	§ 15.247 (d)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.8	Pass
7	Carrier Frequencies Separation	§ 15.247 (a)(1)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.2	Pass
8	Hopping Channel Number	§ 15.247 (a)(1) (iii)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.3	Pass
9	Dwell Time	§ 15.247 (a)(1) (iii)	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.4	Pass
10	Radiated Spurious Emissions	§ 15.247 (d) § 15209	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.4,6.5,6.6	Pass
11	Radiated Emissions which fall in the restricted bands	§ 15.247 (d) § 15.205	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.10.5	Pass

N/A: Not Applicable

3 Test Configuration

3.1 Test mode

Test Mode ^{Note 1}	Description
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non-hopping mode all have been tested)
RX	Keep the EUT in receiving mode
TX Low channel	Keep the EUT in continuously transmitting mode in low channel
TX middle channel	Keep the EUT in continuously transmitting mode in middle channel
TX high channel	Keep the EUT in continuously transmitting mode in high channel

Note 1: The EUT was configured to measure its highest possible emission and/or immunity level. The test modes were adapted according to the operation manual for use

3.2 Operation Frequency each of channel

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz	--	

3.3 Test channel

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

3.4 Auxiliary equipment

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	lenovo	E46OC	N/A	From lab (No.BLA-ZC-BS-2022005)
Rechargeable battery	OUTDO	UTX7L-BS	N/A	From lab (No.BLA-ZC-PJ-2023005)

Note:“--” mean no any auxiliary device during testing.

3.5 Test environment

Environment	Temperature	Voltage
Normal	25°C	DC 12V

4 Laboratory information

4.1 Laboratory and accreditations

The test facility is recognized, certified, or accredited by the following organizations:

Company name:	BlueAsia Technical Services (Shenzhen) Co.,Ltd.
Address:	No.41, South of Beihuan Road, Shangwu Community, Shiyan Subdistrict, Bao'an District, Shenzhen, Guangdong, China
CNAS accredited No.:	L9788
A2LA Cert. No.:	5071.01
FCC Designation No.:	CN1252
Test Firm Registration Number:	923526
ISED CAB identifier No.:	CN0028
Company Number:	24243
Telephone:	+86-755-28682673
FAX:	+86-755-28682673

4.2 Measurement uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=1.96$.

Parameter	Expanded Uncertainty
Radiated Emission(9kHz-30MHz)	$\pm 4.34\text{dB}$
Radiated Emission(30Mz-1000MHz)	$\pm 4.24\text{dB}$
Radiated Emission(1GHz-18GHz)	$\pm 4.68\text{dB}$
Radiated Emission(18GHz-40GHz)	$\pm 4.78\text{dB}$
AC Power Line Conducted Emission(150kHz-30MHz)	$\pm 3.45\text{dB}$
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 1.5\text{ dB}$
Power Spectral Density, conducted	$\pm 3.0\text{ dB}$
Unwanted Emissions, conducted	$\pm 3.0\text{ dB}$
Temperature	$\pm 3\text{ }^{\circ}\text{C}$
Supply voltages	$\pm 3\%$
Time	$\pm 5\%$

5 Test equipment

Radiated Spurious Emissions (Below 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-002-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-002-02	Control room	966 control room	SKET	N/A	2024/3/27	2027/3/26
BLA-EMC-009	EMI receiver	ESR7	R&S	101199	2025/08/05	2026/08/04
BLA-EMC-043	Loop antenna	FMZB1519B	Schwarzbeck	00102	2024/06/29	2026/06/28
BLA-EMC-065	Broadband antenna	VULB9168	Schwarzbeck	01065P	2024/06/29	2026/06/27
BLA-XC-01	Coaxial Cable	N/A	BlueAsia	V01	N/A	N/A
BLA-XC-02	Coaxial Cable	N/A	BlueAsia	V02	N/A	N/A

Radiated Spurious Emissions (Above 1GHz)

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-001-01	Anechoic chamber	9*6*6 chamber	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-001-02	Control Room	966 control room	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-008	Spectrum	FSP40	R&S	100817	2025/08/05	2026/08/04
BLA-EMC-013	Horn Antenna	BBHA9120D	Schwarzbeck	01892	2024/06/29	2026/06/28
BLA-EMC-014	Amplifier	PA_000318G-45	SKET	PA2018043003	2025/08/05	2026/08/04
BLA-EMC-046	Filter bank	2.4G/5G Filter bank	SKET	N/A	2025/06/09	2026/06/08
BLA-EMC-061	Receiver	ESPI7	R&S	101477	2025/06/09	2026/06/08
BLA-EMC-066	Amplifier	LNPA_30M01G-30	SKET	SK2021060801	2025/06/09	2026/06/08
BLA-EMC-086	Amplifier	LNPA_18G40G-50dB	SKET	SK2022071301	2025/06/09	2026/06/08
BLA-EMC-087	Horn Antenna	BBHA 9170	Schwarzbeck	1106	2024/06/29	2026/06/28
BLA-XC-03	Coaxial Cable	N/A	BlueAsia	V03	N/A	N/A
BLA-XC-04	Coaxial Cable	N/A	BlueAsia	V04	N/A	N/A

RF conducted

Equipment	Name	Model	Manufacture	S/N	Cal. Date	Due. Date
BLA-EMC-003-003	Shield room	5*3*3	SKET	N/A	2023/11/16	2026/11/15
BLA-EMC-016	Signal Generator	N5182A	Agilent	MY52420567	2025/06/09	2026/06/08
BLA-EMC-038	Spectrum	N9020A	Agilent	MY49100060	2025/08/05	2026/08/04
BLA-EMC-042	Power sensor	RPR3006 W	DARE	14I00889SN042	2025/08/05	2026/08/04
BLA-EMC-044	Radio communication tester	CMW500	R&S	132429	2025/08/05	2026/08/04
BLA-EMC-064	Signal Generator	N5182B	KEYSIGHT	MY58108892	2025/06/09	2026/06/08
BLA-EMC-079	Spectrum	N9020A	Agilent	MY54420161	2025/08/05	2026/08/04
BLA-EMC-088	Audio Analyzer	ATS-1	Audio Precision	ATS141094	2025/06/09	2026/06/08
BLA-EMC-100	Digital Radio Tester	RWC2010	Redwoodcom m	RWC201024903 04	2025/06/09	2026/06/08

Test Software Record

Software No.	Software Name	Manufacture	Software version	Test site
BLA-EMC-S001	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S002	EZ-EMC	EZ	EEMC-3A1+	RE
BLA-EMC-S010	MTS 8310	MW	2.0.0.0	RF

6 Test result

6.1 Antenna requirement

Test Standard	47 CFR Part 15, Subpart C 15.203
Test Method	N/A

6.1.1 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of a so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT antenna:

The antenna is FPC Antenna The best case gain of the antenna is -11.84dBi


6.2 Conducted peak output Power

Test Standard	47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.2.1 Limit

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

6.2.2 Test setup

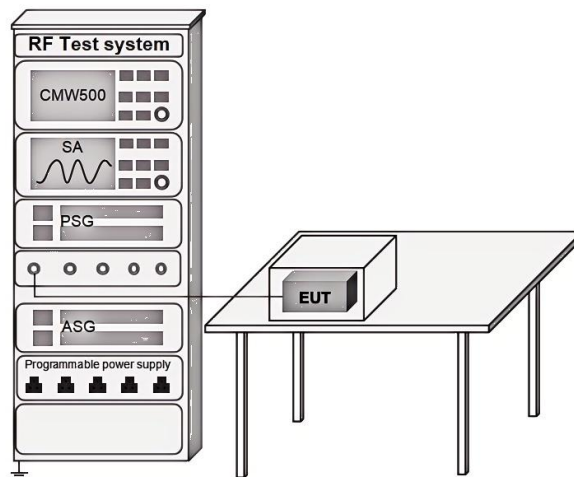


6.2.3 Test data

Note: PK power sensor is used to read PK Conducted power power directly
Pass: Please refer to appendix A for details

6.3 20dB Bandwidth

Test Standard	47 CFR Part 15, Subpart C 15.247 (a)(1)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 6.9.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.3.1 Test setup

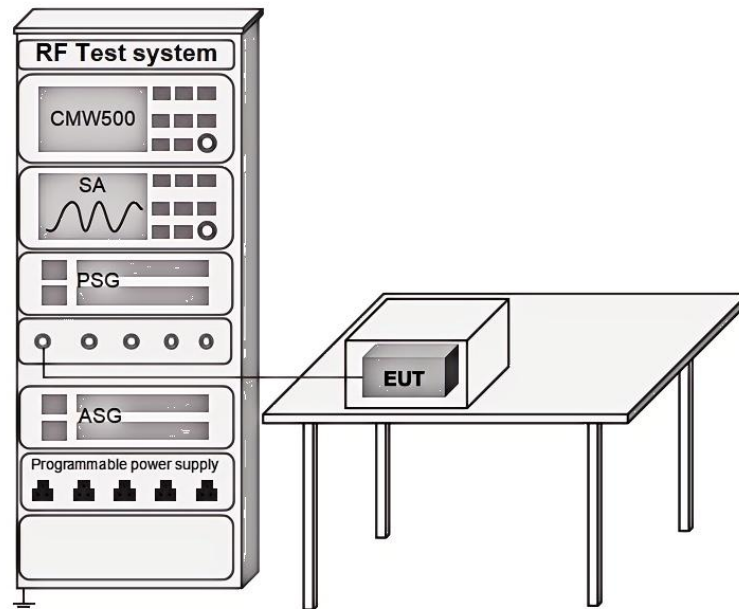

6.3.2 Test data

Pass: Please refer to appendix A for details

6.4 Conducted Band Edges Measurement

Test Standard	47 CFR Part 15, Subpart C 15.247 (d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.4.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.4.2 Test setup

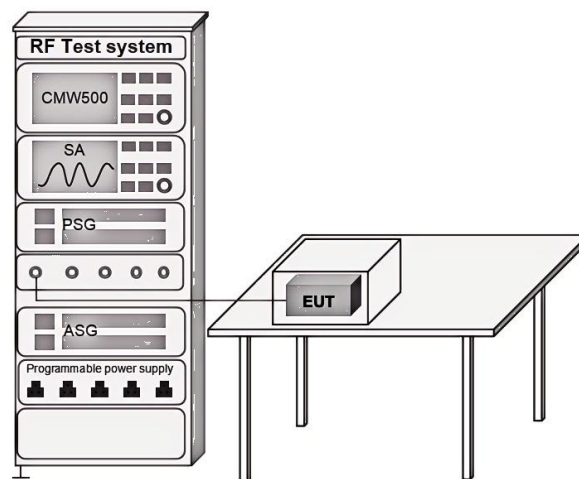

6.4.3 Test data

Pass: Please refer to appendix A for details

BlueAsia

6.5 Conducted spurious emissions

Test Standard	47 CFR Part 15, Subpart C 15.247 (d)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.8
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.5.1 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

6.5.2 Test setup

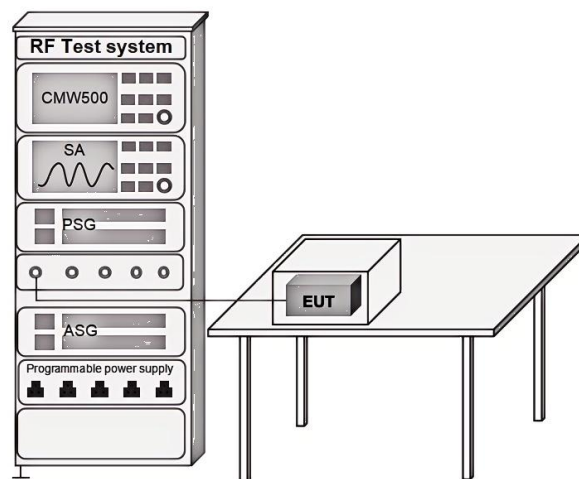

6.5.3 Test data

Pass: Please refer to appendix A for details

BlueAsia


6.6 Carrier Frequencies Separation

Test Standard	47 CFR Part 15, Subpart C 15.247 (a)(1)
Test Method	ANSI C63.10-2020+Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 Clause 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX

6.6.1 Limit

2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W

6.6.2 Test setup

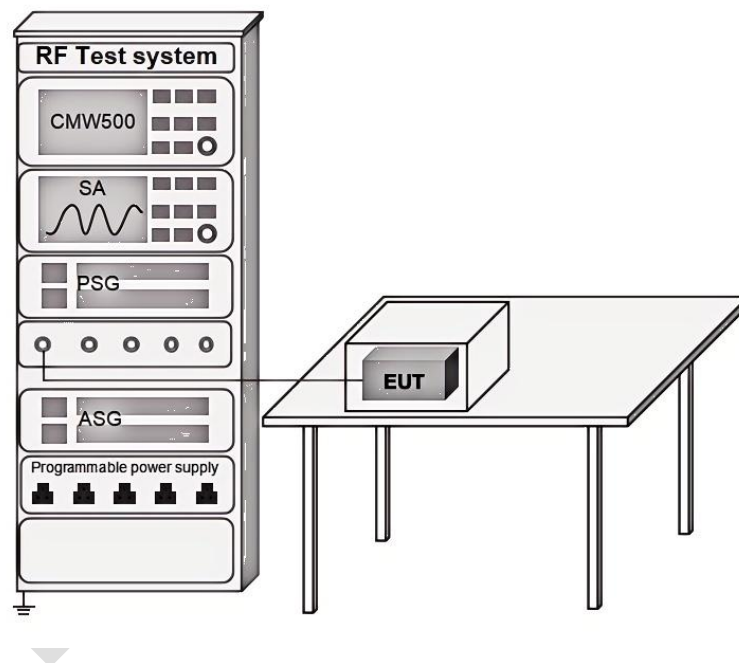

6.6.3 Test data

Pass: Please refer to appendix A for details