

TEST REPORT

Report No.: BCTC2302905605E

Applicant: Movcam Tech. Co., Ltd

Product Name: M2401

Model/Type
reference: 50105

Tested Date: 2023-05-31 to 2023-07-06

Issued Date: 2023-07-06

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AFZ6-50105

Product Name: M2401
Trademark: MOVCAM
Model/Type Ref.: 50105
Prepared For: Movcam Tech. Co., Ltd
Address: F1-Bld2, #224 Huating Road, Dalang street, Longhua New District, Shenzhen, China
Manufacturer: Movcam Tech. Co., Ltd
Address: F1-Bld2, #224 Huating Road, Dalang street, Longhua New District, Shenzhen, China
Prepared By: Shenzhen BCTC Testing Co., Ltd.
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: 2023-02-17
Sample tested Date: 2023-05-31 to 2023-07-06
Issue Date: 2023-07-06
Report No.: BCTC2302905605E
Test Standards: FCC Part15.247
ANSI C63.10-2013
Test Results: PASS
Remark: This is SRD-2.4GHz radio test report.

Tested by:



Lei Chen/Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.


Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information.....	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
4.6 Table of parameters of test software setting	11
5. Test Facility And Test Instrument Used.....	12
5.1 Test Facility.....	12
5.2 Test Instrument Used.....	12
6. Conducted Emissions.....	14
6.1 Block Diagram Of Test Setup.....	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT Operating Conditions	14
6.5 Test Result.....	15
7. Radiated Emissions.....	19
7.1 Block Diagram Of Test Setup.....	19
7.2 Limit	20
7.3 Test procedure	21
7.4 EUT operating Conditions	22
7.5 Test Result.....	23
8. Radiated Band Emission Measurement And Restricted Bands Of Operation	30
8.1 Block Diagram Of Test Setup.....	30
8.2 Limit	30
8.3 Test Procedure	31
8.4 EUT Operating Conditions	31
8.5 Test Result.....	32
9. Power Spectral Density Test	33
9.1 Block Diagram Of Test Setup.....	33
9.2 Limit	33
9.3 Test procedure	33
9.4 EUT Operating Conditions	33
9.5 Test Result.....	34
10. Bandwidth Test.....	36
10.1 Block Diagram Of Test Setup.....	36
10.2 Limit	36
10.3 Test procedure	36
10.4 EUT operating Conditions	36
10.5 Test Result.....	37
11. Peak Output Power Test	39
11.1 Block Diagram Of Test Setup.....	39
11.2 Limit	39

11.3	Test Procedure	39
11.4	EUT Operating Conditions	39
11.5	Test Result	39
12.	100 kHz Bandwidth Of Frequency Band Edge	40
12.1	Block Diagram Of Test Setup.....	40
12.2	Limit	40
12.3	Test procedure	40
12.4	EUT operating Conditions	40
12.5	Test Result	41
13.	Antenna Requirement	43
13.1	Limit	43
13.2	Test Result	43
14.	EUT Photographs	44
15.	EUT Test Setup Photographs.....	45


(Note: N/A Means Not Applicable)

TEST
TC
OVER
檢

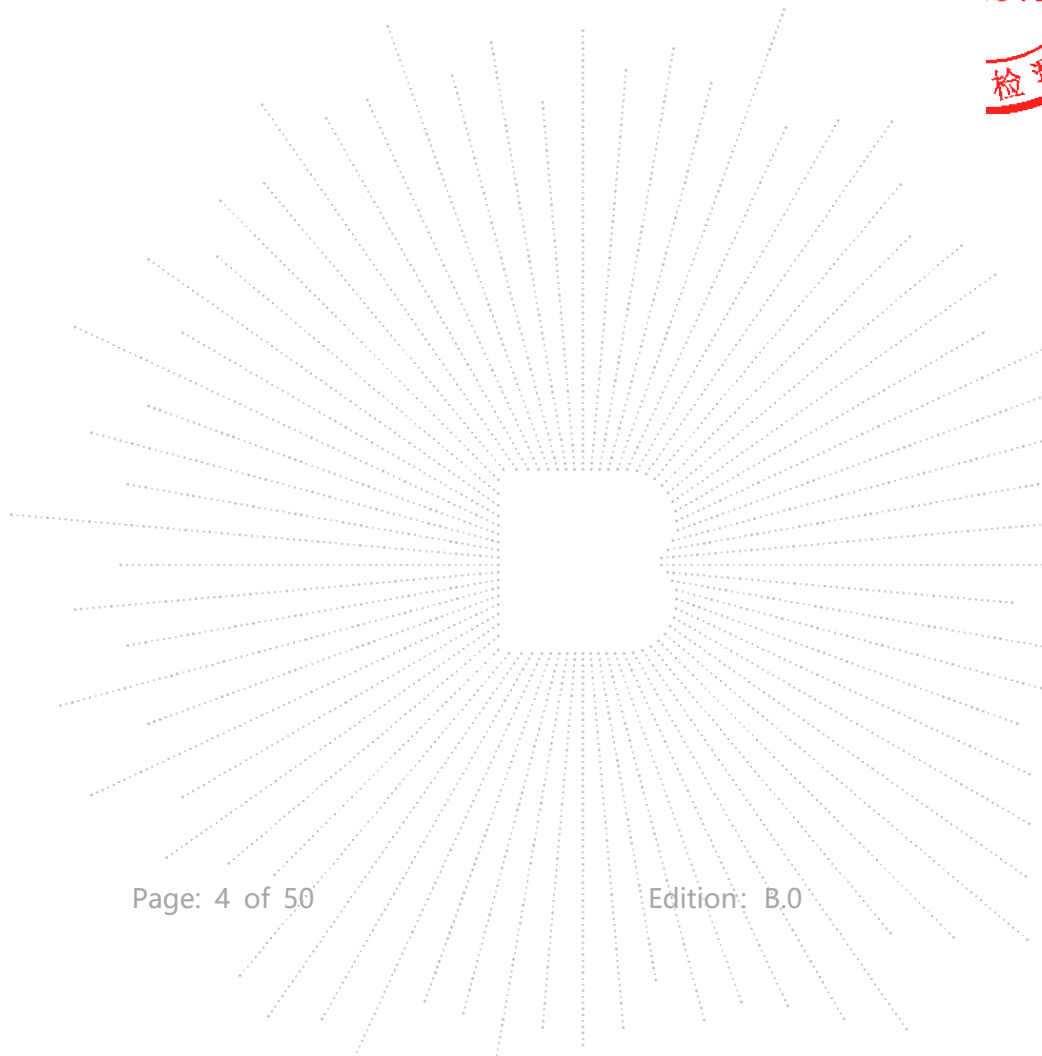

1. Version

Report No.	Issue Date	Description	Approved
BCTC2302905605E	2023-07-06	Original	Valid

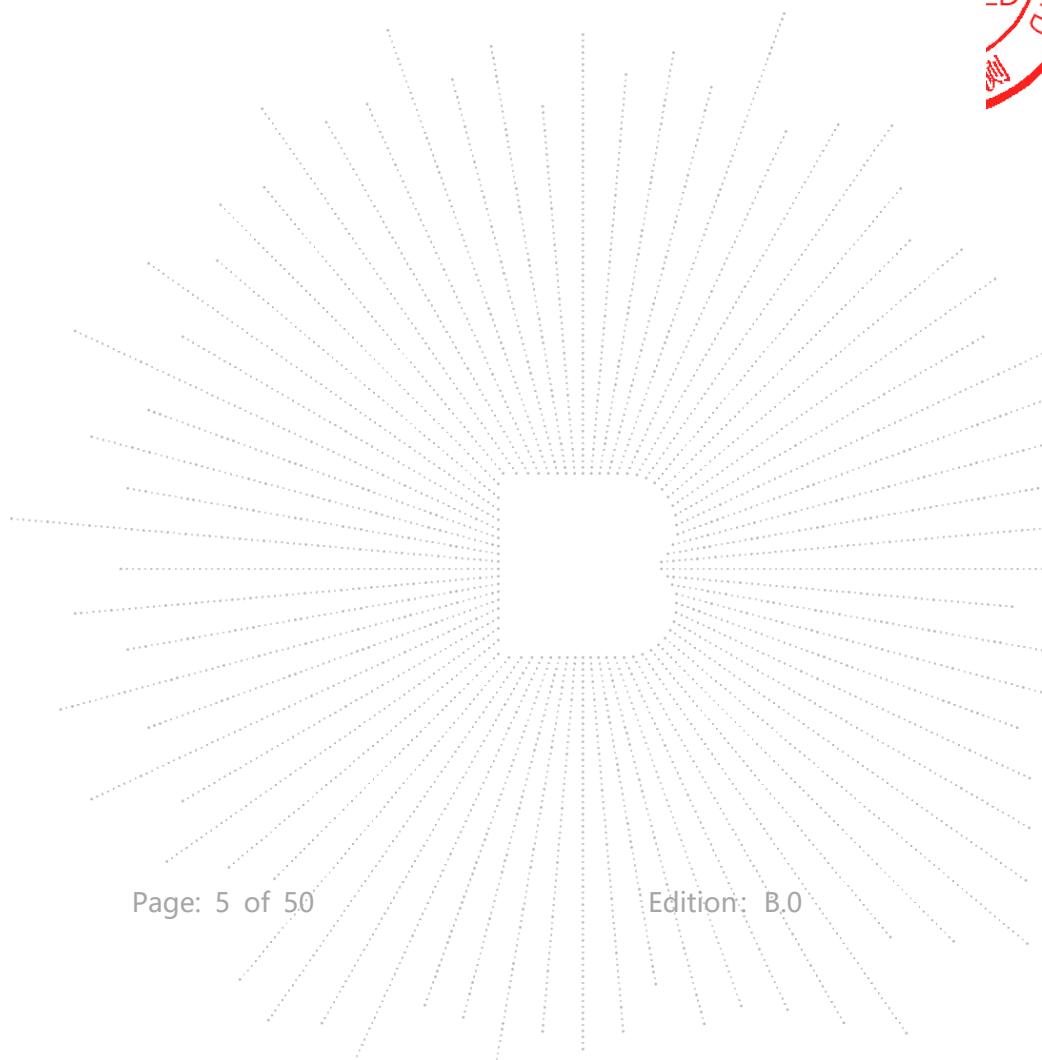

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS
2	6dB Bandwidth	15.247 (a)(2)	PASS
3	Peak Output Power	15.247 (b)	PASS
4	Radiated Spurious Emission	15.247 (d), 15.205	PASS
5	Power Spectral Density	15.247 (e)	PASS
6	Restricted Band of Operation	15.205	PASS
7	Band Edge (Out of Band Emissions)	15.247(d)	PASS
8	Antenna Requirement	15.203	PASS

CO., LTD.

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59℃

4. Product Information And Test Setup

4.1 Product Information


Model/Type reference:	50105
Model differences:	N/A
Hardware Version:	N/A
Software Version:	N/A
Operation Frequency:	2401MHz-2479MHz
Type of Modulation:	GFSK
Number Of Channel:	40CH
Antenna installation:	PCB antenna, Snap antenna
Antenna Gain:	PCB antenna :3.77 dBi Snap antenna: 1.51 dBi
Ratings:	DC 3.3V
Remark:	The module does not support the MIMO mode.




4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	M2401	MOVCAM	50105	N/A	EUT
E-2	PC	N/A	Thinkpad S2	N/A	Auxiliary

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)
0	2401	10	2421	20	2441	30	2461
1	2403	11	2423	21	2443	31	2463
2	2405	12	2425	22	2445	32	2465
3	2407	13	2427	23	2447	33	2467
4	2409	14	2429	24	2449	34	2469
5	2411	15	2431	25	2451	35	2471
6	2413	16	2433	26	2453	36	2473
7	2415	17	2435	27	2455	37	2475
8	2417	18	2437	28	2457	38	2477
9	2419	19	2439	29	2459	39	2479

TE
TC
OVER
檢

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH00	GFSK
Mode 2	CH19	
Mode 3	CH39	
Mode 4	Transmitting (Conducted Emissions& Radiated emission)	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

4.6 Table of parameters of text software setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	N/A		
Frequency	2401 MHz	2439 MHz	2479 MHz
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

FCC Designation Number: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
LISN	R&S	ENV216	101375	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 15, 2023	May 14, 2024


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 15, 2023	May 14, 2024

Radiated Emissions Test (966 Chamber01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	May 15, 2023	May 14, 2026
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRP	101154	May 15, 2023	May 14, 2024
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 15, 2023	May 14, 2024
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	May 29, 2023	May 28, 2024
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 15, 2023	May 14, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35-HG	2034381	May 15, 2023	May 14, 2024
Horn Antenna(18G Hz-40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

SHENZHEN

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

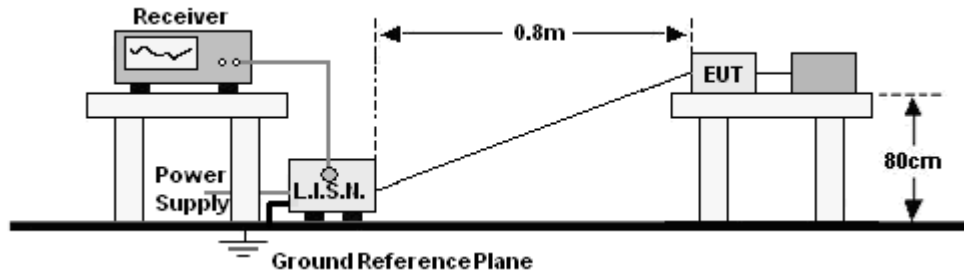

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4 (PCB antenna)	Test Voltage :	AC120V/60Hz

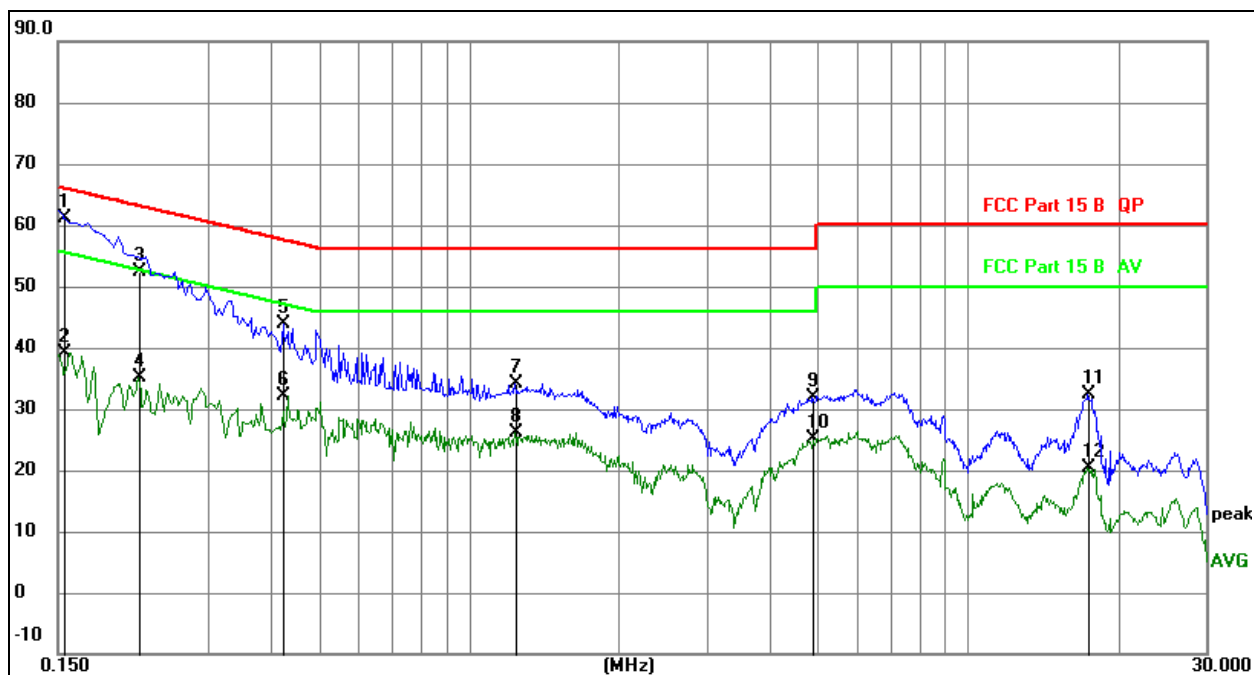


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1548	51.52	9.52	61.04	65.74	-4.70	QP
2		0.1548	29.58	9.52	39.10	55.74	-16.64	AVG
3		0.2175	42.84	9.61	52.45	62.91	-10.46	QP
4		0.2175	25.45	9.61	35.06	52.91	-17.85	AVG
5		0.4245	34.30	9.62	43.92	57.36	-13.44	QP
6		0.4245	22.56	9.62	32.18	47.36	-15.18	AVG
7		1.2390	24.43	9.73	34.16	56.00	-21.84	QP
8		1.2390	16.43	9.73	26.16	46.00	-19.84	AVG
9		4.8840	21.95	9.81	31.76	56.00	-24.24	QP
10		4.8840	15.38	9.81	25.19	46.00	-20.81	AVG
11		17.4615	22.68	9.72	32.40	60.00	-27.60	QP
12		17.4615	10.58	9.72	20.30	50.00	-29.70	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4 (PCB antenna)	Test Voltage :	AC120V/60Hz

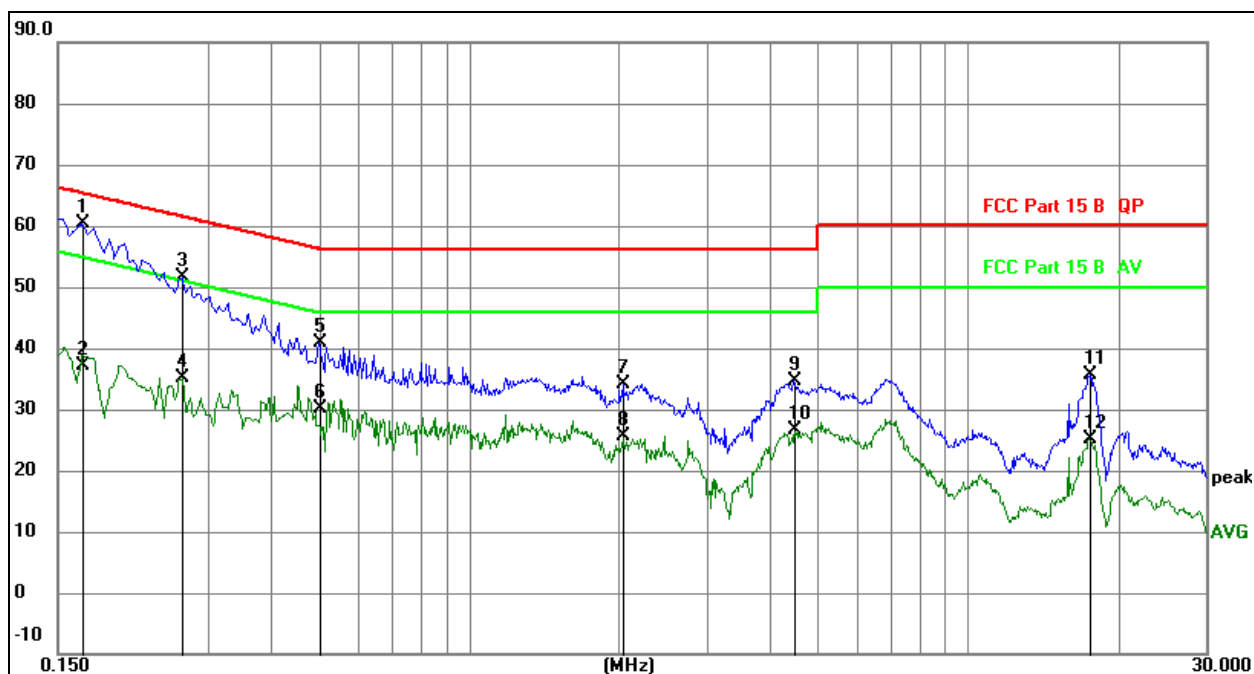


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz		dB	dBuV	dBuV	dB	Detector
1	*	0.1677	50.78	9.55	60.33	65.07	-4.74	QP
2		0.1677	27.58	9.55	37.13	55.07	-17.94	AVG
3		0.2658	42.02	9.61	51.63	61.25	-9.62	QP
4		0.2658	25.51	9.61	35.12	51.25	-16.13	AVG
5		0.4994	31.38	9.62	41.00	56.01	-15.01	QP
6		0.4994	20.57	9.62	30.19	46.01	-15.82	AVG
7		2.0333	24.36	9.73	34.09	56.00	-21.91	QP
8		2.0333	15.85	9.73	25.58	46.00	-20.42	AVG
9		4.4777	24.81	9.82	34.63	56.00	-21.37	QP
10		4.4777	16.83	9.82	26.65	46.00	-19.35	AVG
11		17.4750	25.88	9.72	35.60	60.00	-24.40	QP
12		17.4750	15.51	9.72	25.23	50.00	-24.77	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	L
Test Mode:	Mode 4 (Snap antenna)	Test Voltage :	AC120V/60Hz

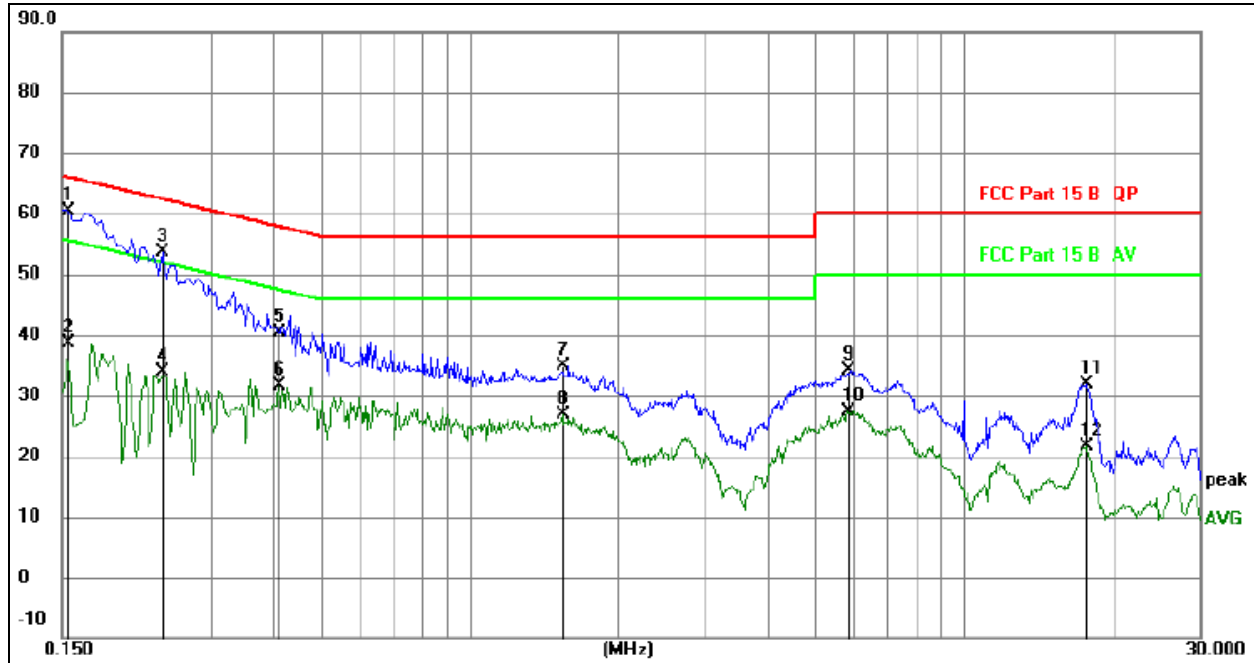


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1548	50.82	9.52	60.34	65.74	-5.40	QP
2		0.1548	29.18	9.52	38.70	55.74	-17.04	AVG
3		0.2391	43.94	9.61	53.55	62.13	-8.58	QP
4		0.2391	24.33	9.61	33.94	52.13	-18.19	AVG
5		0.4105	30.69	9.62	40.31	57.64	-17.33	QP
6		0.4105	22.13	9.62	31.75	47.64	-15.89	AVG
7		1.5436	25.08	9.73	34.81	56.00	-21.19	QP
8		1.5436	17.12	9.73	26.85	46.00	-19.15	AVG
9		5.8050	24.40	9.78	34.18	60.00	-25.82	QP
10		5.8050	17.61	9.78	27.39	50.00	-22.61	AVG
11		17.6611	22.13	9.72	31.85	60.00	-28.15	QP
12		17.6611	11.96	9.72	21.68	50.00	-28.32	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	N
Test Mode:	Mode 4 (Snap antenna)	Test Voltage :	AC120V/60Hz

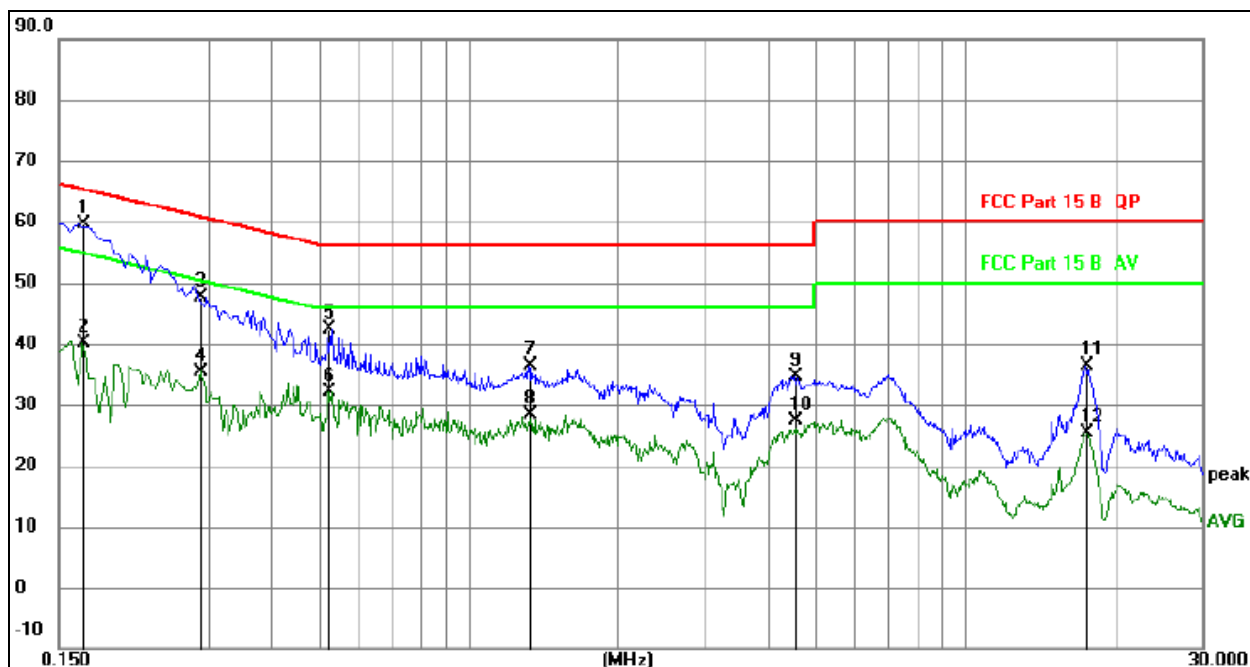

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1680	50.11	9.55	59.66	65.06	-5.40	QP
2		0.1680	30.69	9.55	40.24	55.06	-14.82	AVG
3		0.2895	37.97	9.61	47.58	60.54	-12.96	QP
4		0.2895	25.89	9.61	35.50	50.54	-15.04	AVG
5		0.5235	32.81	9.62	42.43	56.00	-13.57	QP
6		0.5235	22.62	9.62	32.24	46.00	-13.76	AVG
7		1.3290	26.58	9.73	36.31	56.00	-19.69	QP
8		1.3290	18.68	9.73	28.41	46.00	-17.59	AVG
9		4.5375	24.78	9.82	34.60	56.00	-21.40	QP
10		4.5375	17.45	9.82	27.27	46.00	-18.73	AVG
11		17.4975	26.69	9.72	36.41	60.00	-23.59	QP
12		17.4975	15.75	9.72	25.47	50.00	-24.53	AVG

CO., LTD.


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

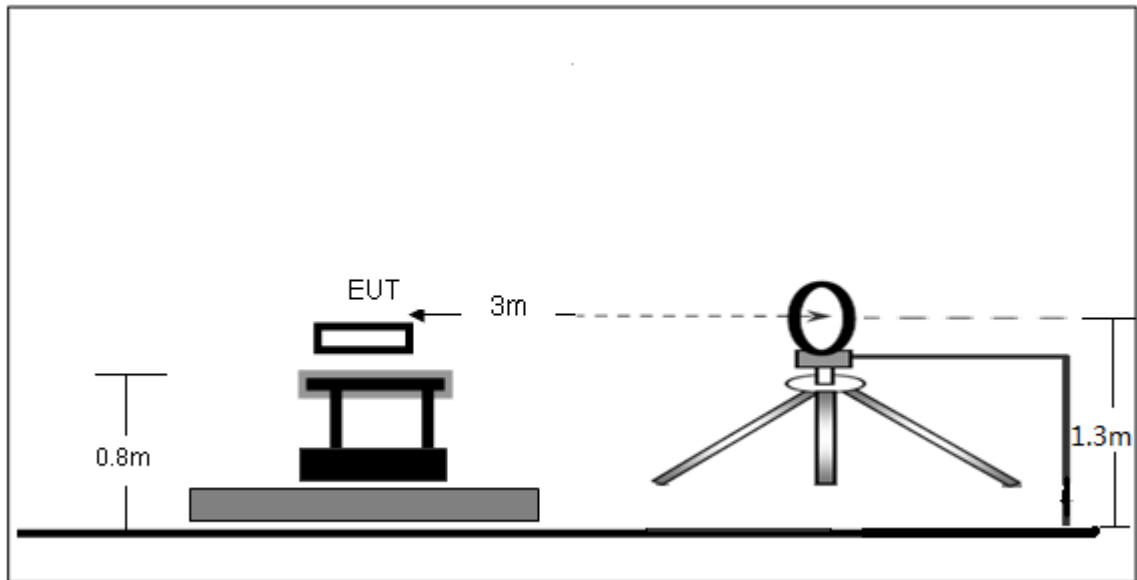

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

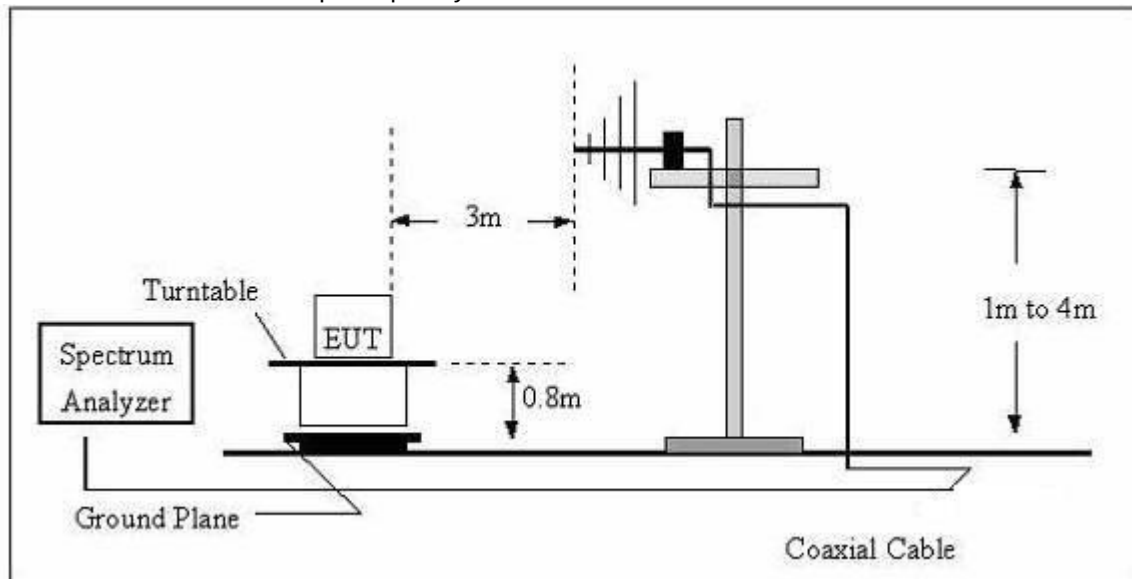

(C) Radiated Emission Test-Up Frequency Above 1GHz

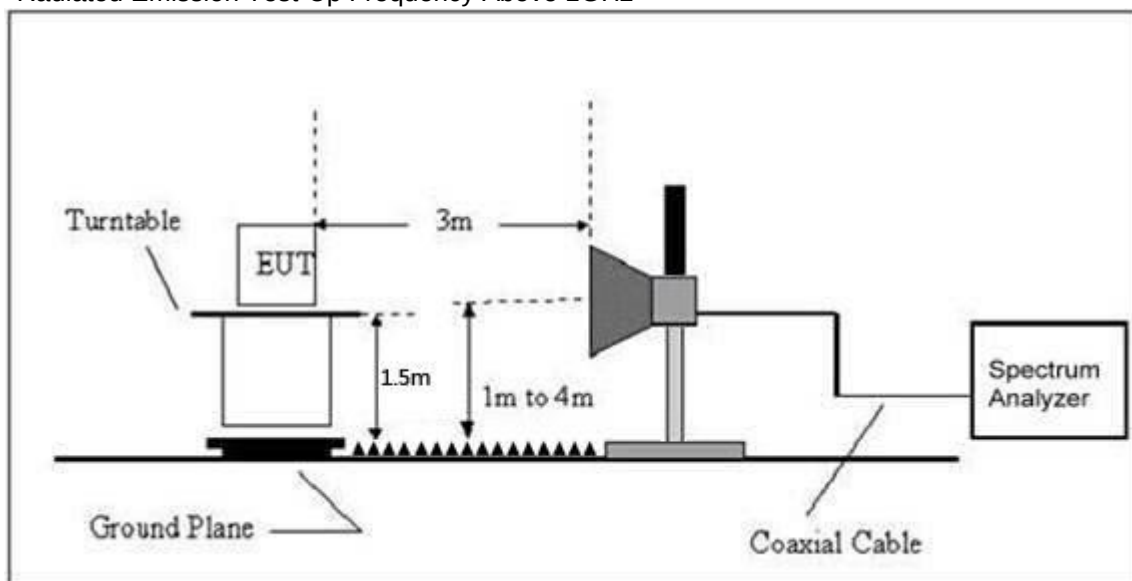

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 30MHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, The antenna installation height is determined by the antenna center being 1.3 meters above the ground.
- The antenna center height is 1.3 meters above the ground to determine the maximum value of the field strength. Measurements shall be performed with the loop antenna placed vertically, in turn, in two polarizations (the measurement axis specified below is the line segment connecting the projections on the ground plane of the centre of the loop antenna and the centre of the EUT arrangement):
 - coaxial (loop plane perpendicular to the ground plane and to the measurement axis);
 - coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis).
- For each suspected emission, the EUT was arranged to its worst case , the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

30M-1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Above 1GHz test procedure as below:
- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel.
- Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.
- Note:
Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26°C	Relative Humidity:	24%
Pressure:	101 kPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 4		


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

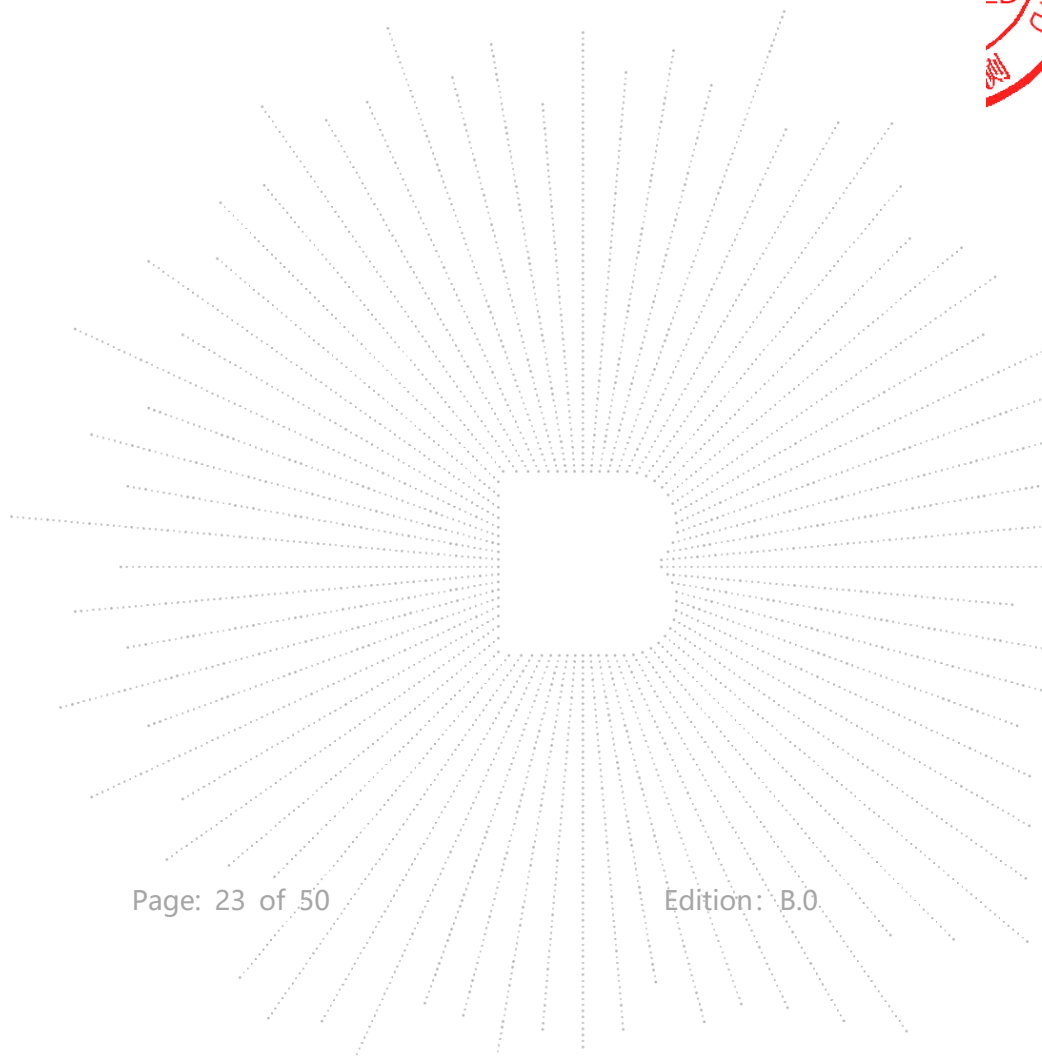

Between 30MHz – 1GHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4 (PCB antenna)	Test Voltage :	AC 120V/60Hz

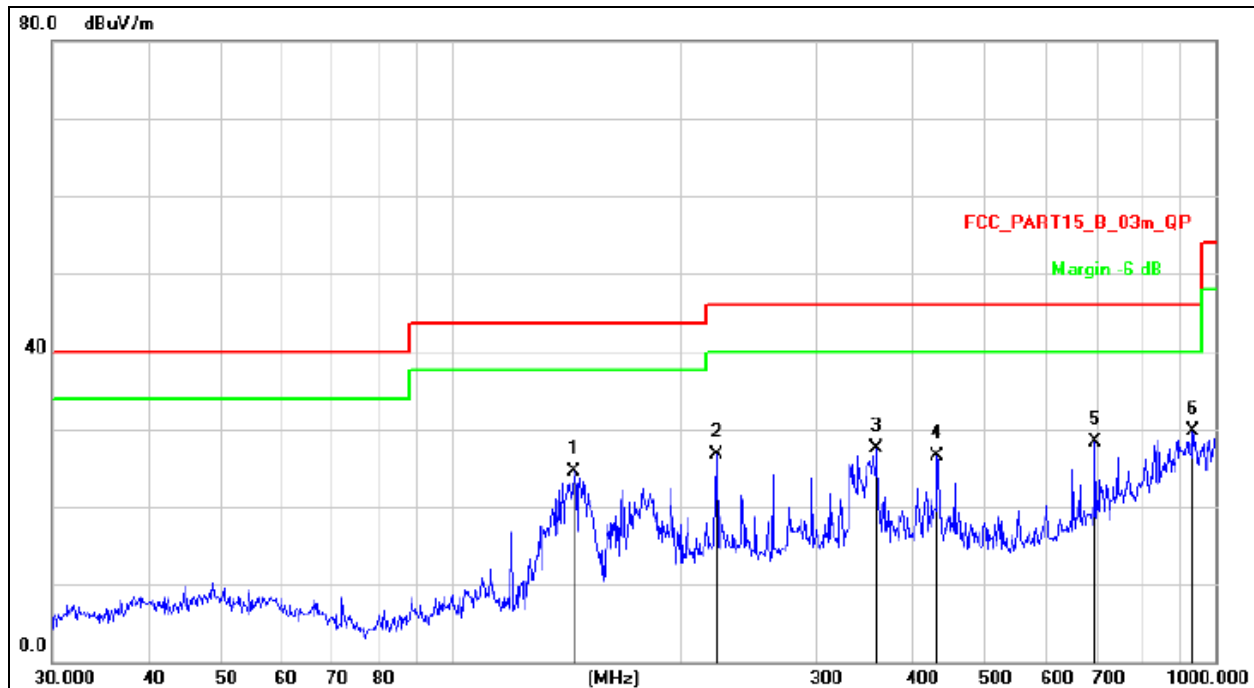


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		144.8418	45.17	-20.71	24.46	43.50	-19.04	QP
2		222.1698	43.44	-16.69	26.75	46.00	-19.25	QP
3		360.4476	40.10	-12.67	27.43	46.00	-18.57	QP
4		432.5457	38.15	-11.74	26.41	46.00	-19.59	QP
5		696.8567	35.59	-7.22	28.37	46.00	-17.63	QP
6	*	932.2715	33.86	-4.24	29.62	46.00	-16.38	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4 (PCB antenna)	Test Voltage :	AC 120V/60Hz

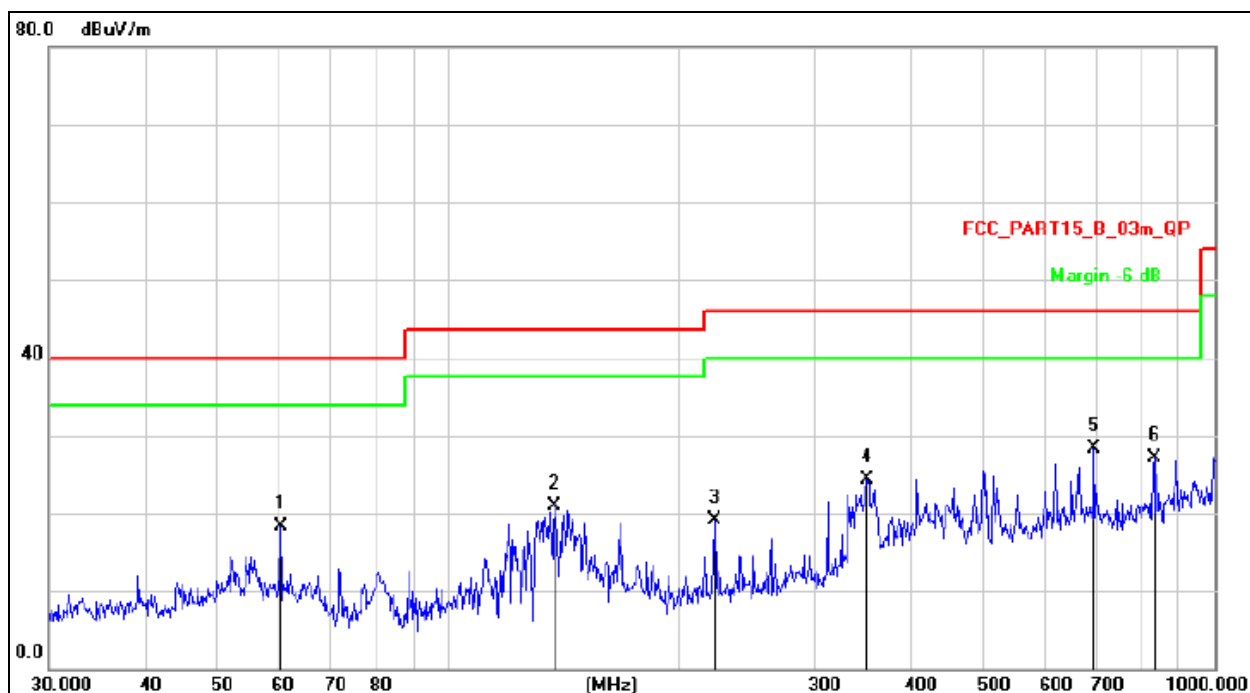


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		60.2801	35.44	-17.17	18.27	40.00	-21.73	QP
2		137.4202	41.20	-20.22	20.98	43.50	-22.52	QP
3		222.1698	35.72	-16.69	19.03	46.00	-26.97	QP
4		351.7079	37.06	-12.77	24.29	46.00	-21.71	QP
5	*	696.8567	35.44	-7.22	28.22	46.00	-17.78	QP
6		833.3171	32.45	-5.29	27.16	46.00	-18.84	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4 (Snap antenna)	Test Voltage :	AC 120V/60Hz

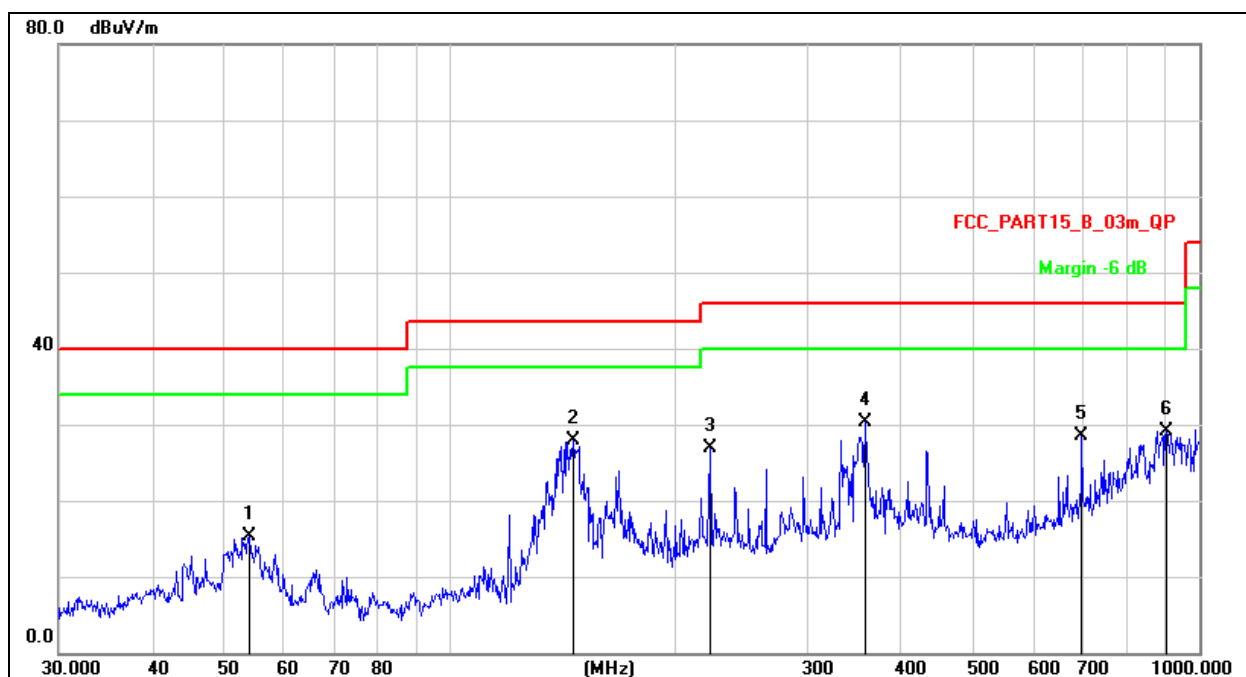


Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		53.8818	31.53	-16.17	15.36	40.00	-24.64	QP
2	*	145.8611	48.73	-20.78	27.95	43.50	-15.55	QP
3		222.1698	43.57	-16.69	26.88	46.00	-19.12	QP
4		357.9287	43.09	-12.70	30.39	46.00	-15.61	QP
5		696.8567	35.65	-7.22	28.43	46.00	-17.57	QP
6		903.3094	33.75	-4.55	29.20	46.00	-16.80	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4 (Snap antenna)	Test Voltage :	AC 120V/60Hz

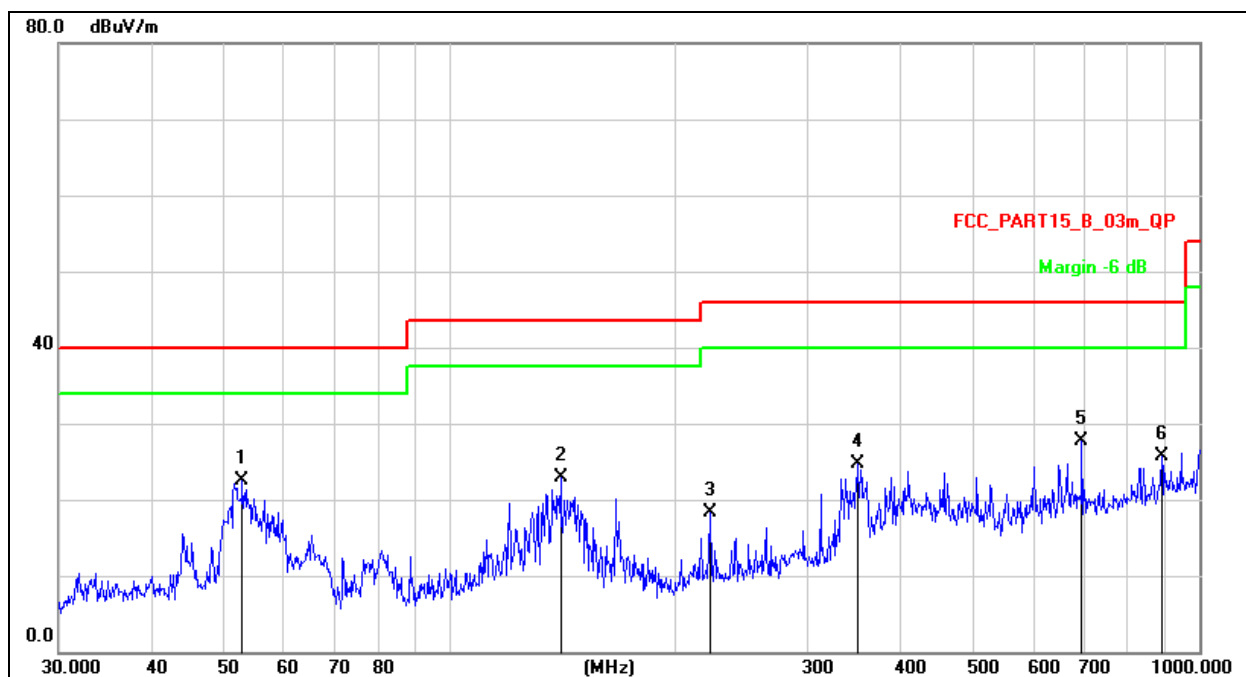

Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	52.7600	38.41	-16.00	22.41	40.00	-17.59	QP
2		140.3421	43.34	-20.41	22.93	43.50	-20.57	QP
3		222.1698	35.09	-16.69	18.40	46.00	-27.60	QP
4		350.4768	37.56	-12.78	24.78	46.00	-21.22	QP
5		696.8567	34.94	-7.22	27.72	46.00	-18.28	QP
6		890.7278	30.37	-4.69	25.68	46.00	-20.32	QP

Between 1GHz – 25GHz

PCB antenna

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4802.00	70.07	-20.00	50.07	74.00	-23.93	PK
V	4802.00	61.91	-20.00	41.91	54.00	-12.09	AV
V	7203.00	62.09	-14.23	47.86	74.00	-26.14	PK
V	7203.00	52.28	-14.23	38.05	54.00	-15.95	AV
H	4802.00	65.21	-20.00	45.21	74.00	-28.79	PK
H	4802.00	55.45	-20.00	35.45	54.00	-18.55	AV
H	7203.00	60.69	-14.23	46.46	74.00	-27.54	PK
H	7203.00	53.21	-14.23	38.98	54.00	-15.02	AV
Middle channel							
V	4878.00	67.58	-19.84	47.74	74.00	-26.26	PK
V	4878.00	59.31	-19.84	39.47	54.00	-14.53	AV
V	7317.00	59.58	-13.91	45.67	74.00	-28.33	PK
V	7317.00	51.10	-13.91	37.19	54.00	-16.81	AV
H	4878.00	64.39	-19.84	44.55	74.00	-29.45	PK
H	4878.00	54.25	-19.84	34.41	54.00	-19.59	AV
H	7317.00	56.89	-13.91	42.98	74.00	-31.02	PK
H	7317.00	48.15	-13.91	34.24	54.00	-19.76	AV
High channel							
V	4958.00	69.08	-19.68	49.40	74.00	-24.60	PK
V	4958.00	58.54	-19.68	38.86	54.00	-15.14	AV
V	7437.00	60.85	-13.58	47.27	74.00	-26.73	PK
V	7437.00	51.61	-13.58	38.03	54.00	-15.97	AV
H	4958.00	66.85	-19.68	47.17	74.00	-26.83	PK
H	4958.00	57.53	-19.68	37.85	54.00	-16.15	AV
H	7437.00	59.74	-13.58	46.16	74.00	-27.84	PK
H	7437.00	52.00	-13.58	38.42	54.00	-15.58	AV

Remark:

1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

GFSK							
Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure-m ent	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel							
V	4802.00	69.21	-20.00	49.21	74.00	-24.79	PK
V	4802.00	59.78	-20.00	39.78	54.00	-14.22	AV
V	7203.00	58.54	-14.23	44.31	74.00	-29.69	PK
V	7203.00	48.88	-14.23	34.65	54.00	-19.35	AV
H	4802.00	67.87	-20.00	47.87	74.00	-26.13	PK
H	4802.00	58.16	-20.00	38.16	54.00	-15.84	AV
H	7203.00	56.18	-14.23	41.95	74.00	-32.05	PK
H	7203.00	48.23	-14.23	34.00	54.00	-20.00	AV
Middle channel							
V	4878.00	66.90	-19.84	47.06	74.00	-26.94	PK
V	4878.00	60.02	-19.84	40.18	54.00	-13.82	AV
V	7317.00	56.03	-13.91	42.12	74.00	-31.88	PK
V	7317.00	46.89	-13.91	32.98	54.00	-21.02	AV
H	4878.00	63.79	-19.84	43.95	74.00	-30.05	PK
H	4878.00	53.79	-19.84	33.95	54.00	-20.05	AV
H	7317.00	54.26	-13.91	40.35	74.00	-33.65	PK
H	7317.00	45.81	-13.91	31.90	54.00	-22.10	AV
High channel							
V	4958.00	69.09	-19.68	49.41	74.00	-24.59	PK
V	4958.00	60.97	-19.68	41.29	54.00	-12.71	AV
V	7437.00	61.79	-13.58	48.21	74.00	-25.79	PK
V	7437.00	50.88	-13.58	37.30	54.00	-16.70	AV
H	4958.00	66.34	-19.68	46.66	74.00	-27.34	PK
H	4958.00	55.53	-19.68	35.85	54.00	-18.15	AV
H	7437.00	59.14	-13.58	45.56	74.00	-28.44	PK
H	7437.00	50.38	-13.58	36.80	54.00	-17.20	AV


Remark:

1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over = Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

8. Radiated Band Emission Measurement And Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

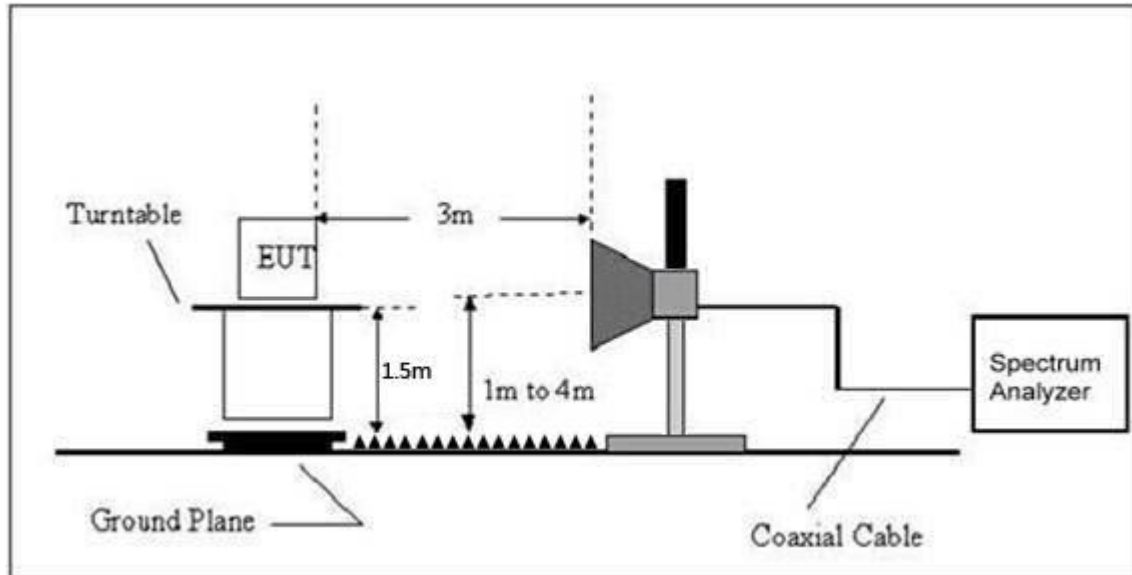

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

(1)The limit for radiated test was performed according to FCC PART 15C.

(2)The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test Procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

GFSK (PCB antenna)	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result	
					PK	PK	AV		
	Low Channel								
	H	2390.00	71.37	-25.43	45.94	74.00	54.00	PASS	
	H	2400.00	75.97	-25.40	50.57	74.00	54.00	PASS	
	V	2390.00	71.58	-25.43	46.15	74.00	54.00	PASS	
	V	2400.00	75.62	-25.40	50.22	74.00	54.00	PASS	
	High Channel								
	H	2483.50	73.46	-25.15	48.31	74.00	54.00	PASS	
	H	2500.00	69.27	-25.10	44.17	74.00	54.00	PASS	
V	2483.50	74.63	-25.15	49.48	74.00	54.00	PASS		
V	2500.00	69.84	-25.10	44.74	74.00	54.00	PASS		
GFSK (Snap antenna)	Low Channel								
	H	2390.00	72.57	-25.43	47.14	74.00	54.00	PASS	
	H	2400.00	76.61	-25.40	51.21	74.00	54.00	PASS	
	V	2390.00	73.55	-25.43	48.12	74.00	54.00	PASS	
	V	2400.00	77.04	-25.40	51.64	74.00	54.00	PASS	
	High Channel								
	H	2483.50	76.59	-25.15	51.44	74.00	54.00	PASS	
	H	2500.00	71.55	-25.10	46.45	74.00	54.00	PASS	
	V	2483.50	77.66	-25.15	52.51	74.00	54.00	PASS	
	V	2500.00	72.69	-25.10	47.59	74.00	54.00	PASS	

Remark:

1. Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit


2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

4. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup

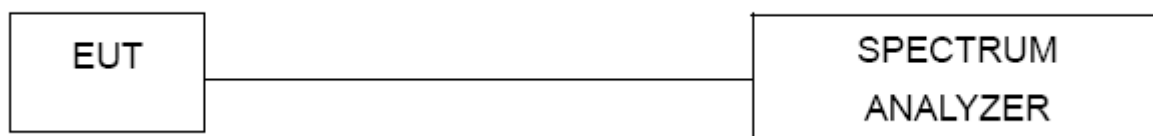

9.2 Limit

FCC Part15 (15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz

Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
2401 MHz	3.183	8	PASS
2439 MHz	3.892	8	PASS
2479 MHz	4.160	8	PASS

Low channel



Middle channel




High channel



10. Bandwidth Test

10.1 Block Diagram Of Test Setup

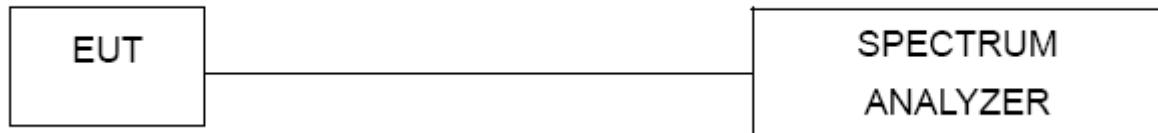

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.


Note: Power Spectral Density(dBm)=Reading+Cable Loss

10.5 Test Result


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz

Frequency (MHz)	-6dB bandwidth (MHz)	Limit (kHz)	Result
2401 MHz	0.571	500	Pass
2439 MHz	0.577	500	Pass
2479 MHz	0.572	500	Pass


Low channel

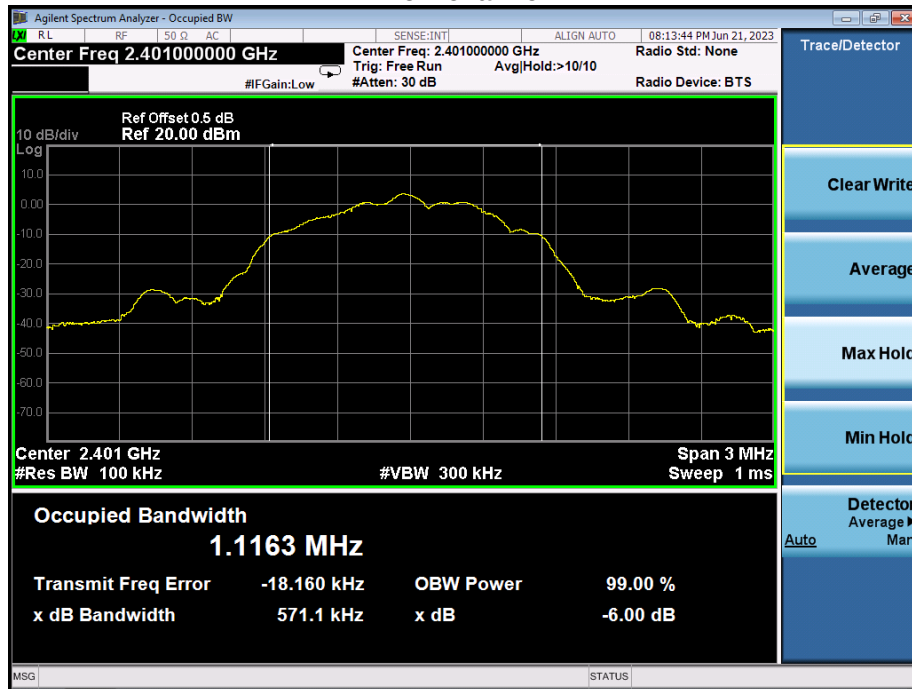

Middle channel

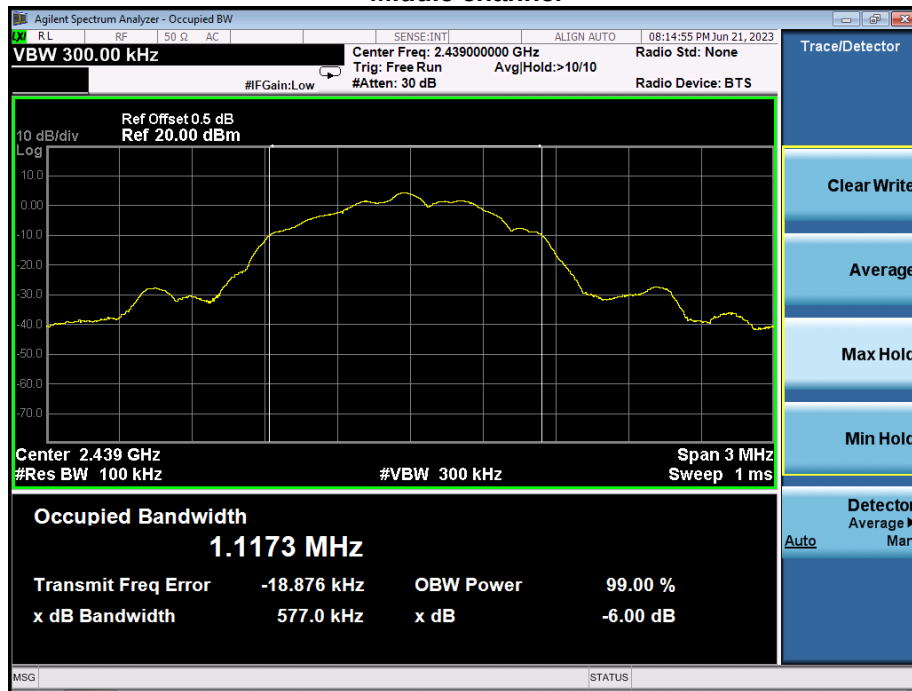

High channel

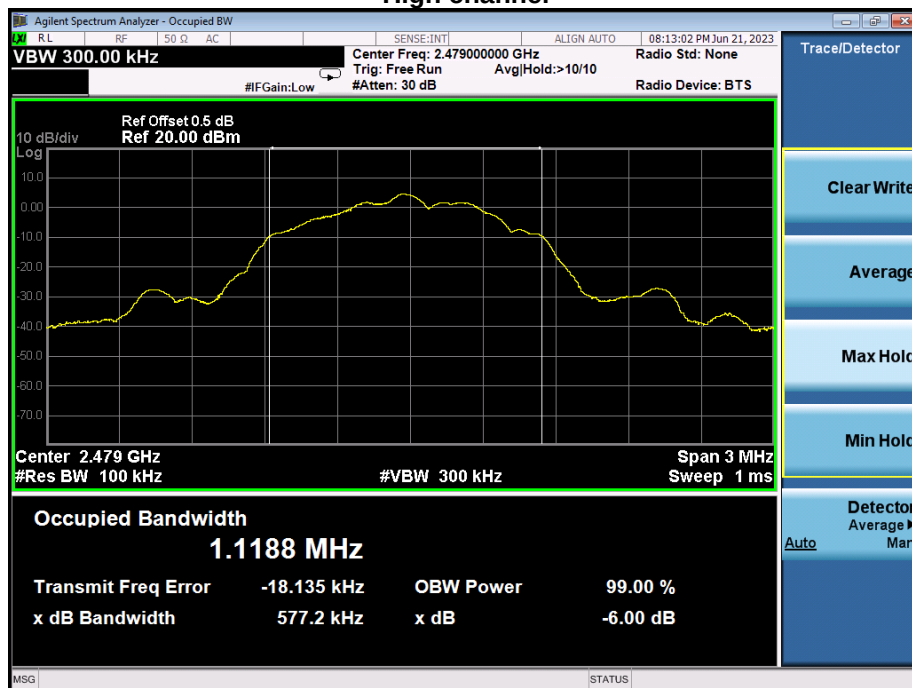

11. Peak Output Power Test

11.1 Block Diagram Of Test Setup



11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

11.3 Test Procedure

- a. The EUT was directly connected to the Power meter

11.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


11.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz

GFSK	Frequency	Maximum Conducted Output Power(PK) (dBm)	Conducted Output Power Limit(dBm)
	2401 MHz	3.658	30
	2439 MHz	4.382	30
	2479 MHz	4.628	30

12. 100 kHz Bandwidth Of Frequency Band Edge

12.1 Block Diagram Of Test Setup

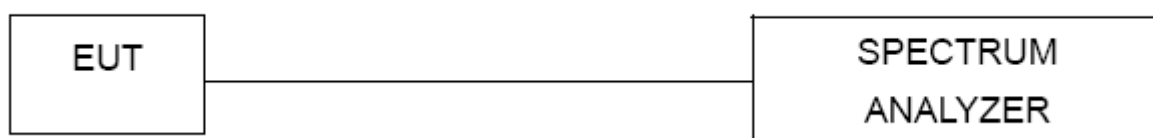

12.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

12.3 Test procedure

Using the following spectrum analyzer setting:

- a) Set the RBW = 100KHz.
- b) Set the VBW = 300KHz.
- c) Sweep time = auto couple.
- d) Detector function = peak.
- e) Trace mode = max hold.
- f) Allow trace to fully stabilize.

12.4 EUT operating Conditions


The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


12.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz


GFSK: Band Edge, Left Side

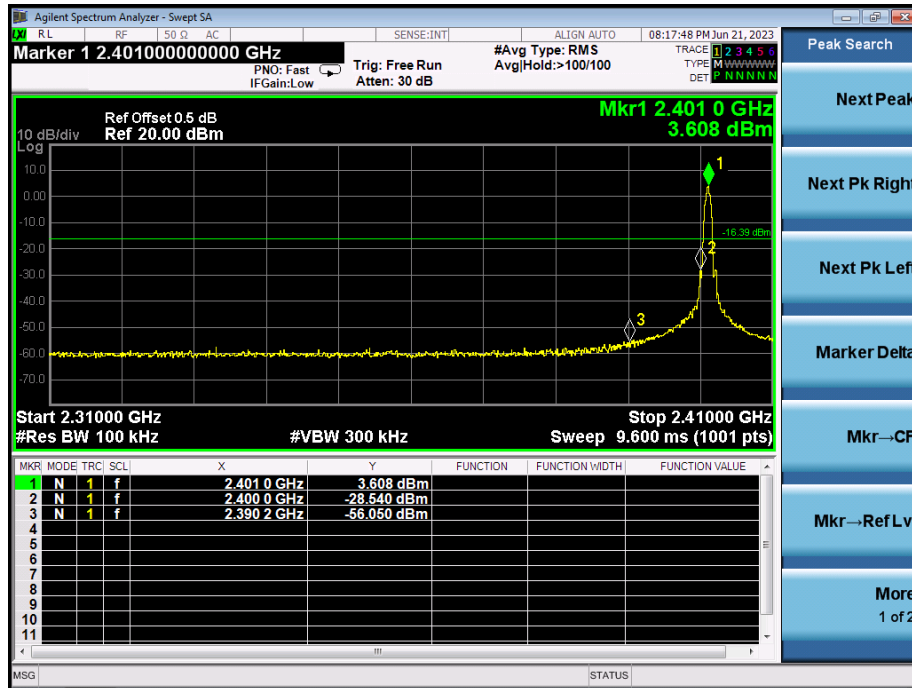


GFSK: Band Edge, Right Side

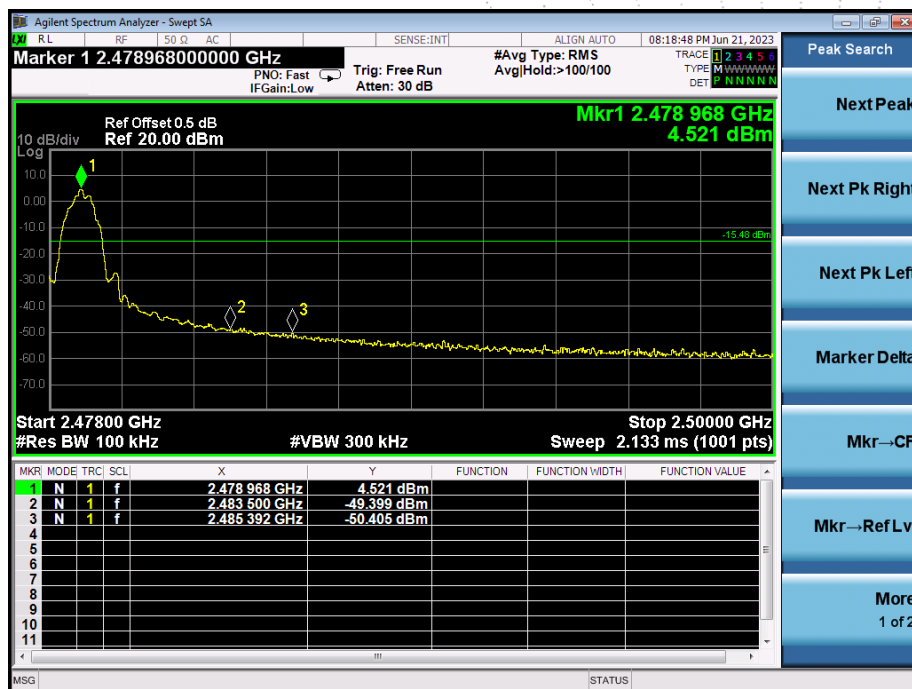


Low Channel 2403MHz

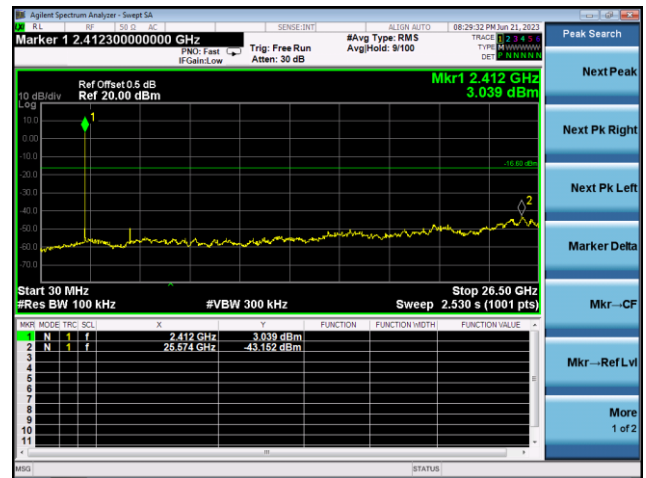

Middle Channel 2442MHz

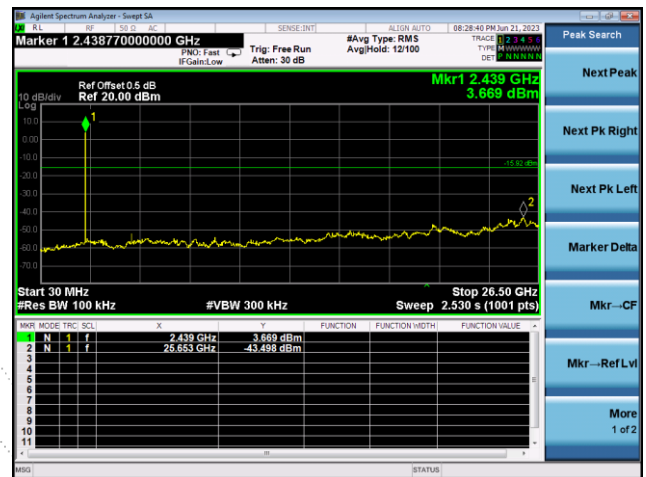

High Channel 2480MHz

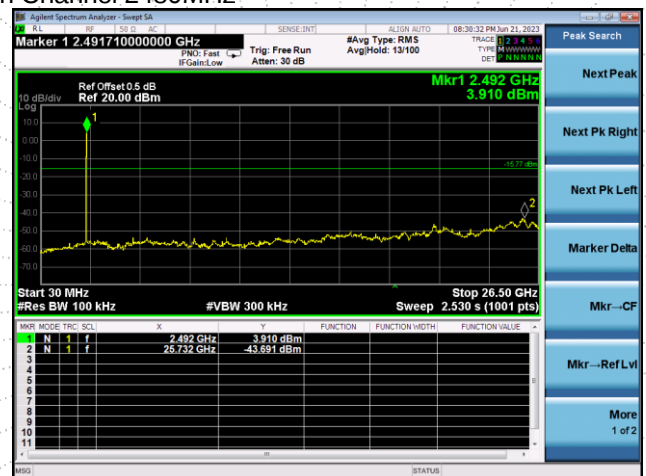

13. Antenna Requirement

13.1 Limit



15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

13.2 Test Result

The EUT antenna is PCB antenna and Snap antenna, Snap antenna connector type is IPEX, fulfill the requirement of this section.

14. EUT Photographs

EUT Photo

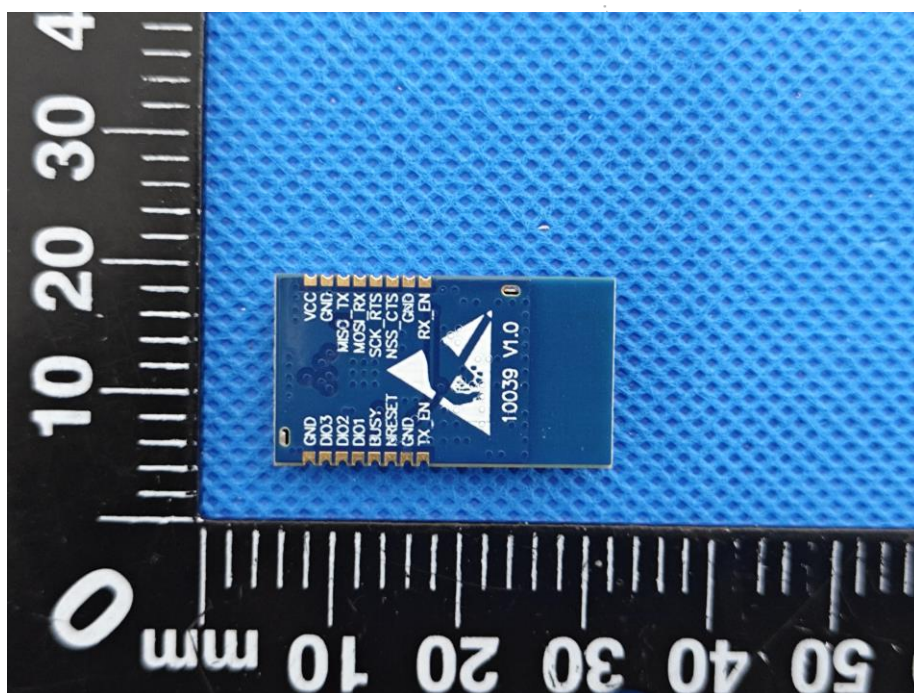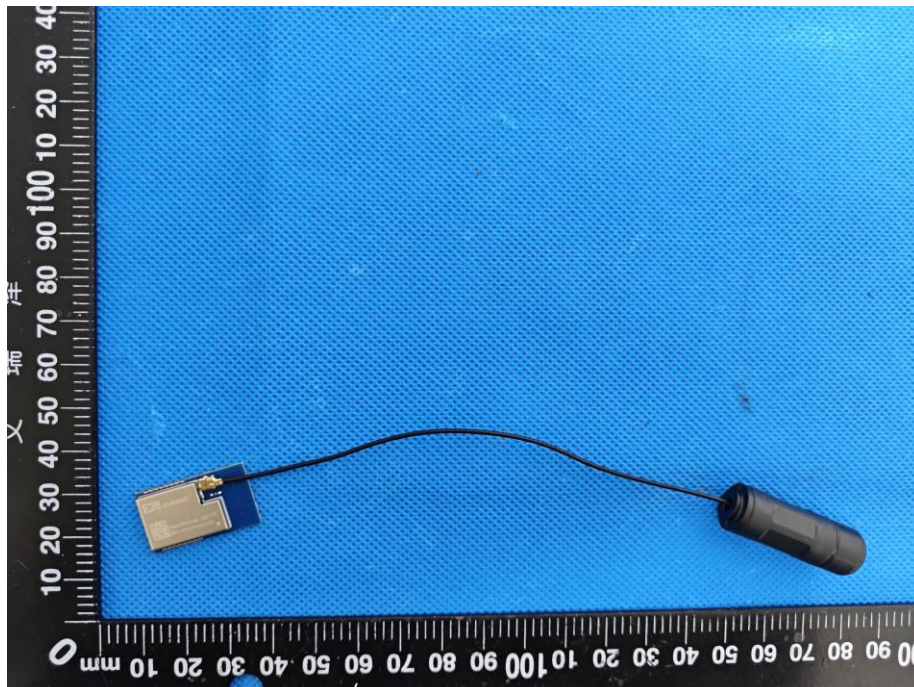

NOTE: Appendix-Photographs Of EUT Constructional Details

15. EUT Test Setup Photographs

Conducted Emissions

Snap antenna



Snap antenna



PCB antenna



PCB antenna




TC
C
PR
测

Radiated Measurement Photos

PCB antenna




PCB antenna

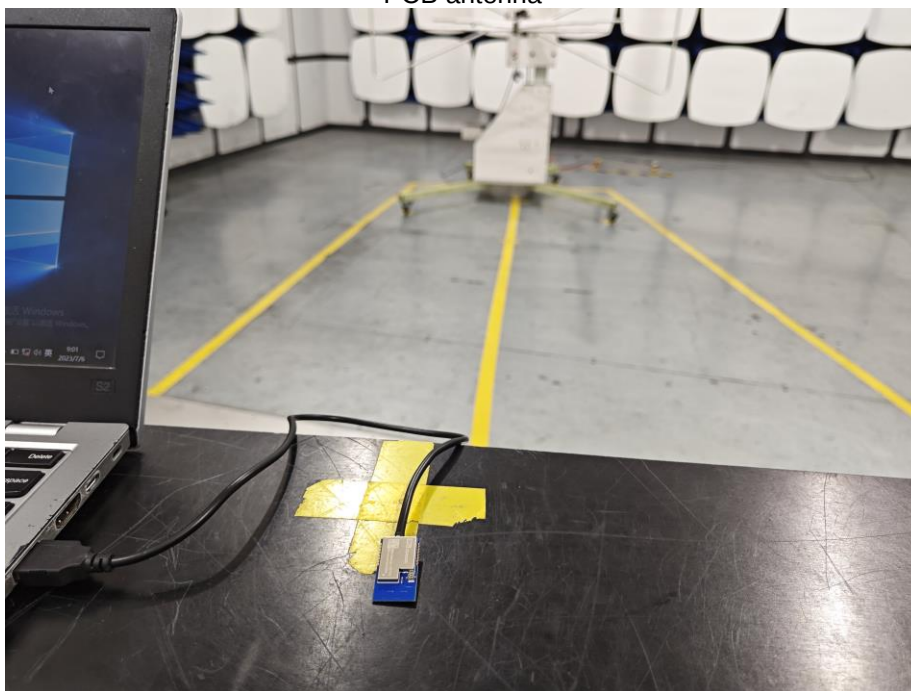

Snap antenna




Snap antenna

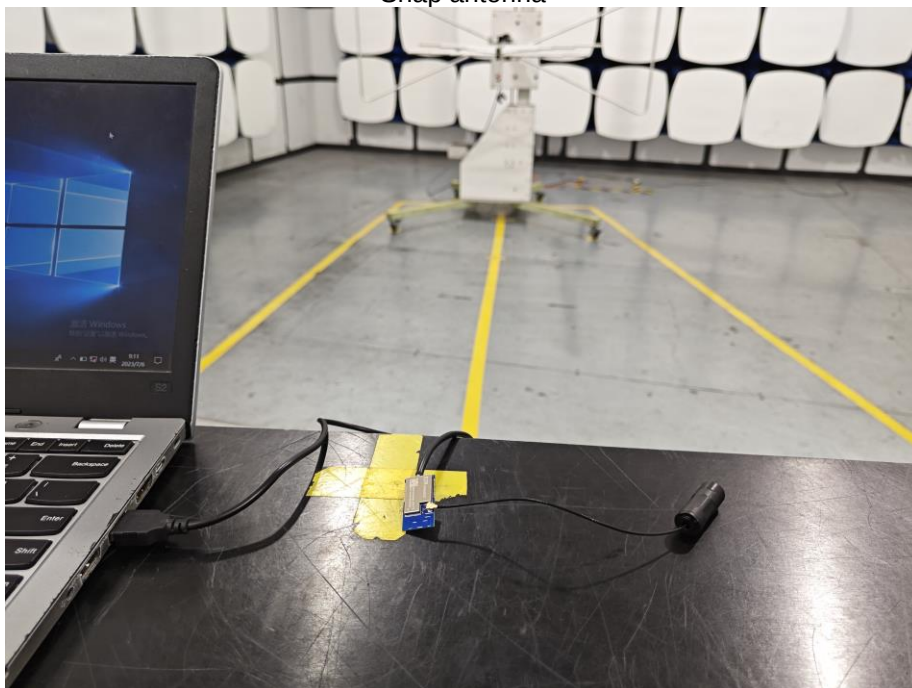

EST
C
'ED
测

Snap antenna

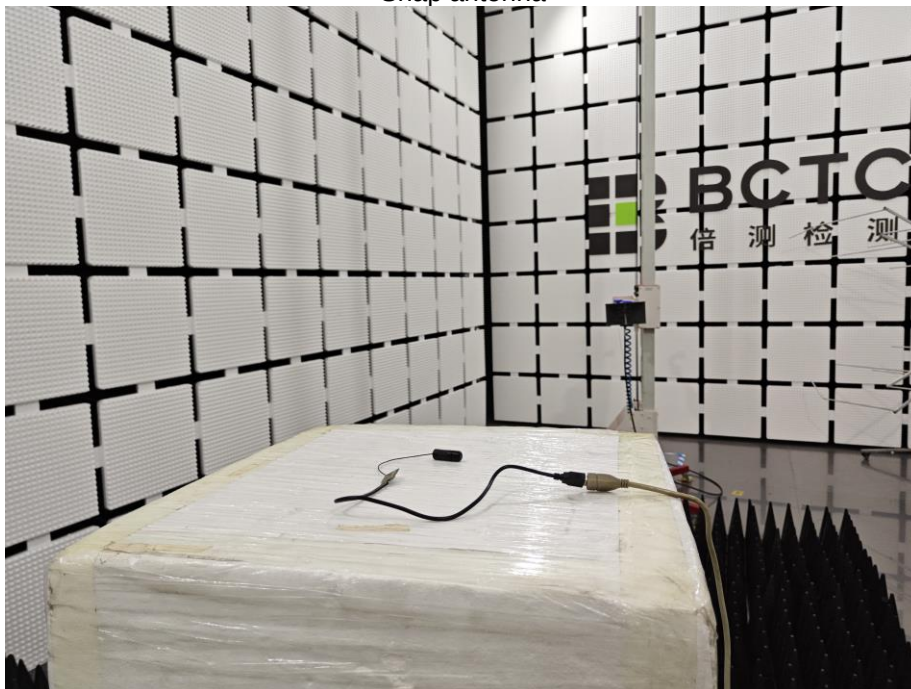

PCB antenna



STATEMENT

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: bctc@bctc-lab.com.cn

******* END *******