


User Manual

Quick Start	2
Introduction	3
App Download & Receiver Connection	4
Sensor Installation	4
APP Features & Guide	6
Receiver Specifications	7
Sensor Specifications	8
Important Safety Instructions	9
Compatibility	9
No NDA inc. One year Warranty	10
Regulatory Compliance	11
Declaration of Conformity	13

Quick Start

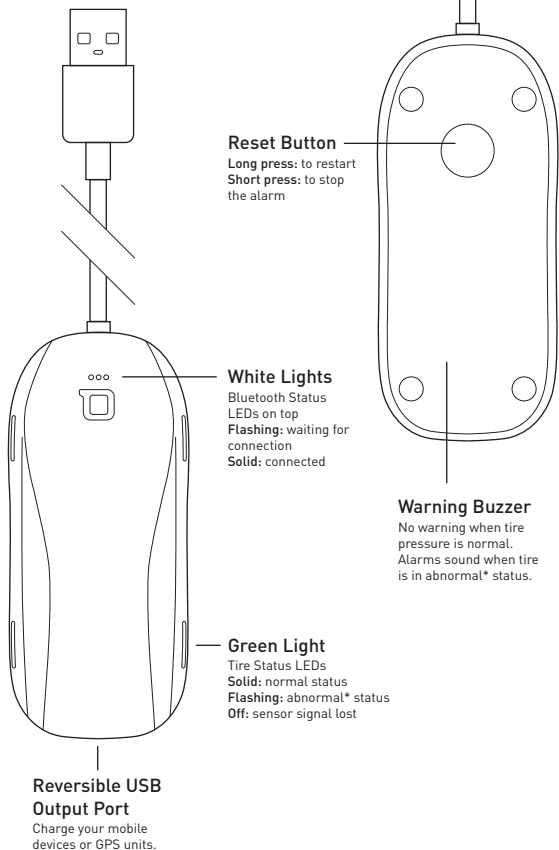


* **abnormal:** high pressure / low pressure / high temperature / sensor battery voltage low / no connection / sensor cannot receive data, corresponding tire has an issue.

Introduction

Tire condition is critical for the safety of riders and drivers, so getting a warning right from your vehicle that your tires have an issue could be a life saver. nonda's Smart Tire Safety Monitor features a USB-powered receiver with 4 internal sensors that transmit data via Bluetooth directly to the ZUS app. Showing the tire pressure of all 4 tires in real time, the monitor can quickly detect punctures and/or excess temperature, giving both a visual and audible warning to alert the driver of possible tire failure. While the receiver utilizes a USB port, it does come with a USB output port for charging your mobile devices or GPS unit. As a result, you never lose a USB port.

At a Glance


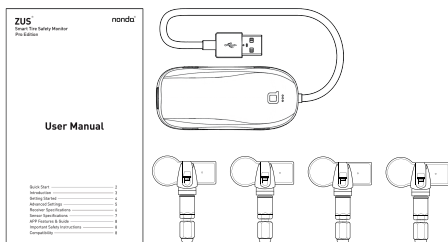


- Receiver × 1pc
- Sensors* × 4 pcs
- User Manual & Warranty × 1pc

* Factory paired and labelled to the corresponding tire (battery pre-installed).

App Download & Receiver Connection

Connect the receiver to a USB car charger. Pair the receiver with your mobile device before installing the sensors.




- 1** Search 'ZUS' on the App Store or Google Play and download the app on your mobile phone.
- 2** Plug the **receiver** into a USB port & start the engine to power it up. Make sure you see the white lights blinking.
- 3** Open the ZUS app, click "add a device" and place your phone next to receiver to pair.

Sensor Installation

Please contact your tire professional vendor to install.


* The sensors are labelled with **Front Left (FL)**, **Front Right (FR)**, **Rear Left (RL)**, and **Rear Right (RR)**. Please install each sensor onto the respective tire.




- 1** Jack up the car and de-mount the tire.
- 2** Remove original valve.




3 Sensor assemble.




4 Tighten the valve by wrench and screw it.



5 Adjust the angle of the sensor to make it fit closely to the rim, then tighten up the screw on the sensor to fix it.



6 Install the tire from left side of the valve clockwise direction, avoid tire bead hits valve and sensor.



7 Balance the tire.



8 Mount the tire to its position.

Troubleshooting Procedures

Should any of the sensors fail to show results, please note the following:

1. The receiver may not be properly connected. Please make sure the receiver is plugged into a USB charger and the white lights are blinking or solid.
2. Drive your vehicle above 14 mph (22 kph) for about 10 mins.
3. Deflate or inflate the problem tire for a little bit and see if you can get any updated readings from the Dashboard.

You could also check the FAQ in the ZUS App for more information.

If all the above mentioned procedures don't work for you, please contact our customer service at cs@nodna.us.

APP Features & Guide

Shows tire pressure for all 4 tires in real time

Monitors pressure range: 0 ~ 46 psi; 0 ~ 3.2 bar

Adjustable alert threshold

Customizable pressure and temperature measuring units (psi / bar / kPa, °C / °F)

Air leakage alarm (Audible & Visual)

High temperature alarm (Audible & Visual)

Low battery voltage (Audible & Visual)

Receiver Specifications

Features	Specifications
Dimensions & Weight	Cable length: 200 mm; 7.9 inch Dimensions: 85 × 38 × 17 mm; 3.3 × 1.5 × 0.67 in Weight: 33 g; 1.16 oz
Warning Buzzer	1. Buzzer warning is triggered in the following circumstances: sensors detect abnormal tire pressure or abnormal tire temperature; sensors detect tire leakage; sensor battery is low; sensor signal is lost. 2. Buzzer warning continues for 5 times unless the alarm status returns to normal or is manually disabled.
Radio Frequency: receiving data transmitted by external sensors	Operating Frequency: 433.92 MHz
Wireless Bluetooth: data exchanged between wireless devices	Bluetooth 4.0 2.4 GHz Max Output Power: -9 dBm
USB Power Requirement	USB Power 5 V (Car charger recommended; You can turn off the receiver by disconnecting receiver from charger.)
USB Output Port	Output for charging only; Charging speed depends on charger capacity; Maximum one device
Operating Temperature	-20°C ~ 85°C; -4°F ~ 185°F
Storage Temperature	-30°C ~ 85°C; -22°F ~ 185°F
Low Power Consumption Management	Tire Status LEDs will be turned off after all tires have been running normally for 5 mins. Tire Status LEDs will be turned on immediately if a tire is in abnormal* status.

White Light: Bluetooth Status LEDs on top Flashing: waiting for connection Solid: connected	Warning Buzzer No warning when tire pressure is normal. Alarms sound when tire is in abnormal* ¹ status.
Green Light: Tire Status LEDs Solid: normal status Flashing: abnormal* status	Button Long press: to restart* ² Short press: to stop the alarm

*¹ **abnormal:** high pressure / low pressure / high temperature / sensor battery voltage low / no connection / sensor cannot receive data, corresponding tire has an issue.

*² You will hear a long beep after restarting.

Sensor Specifications

Features	Specifications
Diamensions & Weight	Size: 59mm x 27mm x 12mm; 2.32in x 1.06in x 0.47in; Weight: 43g; 1.52oz (with battery)
Tire Pressure Threshold	Pressure Range: 0 ~ 46.4psi; 0 ~ 3.25bar Confidence Interval: ± 1.45 psi; ± 0.1 bar
Tire Temperature Threshold	Temperature Range: -20°C ~ 120°C; -4°F ~ 248°F Confidence Interval: $\pm 1^\circ\text{C}$; $\pm 1.8^\circ\text{F}$
Radio Frequency	Operating Frequency: 433.92MHz
RF Transmitter	RF Power: $\leq 8\text{dBm}$
Sensor Battery	Lithium Battery CR2450HT 3V x 1
Battery Life	Normal Usage: 6 Year* * Battery life is calculated based on 2 hours of driving per day. Actual lifespan may vary depending on usage.
Operating Temperature	-30°C ~ 125°C; -22°F ~ 257°F
Storage Temperature	-40°C ~ 125°C; -40°F ~ 257°F
Operating Humidity	Maximum Humidity 100%

Important Safety Instructions

Do not place any open flame source near the devices.

Avoid dropping the devices.

Do not disassemble.

Use of the Smart Tire Safety Monitor is not a substitute for proper tire maintenance, and it is the driver's responsibility to maintain correct tire pressure, even if under-inflation has not reached the level to trigger the low tire pressure alert. Failure to maintain proper tire pressure can result in loss of control of the vehicle, which may lead to serious personal injury or death. Keep out of the reach of children.

Compatibility

Sensors monitor tire temperature (Celsius) and pressure (0–46 psi).

Sensor signal covers 19.6 ft (5.9 m).

COMPATIBLE WITH MOST CARS EXCEPT FOR RVs, TRAILERS, TRUCKS, OR MOTORHOMES.

No NDA inc. One year Warranty

nonda warrants that your nonda hardware product (the "Product") will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date of delivery.

REMEDIES

If a hardware defect in the Product arises and a valid claim is received within the Warranty Period, nonda will, at its sole option and subject to applicable laws: (a) repair the Product at no charge with a new or refurbished components or (b) replace the Product with a new or refurbished Product upon return of the defective Product. This Warranty does not apply to Products you purchase from unauthorized resellers, or where the instructions for use and activation of the Product are not complied with or where the Product is damaged as a result of abuse, accident, modification or other causes beyond our reasonable control. Any replacement product will be warranted for the remainder of the original warranty period or 30 calendar days, whichever is longer.

EXCLUSIONS AND LIMITATIONS

This Limited Warranty applies only to the original purchaser of Product that was purchased from an authorized retailer or sales channel. Non-authorized 3rd party receipts or order numbers are NOT accepted for warranty verification. Without limiting the foregoing, the Limited Warranty does not apply to any (a) nonda products and services other than the Product, (b) Product that is, or nonda reasonably believes to be, stolen, (c) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (d) to damage caused by operating the Product outside the permitted or intended uses described by nonda or with improper voltage or power supply.

OBTAIN WARRANTY SERVICES

To obtain remedies under this Warranty, nonda must receive your claim before the end of the Warranty Period. You also must deliver the Product, in either its original packaging or packaging providing an equal degree of protection, to the address specified by nonda. Consumer shall bear the cost of shipping the device to nonda. By sending the Device, consumer agrees to transfer ownership to nonda. nonda may not return the original device to consumer. If the claim is justified based on this Warranty, nonda shall bear the cost of shipping the repaired or replacement device to the Consumer.

How To Make A Warranty Claim

Read through our warranty above; if you believe you are covered by the warranty please prepare following documents and send them to cs@nonda.us.

1. A copy or screenshot of the original purchase invoice to verify your warranty (order id, purchase date, website or store)
 2. A description of the problem with a photo illustrating the physical damage
 3. Your shipping address including name, postal code and phone number
- If you need software support only, you may contact us with your app account and phone operation system. We would be glad to help.

Please note that, in the European Union, any warranty period less than two years shall be increased to two years.

Regulatory Compliance

FCC Compliance Statement

Receiver FCC ID: 2AFZB-ZUTMBKRAV
Sensor FCC ID: 2AFZB-ZUTMBKPED

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

NCC Statement

Receiver NCC ID: CCAK17LP1490T2

Sensor NCC ID: CCAK17LP1480T2

Administrative Regulations on Low Power Radio Waves Radiated Devices
warning:

Article 12

Without permission granted by the NCC, any company, enterprise, or user is not allowed to change frequency, enhance transmitting power or alter original characteristic as well as performance to a approved low power radio-frequency devices.

Article 14

The low power radio-frequency devices shall not influence aircraft security and interfere legal communications; If found, the user shall cease operating immediately until no interference is achieved.

The said legal communications means radio communications is operated in compliance with the Telecommunications Act.

The low power radio-frequency devices must be susceptible with the interference from legal communications or ISM radio wave radiated devices.

NCC 警語

接收器 NCC ID: CCAK17LP1490T2

傳感器 NCC ID: CCAK17LP1480T2

根據交通部低功率電波輻射性電機管理辦法規定：

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Declaration of Conformity



Refer to article 10(9), shall be provided as follows:

Hereby, No NDA inc. declares that the radio equipment type Smart Tire Safety Monitor is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following Internet address: <https://www.nonda.co/pages/regulation/>.

Please note that, in the European Union, any warranty period less than two years shall be increased to two years.

Manufacturer: No NDA Inc.

Developed by nonda in California. Assembled in China.
No NDA Inc., 320 Mountain View Avenue, Mountain View, CA 94041, USA.
No NDA Inc., Günther-Wagner-Allee 13, 30177 Hannover, Germany.
www.nonda.co | TM and © 2017 No NDA Inc. All rights reserved.