




FCC RADIO TEST REPORT

FCC ID : 2AFZZ-OH3RG
Equipment : Portable Bluetooth Speaker
Brand Name : Xiaomi
Model Name : OH3RG
Marketing Name : Xiaomi Bluetooth Speaker Essential
Applicant : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District,
Beijing, 100085, China
Manufacturer : Xiaomi Communications Co., Ltd.
#019, 9th Floor, Building 6, 33 Xi'erqi
Middle Road, Haidian District,
Beijing, 100085, China
Standard : FCC Part 15 Subpart C §15.247

The product was received on Oct. 20, 2025 and testing was performed from Nov. 13, 2025 to Dec. 11, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	5
1.4 Applicable Standards.....	5
2 Test Configuration of Equipment Under Test.....	6
2.1 Carrier Frequency Channel	6
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	8
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 Test Result.....	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	11
3.3 Power Spectral Density Measurement	12
3.4 Conducted Band Edges and Spurious Emission Measurement	13
3.5 Radiated Band Edges and Spurious Emission Measurement	14
3.6 AC Conducted Emission Measurement.....	18
3.7 Antenna Requirements.....	20
4 List of Measuring Equipment	21
5 Measurement Uncertainty	23
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR5O1407B	01	Initial issue of report	Dec. 23, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Lewis Ho

Report Producer: Vina Su

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth	
Antenna Type Bluetooth: onboard PCB Antenna	

Antenna information		
2402 MHz ~ 2480 MHz	Peak Gain (dBi)	2.69

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_2Mbps
AC Conducted Emission	Mode 1: BT TX + Charge from NB
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - Bluetooth-LE 2Mbps does not support primary advertising channels; it does not support channel 00 and channel 39. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

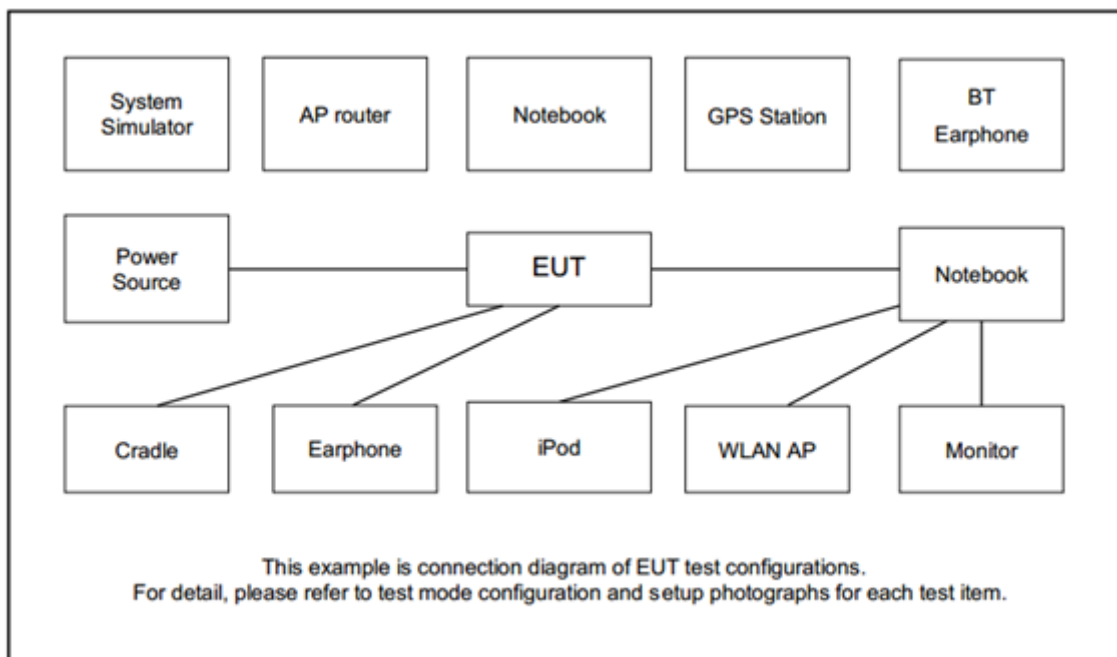

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded,1.8m
2.	Notebook	Dell	Latitude 3400	FCC DoC	N/A	AC I/P : Unshielded,1.2m DC O/P : Shielded, 1.8m
3.	iPod	Apple	A1199	DoC	Shielded, 1.0m	N/A
4.	治具板	FT232RL USB To TTL UART	MCS-73LV	NA	N/A	N/A

Remark: Applicant has ensured support unit would not be attached with the product on the market, support unit is provided by lab for testing.

2.5 EUT Operation Test Setup

The RF test items, utility “FCC Assist 1.0.4” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup

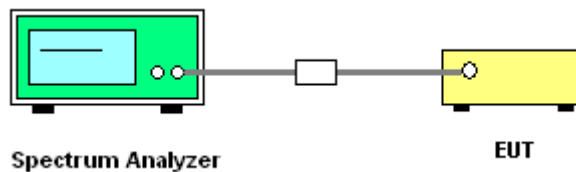

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

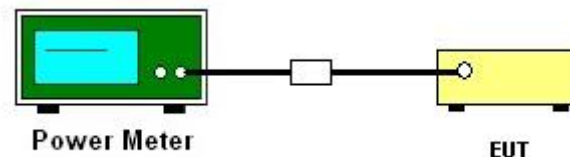

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = No faster than coupled (auto) time, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

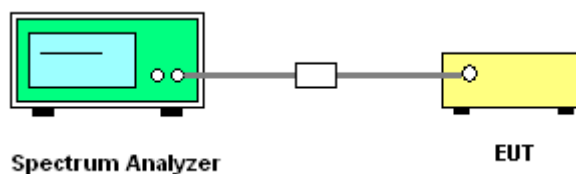

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

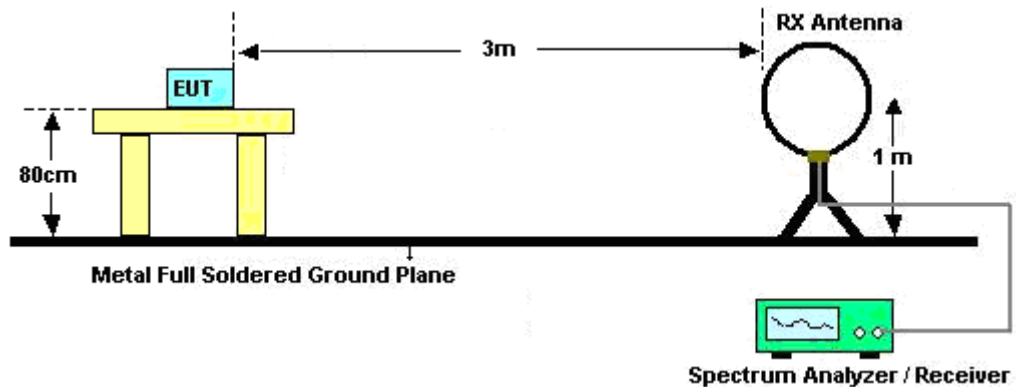


For radiated test from 30MHz to 1GHz

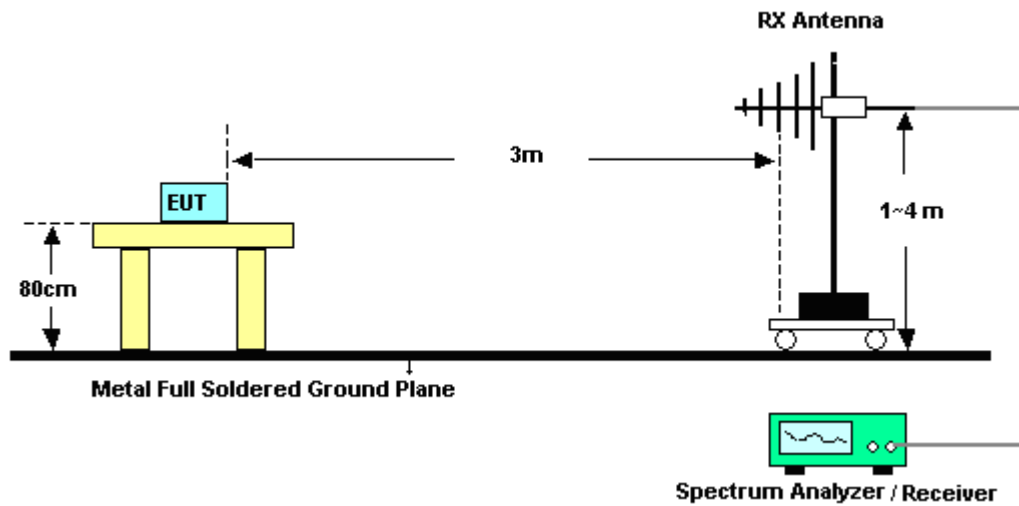

For radiated test from 1GHz to 18GHz

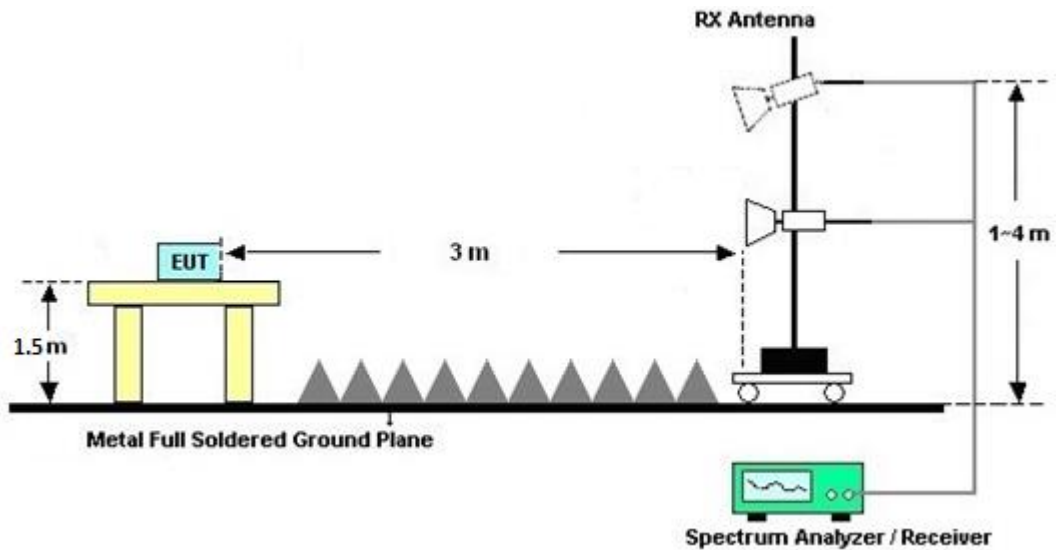

For radiated test above 18GHz

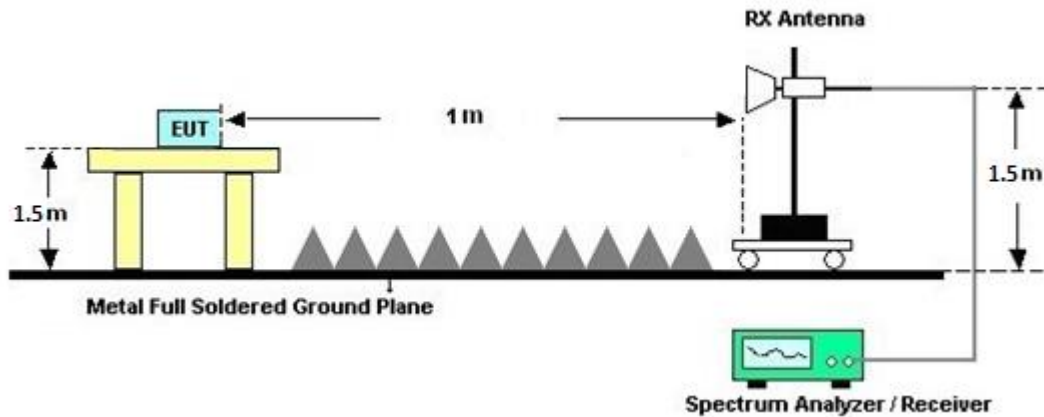

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

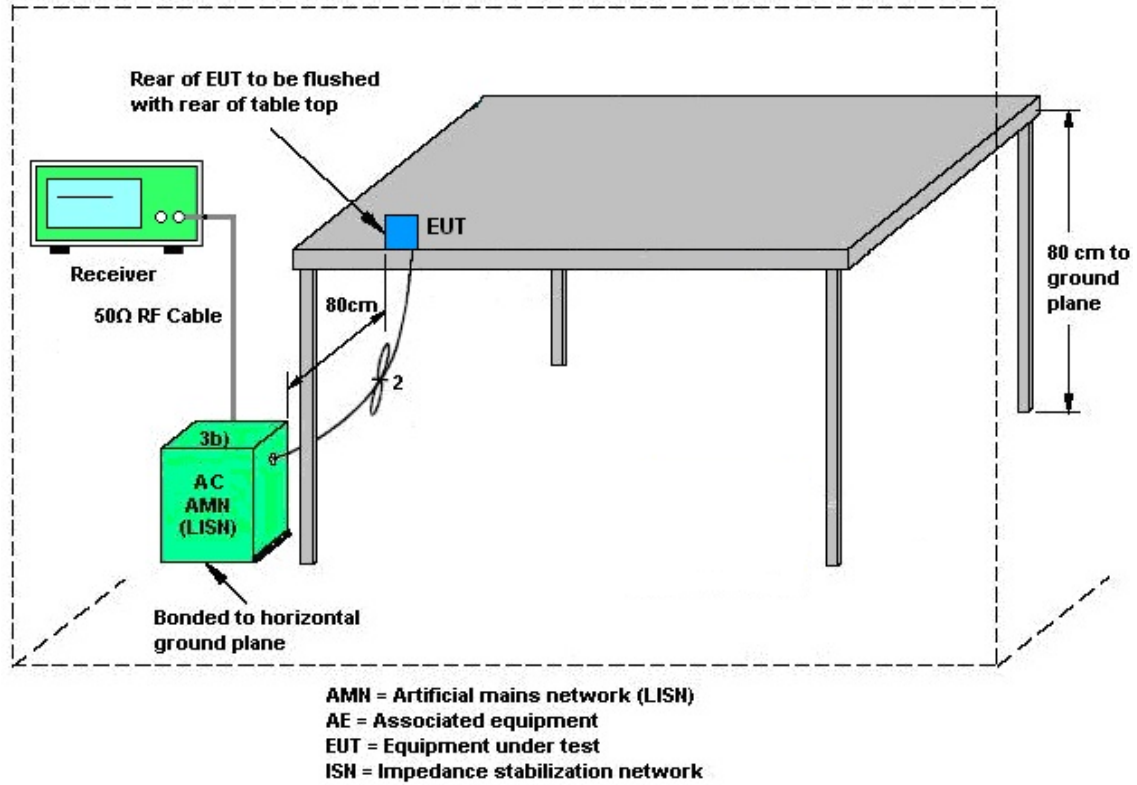

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9 kHz~30 MHz	Dec 18, 2024	Nov. 25, 2025~ Dec. 02, 2025	Dec 17, 2025	Radiation (03CH23-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz~1GHz	Oct.,4, 2025	Nov. 25, 2025~ Dec. 02, 2025	Oct. 3, 2026	Radiation (03CH23-HY)
Amplifier	SONOMA	310N	421582	9kHz~1GHz	Jul. 13, 2025	Nov. 25, 2025~ Dec. 02, 2025	Jul. 12 2026	Radiation (03CH23-HY)
Amplifier	EMEC	EM01G18GA	060878	1GHz~18GHz	Sep. 26, 2025	Nov. 25, 2025~ Dec. 02, 2025	Sep. 25, 2026	Radiation (03CH23-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C05A18E N	1GHz~18GHz	Jul.02 ,2025	Nov. 25, 2025~ Dec. 02, 2025	Jul.01,2026	Radiation (03CH23-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	1225	18GHz~40GHz	Jul.02 ,2025	Nov. 25, 2025~ Dec. 02, 2025	Jul.01,2026	Radiation (03CH23-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Aug. 26, 2025	Nov. 25, 2025~ Dec. 02, 2025	Aug. 25, 2026	Radiation (03CH23-HY)
Signal Analyzer	Keysight	N9010B	MY62170337	10Hz~44GHz	Aug. 26, 2025	Nov. 25, 2025~ Dec. 02, 2025	Aug. 25, 2026	Radiation (03CH23-HY)
Hygrometer	TECPEL	DTM-303A	TP210001	N/A	Nov. 6, 2025	Nov. 25, 2025~ Dec. 02, 2025	Nov. 5, 2026	Radiation (03CH23-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Nov. 25, 2025~ Dec. 02, 2025	N/A	Radiation (03CH23-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Nov. 25, 2025~ Dec. 02, 2025	N/A	Radiation (03CH23-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Nov. 25, 2025~ Dec. 02, 2025	N/A	Radiation (03CH23-HY)
Software	Audix	E3 6.09824_2019 122	RK-002348	N/A	N/A	Nov. 25, 2025~ Dec. 02, 2025	N/A	Radiation (03CH23-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804395/2	30MHz~40GHz	Nov. 25, 2025	Nov. 25, 2025~ Dec. 02, 2025	Nov. 24, 2026	Radiation (03CH23-HY)
RF Cable	EMC	EMC101Y	231115/23111 9/231122	30MHz~40GHz	Nov. 25, 2025	Nov. 25, 2025~ Dec. 02, 2025	Nov. 24, 2026	Radiation (03CH23-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Nov. 13, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Nov. 13, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2025	Nov. 13, 2025	Oct. 19, 2026	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 3, 2025	Nov. 13, 2025	Mar. 2, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Nov. 13, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Nov. 13, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESC17	100724	9kHz~7GHz	Feb. 13, 2025	Nov. 13, 2025	Feb. 12, 2026	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 04, 2025	Dec. 11, 2025	Nov. 03, 2026	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 37 (NO:167)	10MHz~6GHz	Nov. 14, 2025	Dec. 11, 2025	Nov. 13, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 29, 2025	Dec. 11, 2025	Aug. 28, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Dec. 11, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Dec. 11, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.7 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Joseph Hu / Hank Hsu	Temperature:	21~25	°C
Test Date:	2025/12/11	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.016	0.505	0.50	Pass
BLE	1Mbps	1	19	2440	1.002	0.511	0.50	Pass
BLE	1Mbps	1	39	2480	1.001	0.511	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
BLE	1Mbps	1	0	2402	6.78	30.00	2.69	9.47	36.00	Pass	Default
BLE	1Mbps	1	19	2440	6.54	30.00	2.69	9.23	36.00	Pass	Default
BLE	1Mbps	1	39	2480	6.48	30.00	2.69	9.17	36.00	Pass	Default

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.14	-2.85	2.69	8.00	Pass
BLE	1Mbps	1	19	2440	6.94	-3.07	2.69	8.00	Pass
BLE	1Mbps	1	39	2480	6.68	-3.38	2.69	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.005	0.670	0.50	Pass
BLE	2Mbps	1	19	2440	2.000	0.851	0.50	Pass
BLE	2Mbps	1	38	2478	1.993	0.851	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	Setting
BLE	2Mbps	1	1	2404	6.80	30.00	2.69	9.49	36.00	Pass	Default
BLE	2Mbps	1	19	2440	6.54	30.00	2.69	9.23	36.00	Pass	Default
BLE	2Mbps	1	38	2478	6.44	30.00	2.69	9.13	36.00	Pass	Default

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	7.13	-3.15	2.69	8.00	Pass
BLE	2Mbps	1	19	2440	6.94	-3.32	2.69	8.00	Pass
BLE	2Mbps	1	38	2478	6.61	-3.60	2.69	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.




Number of TX = 1, Ant. 1 (Measured)


6dB Bandwidth

<1M>


6 dB Bandwidth Plot on Channel 00

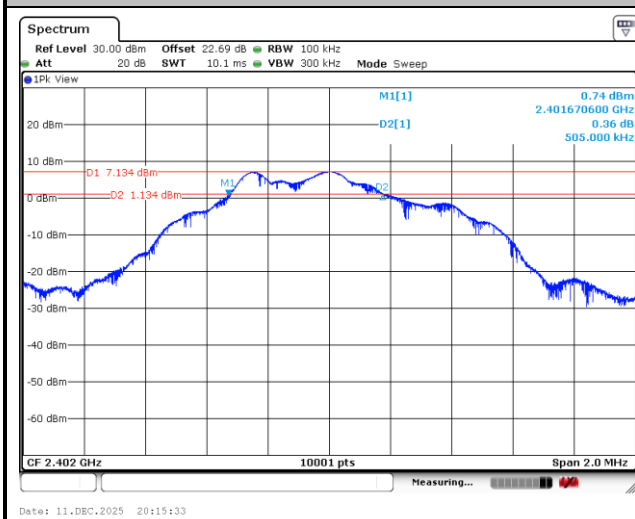

6 dB Bandwidth Plot on Channel 19

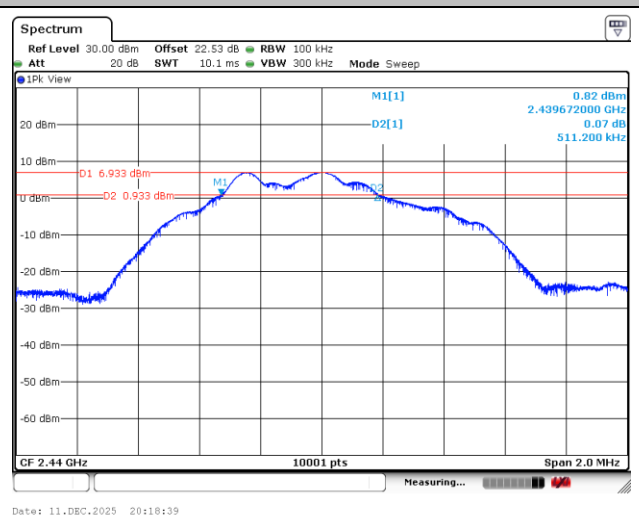


6 dB Bandwidth Plot on Channel 39

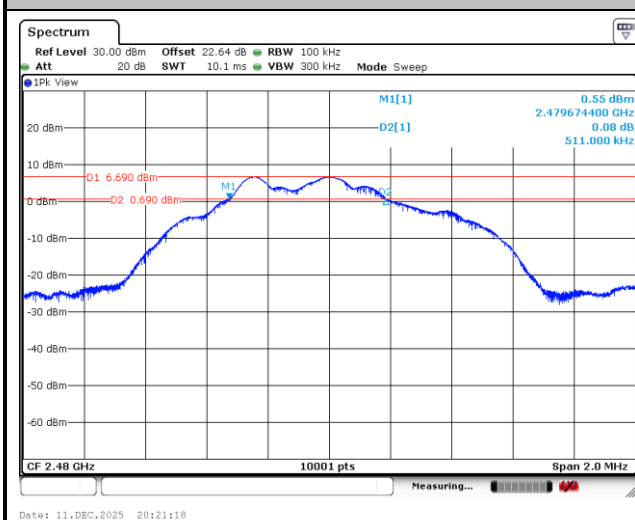




<2M>

6 dB Bandwidth Plot on Channel 01

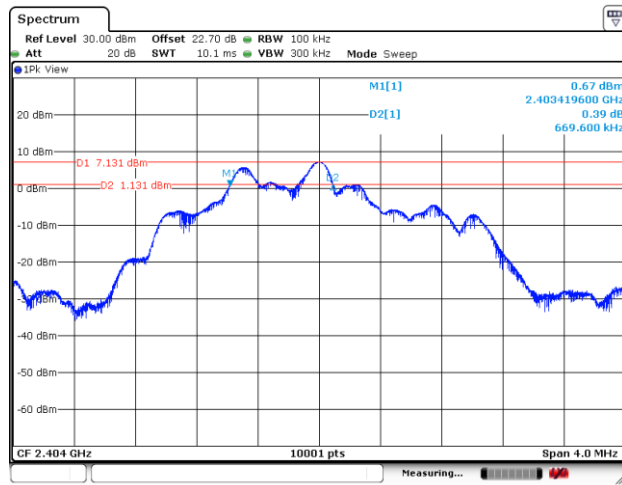


Date: 11.DEC.2025 20:26:04

6 dB Bandwidth Plot on Channel 19

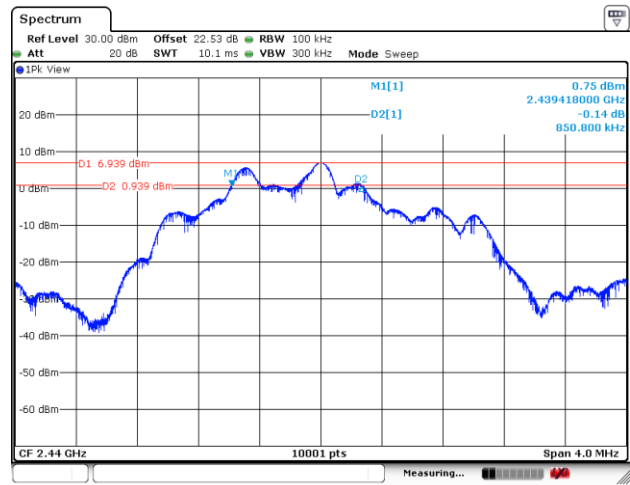

Date: 11.DEC.2025 20:28:41




6 dB Bandwidth Plot on Channel 38

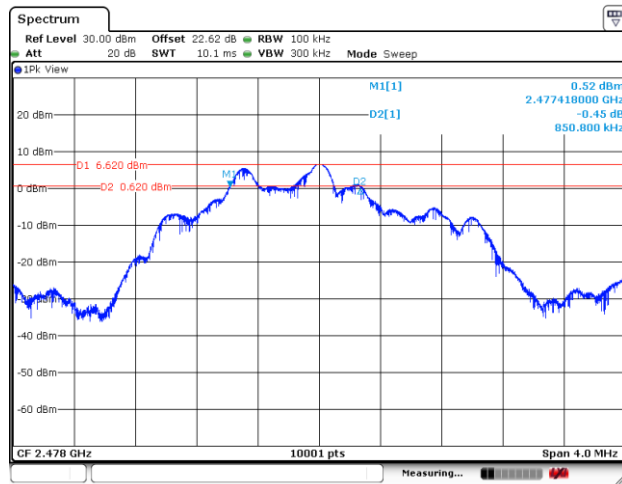

Date: 11.DEC.2025 20:33:44

**99% Occupied Bandwidth**


<1M>

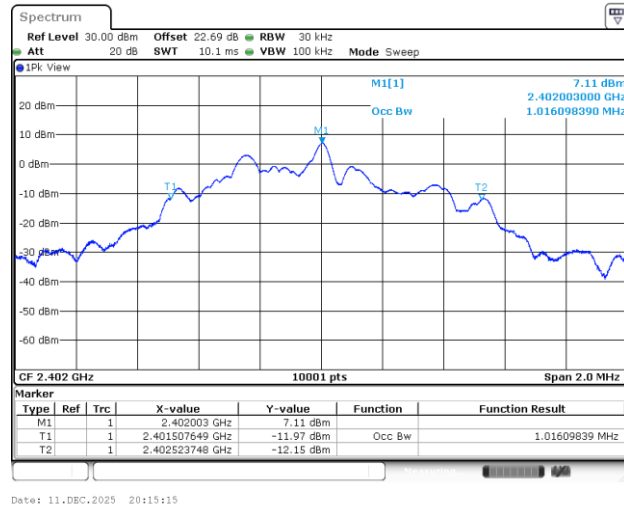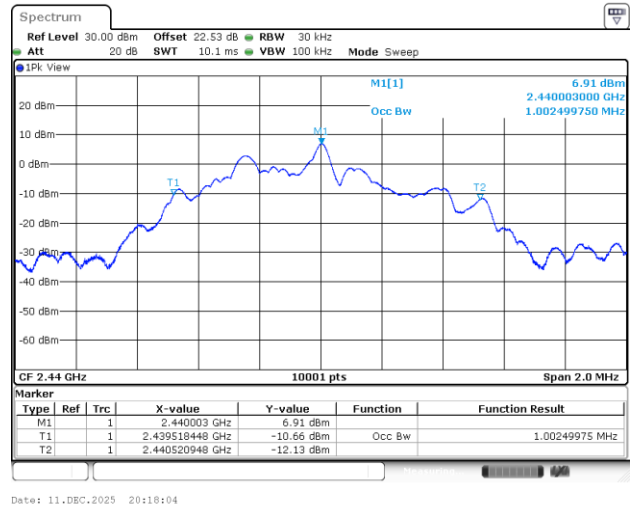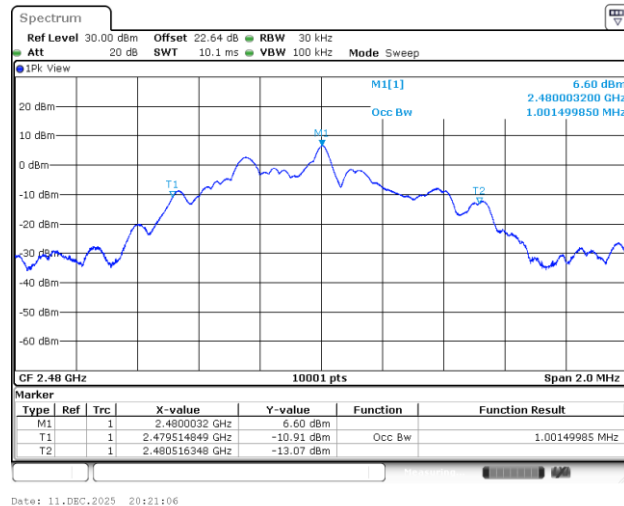99% Occupied Bandwidth Plot on Channel 00**99% Occupied Bandwidth Plot on Channel 19****99% Occupied Bandwidth Plot on Channel 39**




<2M>


99% Occupied Bandwidth Plot on Channel 01

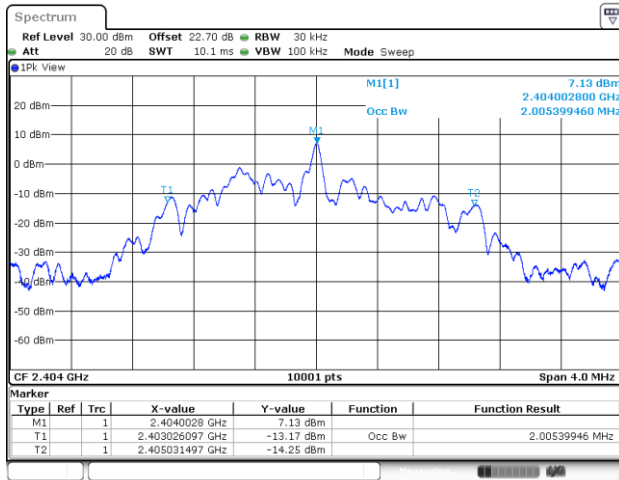

99% Occupied Bandwidth Plot on Channel 19



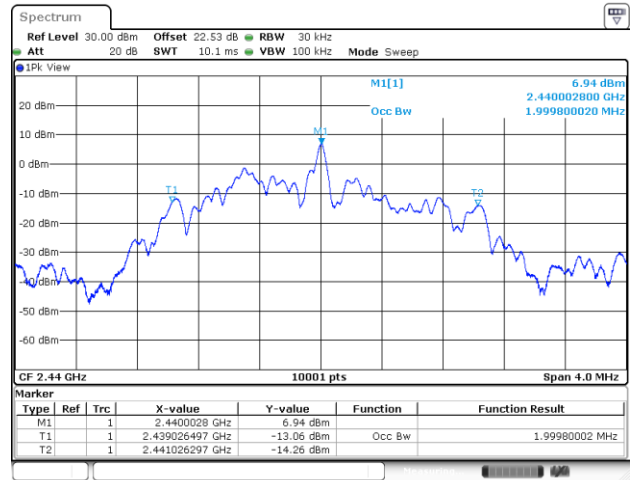


99% Occupied Bandwidth Plot on Channel 38

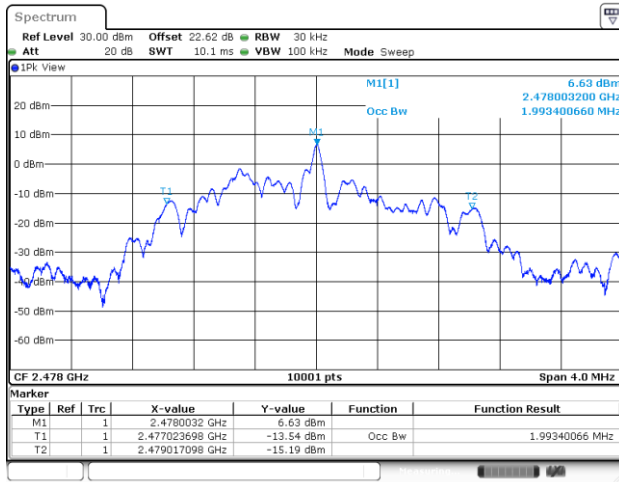

**Power Spectral Density (dBm/3kHz)**


<1M>

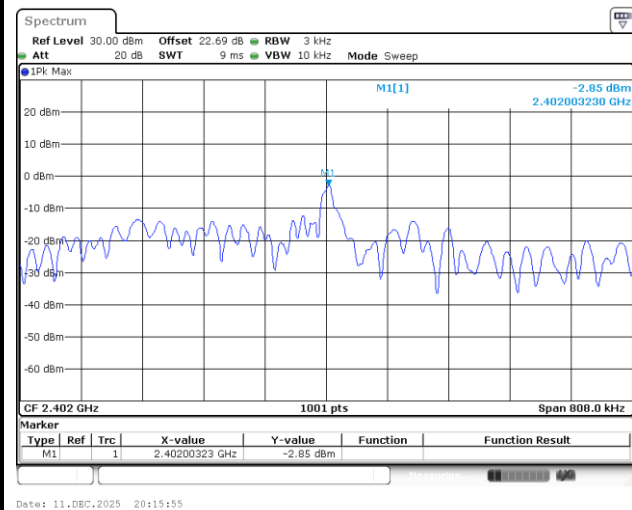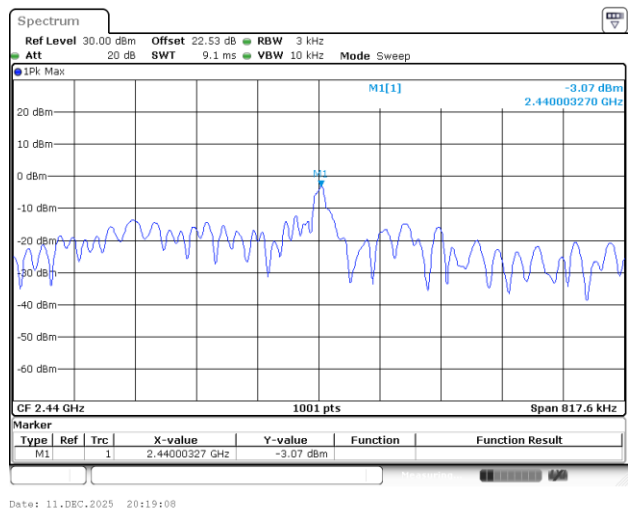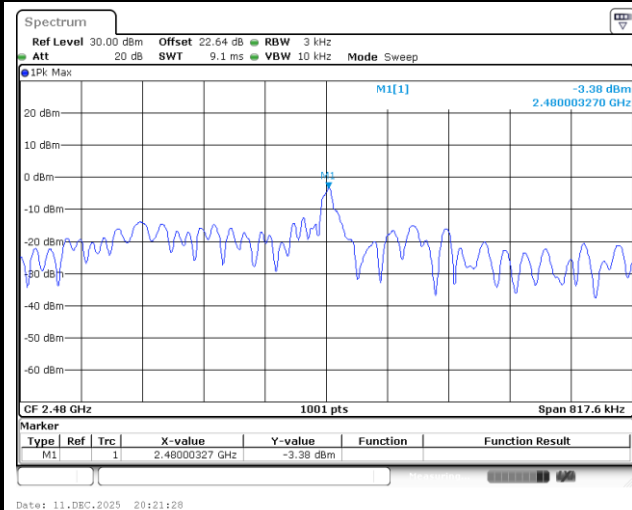Power Density (dBm/3kHz) Plot Channel 00**Power Density (dBm/3kHz) Plot Channel 19****Power Density (dBm/3kHz) Plot Channel 39**




<2M>


Power Density (dBm/3kHz) Plot Channel 01

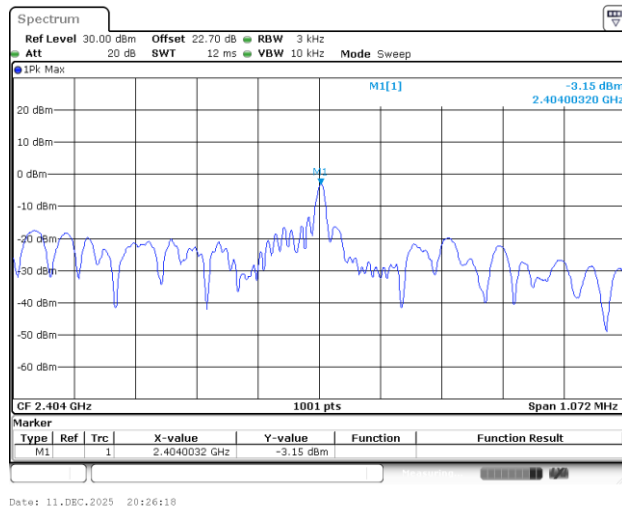

Power Density (dBm/3kHz) Plot Channel 19

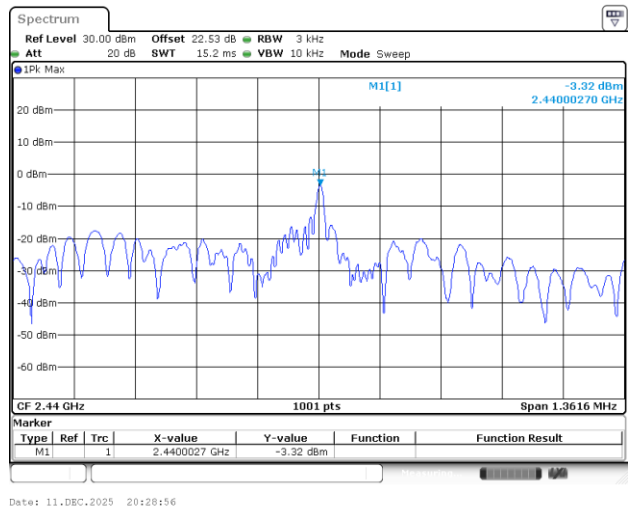


Power Density (dBm/3kHz) Plot Channel 38

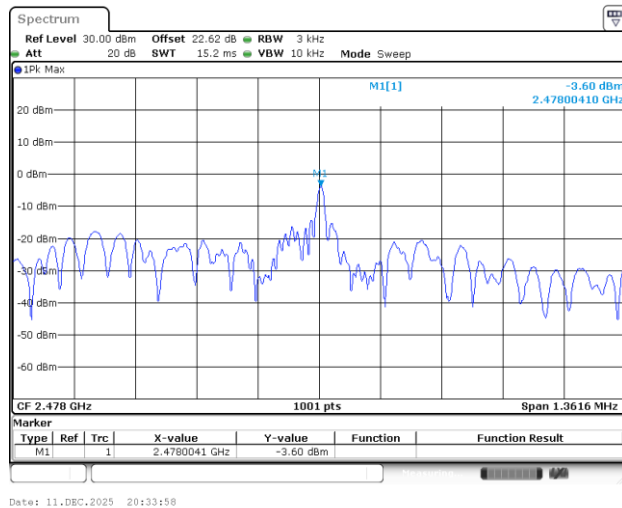

**Band Edge and Conducted Spurious Emission**


<1M>

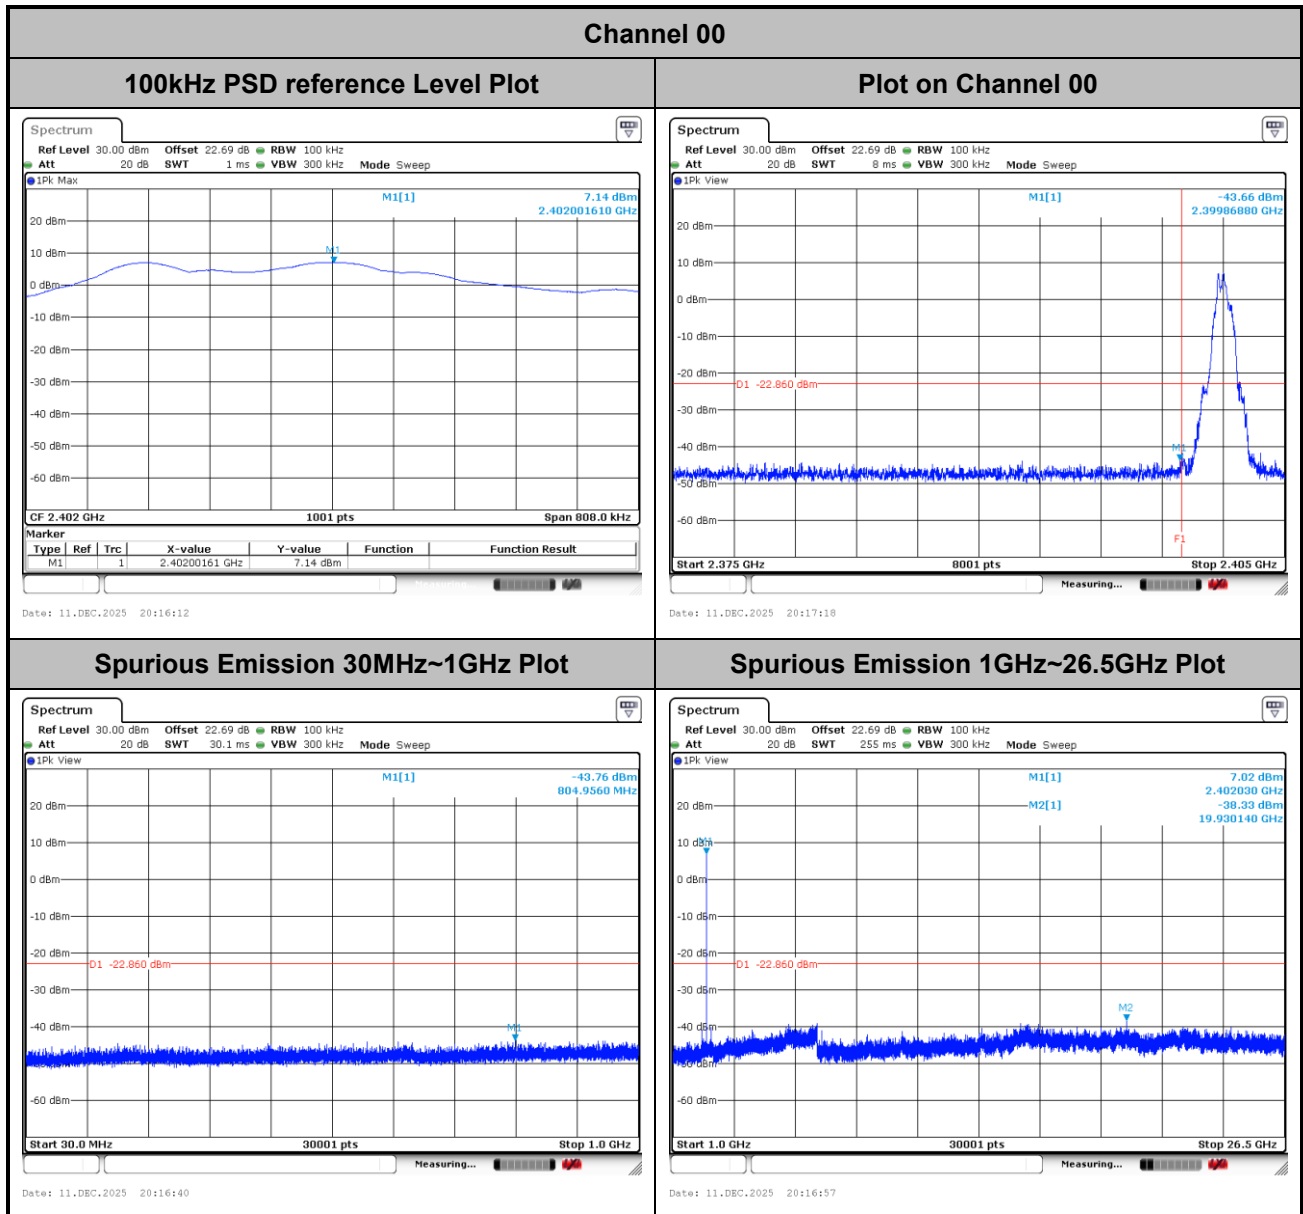




Channel 19


100kHz PSD reference Level Plot

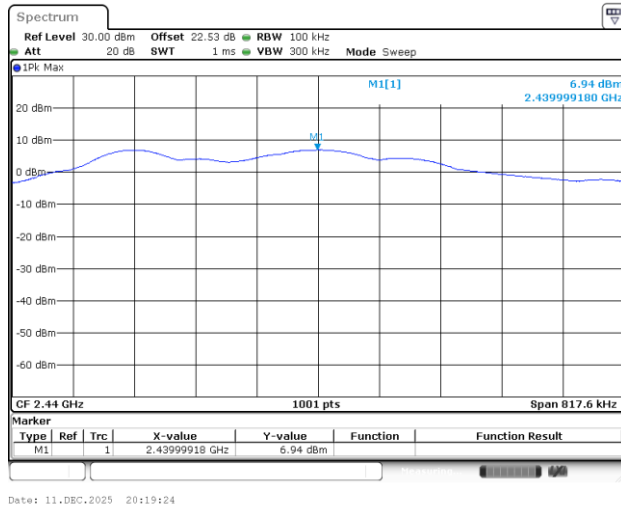

Spurious Emission 30MHz~1GHz Plot

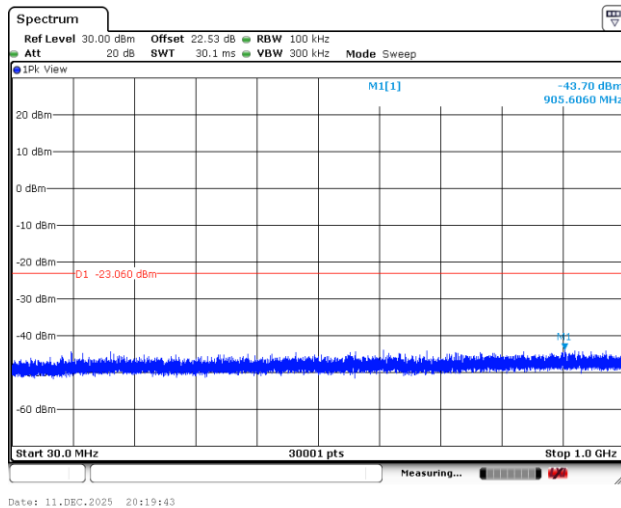


Spurious Emission 1GHz~26.5GHz Plot

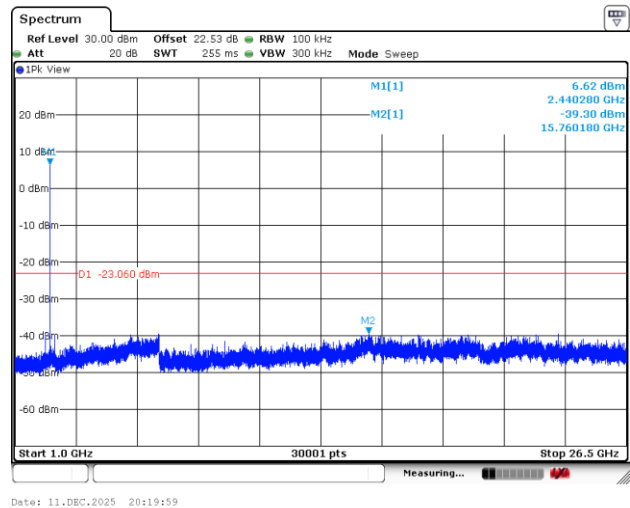




Channel 39


100kHz PSD reference Level Plot

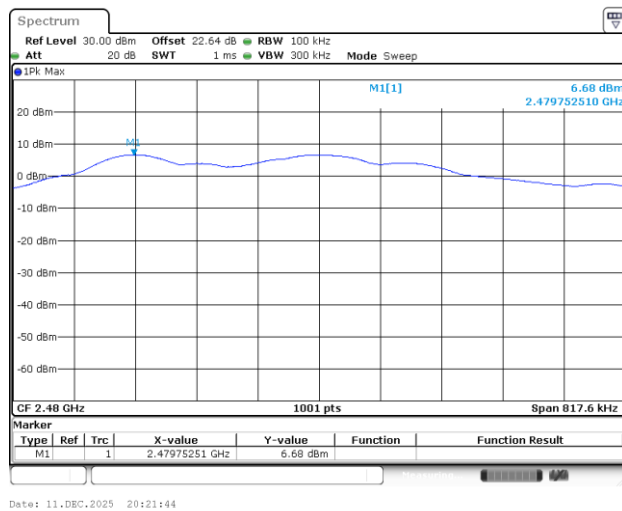


Plot on Channel 39

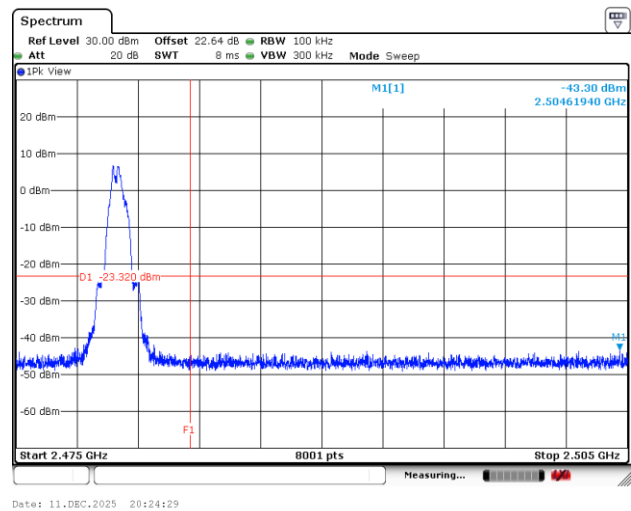

Spurious Emission 30MHz~1GHz Plot

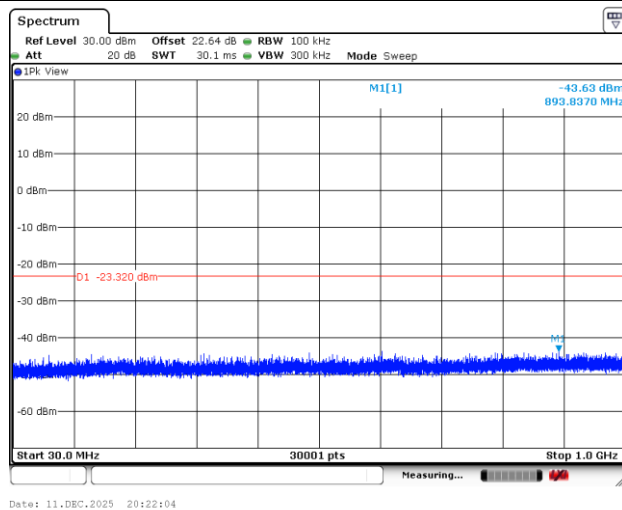


Spurious Emission 1GHz~26.5GHz Plot

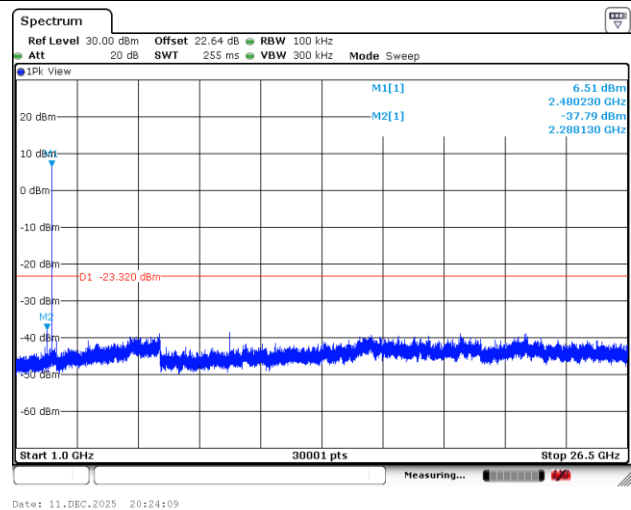




<2M>

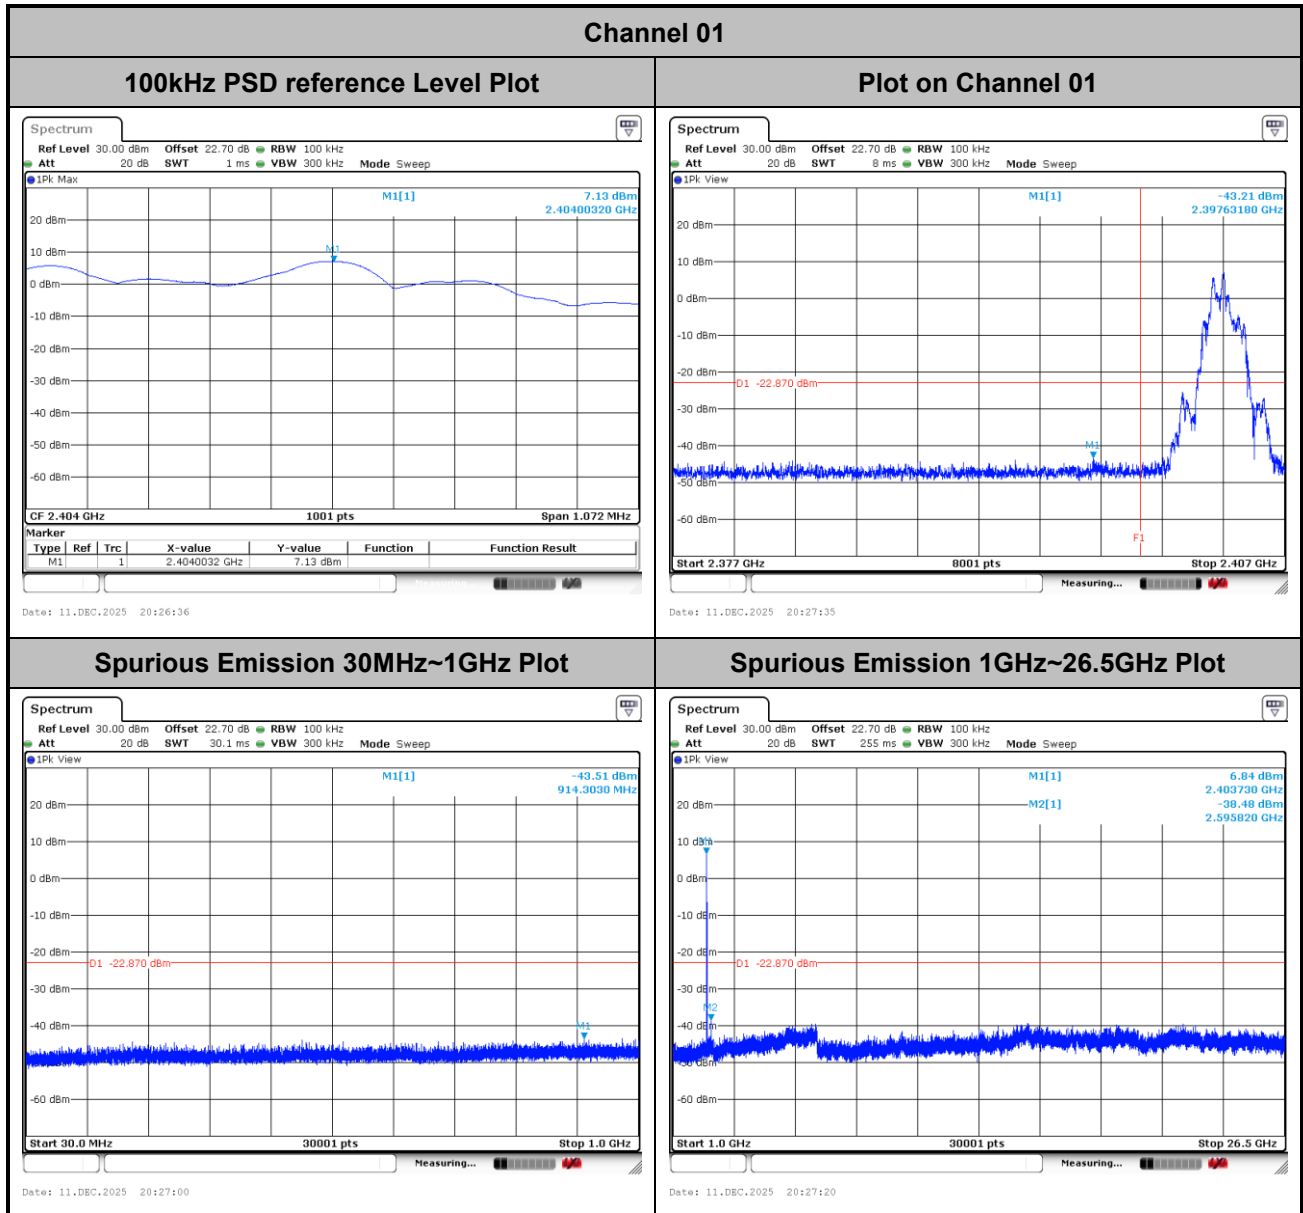




Channel 19


100kHz PSD reference Level Plot

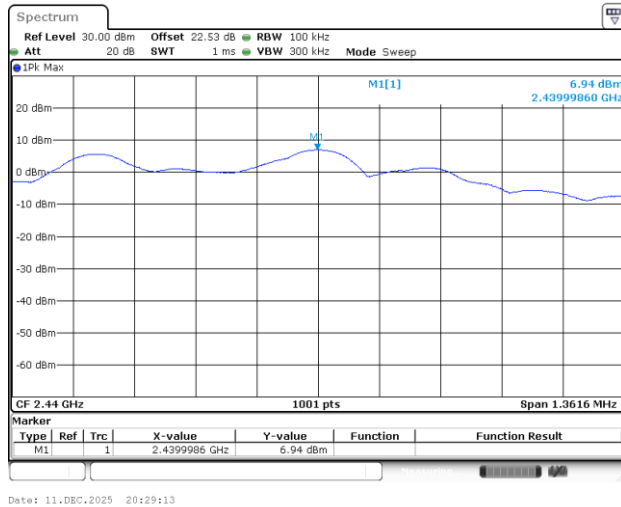

Spurious Emission 30MHz~1GHz Plot

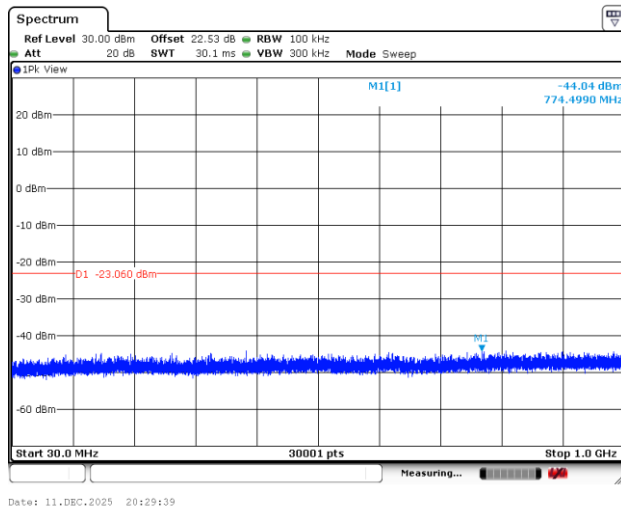


Spurious Emission 1GHz~26.5GHz Plot

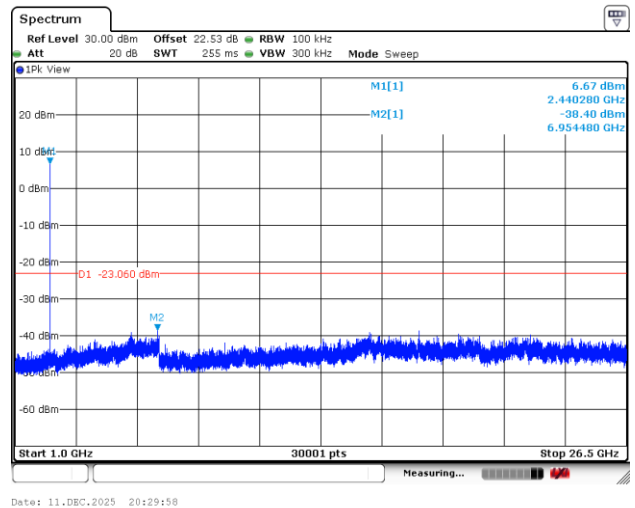




Channel 38


100kHz PSD reference Level Plot

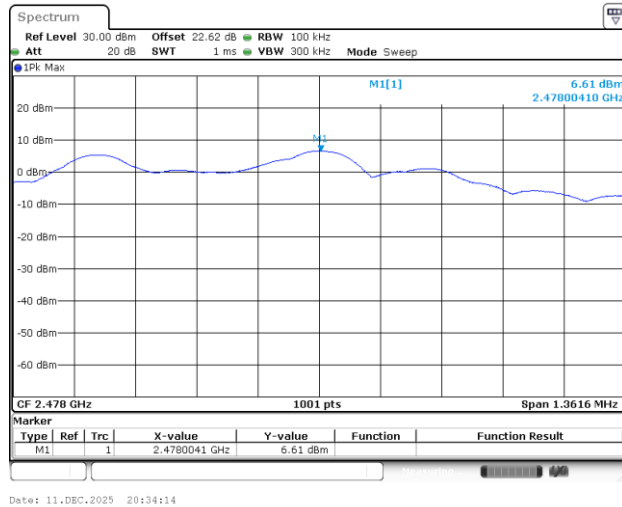


Plot on Channel 38

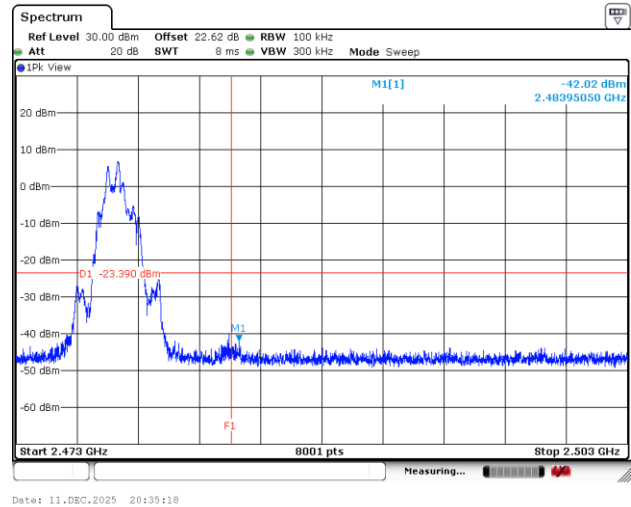

Spurious Emission 30MHz~1GHz Plot

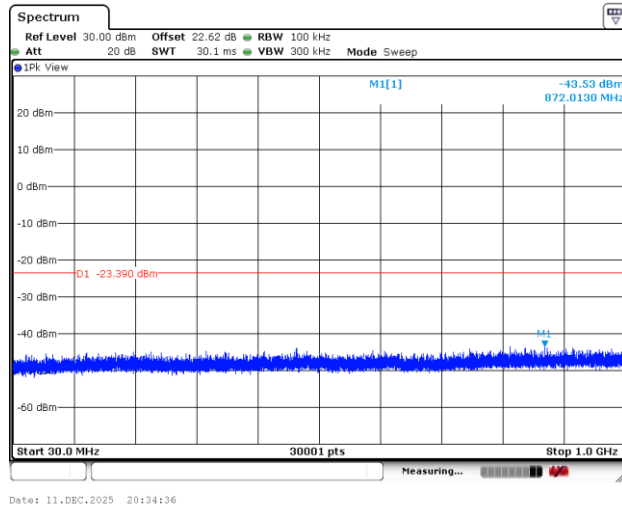

Spurious Emission 1GHz~26.5GHz Plot

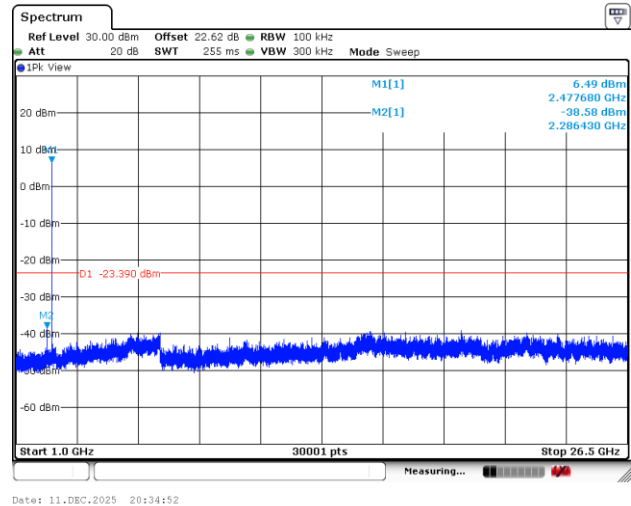



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	22~25.6°C
		Relative Humidity :	58.7~66.3%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

501407
Mode 1
120Vac/60Hz
Line

Full Spectrum

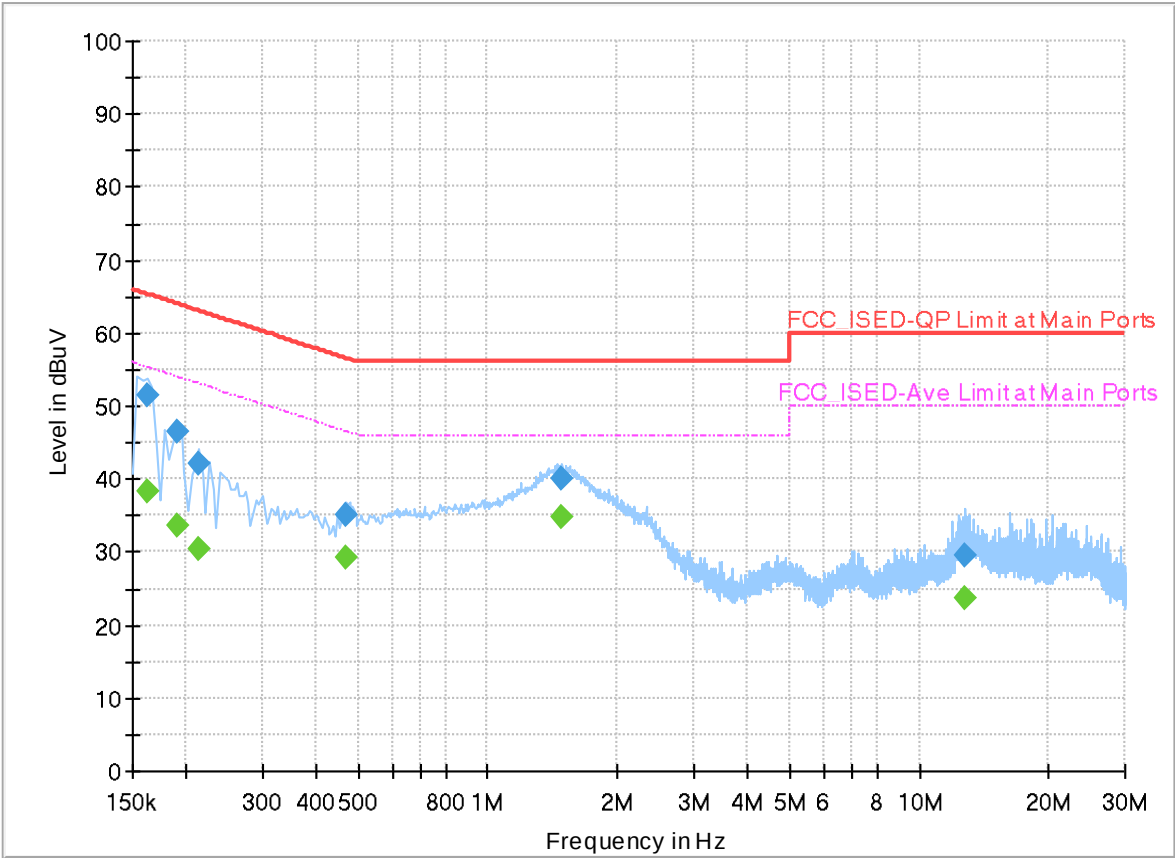


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	38.29	55.36	17.07	L1	OFF	20.0
0.162000	51.55	---	65.36	13.81	L1	OFF	20.0
0.190000	---	33.71	54.04	20.33	L1	OFF	20.0
0.190000	46.43	---	64.04	17.61	L1	OFF	20.0
0.214000	---	30.53	53.05	22.52	L1	OFF	20.0
0.214000	42.23	---	63.05	20.82	L1	OFF	20.0
0.470000	---	29.29	46.51	17.22	L1	OFF	20.0
0.470000	35.12	---	56.51	21.39	L1	OFF	20.0
1.490000	---	34.84	46.00	11.16	L1	OFF	20.0
1.490000	40.15	---	56.00	15.85	L1	OFF	20.0
12.762000	---	23.83	50.00	26.17	L1	OFF	20.1
12.762000	29.67	---	60.00	30.33	L1	OFF	20.1

EUT Information

Report NO : 5O1407
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

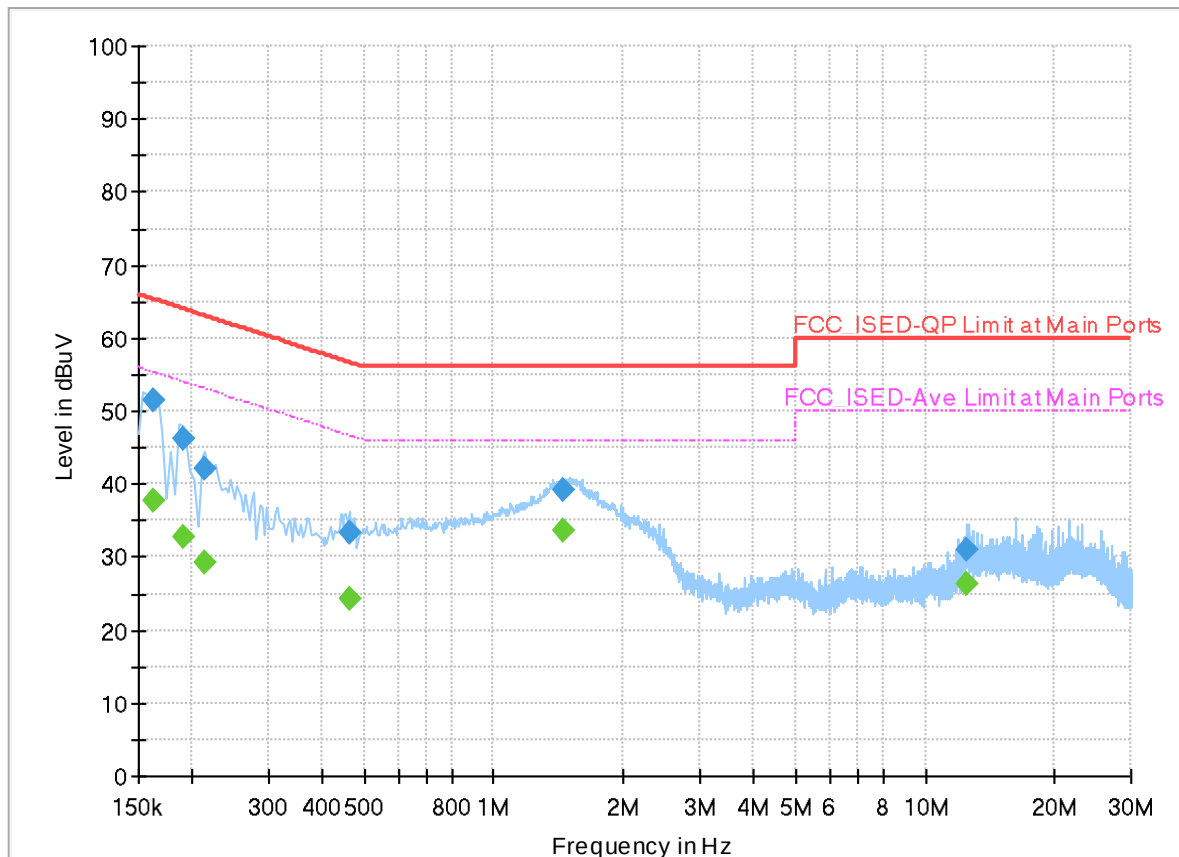

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	37.73	55.36	17.63	N	OFF	20.0
0.162000	51.50	---	65.36	13.86	N	OFF	20.0
0.190000	---	32.89	54.04	21.15	N	OFF	20.0
0.190000	46.32	---	64.04	17.72	N	OFF	20.0
0.214000	---	29.33	53.05	23.72	N	OFF	20.0
0.214000	42.01	---	63.05	21.04	N	OFF	20.0
0.462000	---	24.29	46.66	22.37	N	OFF	19.9
0.462000	33.25	---	56.66	23.41	N	OFF	19.9
1.450000	---	33.67	46.00	12.33	N	OFF	20.0
1.450000	39.26	---	56.00	16.74	N	OFF	20.0
12.498000	---	26.33	50.00	23.67	N	OFF	20.1
12.498000	31.02	---	60.00	28.98	N	OFF	20.1



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou , Lucifer Jiang	Temperature :	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

<1M>

-L	Low channel location
-R	High channel location







C1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	1	Bluetooth-LE_GFSK	39	2480	1Mbps	-	-

C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth-LE_GFSK	00	2366.76	43.93	54.00	-10.07	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	00	4804.00	46.29	74.00	-27.71	V	Peak	Pass	-	Harmonic
2	Bluetooth-LE_GFSK	19	2487.82	44.68	54.00	-9.32	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	39.43	54.00	-14.57	V	Avg.	Pass	-	Harmonic
3	Bluetooth-LE_GFSK	39	2483.66	43.88	54.00	-10.12	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	39	7440.00	39.41	54.00	-14.59	V	Avg.	Pass	-	Harmonic

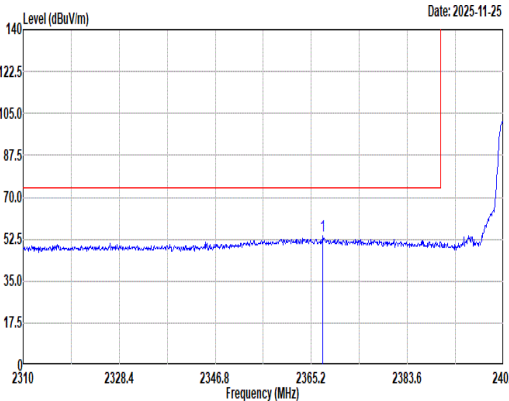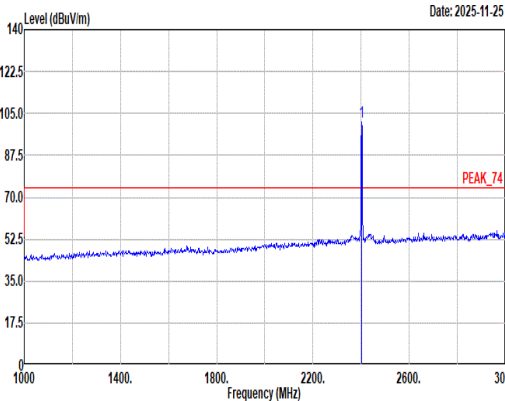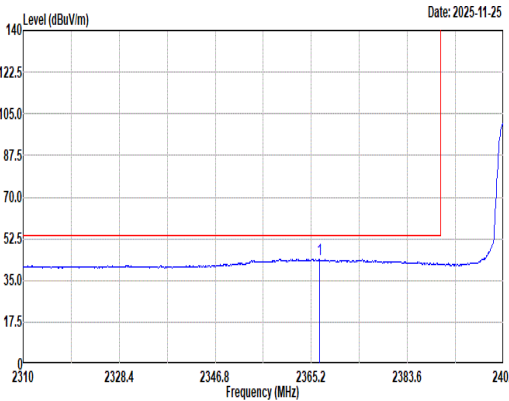
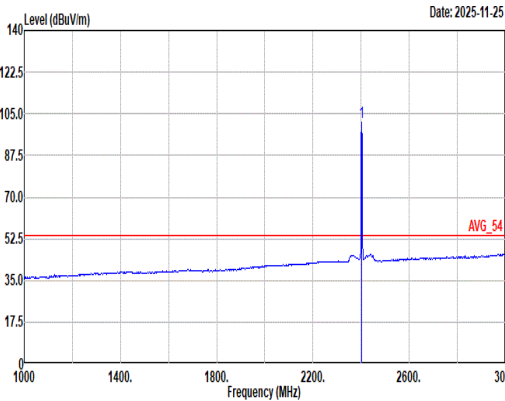


Mode	1																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2367.32</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>41.48</td><td>26.93</td><td>7.08</td><td>31.83</td><td>10.28</td><td>331</td><td>186</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.32	53.94	74.00	-20.06	41.48	26.93	7.08	31.83	10.28	331	186	Peak	 Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.67</td><td>-----</td><td>-----</td><td>89.21</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>331</td><td>186</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.67	-----	-----	89.21	26.90	7.12	31.84	10.28	331	186	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2367.32	53.94	74.00	-20.06	41.48	26.93	7.08	31.83	10.28	331	186	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	101.67	-----	-----	89.21	26.90	7.12	31.84	10.28	331	186	Peak																																																																																								
Avg	 Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2366.76</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>31.47</td><td>26.93</td><td>7.08</td><td>31.83</td><td>10.28</td><td>331</td><td>186</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.76	43.93	54.00	-10.07	31.47	26.93	7.08	31.83	10.28	331	186	Average	 Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>101.17</td><td>-----</td><td>-----</td><td>88.71</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>331</td><td>186</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.17	-----	-----	88.71	26.90	7.12	31.84	10.28	331	186	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2366.76	43.93	54.00	-10.07	31.47	26.93	7.08	31.83	10.28	331	186	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2402.00	101.17	-----	-----	88.71	26.90	7.12	31.84	10.28	331	186	Average																																																																																								



Mode	1																																																																																					
	Band Edge																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																					
ANT	1																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.25</td><td>52.65</td><td>74.00</td><td>-21.35</td><td>40.28</td><td>26.83</td><td>7.09</td><td>31.83</td><td>10.28</td><td>86 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.25	52.65	74.00	-21.35	40.28	26.83	7.09	31.83	10.28	86 Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.63</td><td>-----</td><td>-----</td><td>88.17</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>86 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.63	-----	-----	88.17	26.90	7.12	31.84	10.28	86 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2377.25	52.65	74.00	-21.35	40.28	26.83	7.09	31.83	10.28	86 Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2402.00	100.63	-----	-----	88.17	26.90	7.12	31.84	10.28	86 Peak																																																																												
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.37</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>31.09</td><td>26.96</td><td>7.08</td><td>31.82</td><td>10.28</td><td>86 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.37	43.59	54.00	-10.41	31.09	26.96	7.08	31.82	10.28	86 Average	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.13</td><td>-----</td><td>-----</td><td>87.67</td><td>26.90</td><td>7.12</td><td>31.84</td><td>10.28</td><td>86 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.13	-----	-----	87.67	26.90	7.12	31.84	10.28	86 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2364.37	43.59	54.00	-10.41	31.09	26.96	7.08	31.82	10.28	86 Average																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	2402.00	100.13	-----	-----	87.67	26.90	7.12	31.84	10.28	86 Average																																																																												

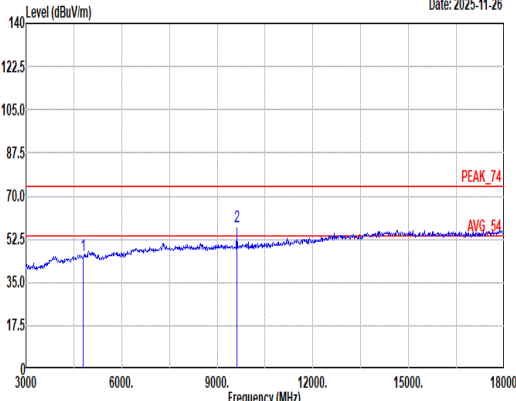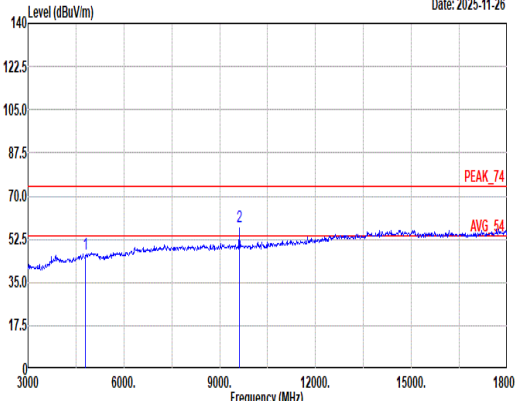

Mode	1																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal						Vertical																																																																																																							
Peak Avg	 Level (dBuV/m) Date: 2025-11-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) PEAK_74 AVG_54 2						 Level (dBuV/m) Date: 2025-11-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000. 9000. 12000. 15000. 18000 Frequency (MHz) PEAK_74 AVG_54 2																																																																																																							
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL						Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL																																																																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>33.92</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71 -- Peak</td></tr><tr><td>2</td><td>9608.00</td><td>57.84</td><td>-----</td><td>-----</td><td>41.79</td><td>37.30</td><td>14.74</td><td>38.16</td><td>2.17 210 237 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.22	74.00	-27.78	33.92	32.41	10.51	32.33	1.71 -- Peak	2	9608.00	57.84	-----	-----	41.79	37.30	14.74	38.16	2.17 210 237 Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>46.29</td><td>74.00</td><td>-27.71</td><td>33.99</td><td>32.41</td><td>10.51</td><td>32.33</td><td>1.71 -- Peak</td></tr><tr><td>2</td><td>9608.00</td><td>57.58</td><td>-----</td><td>-----</td><td>41.53</td><td>37.30</td><td>14.74</td><td>38.16</td><td>2.17 100 58 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.29	74.00	-27.71	33.99	32.41	10.51	32.33	1.71 -- Peak	2	9608.00	57.58	-----	-----	41.53	37.30	14.74	38.16
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	46.22	74.00	-27.78	33.92	32.41	10.51	32.33	1.71 -- Peak																																																																																																					
2	9608.00	57.84	-----	-----	41.79	37.30	14.74	38.16	2.17 210 237 Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	4804.00	46.29	74.00	-27.71	33.99	32.41	10.51	32.33	1.71 -- Peak																																																																																																					
2	9608.00	57.58	-----	-----	41.53	37.30	14.74	38.16	2.17 100 58 Peak																																																																																																					

Remark: The unwanted signal 9608.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	1	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH00_2402MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-26 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-26 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	2																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.78</td><td>51.46</td><td>74.00</td><td>-22.54</td><td>39.11</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>317</td><td>186</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.78	51.46	74.00	-22.54	39.11	26.00	7.11	31.84	10.28	317	186	Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.81</td><td>-----</td><td>-----</td><td>88.40</td><td>26.00</td><td>7.19</td><td>31.86</td><td>10.28</td><td>317</td><td>186</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.81	-----	-----	88.40	26.00	7.19	31.86	10.28	317	186	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.78	51.46	74.00	-22.54	39.11	26.00	7.11	31.84	10.28	317	186	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.81	-----	-----	88.40	26.00	7.19	31.86	10.28	317	186	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2343.93</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>30.60</td><td>27.00</td><td>7.06</td><td>31.82</td><td>10.28</td><td>317</td><td>186</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2343.93	43.12	54.00	-10.88	30.60	27.00	7.06	31.82	10.28	317	186	Average	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.35</td><td>-----</td><td>-----</td><td>87.94</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>317</td><td>186</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.35	-----	-----	87.94	26.80	7.19	31.86	10.28	317	186	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2343.93	43.12	54.00	-10.88	30.60	27.00	7.06	31.82	10.28	317	186	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.35	-----	-----	87.94	26.80	7.19	31.86	10.28	317	186	Average																																																																																								



Mode	2	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Fundamental
Peak		



Mode	2																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>51.01</td><td>74.00</td><td>-22.99</td><td>30.66</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>100</td><td>84 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	51.01	74.00	-22.99	30.66	26.00	7.11	31.84	10.28	100	84 Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.31</td><td>-----</td><td>-----</td><td>88.90</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>100</td><td>84 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.31	-----	-----	88.90	26.80	7.19	31.86	10.28	100	84 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.30	51.01	74.00	-22.99	30.66	26.00	7.11	31.84	10.28	100	84 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	101.31	-----	-----	88.90	26.80	7.19	31.86	10.28	100	84 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>30.02</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>100</td><td>84 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	42.37	54.00	-11.63	30.02	26.00	7.11	31.84	10.28	100	84 Average	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.85</td><td>-----</td><td>-----</td><td>88.44</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>100</td><td>84 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.85	-----	-----	88.44	26.80	7.19	31.86	10.28	100	84 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.30	42.37	54.00	-11.63	30.02	26.00	7.11	31.84	10.28	100	84 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	100.85	-----	-----	88.44	26.80	7.19	31.86	10.28	100	84 Average																																																																																							



Mode	2																																																		
	Band Edge - R																																																		
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	Level (dBuV/m) Date: 2025-11-25 PEAK_BE_74 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.94</td><td>53.55</td><td>74.00</td><td>-20.45</td><td></td><td>40.99</td><td>26.88</td><td>7.27</td><td>31.88</td><td>10.29</td><td>100</td><td>84</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.94	53.55	74.00	-20.45		40.99	26.88	7.27	31.88	10.29	100	84	Peak	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																								
1 2487.94	53.55	74.00	-20.45		40.99	26.88	7.27	31.88	10.29	100	84	Peak																																							
Avg	Level (dBuV/m) Date: 2025-11-25 AVG_BE_54 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2487.82</td><td>44.68</td><td>54.00</td><td>-9.32</td><td></td><td>32.12</td><td>26.88</td><td>7.27</td><td>31.88</td><td>10.29</td><td>100</td><td>84</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg		1 2487.82	44.68	54.00	-9.32		32.12	26.88	7.27	31.88	10.29	100	84	Average	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	cm	deg																																								
1 2487.82	44.68	54.00	-9.32		32.12	26.88	7.27	31.88	10.29	100	84	Average																																							



Mode	2																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal								Vertical																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>47.39</td><td>74.00</td><td>-26.61</td><td>34.78</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>32.68</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>39.17</td><td>54.00</td><td>-14.83</td><td>22.85</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr><tr><td>4 9760.00</td><td>60.22</td><td>-----</td><td>-----</td><td>43.73</td><td>37.76</td><td>14.92</td><td>38.37</td><td>2.18</td><td>215 239 Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	47.39	74.00	-26.61	34.78	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	49.00	74.00	-25.00	32.68	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	39.17	54.00	-14.83	22.85	37.28	12.79	35.68	1.93	-- -- Average	4 9760.00	60.22	-----	-----	43.73	37.76	14.92	38.37	2.18	215 239 Peak	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4880.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>33.51</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>-- -- Peak</td></tr><tr><td>2 7320.00</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>32.72</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Peak</td></tr><tr><td>3 7320.00</td><td>39.43</td><td>54.00</td><td>-14.57</td><td>23.11</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>-- -- Average</td></tr><tr><td>4 9760.00</td><td>59.60</td><td>-----</td><td>-----</td><td>43.11</td><td>37.76</td><td>14.92</td><td>38.37</td><td>2.18</td><td>104 61 Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4880.00	46.12	74.00	-27.88	33.51	32.62	10.57	32.29	1.71	-- -- Peak	2 7320.00	49.04	74.00	-24.96	32.72	37.28	12.79	35.68	1.93	-- -- Peak	3 7320.00	39.43	54.00	-14.57	23.11	37.28	12.79	35.68	1.93	-- -- Average	4 9760.00	59.60	-----	-----	43.11	37.76	14.92	38.37	2.18	104 61 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																			
1 4880.00	47.39	74.00	-26.61	34.78	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																																																			
2 7320.00	49.00	74.00	-25.00	32.68	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																																																			
3 7320.00	39.17	54.00	-14.83	22.85	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																																																			
4 9760.00	60.22	-----	-----	43.73	37.76	14.92	38.37	2.18	215 239 Peak																																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																			
1 4880.00	46.12	74.00	-27.88	33.51	32.62	10.57	32.29	1.71	-- -- Peak																																																																																																																																																			
2 7320.00	49.04	74.00	-24.96	32.72	37.28	12.79	35.68	1.93	-- -- Peak																																																																																																																																																			
3 7320.00	39.43	54.00	-14.57	23.11	37.28	12.79	35.68	1.93	-- -- Average																																																																																																																																																			
4 9760.00	59.60	-----	-----	43.11	37.76	14.92	38.37	2.18	104 61 Peak																																																																																																																																																			

Remark: The unwanted signal 9760.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	2	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.52</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>44.07</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>313</td><td>171</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.52	56.58	74.00	-17.42	44.07	26.84	7.26	31.88	10.29	313	171	Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>100.32</td><td>-----</td><td>-----</td><td>87.85</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>313</td><td>171</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	100.32	-----	-----	87.85	26.80	7.26	31.88	10.29	313	171	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2483.52	56.58	74.00	-17.42	44.07	26.84	7.26	31.88	10.29	313	171	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2480.00	100.32	-----	-----	87.85	26.80	7.26	31.88	10.29	313	171	Peak																																																																														
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2499.76</td><td>43.39</td><td>54.00</td><td>-10.61</td><td>30.00</td><td>26.90</td><td>7.29</td><td>31.89</td><td>10.29</td><td>313</td><td>171</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2499.76	43.39	54.00	-10.61	30.00	26.90	7.29	31.89	10.29	313	171	Average	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>99.79</td><td>-----</td><td>-----</td><td>87.32</td><td>26.80</td><td>7.26</td><td>31.88</td><td>10.29</td><td>313</td><td>171</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	99.79	-----	-----	87.32	26.80	7.26	31.88	10.29	313	171	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2499.76	43.39	54.00	-10.61	30.00	26.90	7.29	31.89	10.29	313	171	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2480.00	99.79	-----	-----	87.32	26.80	7.26	31.88	10.29	313	171	Average																																																																														



Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2485.90 55.99 74.00 -18.01 43.45 26.86 7.27 31.88 10.29 100 86 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2485.90 55.99 74.00 -18.01 43.45 26.86 7.27 31.88 10.29 100 86 Peak									Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 101.04 ----- 88.57 26.80 7.26 31.88 10.29 100 86 Peak</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2480.00 101.04 ----- 88.57 26.80 7.26 31.88 10.29 100 86 Peak								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																	
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2485.90 55.99 74.00 -18.01 43.45 26.86 7.27 31.88 10.29 100 86 Peak																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2480.00 101.04 ----- 88.57 26.80 7.26 31.88 10.29 100 86 Peak																																																																										
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2483.66 43.88 54.00 -10.12 31.37 26.84 7.26 31.88 10.29 100 86 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2483.66 43.88 54.00 -10.12 31.37 26.84 7.26 31.88 10.29 100 86 Average									Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin Level Factor Loss Factor Factor</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2480.00 100.57 ----- 88.10 26.80 7.26 31.88 10.29 100 86 Average</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin Level Factor Loss Factor Factor									MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg									1 2480.00 100.57 ----- 88.10 26.80 7.26 31.88 10.29 100 86 Average								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2483.66 43.88 54.00 -10.12 31.37 26.84 7.26 31.88 10.29 100 86 Average																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor																																																																										
MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB cm deg																																																																										
1 2480.00 100.57 ----- 88.10 26.80 7.26 31.88 10.29 100 86 Average																																																																										



Mode	3																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal								Vertical																																																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>33.94</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71 -- -- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>49.39</td><td>74.00</td><td>-24.61</td><td>33.19</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94 -- -- Peak</td></tr><tr><td>3</td><td>7440.00</td><td>39.23</td><td>54.00</td><td>-14.77</td><td>23.03</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94 -- -- Average</td></tr><tr><td>4</td><td>9920.00</td><td>60.67</td><td>-----</td><td>-----</td><td>44.38</td><td>37.60</td><td>14.96</td><td>38.59</td><td>2.32 219 236 Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4960.00	46.95	74.00	-27.05	33.94	32.92	10.62	32.24	1.71 -- -- Peak	2	7440.00	49.39	74.00	-24.61	33.19	37.14	12.90	35.78	1.94 -- -- Peak	3	7440.00	39.23	54.00	-14.77	23.03	37.14	12.90	35.78	1.94 -- -- Average	4	9920.00	60.67	-----	-----	44.38	37.60	14.96	38.59	2.32 219 236 Peak	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>4960.00</td><td>46.78</td><td>74.00</td><td>-27.22</td><td>33.77</td><td>32.92</td><td>10.62</td><td>32.24</td><td>1.71 -- -- Peak</td></tr><tr><td>2</td><td>7440.00</td><td>49.09</td><td>74.00</td><td>-24.91</td><td>32.09</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94 -- -- Peak</td></tr><tr><td>3</td><td>7440.00</td><td>39.41</td><td>54.00</td><td>-14.59</td><td>23.21</td><td>37.14</td><td>12.90</td><td>35.78</td><td>1.94 -- -- Average</td></tr><tr><td>4</td><td>9920.00</td><td>60.31</td><td>-----</td><td>-----</td><td>44.02</td><td>37.60</td><td>14.96</td><td>38.59</td><td>2.32 103 59 Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	4960.00	46.78	74.00	-27.22	33.77	32.92	10.62	32.24	1.71 -- -- Peak	2	7440.00	49.09	74.00	-24.91	32.09	37.14	12.90	35.78	1.94 -- -- Peak	3	7440.00	39.41	54.00	-14.59	23.21	37.14	12.90	35.78	1.94 -- -- Average	4	9920.00	60.31	-----	-----	44.02	37.60	14.96	38.59	2.32 103 59 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																			
1	4960.00	46.95	74.00	-27.05	33.94	32.92	10.62	32.24	1.71 -- -- Peak																																																																																																																																																			
2	7440.00	49.39	74.00	-24.61	33.19	37.14	12.90	35.78	1.94 -- -- Peak																																																																																																																																																			
3	7440.00	39.23	54.00	-14.77	23.03	37.14	12.90	35.78	1.94 -- -- Average																																																																																																																																																			
4	9920.00	60.67	-----	-----	44.38	37.60	14.96	38.59	2.32 219 236 Peak																																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																			
1	4960.00	46.78	74.00	-27.22	33.77	32.92	10.62	32.24	1.71 -- -- Peak																																																																																																																																																			
2	7440.00	49.09	74.00	-24.91	32.09	37.14	12.90	35.78	1.94 -- -- Peak																																																																																																																																																			
3	7440.00	39.41	54.00	-14.59	23.21	37.14	12.90	35.78	1.94 -- -- Average																																																																																																																																																			
4	9920.00	60.31	-----	-----	44.02	37.60	14.96	38.59	2.32 103 59 Peak																																																																																																																																																			

Remark: The unwanted signal 9920.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	3	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH39_2480MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Leo Li , Karl Hou , Lucifer Jiang	Temperature :	19~23°C
		Relative Humidity :	60~64.5%

Note symbol

<2M>

-L	Low channel location
-R	High channel location







C1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 4	2400-2483.5	1	Bluetooth-LE_GFSK	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	1	Bluetooth-LE_GFSK	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	1	Bluetooth-LE_GFSK	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	1	Bluetooth-LE_GFSK	38	2478	2Mbps	-	LF
Mode 8	2400-2483.5	1	Bluetooth-LE_GFSK	38	2478	2Mbps	-	SHF





C2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
4	Bluetooth-LE_GFSK	01	2376.55	45.80	54.00	-8.20	H	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	01	4808.00	46.73	74.00	-27.27	V	Peak	Pass	-	Harmonic
5	Bluetooth-LE_GFSK	19	2488.12	45.13	54.00	-8.87	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	19	7320.00	40.61	54.00	-13.39	V	Avg.	Pass	-	Harmonic
6	Bluetooth-LE_GFSK	38	2483.54	49.60	54.00	-4.40	V	Avg.	Pass	-	Band Edge
	Bluetooth-LE_GFSK	38	7434.00	39.42	54.00	-14.58	H	Avg.	Pass	-	Harmonic
7	BLE Tx LF	38	716.76	38.29	46.00	-7.71	H	Peak	Pass	-	LF
8	BLE Tx SHF	38	23971.00	41.70	74.00	-32.30	V	Peak	Pass	-	SHF

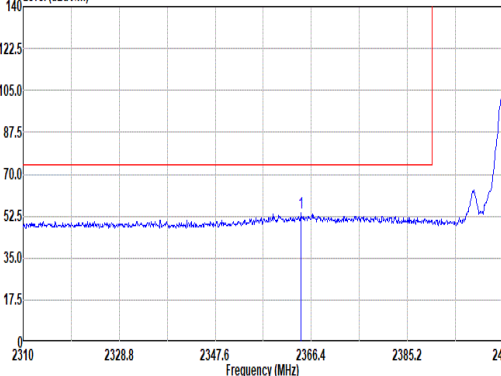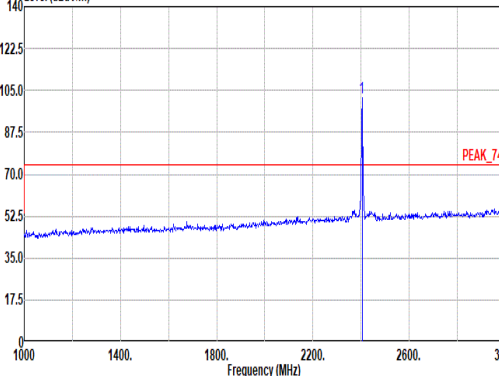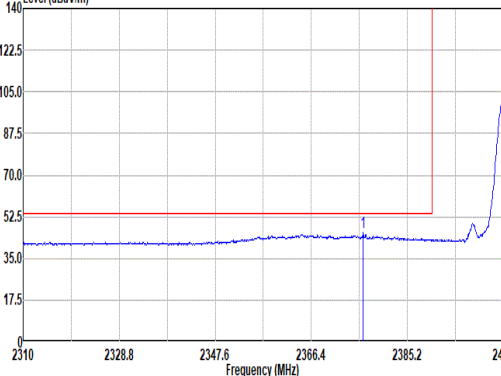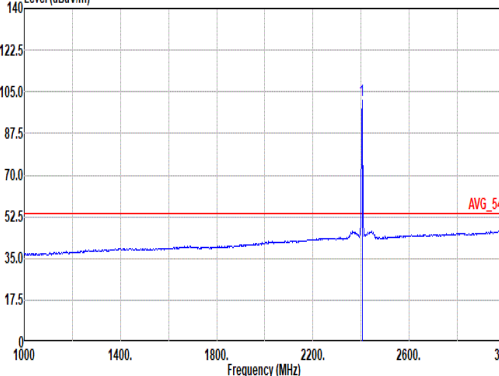

Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH01_2404MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2364.43</td><td>53.69</td><td>74.00</td><td>-20.31</td><td>41.19</td><td>26.96</td><td>7.08</td><td>31.82</td><td>10.28</td><td>332</td><td>173</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2364.43	53.69	74.00	-20.31	41.19	26.96	7.08	31.82	10.28	332	173	Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2404.00</td><td>102.13</td><td>-----</td><td>-----</td><td>89.66</td><td>26.90</td><td>7.13</td><td>31.84</td><td>10.28</td><td>332</td><td>173</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2404.00	102.13	-----	-----	89.66	26.90	7.13	31.84	10.28	332	173	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2364.43	53.69	74.00	-20.31	41.19	26.96	7.08	31.82	10.28	332	173	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2404.00	102.13	-----	-----	89.66	26.90	7.13	31.84	10.28	332	173	Peak																																																																									
Avg	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2376.55</td><td>45.80</td><td>54.00</td><td>-8.20</td><td>33.43</td><td>26.83</td><td>7.09</td><td>31.83</td><td>10.28</td><td>332</td><td>173</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2376.55	45.80	54.00	-8.20	33.43	26.83	7.09	31.83	10.28	332	173	Average	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2404.00</td><td>101.43</td><td>-----</td><td>-----</td><td>88.96</td><td>26.90</td><td>7.13</td><td>31.84</td><td>10.28</td><td>332</td><td>173</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2404.00	101.43	-----	-----	88.96	26.90	7.13	31.84	10.28	332	173	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2376.55	45.80	54.00	-8.20	33.43	26.83	7.09	31.83	10.28	332	173	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2404.00	101.43	-----	-----	88.96	26.90	7.13	31.84	10.28	332	173	Average																																																																									

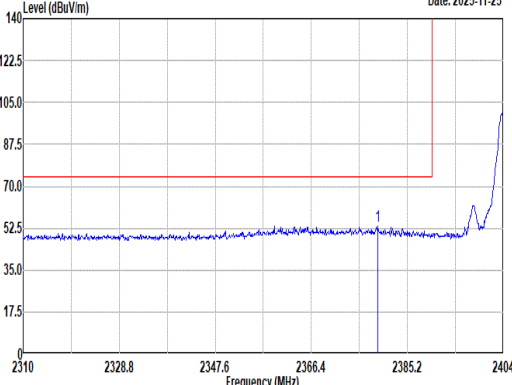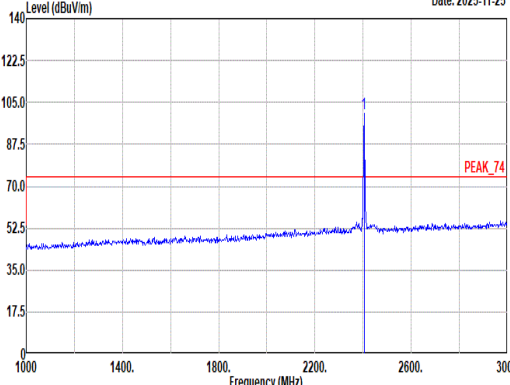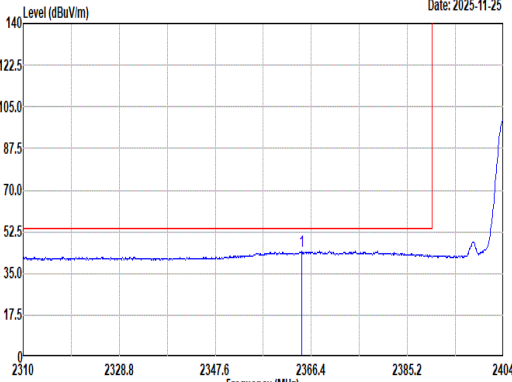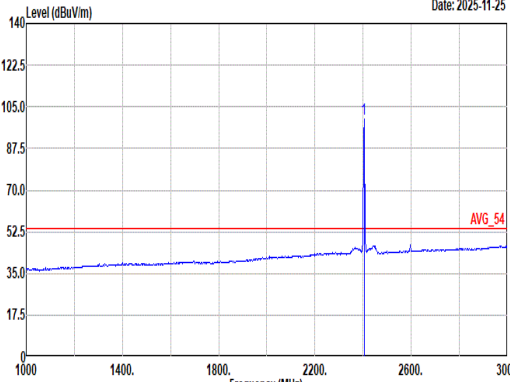

Mode	4																																																																																																
	Band Edge																																																																																																
	2400-2483.5_Bluetooth-LE_GFSK_CH01_2404MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2379.37</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>41.02</td><td>26.81</td><td>7.10</td><td>31.83</td><td>10.28</td><td>103</td><td>86 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2379.37	53.38	74.00	-20.62	41.02	26.81	7.10	31.83	10.28	103	86 Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>100.44</td><td>-----</td><td>-----</td><td>87.97</td><td>26.90</td><td>7.13</td><td>31.84</td><td>10.28</td><td>103</td><td>86 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	100.44	-----	-----	87.97	26.90	7.13	31.84	10.28	103	86 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2379.37	53.38	74.00	-20.62	41.02	26.81	7.10	31.83	10.28	103	86 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2404.00	100.44	-----	-----	87.97	26.90	7.13	31.84	10.28	103	86 Peak																																																																																						
Avg	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2364.52</td><td>44.31</td><td>54.00</td><td>-9.69</td><td>31.82</td><td>26.95</td><td>7.08</td><td>31.82</td><td>10.28</td><td>103</td><td>86 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2364.52	44.31	54.00	-9.69	31.82	26.95	7.08	31.82	10.28	103	86 Average	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>99.84</td><td>-----</td><td>-----</td><td>87.37</td><td>26.90</td><td>7.13</td><td>31.84</td><td>10.28</td><td>103</td><td>86 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	99.84	-----	-----	87.37	26.90	7.13	31.84	10.28	103	86 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2364.52	44.31	54.00	-9.69	31.82	26.95	7.08	31.82	10.28	103	86 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2404.00	99.84	-----	-----	87.37	26.90	7.13	31.84	10.28	103	86 Average																																																																																						



Mode	4																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_Bluetooth-LE_GFSK_CH01_2404MHz																																																																																																																								
ANT	1																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>46.65</td><td>74.00</td><td>-27.35</td><td>34.33</td><td>32.42</td><td>10.52</td><td>32.33</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>9616.00</td><td>58.17</td><td>-----</td><td>-----</td><td>42.12</td><td>37.30</td><td>14.75</td><td>38.17</td><td>2.17</td><td>210</td><td>237 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	46.65	74.00	-27.35	34.33	32.42	10.52	32.33	1.71	--	Peak	2	9616.00	58.17	-----	-----	42.12	37.30	14.75	38.17	2.17	210	237 Peak	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4800.00</td><td>46.73</td><td>74.00</td><td>-27.27</td><td>34.41</td><td>32.42</td><td>10.52</td><td>32.33</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>9616.00</td><td>58.00</td><td>-----</td><td>-----</td><td>41.95</td><td>37.30</td><td>14.75</td><td>38.17</td><td>2.17</td><td>100</td><td>58 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4800.00	46.73	74.00	-27.27	34.41	32.42	10.52	32.33	1.71	--	Peak	2	9616.00	58.00	-----	-----	41.95	37.30	14.75	38.17	2.17	100	58 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4800.00	46.65	74.00	-27.35	34.33	32.42	10.52	32.33	1.71	--	Peak																																																																																																														
2	9616.00	58.17	-----	-----	42.12	37.30	14.75	38.17	2.17	210	237 Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4800.00	46.73	74.00	-27.27	34.41	32.42	10.52	32.33	1.71	--	Peak																																																																																																														
2	9616.00	58.00	-----	-----	41.95	37.30	14.75	38.17	2.17	100	58 Peak																																																																																																														

Remark: The unwanted signal 9616.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	4	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH01_2404MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL







Mode	5																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.02</td><td>51.83</td><td>74.00</td><td>-22.17</td><td>39.48</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>293</td><td>184</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.02	51.83	74.00	-22.17	39.48	26.00	7.11	31.84	10.28	293	184	Peak	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.92</td><td>-----</td><td>-----</td><td>88.51</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>293</td><td>184</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.92	-----	-----	88.51	26.80	7.19	31.86	10.28	293	184	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.02	51.83	74.00	-22.17	39.48	26.00	7.11	31.84	10.28	293	184	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.92	-----	-----	88.51	26.80	7.19	31.86	10.28	293	184	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.39</td><td>43.74</td><td>54.00</td><td>-10.26</td><td>31.39</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>293</td><td>184</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.39	43.74	54.00	-10.26	31.39	26.00	7.11	31.84	10.28	293	184	Average	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.26</td><td>-----</td><td>-----</td><td>87.85</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>293</td><td>184</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.26	-----	-----	87.85	26.80	7.19	31.86	10.28	293	184	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2388.39	43.74	54.00	-10.26	31.39	26.00	7.11	31.84	10.28	293	184	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2440.00	100.26	-----	-----	87.85	26.80	7.19	31.86	10.28	293	184	Average																																																																																								



Mode	5											
	Band Edge - R											
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz											
ANT	1											
Pol.	Horizontal						Fundamental					
Peak												

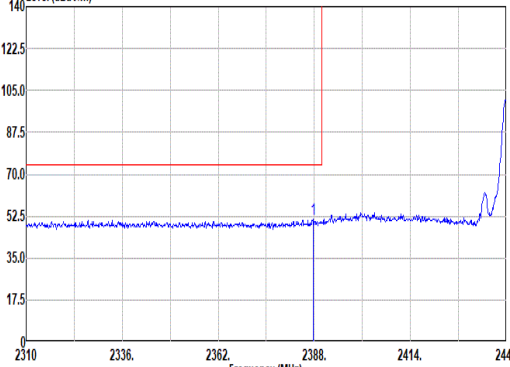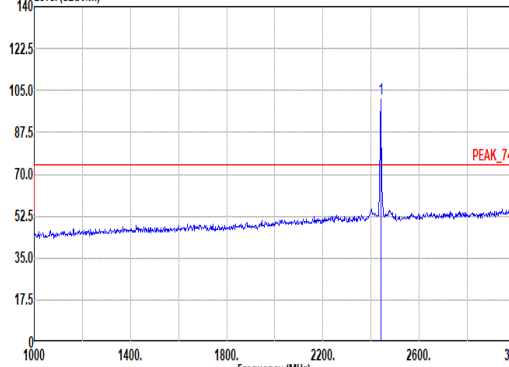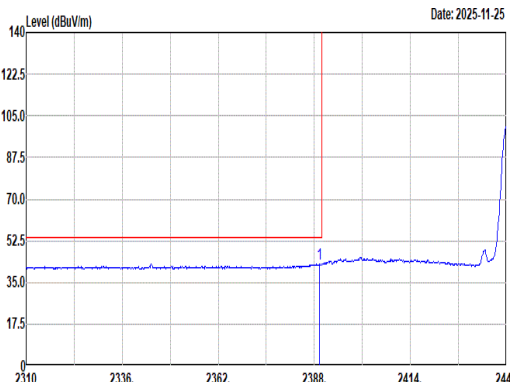
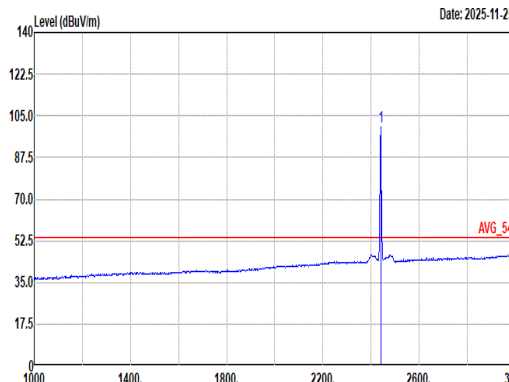


Mode	5																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.61</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>39.05</td><td>26.00</td><td>7.11</td><td>31.84</td><td>10.28</td><td>100</td><td>86 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.61	51.40	74.00	-22.60	39.05	26.00	7.11	31.84	10.28	100	86 Peak	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>101.30</td><td>-----</td><td>-----</td><td>88.09</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>100</td><td>86 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	101.30	-----	-----	88.09	26.80	7.19	31.86	10.28	100	86 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2387.61	51.40	74.00	-22.60	39.05	26.00	7.11	31.84	10.28	100	86 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	101.30	-----	-----	88.09	26.80	7.19	31.86	10.28	100	86 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.30</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>30.68</td><td>26.80</td><td>7.11</td><td>31.84</td><td>10.28</td><td>100</td><td>86 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	43.03	54.00	-10.97	30.68	26.80	7.11	31.84	10.28	100	86 Average	Level (dBuV/m) Date: 2025-11-25  Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2440.00</td><td>100.63</td><td>-----</td><td>-----</td><td>88.22</td><td>26.80</td><td>7.19</td><td>31.86</td><td>10.28</td><td>100</td><td>86 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2440.00	100.63	-----	-----	88.22	26.80	7.19	31.86	10.28	100	86 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.30	43.03	54.00	-10.97	30.68	26.80	7.11	31.84	10.28	100	86 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2440.00	100.63	-----	-----	88.22	26.80	7.19	31.86	10.28	100	86 Average																																																																																							



Mode	5	
	Band Edge - R	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Vertical	Fundamental
Peak		

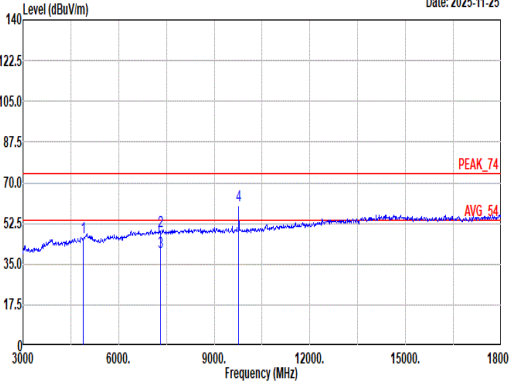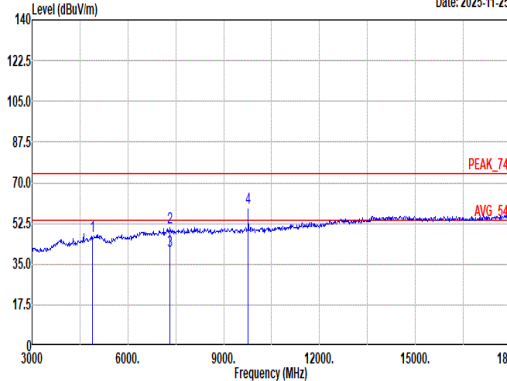





Mode	5																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Vertical																																																																																			
Peak Avg																																																																																										
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.70</td><td>74.00</td><td>-27.30</td><td>34.09</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>32.09</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>40.39</td><td>54.00</td><td>-13.61</td><td>24.07</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>9760.00</td><td>60.19</td><td>-----</td><td>-----</td><td>43.70</td><td>37.76</td><td>14.92</td><td>38.37</td><td>2.18</td><td>217</td><td>239 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.70	74.00	-27.30	34.09	32.62	10.57	32.29	1.71	--	Peak	2	7320.00	49.21	74.00	-24.79	32.09	37.28	12.79	35.68	1.93	--	Peak	3	7320.00	40.39	54.00	-13.61	24.07	37.28	12.79	35.68	1.93	--	Average	4	9760.00	60.19	-----	-----	43.70	37.76	14.92	38.37	2.18	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4880.00	46.70	74.00	-27.30	34.09	32.62	10.57	32.29	1.71	--	Peak																																																																															
2	7320.00	49.21	74.00	-24.79	32.09	37.28	12.79	35.68	1.93	--	Peak																																																																															
3	7320.00	40.39	54.00	-13.61	24.07	37.28	12.79	35.68	1.93	--	Average																																																																															
4	9760.00	60.19	-----	-----	43.70	37.76	14.92	38.37	2.18	217	239 Peak																																																																															
Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>34.28</td><td>32.62</td><td>10.57</td><td>32.29</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>50.72</td><td>74.00</td><td>-23.28</td><td>34.40</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7320.00</td><td>40.61</td><td>54.00</td><td>-13.39</td><td>24.29</td><td>37.28</td><td>12.79</td><td>35.68</td><td>1.93</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>9760.00</td><td>59.18</td><td>-----</td><td>-----</td><td>42.69</td><td>37.76</td><td>14.92</td><td>38.37</td><td>2.18</td><td>107</td><td>35 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	46.89	74.00	-27.11	34.28	32.62	10.57	32.29	1.71	--	Peak	2	7320.00	50.72	74.00	-23.28	34.40	37.28	12.79	35.68	1.93	--	Peak	3	7320.00	40.61	54.00	-13.39	24.29	37.28	12.79	35.68	1.93	--	Average	4	9760.00	59.18	-----	-----	42.69	37.76	14.92	38.37	2.18	107	35 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4880.00	46.89	74.00	-27.11	34.28	32.62	10.57	32.29	1.71	--	Peak																																																																															
2	7320.00	50.72	74.00	-23.28	34.40	37.28	12.79	35.68	1.93	--	Peak																																																																															
3	7320.00	40.61	54.00	-13.39	24.29	37.28	12.79	35.68	1.93	--	Average																																																																															
4	9760.00	59.18	-----	-----	42.69	37.76	14.92	38.37	2.18	107	35 Peak																																																																															

Remark: The unwanted signal 9760.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	5	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH19_2440MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-25 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-25 Frequency (MHz) Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL

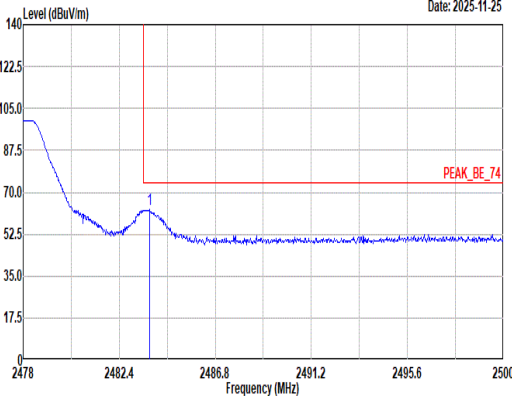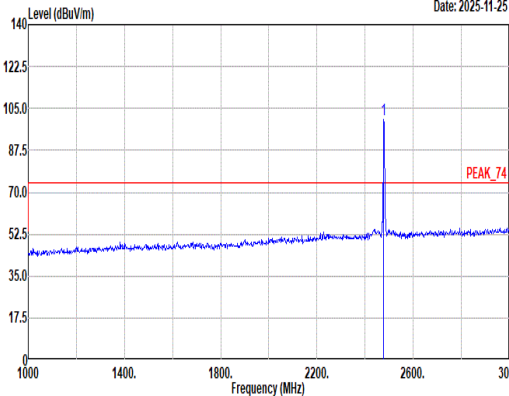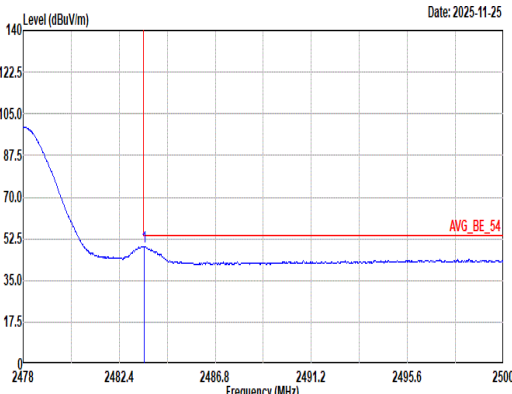
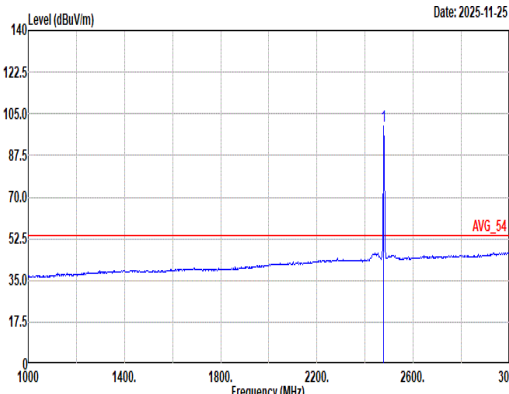


Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal						Fundamental																																																																													
Peak	 Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.79</td><td>62.69</td><td>74.00</td><td>-11.31</td><td>50.18</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>315</td><td>167</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.79	62.69	74.00	-11.31	50.18	26.84	7.26	31.88	10.29	315	167	Peak	 Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>100.44</td><td>-----</td><td>-----</td><td>87.98</td><td>26.80</td><td>7.25</td><td>31.88</td><td>10.29</td><td>315</td><td>167</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2478.00	100.44	-----	-----	87.98	26.80	7.25	31.88	10.29	315	167	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.79	62.69	74.00	-11.31	50.18	26.84	7.26	31.88	10.29	315	167	Peak																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2478.00	100.44	-----	-----	87.98	26.80	7.25	31.88	10.29	315	167	Peak																																																																									
Avg	 Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.54</td><td>49.06</td><td>54.00</td><td>-4.94</td><td>36.55</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td>315</td><td>167</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.54	49.06	54.00	-4.94	36.55	26.84	7.26	31.88	10.29	315	167	Average	 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2478.00</td><td>99.74</td><td>-----</td><td>-----</td><td>87.28</td><td>26.80</td><td>7.25</td><td>31.88</td><td>10.29</td><td>315</td><td>167</td><td>Average</td></tr></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2478.00	99.74	-----	-----	87.28	26.80	7.25	31.88	10.29	315	167	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2483.54	49.06	54.00	-4.94	36.55	26.84	7.26	31.88	10.29	315	167	Average																																																																									
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 2478.00	99.74	-----	-----	87.28	26.80	7.25	31.88	10.29	315	167	Average																																																																									



Mode	6																																																																																													
	Band Edge																																																																																													
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical										Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-11-25										Level (dBuV/m) Date: 2025-11-25																																																																																			
	Site : 03CH23-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto										Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																			
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>63.13</td><td>74.00</td><td>-10.87</td><td>50.62</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td></td><td>100</td><td>106 Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.54	63.13	74.00	-10.87	50.62	26.84	7.26	31.88	10.29		100	106 Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>100.84</td><td>-----</td><td>-----</td><td>88.38</td><td>26.80</td><td>7.25</td><td>31.88</td><td>10.29</td><td></td><td>100</td><td>106 Peak</td></tr></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2478.00	100.84	-----	-----	88.38	26.80	7.25	31.88	10.29		100
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2483.54	63.13	74.00	-10.87	50.62	26.84	7.26	31.88	10.29		100	106 Peak																																																																																		
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2478.00	100.84	-----	-----	88.38	26.80	7.25	31.88	10.29		100	106 Peak																																																																																		
Avg	Level (dBuV/m) Date: 2025-11-25										Level (dBuV/m) Date: 2025-11-25																																																																																			
	Site : 03CH23-HY Condition: AVG_BE_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto										Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SMT:Auto																																																																																			
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>49.60</td><td>54.00</td><td>-4.40</td><td>37.09</td><td>26.84</td><td>7.26</td><td>31.88</td><td>10.29</td><td></td><td>100</td><td>106 Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2483.54	49.60	54.00	-4.40	37.09	26.84	7.26	31.88	10.29		100	106 Average	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>100.19</td><td>-----</td><td>-----</td><td>87.73</td><td>26.80</td><td>7.25</td><td>31.88</td><td>10.29</td><td></td><td>100</td><td>106 Average</td></tr></table>								Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	2478.00	100.19	-----	-----	87.73	26.80	7.25	31.88	10.29		100
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2483.54	49.60	54.00	-4.40	37.09	26.84	7.26	31.88	10.29		100	106 Average																																																																																		
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																		
1	2478.00	100.19	-----	-----	87.73	26.80	7.25	31.88	10.29		100	106 Average																																																																																		

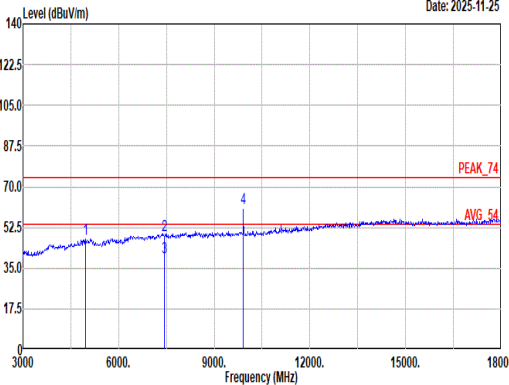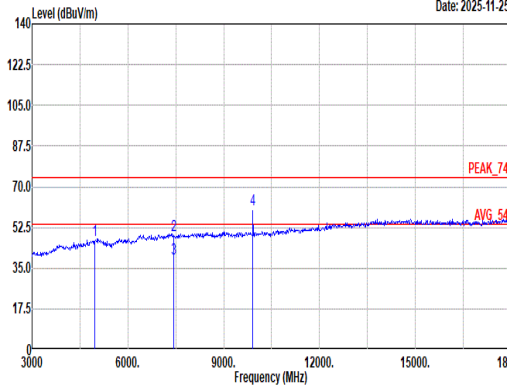

Mode	6																																																																																									
	Harmonic																																																																																									
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal						Vertical																																																																																			
Peak Avg																																																																																										
	Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL																																																																																									
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>34.65</td><td>32.91</td><td>10.62</td><td>32.25</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>32.72</td><td>37.16</td><td>12.89</td><td>35.78</td><td>1.94</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7434.00</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>23.21</td><td>37.16</td><td>12.89</td><td>35.78</td><td>1.94</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>9912.00</td><td>60.98</td><td>-----</td><td>-----</td><td>44.69</td><td>37.60</td><td>14.96</td><td>38.58</td><td>2.31</td><td>216</td><td>235 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	47.64	74.00	-26.36	34.65	32.91	10.62	32.25	1.71	--	Peak	2	7434.00	48.93	74.00	-25.07	32.72	37.16	12.89	35.78	1.94	--	Peak	3	7434.00	39.42	54.00	-14.58	23.21	37.16	12.89	35.78	1.94	--	Average	4	9912.00	60.98	-----	-----	44.69	37.60	14.96	38.58	2.31	216
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4956.00	47.64	74.00	-26.36	34.65	32.91	10.62	32.25	1.71	--	Peak																																																																															
2	7434.00	48.93	74.00	-25.07	32.72	37.16	12.89	35.78	1.94	--	Peak																																																																															
3	7434.00	39.42	54.00	-14.58	23.21	37.16	12.89	35.78	1.94	--	Average																																																																															
4	9912.00	60.98	-----	-----	44.69	37.60	14.96	38.58	2.31	216	235 Peak																																																																															
Site : 03CH23-HY Condition: PEAK_74 3m DRH18-E_LE2C05A18EN_250702 VERTICAL																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>33.92</td><td>32.91</td><td>10.62</td><td>32.25</td><td>1.71</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>49.18</td><td>74.00</td><td>-24.82</td><td>32.97</td><td>37.16</td><td>12.89</td><td>35.78</td><td>1.94</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>7434.00</td><td>39.33</td><td>54.00</td><td>-14.67</td><td>23.12</td><td>37.16</td><td>12.89</td><td>35.78</td><td>1.94</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>9912.00</td><td>60.18</td><td>-----</td><td>-----</td><td>43.89</td><td>37.60</td><td>14.96</td><td>38.58</td><td>2.31</td><td>100</td><td>59 Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	46.91	74.00	-27.09	33.92	32.91	10.62	32.25	1.71	--	Peak	2	7434.00	49.18	74.00	-24.82	32.97	37.16	12.89	35.78	1.94	--	Peak	3	7434.00	39.33	54.00	-14.67	23.12	37.16	12.89	35.78	1.94	--	Average	4	9912.00	60.18	-----	-----	43.89	37.60	14.96	38.58	2.31	100	59 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	4956.00	46.91	74.00	-27.09	33.92	32.91	10.62	32.25	1.71	--	Peak																																																																															
2	7434.00	49.18	74.00	-24.82	32.97	37.16	12.89	35.78	1.94	--	Peak																																																																															
3	7434.00	39.33	54.00	-14.67	23.12	37.16	12.89	35.78	1.94	--	Average																																																																															
4	9912.00	60.18	-----	-----	43.89	37.60	14.96	38.58	2.31	100	59 Peak																																																																															

Remark: The unwanted signal 9912.000MHz can be ignored since it falls within the non-restricted band and meet the requirements of 15.247 (d).



Mode	6	
	Harmonic	
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 HORIZONTAL	Level (dBuV/m) Date: 2025-11-25 Site : 03CH23-HY Condition: AVG_54 3m DRH18-E_LE2C05A18EN_250702 VERTICAL



Mode	7																																																																																																																																																																																					
	LF																																																																																																																																																																																					
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz																																																																																																																																																																																					
ANT	1																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																				
QPI Peak	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>48.43</td><td>27.17</td><td>40.00</td><td>-12.83</td><td>44.03</td><td>14.92</td><td>0.72</td><td>32.53</td><td>0.03 -- -- Peak</td></tr><tr><td>2</td><td>127.97</td><td>33.40</td><td>43.50</td><td>-10.10</td><td>47.31</td><td>17.26</td><td>1.27</td><td>32.48</td><td>0.04 -- -- Peak</td></tr><tr><td>3</td><td>261.83</td><td>29.17</td><td>46.00</td><td>-16.83</td><td>39.98</td><td>19.67</td><td>1.97</td><td>32.52</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>321.00</td><td>34.35</td><td>46.00</td><td>-11.65</td><td>45.47</td><td>19.11</td><td>2.25</td><td>32.55</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>716.76</td><td>38.29</td><td>46.00</td><td>-7.71</td><td>41.04</td><td>26.28</td><td>3.48</td><td>32.64</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>800.18</td><td>36.62</td><td>46.00</td><td>-9.38</td><td>37.75</td><td>27.37</td><td>3.69</td><td>32.37</td><td>0.18 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	48.43	27.17	40.00	-12.83	44.03	14.92	0.72	32.53	0.03 -- -- Peak	2	127.97	33.40	43.50	-10.10	47.31	17.26	1.27	32.48	0.04 -- -- Peak	3	261.83	29.17	46.00	-16.83	39.98	19.67	1.97	32.52	0.07 -- -- Peak	4	321.00	34.35	46.00	-11.65	45.47	19.11	2.25	32.55	0.07 -- -- Peak	5	716.76	38.29	46.00	-7.71	41.04	26.28	3.48	32.64	0.13 -- -- Peak	6	800.18	36.62	46.00	-9.38	37.75	27.37	3.69	32.37	0.18 -- -- Peak	Level (dBuV/m) Date: 2025-11-26 Site : 03CH23-HY Condition: QP 3m CBL6111D&00802N1D01N-06_47020 & 06_251004 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>34.85</td><td>27.49</td><td>40.00</td><td>-12.51</td><td>37.83</td><td>21.66</td><td>0.54</td><td>32.56</td><td>0.02 -- -- Peak</td></tr><tr><td>2</td><td>185.20</td><td>33.45</td><td>43.50</td><td>-10.05</td><td>49.78</td><td>14.49</td><td>1.61</td><td>32.49</td><td>0.06 -- -- Peak</td></tr><tr><td>3</td><td>259.89</td><td>26.89</td><td>46.00</td><td>-19.11</td><td>37.72</td><td>19.66</td><td>1.96</td><td>32.52</td><td>0.07 -- -- Peak</td></tr><tr><td>4</td><td>342.34</td><td>27.86</td><td>46.00</td><td>-18.14</td><td>38.34</td><td>19.68</td><td>2.34</td><td>32.57</td><td>0.07 -- -- Peak</td></tr><tr><td>5</td><td>717.73</td><td>37.12</td><td>46.00</td><td>-8.88</td><td>39.82</td><td>26.33</td><td>3.48</td><td>32.64</td><td>0.13 -- -- Peak</td></tr><tr><td>6</td><td>912.70</td><td>35.13</td><td>46.00</td><td>-10.87</td><td>33.99</td><td>28.59</td><td>3.93</td><td>31.55</td><td>0.17 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	34.85	27.49	40.00	-12.51	37.83	21.66	0.54	32.56	0.02 -- -- Peak	2	185.20	33.45	43.50	-10.05	49.78	14.49	1.61	32.49	0.06 -- -- Peak	3	259.89	26.89	46.00	-19.11	37.72	19.66	1.96	32.52	0.07 -- -- Peak	4	342.34	27.86	46.00	-18.14	38.34	19.68	2.34	32.57	0.07 -- -- Peak	5	717.73	37.12	46.00	-8.88	39.82	26.33	3.48	32.64	0.13 -- -- Peak	6	912.70	35.13	46.00	-10.87	33.99	28.59	3.93	31.55	0.17 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	48.43	27.17	40.00	-12.83	44.03	14.92	0.72	32.53	0.03 -- -- Peak																																																																																																																																																																													
2	127.97	33.40	43.50	-10.10	47.31	17.26	1.27	32.48	0.04 -- -- Peak																																																																																																																																																																													
3	261.83	29.17	46.00	-16.83	39.98	19.67	1.97	32.52	0.07 -- -- Peak																																																																																																																																																																													
4	321.00	34.35	46.00	-11.65	45.47	19.11	2.25	32.55	0.07 -- -- Peak																																																																																																																																																																													
5	716.76	38.29	46.00	-7.71	41.04	26.28	3.48	32.64	0.13 -- -- Peak																																																																																																																																																																													
6	800.18	36.62	46.00	-9.38	37.75	27.37	3.69	32.37	0.18 -- -- Peak																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																													
1	34.85	27.49	40.00	-12.51	37.83	21.66	0.54	32.56	0.02 -- -- Peak																																																																																																																																																																													
2	185.20	33.45	43.50	-10.05	49.78	14.49	1.61	32.49	0.06 -- -- Peak																																																																																																																																																																													
3	259.89	26.89	46.00	-19.11	37.72	19.66	1.96	32.52	0.07 -- -- Peak																																																																																																																																																																													
4	342.34	27.86	46.00	-18.14	38.34	19.68	2.34	32.57	0.07 -- -- Peak																																																																																																																																																																													
5	717.73	37.12	46.00	-8.88	39.82	26.33	3.48	32.64	0.13 -- -- Peak																																																																																																																																																																													
6	912.70	35.13	46.00	-10.87	33.99	28.59	3.93	31.55	0.17 -- -- Peak																																																																																																																																																																													



Mode	8																																																																																							
	SHF																																																																																							
	2400-2483.5_Bluetooth-LE_GFSK_CH38_2478MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak	Date: 2025-12-02 Site : 03CH23-HY Condition: PEAK_74 1m BBHA9170_1225_250702 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>19288.00</td><td>41.24</td><td>74.00</td><td>-32.76</td><td>56.37</td><td>38.20</td><td>20.47</td><td>64.26</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	19288.00	41.24	74.00	-32.76	56.37	38.20	20.47	64.26	-9.54	--	-- Peak	Date: 2025-12-02 Site : 03CH23-HY Condition: PEAK_74 1m BBHA9170_1225_250702 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>23971.00</td><td>41.70</td><td>74.00</td><td>-32.30</td><td>50.79</td><td>39.04</td><td>23.13</td><td>61.72</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	23971.00	41.70	74.00	-32.30	50.79	39.04	23.13	61.72	-9.54	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	19288.00	41.24	74.00	-32.76	56.37	38.20	20.47	64.26	-9.54	--	-- Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	23971.00	41.70	74.00	-32.30	50.79	39.04	23.13	61.72	-9.54	--	-- Peak																																																																													



Appendix D. Duty Cycle Plots

Band	Duty Cycle (%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	60.77	381	2.62	2.7kHz
Bluetooth - LE for 2Mbps	31.63	198	5.05	5.1kHz

