



FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : MI
MODEL NAME : M1902F1G
FCC ID : 2AFZZ-XMSF1G
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Nov. 23, 2018 and testing was completed on Jan. 07, 2019. We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Approved by: James Huang / Manager



Sporton International (Kunshan) Inc.
No. 1098, Pengxi North Road, Kunshan Economic Development Zone,
Jiangsu Province 215335, China
China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Applicable Standards.....	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	13
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT.....	15
3.1 26dB & 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	17
3.3 Power Spectral Density Measurement	19
3.4 Unwanted Emissions Measurement.....	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Automatically Discontinue Transmission	29
3.7 Antenna Requirements.....	30
4 LIST OF MEASURING EQUIPMENT	31
5 UNCERTAINTY OF EVALUATION	32
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR8N2303E	Rev. 01	Initial issue of report	Jan. 17, 2019

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.38 dB at 5149.980 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 12.35 dB at 0.151 MHz
3.6	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.7	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

The Rainbow City of China Resources, NO.68, Qinghe Middle Street, Haidian District, Beijing, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	MI
Model Name	M1902F1G
FCC ID	2AFZZ-XMSF1G
EUT supports Radios application	CDMA/EV-DO/GSM/GPRS/EGPRS/WCDMA/HSPA/ DC-HSDPA/HSPA+/LTE/NFC/WPC WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE
IMEI Code	Conducted: 869890040015335/869890040015343 Radiation: 869890040013595/869890040013603 Conduction: 869890040015376/869890040015384
HW Version	P2
SW Version	MIUI 10
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two samples under test, the difference of two samples is for memory: the sample 1 is 6+128GB capacity and the sample 2 is 6+64GB capacity. According to the difference, sample 1 perform full test.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	SISO<Ant.2> <5180 MHz ~ 5240 MHz> 802.11a : 18.95 dBm / 0.0785 W 802.11n HT20 : 17.92 dBm / 0.0619 W 802.11n HT40 : 16.97 dBm / 0.0498 W 802.11ac VHT80 : 16.64 dBm / 0.0461 W <5260 MHz ~ 5320 MHz> 802.11a : 18.98 dBm / 0.0791 W 802.11n HT20 : 17.98 dBm / 0.0628 W 802.11n HT40 : 16.92 dBm / 0.0492 W 802.11ac VHT80 : 16.60 dBm / 0.0457 W <5500 MHz ~ 5700 MHz > 802.11a : 18.96 dBm / 0.0787 W 802.11n HT20 : 17.90 dBm / 0.0617 W 802.11n HT40 : 16.91 dBm / 0.0491 W 802.11ac VHT80 : 16.71 dBm / 0.0469 W MIMO<Ant.1+2> <5180 MHz ~ 5240 MHz> 802.11a : 17.59 dBm / 0.0574 W 802.11n HT20 : 17.01 dBm / 0.0502 W 802.11n HT40 : 16.92 dBm / 0.0492 W 802.11ac VHT80 : 16.95 dBm / 0.0495 W <5260 MHz ~ 5320 MHz> 802.11a : 17.84 dBm / 0.0608 W 802.11n HT20 : 17.34 dBm / 0.0542 W 802.11n HT40 : 17.26 dBm / 0.0532 W 802.11ac VHT80 : 17.09 dBm / 0.0512 W <5500 MHz ~ 5700 MHz > 802.11a : 19.81 dBm / 0.0957 W 802.11n HT20 : 19.23 dBm / 0.0838 W 802.11n HT40 : 19.17 dBm / 0.0826 W 802.11ac VHT80 : 19.17 dBm / 0.0826 W
99% Occupied Bandwidth	SISO<Ant.2> <5180 MHz ~ 5240 MHz> 802.11a : 17.73 MHz 802.11n HT20 : 18.93 MHz 802.11n HT40 : 36.66 MHz 802.11ac VHT80 : 76.00 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.83 MHz 802.11n HT20 : 18.88 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.88 MHz <5500 MHz ~ 5700 MHz > 802.11a : 17.73 MHz 802.11n HT20 : 18.83 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.88 MHz

	MIMO<Ant.1+2> <5180 MHz ~ 5240 MHz> 802.11a : 17.58 MHz 802.11n HT20 : 18.78 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.52 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.53 MHz 802.11n HT20 : 18.83 MHz 802.11n HT40 : 36.56 MHz 802.11ac VHT80 : 75.64 MHz <5500 MHz ~ 5700 MHz > 802.11a : 17.68 MHz 802.11n HT20 : 18.83 MHz 802.11n HT40 : 36.66 MHz 802.11ac VHT80 : 75.64 MHz		
Antenna Gain / Gain	<5150 MHz ~ 5250 MHz> <Ant. 1> : PIFA Antenna with gain -2.86 dBi <Ant. 2> : PIFA Antenna with gain -2.37 dBi <5250 MHz ~ 5350 MHz> <Ant. 1> : PIFA Antenna with gain -2.86 dBi <Ant. 2> : PIFA Antenna with gain -0.46 dBi <5470 MHz ~ 5725 MHz> <Ant. 1> : PIFA Antenna with gain -3.75 dBi <Ant. 2> : PIFA Antenna with gain 0.50 dBi		
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 a/n/ac SISO	-	V
	802.11 a/n/ac MIMO	V	

Note:

- For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing have assessed only 802.11an HT20/ HT40 by referring to their maximum conducted power.
- For 802.11a/n/ac SISO & MIMO mode, the whole testing has assessed SISO Ant 2 11a/n HT20/HT40 for 5180 MHz ~ 5240 MHz, 11a/n HT20 for 5260 MHz ~ 5320 MHz and MIMO mode by referring to their higher conducted power for RSE.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International (Kunshan) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600155-0).

Test Site	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone, Jiangsu Province 215335, China TEL : 86-512-57900158 FAX : 86-512-57900958		
Test Site No.	Sporton Site No.	FCC designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH05-KS	CN5013	630927

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500-5700 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Note:

1. The above Frequency and Channel in "*" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable 2(Charging from adapter)
Remark: For Radiated Test Cases, The tests were performed with Adapter and USB Cable 1.	




Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5180-5240 MHz	Band II : 5260-5320 MHz	Band III : 5500-5700MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122

2.3 Connection Diagram of Test System

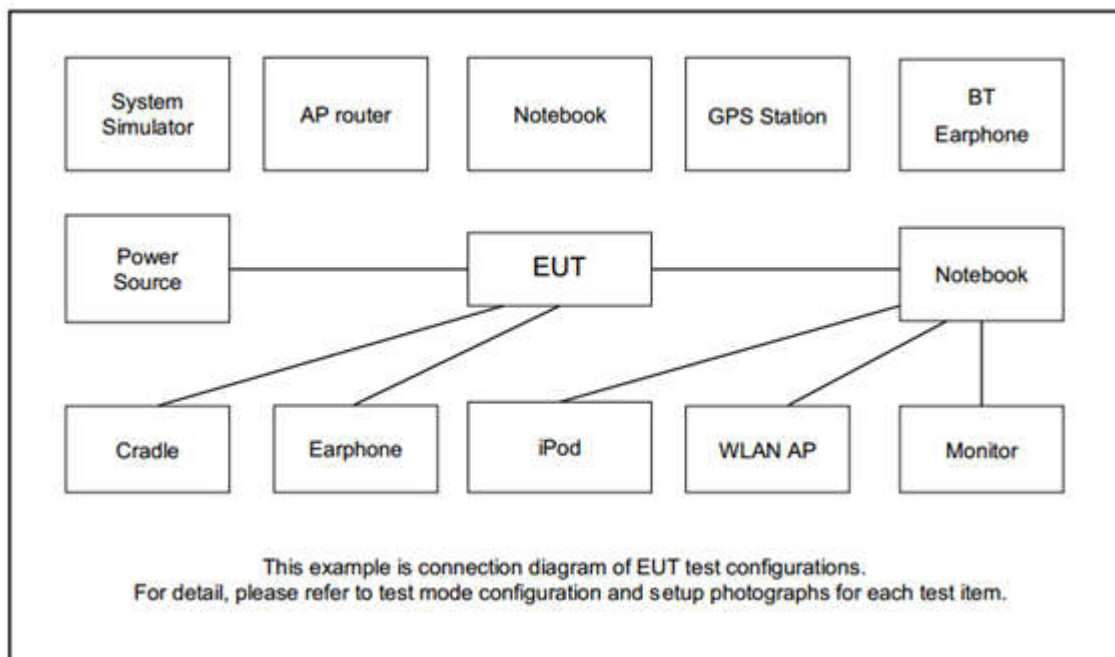

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Xiaomi	LYEJ02LM	N/A	N/A	N/A
3.	WLAN AP	D-link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	SD Card	Kingston	8GB	N/A	N/A	N/A



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss

Following shows an offset computation example with cable loss 6.8dB.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 6.8 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1MHz and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

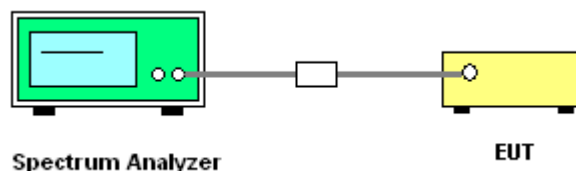

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

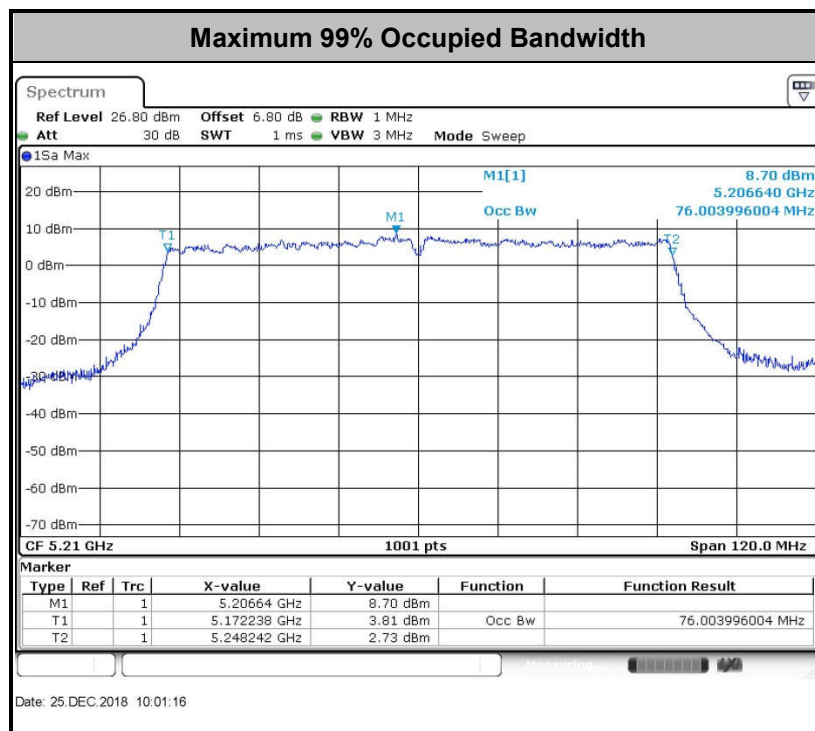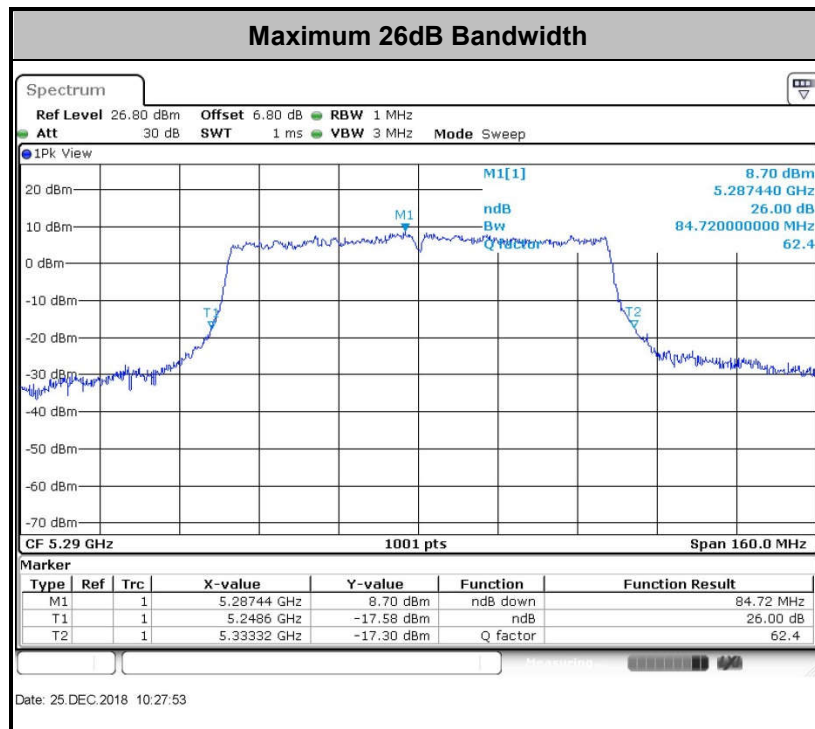

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

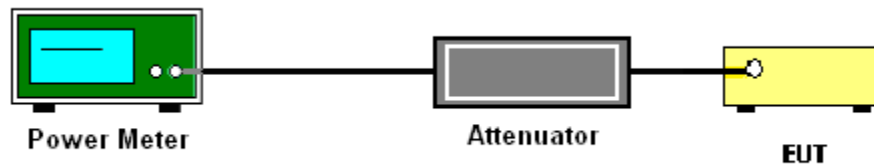

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

Method SA-2


(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


3.3.4 Test Setup

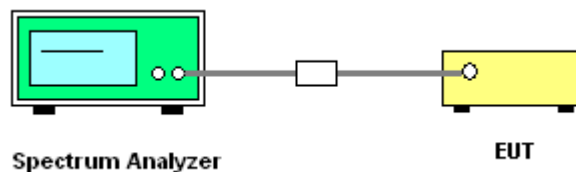



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

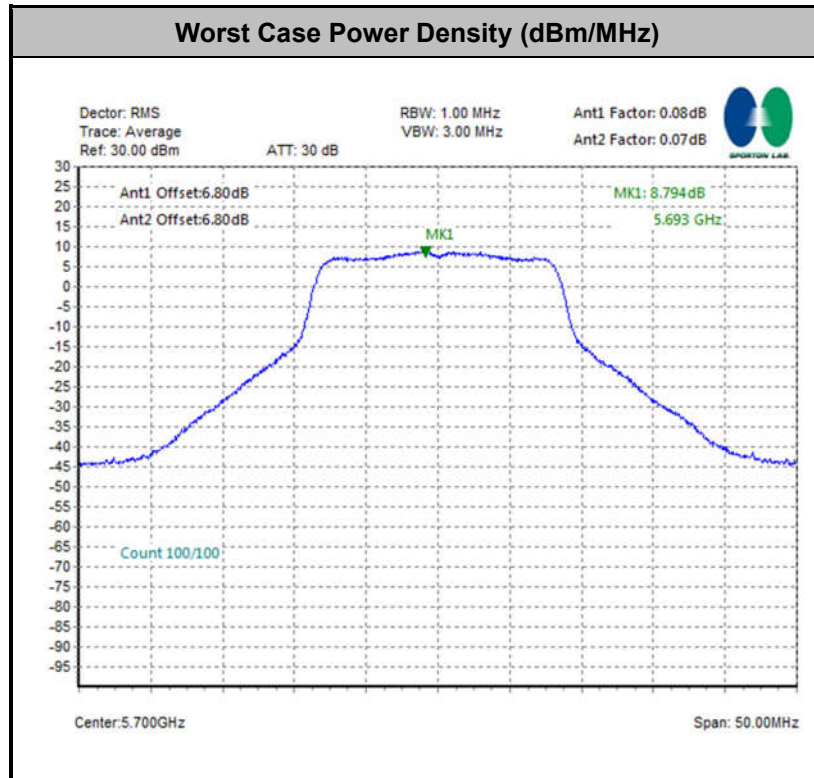

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log(d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

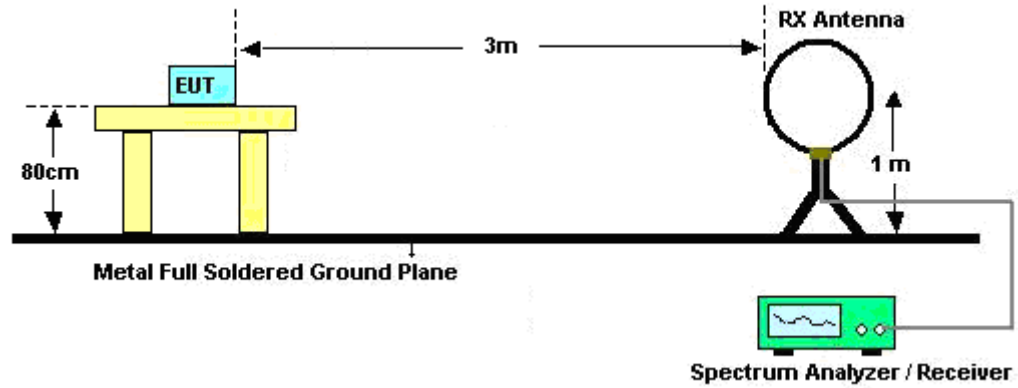

For radiated emissions from 30MHz to 1GHz

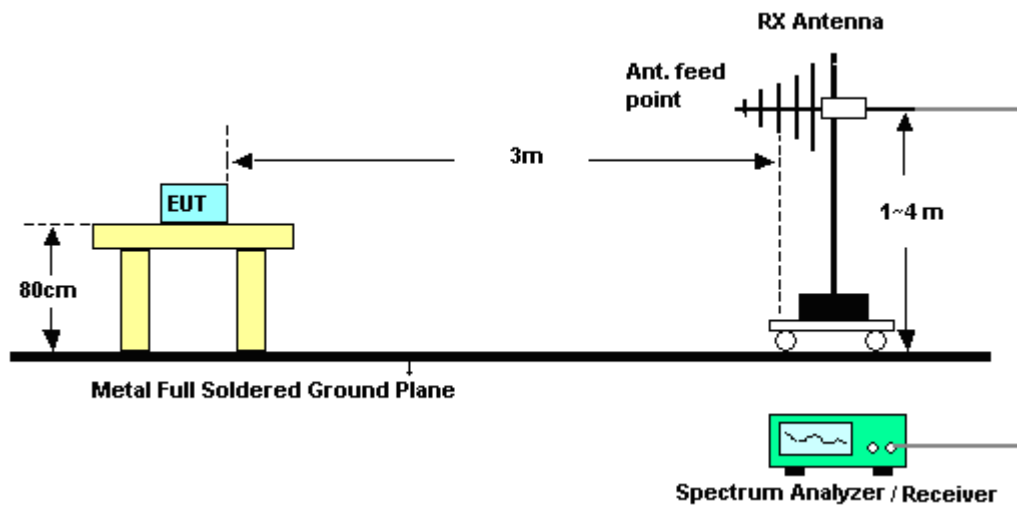

For radiated emissions above 1GHz

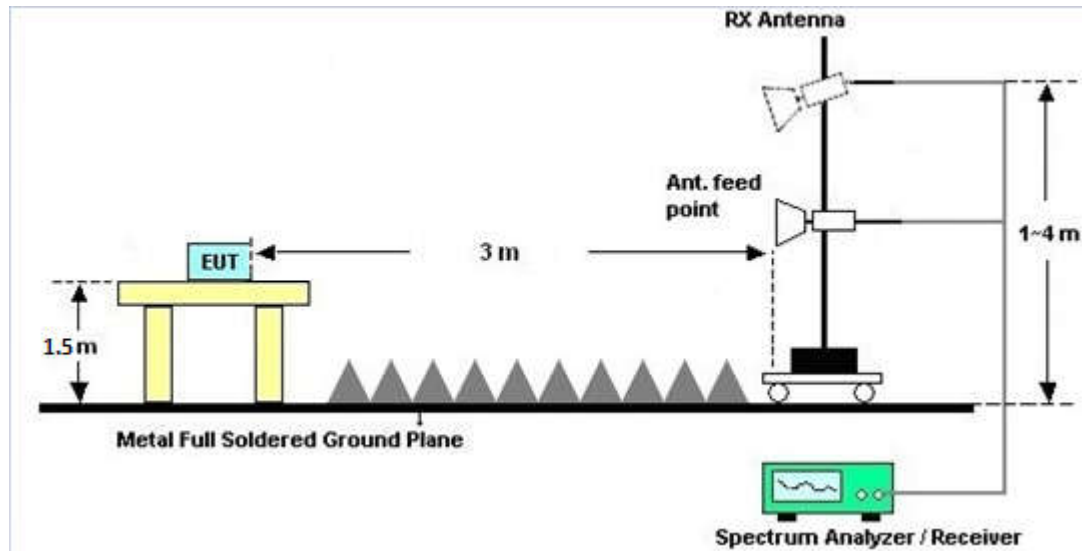

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

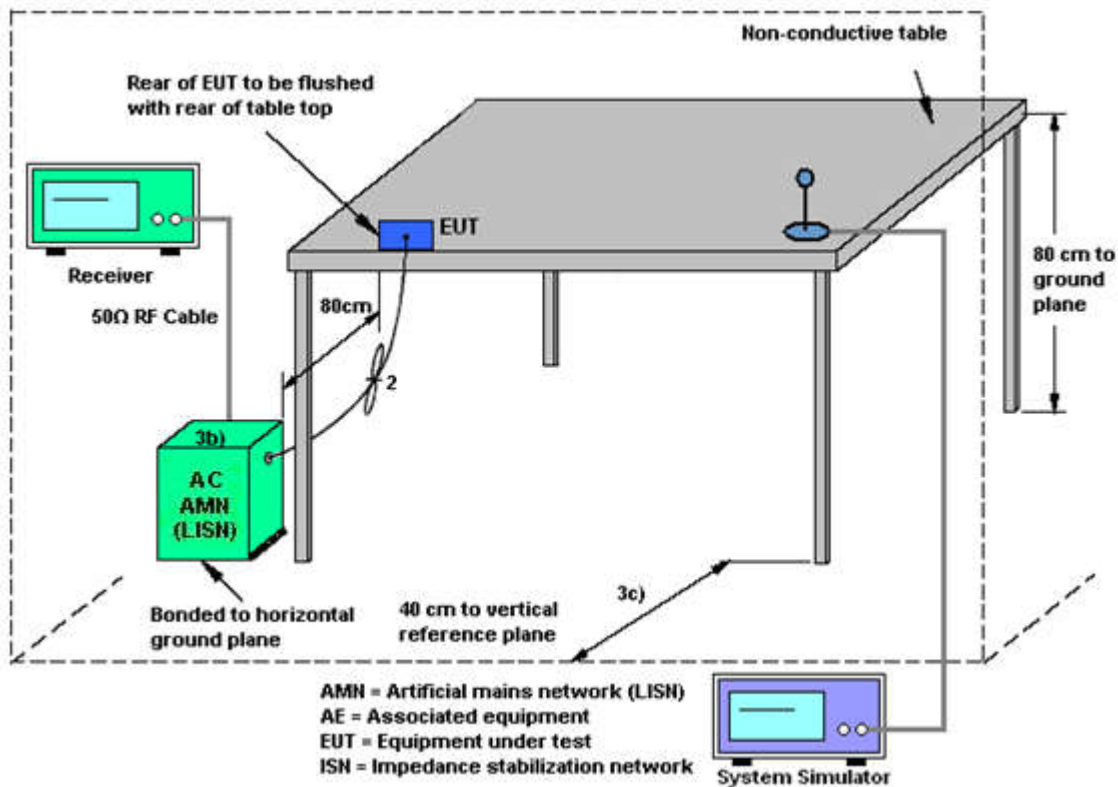

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Automatically Discontinue Transmission

3.6.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = $10 \log(\text{NANT}/\text{NSS}=1)$ dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $\text{NANT} \leq 4$.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	-2.86	-2.37	-2.37	0.40	0.00	0.00
Band II	-2.86	-0.46	-0.46	1.43	0.00	0.00
Band III	-3.75	0.50	0.50	1.64	0.00	0.00

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 07, 2018	Dec. 25, 2018	Aug. 06, 2019	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 18, 2018	Dec. 25, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 18, 2018	Dec. 25, 2018	Jan. 17, 2019	Conducted (TH01-KS)
Thermal Chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jun. 27, 2018	Dec. 25, 2018	Jun. 26, 2019	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz; Max 30dBm	Jun. 25, 2018	Dec. 24, 2018~ Jan. 07, 2019	Jun. 24, 2019	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150244	10Hz~44GHz	Apr. 17, 2018	Dec. 24, 2018~ Jan. 07, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 19, 2018	Dec. 24, 2018~ Jan. 07, 2019	Oct. 18, 2019	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	Jun. 12, 2018	Dec. 24, 2018~ Jan. 07, 2019	Jun. 11, 2019	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Jan. 21, 2018	Dec. 24, 2018~ Jan. 07, 2019	Jan. 20, 2019	Radiation (03CH05-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170249	15GHz~40GHz	Feb. 07, 2018	Dec. 24, 2018~ Jan. 07, 2019	Feb. 06, 2019	Radiation (03CH05-KS)
Amplifier	com-power	PA-103A	161069	1MHz~1000MHz / 32 dB	Apr. 17, 2018	Dec. 24, 2018~ Jan. 07, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Apr. 17, 2018	Dec. 24, 2018~ Jan. 07, 2019	Apr. 16, 2019	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY57280106	500MHz~26.5GHz	Apr. 18, 2018	Dec. 24, 2018~ Jan. 07, 2019	Apr. 17, 2019	Radiation (03CH05-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18~40GHz	Feb. 08, 2018	Dec. 24, 2018~ Jan. 07, 2019	Feb. 07, 2019	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 24, 2018~ Jan. 07, 2019	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 24, 2018~ Jan. 07, 2019	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 24, 2018~ Jan. 07, 2019	NCR	Radiation (03CH05-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 19, 2018	Dec. 24, 2018	Apr. 18, 2019	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 12, 2018	Dec. 24, 2018	Oct. 11, 2019	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Nov. 19, 2018	Dec. 24, 2018	Nov. 18, 2019	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2018	Dec. 24, 2018	Oct. 11, 2019	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.9dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0 dB
--	--------



Appendix A. Conducted Test Results

Report Number : FR8N2303E

Test Engineer:	Orion LI	Temperature:	21~25	°C
Test Date:	2018/12/25	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180		17.58		24.03	-		22.45		
11a	6Mbps	1	44	5220		17.68		24.78	-		22.48		
11a	6Mbps	1	48	5240		17.73		25.38	-		22.49		
HT20	MCS0	1	36	5180		18.68		24.78	-		22.71		
HT20	MCS0	1	44	5220		18.93		24.88	-		22.77		
HT20	MCS0	1	48	5240		18.88		24.98	-		22.76		
HT40	MCS0	1	38	5190		36.56		41.72	-		23.01		
HT40	MCS0	1	46	5230		36.66		41.81	-		23.01		
VHT80	MCS0	1	42	5210		76.00		84.24	-		23.01		
11a	6Mbps	2	36	5180	17.43	17.48	23.68	22.73	-		22.41		
11a	6Mbps	2	44	5220	17.48	17.43	23.68	22.88	-		22.41		
11a	6Mbps	2	48	5240	17.53	17.58	24.18	23.03	-		22.44		
HT20	MCS0	2	36	5180	18.73	18.63	24.18	23.88	-		22.70		
HT20	MCS0	2	44	5220	18.78	18.63	25.08	24.63	-		22.70		
HT20	MCS0	2	48	5240	18.78	18.78	24.78	24.78	-		22.74		
HT40	MCS0	2	38	5190	36.56	36.46	41.45	41.63	-		23.01		
HT40	MCS0	2	46	5230	36.56	36.46	41.54	41.81	-		23.01		
VHT80	MCS0	2	42	5210	75.52	75.52	83.12	82.80	-		23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180		0.08		18.63		24.00	24.00	-2.86	-2.37	Pass
11a	6Mbps	1	44	5220		0.08		18.60		24.00	24.00	-2.86	-2.37	Pass
11a	6Mbps	1	48	5240		0.08		18.95		24.00	24.00	-2.86	-2.37	Pass
HT20	MCS0	1	36	5180		0.10		17.92		24.00	24.00	-2.86	-2.37	Pass
HT20	MCS0	1	44	5220		0.10		17.75		24.00	24.00	-2.86	-2.37	Pass
HT20	MCS0	1	48	5240		0.10		17.70		24.00	24.00	-2.86	-2.37	Pass
HT40	MCS0	1	38	5190		0.18		16.65		24.00	24.00	-2.86	-2.37	Pass
HT40	MCS0	1	46	5230		0.18		16.97		24.00	24.00	-2.86	-2.37	Pass
VHT80	MCS0	1	42	5210		0.36		16.64		24.00	24.00	-2.86	-2.37	Pass
11a	6Mbps	2	36	5180	0.08	0.07	14.60	14.53	17.58	24.00		-2.37		Pass
11a	6Mbps	2	44	5220	0.08	0.07	14.67	14.48	17.59	24.00		-2.37		Pass
11a	6Mbps	2	48	5240	0.08	0.07	14.59	14.28	17.45	24.00		-2.37		Pass
HT20	MCS0	2	36	5180	0.10	0.10	14.06	13.94	17.01	24.00		-2.37		Pass
HT20	MCS0	2	44	5220	0.10	0.10	13.93	13.92	16.94	24.00		-2.37		Pass
HT20	MCS0	2	48	5240	0.10	0.10	13.85	13.71	16.79	24.00		-2.37		Pass
HT40	MCS0	2	38	5190	0.23	0.20	14.03	13.75	16.90	24.00		-2.37		Pass
HT40	MCS0	2	46	5230	0.23	0.20	14.08	13.73	16.92	24.00		-2.37		Pass
VHT80	MCS0	2	42	5210	0.57	0.64	13.99	13.88	16.95	24.00		-2.37		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180		0.08		8.21			11.00	-2.86	-2.37	Pass
11a	6Mbps	1	44	5220		0.08		7.82			11.00	-2.86	-2.37	Pass
11a	6Mbps	1	48	5240		0.08		8.23			11.00	-2.86	-2.37	Pass
HT20	MCS0	1	36	5180		0.10		6.97			11.00	-2.86	-2.37	Pass
HT20	MCS0	1	44	5220		0.10		6.36			11.00	-2.86	-2.37	Pass
HT20	MCS0	1	48	5240		0.10		6.68			11.00	-2.86	-2.37	Pass
HT40	MCS0	1	38	5190		0.18		2.50			11.00	-2.86	-2.37	Pass
HT40	MCS0	1	46	5230		0.18		2.26			11.00	-2.86	-2.37	Pass
VHT80	MCS0	1	42	5210		0.36		-0.37			11.00	-2.86	-2.37	Pass
11a	6Mbps	2	36	5180	0.08	0.07			6.87		11.00		0.40	Pass
11a	6Mbps	2	44	5220	0.08	0.07			6.24		11.00		0.40	Pass
11a	6Mbps	2	48	5240	0.08	0.07			6.47		11.00		0.40	Pass
HT20	MCS0	2	36	5180	0.10	0.10			6.00		11.00		0.40	Pass
HT20	MCS0	2	44	5220	0.10	0.10			5.99		11.00		0.40	Pass
HT20	MCS0	2	48	5240	0.10	0.10			5.43		11.00		0.40	Pass
HT40	MCS0	2	38	5190	0.23	0.20			2.75		11.00		0.40	Pass
HT40	MCS0	2	46	5230	0.23	0.20			2.40		11.00		0.40	Pass
VHT80	MCS0	2	42	5210	0.57	0.64			-0.04		11.00		0.40	Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260		17.63		24.98		23.46		29.46		23.98	
11a	6Mbps	1	60	5300		17.78		25.62		23.50		29.50		23.98	
11a	6Mbps	1	64	5320		17.83		25.82		23.51		29.51		23.98	
HT20	MCS0	1	52	5260		18.78		25.38		23.74		29.74		23.98	
HT20	MCS0	1	60	5300		18.88		25.67		23.76		29.76		23.98	
HT20	MCS0	1	64	5320		18.88		25.92		23.76		29.76		23.98	
HT40	MCS0	1	54	5270		36.46		41.54		23.98		30.00		23.98	
HT40	MCS0	1	62	5310		36.56		41.81		23.98		30.00		23.98	
VHT80	MCS0	1	58	5290		75.88		84.72		23.98		30.00		23.98	
11a	6Mbps	2	52	5260	17.43	17.53	22.78	22.48	23.41		29.41		23.98		
11a	6Mbps	2	60	5300	17.48	17.53	23.73	23.03	23.43		29.43		23.98		
11a	6Mbps	2	64	5320	17.53	17.53	23.83	23.13	23.44		29.44		23.98		
HT20	MCS0	2	52	5260	18.73	18.63	25.23	24.63	23.70		29.70		23.98		
HT20	MCS0	2	60	5300	18.83	18.73	25.28	24.38	23.73		29.73		23.98		
HT20	MCS0	2	64	5320	18.73	18.78	24.93	24.48	23.73		29.73		23.98		
HT40	MCS0	2	54	5270	36.56	36.46	41.72	41.90	23.98		30.00		23.98		
HT40	MCS0	2	62	5310	36.46	36.46	41.63	41.72	23.98		30.00		23.98		
VHT80	MCS0	2	58	5290	75.64	75.52	83.60	82.64	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC Band II															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260		0.08		18.71			23.98	-2.86	-0.46	26.99	Pass
11a	6Mbps	1	60	5300		0.08		18.98			23.98	-2.86	-0.46	26.99	Pass
11a	6Mbps	1	64	5320		0.08		18.75			23.98	-2.86	-0.46	26.99	Pass
HT20	MCS0	1	52	5260		0.10		17.77			23.98	-2.86	-0.46	26.99	Pass
HT20	MCS0	1	60	5300		0.10		17.98			23.98	-2.86	-0.46	26.99	Pass
HT20	MCS0	1	64	5320		0.10		17.83			23.98	-2.86	-0.46	26.99	Pass
HT40	MCS0	1	54	5270		0.18		16.92			23.98	-2.86	-0.46	26.99	Pass
HT40	MCS0	1	62	5310		0.18		16.80			23.98	-2.86	-0.46	26.99	Pass
VHT80	MCS0	1	58	5290		0.36		16.60			23.98	-2.86	-0.46	26.99	Pass
11a	6Mbps	2	52	5260	0.08	0.07	15.02	14.63	17.84	23.98		-0.46		26.99	Pass
11a	6Mbps	2	60	5300	0.08	0.07	14.99	14.58	17.80	23.98		-0.46		26.99	Pass
11a	6Mbps	2	64	5320	0.08	0.07	15.04	14.47	17.78	23.98		-0.46		26.99	Pass
HT20	MCS0	2	52	5260	0.10	0.10	14.55	14.10	17.34	23.98		-0.46		26.99	Pass
HT20	MCS0	2	60	5300	0.10	0.10	14.47	14.02	17.26	23.98		-0.46		26.99	Pass
HT20	MCS0	2	64	5320	0.10	0.10	14.45	13.81	17.15	23.98		-0.46		26.99	Pass
HT40	MCS0	2	54	5270	0.23	0.20	14.21	13.95	17.09	23.98		-0.46		26.99	Pass
HT40	MCS0	2	62	5310	0.23	0.20	14.44	14.05	17.26	23.98		-0.46		26.99	Pass
VHT80	MCS0	2	58	5290	0.57	0.64	14.22	13.94	17.09	23.98		-0.46		26.99	Pass

TEST RESULTS DATA
Power Spectral Density

Band II														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260		0.08		8.33			11.00	-2.86	-0.46	Pass
11a	6Mbps	1	60	5300		0.08		8.22			11.00	-2.86	-0.46	Pass
11a	6Mbps	1	64	5320		0.08		8.37			11.00	-2.86	-0.46	Pass
HT20	MCS0	1	52	5260		0.10		6.97			11.00	-2.86	-0.46	Pass
HT20	MCS0	1	60	5300		0.10		6.90			11.00	-2.86	-0.46	Pass
HT20	MCS0	1	64	5320		0.10		6.70			11.00	-2.86	-0.46	Pass
HT40	MCS0	1	54	5270		0.18		3.34			11.00	-2.86	-0.46	Pass
HT40	MCS0	1	62	5310		0.18		3.04			11.00	-2.86	-0.46	Pass
VHT80	MCS0	1	58	5290		0.36		-0.51			11.00	-2.86	-0.46	Pass
11a	6Mbps	2	52	5260	0.08	0.07			7.05		11.00		1.43	Pass
11a	6Mbps	2	60	5300	0.08	0.07			6.97		11.00		1.43	Pass
11a	6Mbps	2	64	5320	0.08	0.07			6.92		11.00		1.43	Pass
HT20	MCS0	2	52	5260	0.10	0.10			6.50		11.00		1.43	Pass
HT20	MCS0	2	60	5300	0.10	0.10			5.90		11.00		1.43	Pass
HT20	MCS0	2	64	5320	0.10	0.10			6.18		11.00		1.43	Pass
HT40	MCS0	2	54	5270	0.23	0.20			2.69		11.00		1.43	Pass
HT40	MCS0	2	62	5310	0.23	0.20			2.82		11.00		1.43	Pass
VHT80	MCS0	2	58	5290	0.57	0.64			0.42		11.00		1.43	Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500		17.68		24.73		23.48		29.48		23.98	
11a	6Mbps	1	116	5580		17.73		25.13		23.49		29.49		23.98	
11a	6Mbps	1	140	5700		17.68		25.23		23.48		29.48		23.98	
HT20	MCS0	1	100	5500		18.83		24.48		23.75		29.75		23.98	
HT20	MCS0	1	116	5580		18.83		25.82		23.75		29.75		23.98	
HT20	MCS0	1	140	5700		18.78		25.03		23.74		29.74		23.98	
HT40	MCS0	1	102	5510		36.56		41.72		23.98		30.00		23.98	
HT40	MCS0	1	110	5550		36.56		41.63		23.98		30.00		23.98	
HT40	MCS0	1	134	5670		36.56		41.81		23.98		30.00		23.98	
VHT80	MCS0	1	106	5530		75.88		84.40		23.98		30.00		23.98	
VHT80	MCS0	1	122	5610		75.88		83.44		23.98		30.00		23.98	
11a	6Mbps	2	100	5500	17.58	17.53	23.68	23.28	23.44		29.44		23.98		
11a	6Mbps	2	116	5580	17.58	17.63	23.58	23.63	23.45		29.45		23.98		
11a	6Mbps	2	140	5700	17.68	17.53	24.68	23.08	23.44		29.44		23.98		
HT20	MCS0	2	100	5500	18.78	16.68	24.93	24.38	23.22		29.22		23.98		
HT20	MCS0	2	116	5580	18.83	18.78	25.52	24.53	23.74		29.74		23.98		
HT20	MCS0	2	140	5700	18.78	18.63	25.08	24.18	23.70		29.70		23.98		
HT40	MCS0	2	102	5510	36.56	36.46	41.63	41.90	23.98		30.00		23.98		
HT40	MCS0	2	110	5550	36.66	36.46	41.72	41.90	23.98		30.00		23.98		
HT40	MCS0	2	134	5670	36.66	36.46	41.72	42.17	23.98		30.00		23.98		
VHT80	MCS0	2	106	5530	75.64	75.52	83.28	82.64	23.98		30.00		23.98		
VHT80	MCS0	2	122	5610	75.52	75.52	83.28	82.80	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table


FCC Band III															
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500		0.08		18.96			23.98	-3.75	0.50	26.99	Pass
11a	6Mbps	1	116	5580		0.08		18.78			23.98	-3.75	0.50	26.99	Pass
11a	6Mbps	1	140	5700		0.08		18.83			23.98	-3.75	0.50	26.99	Pass
HT20	MCS0	1	100	5500		0.10		17.90			23.98	-3.75	0.50	26.99	Pass
HT20	MCS0	1	116	5580		0.10		17.67			23.98	-3.75	0.50	26.99	Pass
HT20	MCS0	1	140	5700		0.10		17.61			23.98	-3.75	0.50	26.99	Pass
HT40	MCS0	1	102	5510		0.18		16.81			23.98	-3.75	0.50	26.99	Pass
HT40	MCS0	1	110	5550		0.18		16.89			23.98	-3.75	0.50	26.99	Pass
HT40	MCS0	1	134	5670		0.18		16.91			23.98	-3.75	0.50	26.99	Pass
VHT80	MCS0	1	106	5530		0.36		16.57			23.98	-3.75	0.50	26.99	Pass
VHT80	MCS0	1	122	5610		0.36		16.71			23.98	-3.75	0.50	26.99	Pass
11a	6Mbps	2	100	5500	0.08	0.07	17.00	16.30	19.68	23.98		0.50		26.99	Pass
11a	6Mbps	2	116	5580	0.08	0.07	16.80	16.62	19.72	23.98		0.50		26.99	Pass
11a	6Mbps	2	140	5700	0.08	0.07	16.90	16.69	19.81	23.98		0.50		26.99	Pass
HT20	MCS0	2	100	5500	0.10	0.10	16.22	16.05	19.15	23.98		0.50		26.99	Pass
HT20	MCS0	2	116	5580	0.10	0.10	16.14	16.22	19.19	23.98		0.50		26.99	Pass
HT20	MCS0	2	140	5700	0.10	0.10	16.31	16.12	19.23	23.98		0.50		26.99	Pass
HT40	MCS0	2	102	5510	0.23	0.20	16.08	15.90	19.00	23.98		0.50		26.99	Pass
HT40	MCS0	2	110	5550	0.23	0.20	16.44	15.86	19.17	23.98		0.50		26.99	Pass
HT40	MCS0	2	134	5670	0.23	0.20	16.15	15.92	19.04	23.98		0.50		26.99	Pass
VHT80	MCS0	2	106	5530	0.57	0.64	16.45	15.84	19.17	23.98		0.50		26.99	Pass
VHT80	MCS0	2	122	5610	0.57	0.64	16.17	15.89	19.04	23.98		0.50		26.99	Pass


TEST RESULTS DATA
Power Spectral Density

Band III														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500		0.08		8.35			11.00	-3.75	0.50	Pass
11a	6Mbps	1	116	5580		0.08		7.80			11.00	-3.75	0.50	Pass
11a	6Mbps	1	140	5700		0.08		8.51			11.00	-3.75	0.50	Pass
HT20	MCS0	1	100	5500		0.10		6.67			11.00	-3.75	0.50	Pass
HT20	MCS0	1	116	5580		0.10		6.05			11.00	-3.75	0.50	Pass
HT20	MCS0	1	140	5700		0.10		6.66			11.00	-3.75	0.50	Pass
HT40	MCS0	1	102	5510		0.18		3.35			11.00	-3.75	0.50	Pass
HT40	MCS0	1	110	5550		0.18		2.44			11.00	-3.75	0.50	Pass
HT40	MCS0	1	134	5670		0.18		2.86			11.00	-3.75	0.50	Pass
VHT80	MCS0	1	106	5530		0.36		-0.65			11.00	-3.75	0.50	Pass
VHT80	MCS0	1	122	5610		0.36		-0.71			11.00	-3.75	0.50	Pass
11a	6Mbps	2	100	5500	0.08	0.07			8.77		11.00		1.64	Pass
11a	6Mbps	2	116	5580	0.08	0.07			8.21		11.00		1.64	Pass
11a	6Mbps	2	140	5700	0.08	0.07			8.79		11.00		1.64	Pass
HT20	MCS0	2	100	5500	0.10	0.10			7.91		11.00		1.64	Pass
HT20	MCS0	2	116	5580	0.10	0.10			7.25		11.00		1.64	Pass
HT20	MCS0	2	140	5700	0.10	0.10			7.84		11.00		1.64	Pass
HT40	MCS0	2	102	5510	0.23	0.20			4.40		11.00		1.64	Pass
HT40	MCS0	2	110	5550	0.23	0.20			3.83		11.00		1.64	Pass
HT40	MCS0	2	134	5670	0.23	0.20			4.32		11.00		1.64	Pass
VHT80	MCS0	2	106	5530	0.57	0.64			2.24		11.00		1.64	Pass
VHT80	MCS0	2	122	5610	0.57	0.64			2.17		11.00		1.64	Pass



Appendix B. AC Conducted Emission Test Results

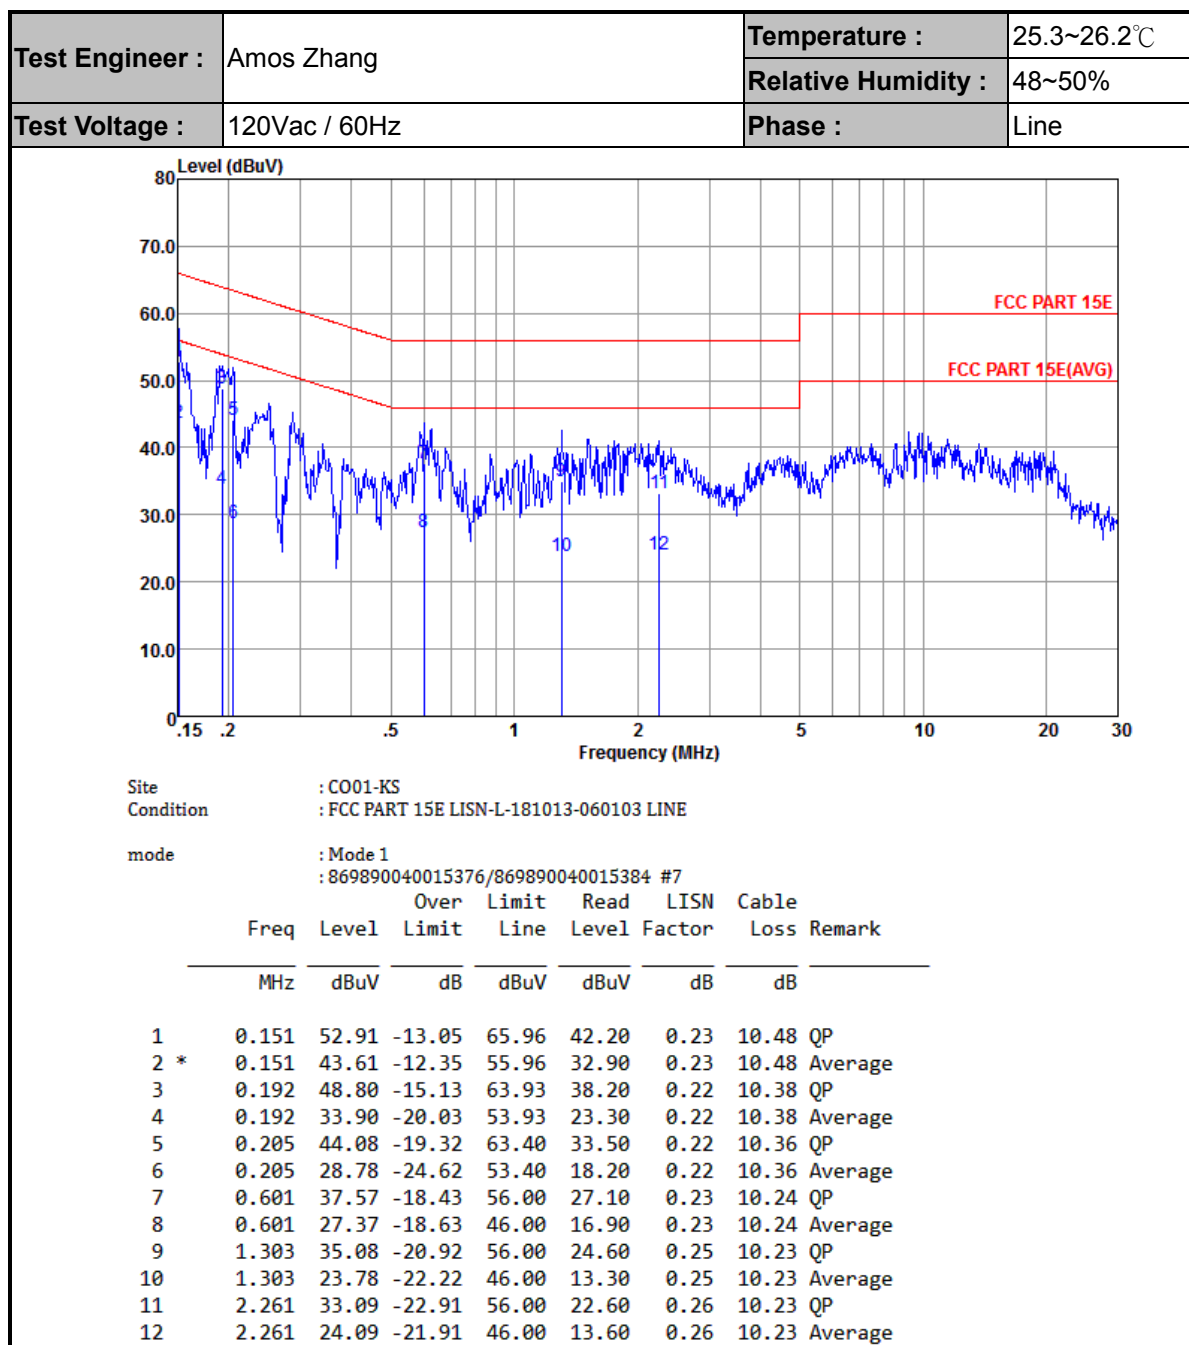

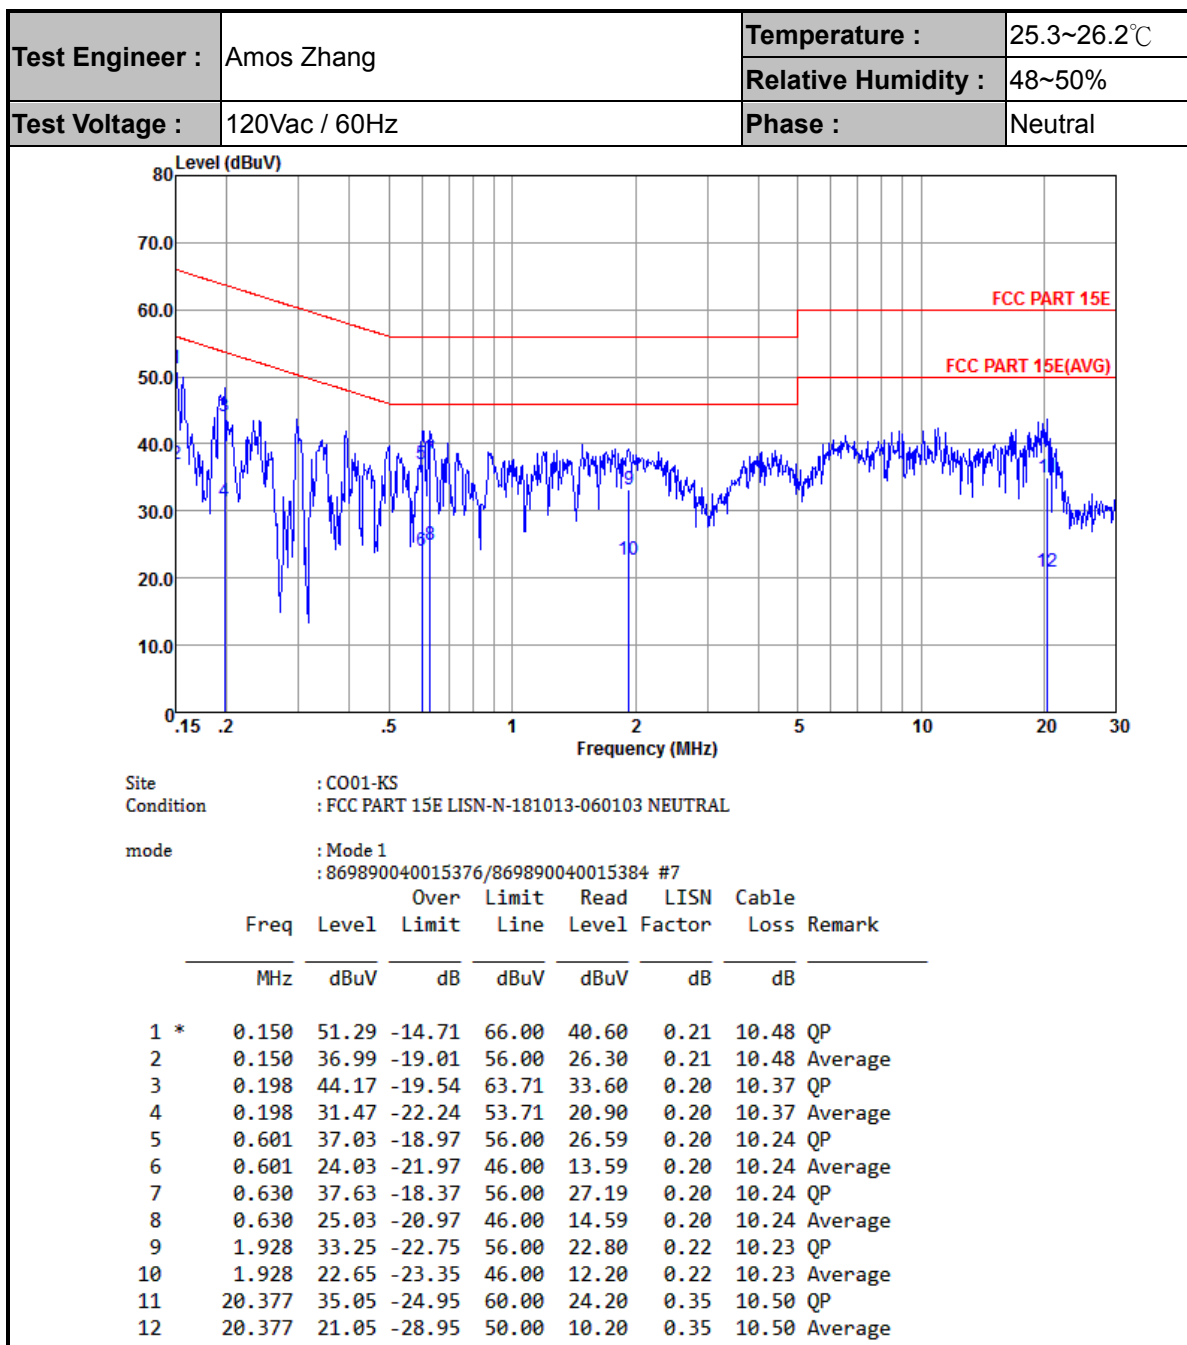

Appendix C. Radiated Spurious Emission

15E Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5144.64	58.01	-15.99	74	50.69	34.3	8.14	35.12	298	34	P	H
		5149.98	40.99	-13.01	54	33.67	34.3	8.14	35.12	298	34	A	H
		5182	100.44	-	-	93.02	34.37	8.17	35.12	298	34	P	H
		5182	93.16	-	-	85.74	34.37	8.17	35.12	298	34	A	H
		5146.24	58.78	-15.22	74	51.46	34.3	8.14	35.12	301	60	P	V
		5149.44	41.01	-12.99	54	33.69	34.3	8.14	35.12	301	60	A	V
		5178	99.56	-	-	92.14	34.37	8.17	35.12	301	60	P	V
		5178	92.47	-	-	85.05	34.37	8.17	35.12	301	60	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a		10360	43.1	-25.2	68.3	56.62	37.67	11.87	63.06	100	360	P	H
CH 36		10360	42.93	-25.37	68.3	56.45	37.67	11.87	63.06	100	360	P	V
5180MHz													
802.11a		10440	43.63	-24.67	68.3	57.01	37.73	11.93	63.04	100	360	P	H
CH 44		10440	43.21	-25.09	68.3	56.59	37.73	11.93	63.04	100	0	P	V
5220MHz													
802.11a		10480	43.22	-25.08	68.3	56.5	37.78	11.97	63.03	100	360	P	H
CH 48		10480	43.33	-24.97	68.3	56.61	37.78	11.97	63.03	100	360	P	V
5240MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		5138.4	50.18	-23.82	74	42.89	34.27	8.14	35.12	104	116	P	H
		5148.96	39.86	-14.14	54	32.54	34.3	8.14	35.12	104	116	A	H
		5180	93.42	-	-	86	34.37	8.17	35.12	104	116	P	H
		5180	85.91	-	-	78.49	34.37	8.17	35.12	104	116	A	H
		5129.76	54.61	-19.39	74	47.32	34.27	8.14	35.12	384	188	P	V
		5147.04	40.52	-13.48	54	33.2	34.3	8.14	35.12	384	188	A	V
		5178	95.74	-	-	88.32	34.37	8.17	35.12	384	188	P	V
		5178	88.48	-	-	81.06	34.37	8.17	35.12	384	188	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 36 5180MHz		10360	43.62	-24.68	68.3	57.14	37.67	11.87	63.06	100	360	P	H
		10360	43.15	-25.15	68.3	56.67	37.67	11.87	63.06	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	43.18	-25.12	68.3	56.56	37.73	11.93	63.04	100	360	P	H
		10440	44.17	-24.13	68.3	57.55	37.73	11.93	63.04	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	43.44	-24.86	68.3	56.72	37.78	11.97	63.03	100	360	P	H
		10480	43.19	-25.11	68.3	56.47	37.78	11.97	63.03	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		5109.6	51.38	-22.62	74	44.16	34.23	8.1	35.11	103	118	P	H
		5149.6	40.76	-13.24	54	33.44	34.3	8.14	35.12	103	118	A	H
		5194	89.97	-	-	82.5	34.4	8.2	35.13	103	118	P	H
		5194	82.43	-	-	74.96	34.4	8.2	35.13	103	118	A	H
		5354.64	48.94	-25.06	74	41.09	34.7	8.3	35.15	103	118	P	H
		5361.12	39.4	-14.6	54	31.55	34.7	8.3	35.15	103	118	A	H
		5140.16	51.88	-22.12	74	44.56	34.3	8.14	35.12	100	195	P	V
		5149.92	41.24	-12.76	54	33.92	34.3	8.14	35.12	100	195	A	V
		5196	94.47	-	-	87	34.4	8.2	35.13	100	195	P	V
		5196	86.37	-	-	78.9	34.4	8.2	35.13	100	195	A	V
		5352.66	48.93	-25.07	74	41.08	34.7	8.3	35.15	100	195	P	V
		5351.94	39.4	-14.6	54	31.55	34.7	8.3	35.15	100	195	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 1 5150~5250MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 38 5190MHz		10380	43.32	-24.98	68.3	56.79	37.68	11.9	63.05	100	360	P	H
		10380	43.03	-25.27	68.3	56.5	37.68	11.9	63.05	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	43.36	-24.94	68.3	56.68	37.75	11.97	63.04	100	360	P	H
		10460	44.2	-24.1	68.3	57.52	37.75	11.97	63.04	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz		5322	103.64	-	-	95.89	34.63	8.27	35.15	101	243	P	H
		5322	96.23	-	-	88.48	34.63	8.27	35.15	101	243	A	H
		5356.1	63.92	-10.08	74	56.07	34.7	8.3	35.15	101	243	P	H
		5355.7	42.52	-11.48	54	34.67	34.7	8.3	35.15	101	243	A	H
		5322	104.65	-	-	96.9	34.63	8.27	35.15	333	169	P	V
		5322	96.54	-	-	88.79	34.63	8.27	35.15	333	169	A	V
		5351.1	63.04	-10.96	74	55.19	34.7	8.3	35.15	333	169	P	V
		5350	41.67	-12.33	54	33.82	34.7	8.3	35.15	333	169	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a		10520	43.63	-24.67	68.3	56.84	37.82	12	63.03	100	360	P	H
CH 52		10520	44.98	-23.32	68.3	58.19	37.82	12	63.03	100	360	P	V
5260MHz													
802.11a		10600	43.15	-25.15	68.3	56.2	37.9	12.06	63.01	100	360	P	H
CH 60		10600	44.07	-24.23	68.3	57.12	37.9	12.06	63.01	100	360	P	V
5300MHz													
802.11a		10640	43.04	-30.96	74	56.05	37.9	12.09	63	100	360	P	H
CH 64		10640	44.31	-29.69	74	57.32	37.9	12.09	63	100	360	P	V
5320MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


15E band 2 5250~5350MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 64 5320MHz		5318	102.22	-	-	94.47	34.63	8.27	35.15	107	241	P	H
		5318	94.54	-	-	86.79	34.63	8.27	35.15	107	241	A	H
		5354.2	56.52	-17.48	74	48.67	34.7	8.3	35.15	107	241	P	H
		5358.3	40.87	-13.13	54	33.02	34.7	8.3	35.15	107	241	A	H
		5320	102.11	-	-	94.36	34.63	8.27	35.15	389	162	P	V
		5320	94.72	-	-	86.97	34.63	8.27	35.15	389	162	A	V
		5350.1	55.5	-18.5	74	47.65	34.7	8.3	35.15	389	162	P	V
		5350.2	40.09	-13.91	54	32.24	34.7	8.3	35.15	389	162	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



15E band 2 5250~5350MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 52 5260MHz		10520	44.46	-23.84	68.3	57.67	37.82	12	63.03	100	360	P	H
		10520	44.7	-23.6	68.3	57.91	37.82	12	63.03	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	43.52	-24.78	68.3	56.57	37.9	12.06	63.01	100	0	P	H
		10600	43.42	-24.88	68.3	56.47	37.9	12.06	63.01	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	42.96	-31.04	74	55.97	37.9	12.09	63	100	0	P	H
		10640	43.84	-30.16	74	56.85	37.9	12.09	63	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 - 5150~5250MHz

WIFI 802.11a(Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 36 5180MHz		5149.44	55.2	-18.8	74	47.88	34.3	8.14	35.12	236	150	P	H
		5135.04	40.54	-13.46	54	33.25	34.27	8.14	35.12	236	150	A	H
	*	5180	99.48	-	-	92.06	34.37	8.17	35.12	236	150	P	H
		5180	92.63	-	-	85.21	34.37	8.17	35.12	236	150	A	H
		5134.72	53.28	-20.72	74	45.99	34.27	8.14	35.12	359	172	P	V
		5145.44	40.44	-13.56	54	33.12	34.3	8.14	35.12	359	172	A	V
	*	5178	99.15	-	-	91.73	34.37	8.17	35.12	359	172	P	V
		5178	92.14	-	-	84.72	34.37	8.17	35.12	359	172	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	43.75	-24.55	68.3	57.27	37.67	11.87	63.06	100	360	P	H
		10360	44.05	-24.25	68.3	57.57	37.67	11.87	63.06	100	360	P	V
802.11a CH 44 5220MHz		10440	43.01	-25.29	68.3	56.39	37.73	11.93	63.04	100	360	P	H
		10440	43.71	-24.59	68.3	57.09	37.73	11.93	63.04	100	360	P	V
802.11a CH 48 5240MHz		10480	43.09	-25.21	68.3	56.37	37.78	11.97	63.03	100	360	P	H
		10480	45.05	-23.25	68.3	58.33	37.78	11.97	63.03	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5144	66.24	-7.76	74	58.92	34.3	8.14	35.12	100	118	P	H
		5149.98	42.55	-11.45	54	35.23	34.3	8.14	35.12	100	118	A	H
	*	5178	103.52	-	-	96.1	34.37	8.17	35.12	100	118	P	H
		5178	96.37	-	-	88.95	34.37	8.17	35.12	100	118	A	H
		5149.76	61.22	-12.78	74	53.9	34.3	8.14	35.12	100	178	P	V
		5149.98	41	-13	54	33.68	34.3	8.14	35.12	100	178	A	V
	*	5178	101.55	-	-	94.13	34.37	8.17	35.12	100	178	P	V
		5178	94.68	-	-	87.26	34.37	8.17	35.12	100	178	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	42.79	-25.51	68.3	56.31	37.67	11.87	63.06	100	360	P	H
		10360	42.75	-25.55	68.3	56.27	37.67	11.87	63.06	100	360	P	V
802.11n HT20 CH 44 5220MHz		10440	43.36	-24.94	68.3	56.74	37.73	11.93	63.04	100	360	P	H
		10440	43.3	-25	68.3	56.68	37.73	11.93	63.04	100	360	P	V
802.11n HT20 CH 48 5240MHz		10480	44.68	-23.62	68.3	57.96	37.78	11.97	63.03	100	360	P	H
		10480	44.23	-24.07	68.3	57.51	37.78	11.97	63.03	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5142.4	64.38	-9.62	74	57.06	34.3	8.14	35.12	100	118	P	H
		5149.98	50.62	-3.38	54	43.3	34.3	8.14	35.12	100	118	A	H
	*	5188	100.38	-	-	92.96	34.37	8.17	35.12	100	118	P	H
		5188	93.77	-	-	86.35	34.37	8.17	35.12	100	118	A	H
		5390.64	48.92	-25.08	74	41.06	34.7	8.32	35.16	100	118	P	H
		5380.02	39.94	-14.06	54	32.1	34.7	8.3	35.16	100	118	A	H
		5148.48	54.24	-19.76	74	46.92	34.3	8.14	35.12	398	190	P	V
		5148.64	44.2	-9.8	54	36.88	34.3	8.14	35.12	398	190	A	V
	*	5186	101.05	-	-	93.63	34.37	8.17	35.12	398	190	P	V
		5186	94.93	-	-	87.51	34.37	8.17	35.12	398	190	A	V
		5367.06	49.64	-24.36	74	41.79	34.7	8.3	35.15	398	190	P	V
		5393.16	39.85	-14.15	54	31.99	34.7	8.32	35.16	398	190	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11n HT40(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	43.46	-24.84	68.3	56.93	37.68	11.9	63.05	100	360	P	H
		10380	42.75	-25.55	68.3	56.22	37.68	11.9	63.05	100	360	P	V
802.11n HT40 CH 46 5230MHz		10460	42.62	-25.68	68.3	55.94	37.75	11.97	63.04	100	360	P	H
		10460	42.52	-25.78	68.3	55.84	37.75	11.97	63.04	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ac VHT80(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5149.6	54.8	-19.2	74	47.48	34.3	8.14	35.12	100	246	P	H
		5148.16	42.18	-11.82	54	34.86	34.3	8.14	35.12	100	246	A	H
	*	5206	93.74	-	-	86.27	34.4	8.2	35.13	100	246	P	H
		5206	85.93	-	-	78.46	34.4	8.2	35.13	100	246	A	H
		5380.02	49.32	-24.68	74	41.48	34.7	8.3	35.16	100	246	P	H
		5395.32	40.9	-13.1	54	33.04	34.7	8.32	35.16	100	246	A	H
		5134.08	52.95	-21.05	74	45.66	34.27	8.14	35.12	392	202	P	V
		5100.48	41.96	-12.04	54	34.77	34.2	8.1	35.11	392	202	A	V
	*	5218	94.17	-	-	86.67	34.43	8.2	35.13	392	202	P	V
		5218	86.74	-	-	79.24	34.43	8.2	35.13	392	202	A	V
		5381.82	48.9	-25.1	74	41.06	34.7	8.3	35.16	392	202	P	V
		5385.42	40.65	-13.35	54	32.81	34.7	8.3	35.16	392	202	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10420	43.17	-25.13	68.3	56.57	37.72	11.93	63.05	100	360	P	H
VHT80													
CH 42		10420	43.39	-24.91	68.3	56.79	37.72	11.93	63.05	100	360	P	V
5210MHz													
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a(Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 64 5320MHz	*	5318	100.63	-	-	92.88	34.63	8.27	35.15	337	150	P	H
		5318	92.77	-	-	85.02	34.63	8.27	35.15	337	150	A	H
		5361.8	56.41	-17.59	74	48.56	34.7	8.3	35.15	337	150	P	H
		5353.1	39.89	-14.11	54	32.04	34.7	8.3	35.15	337	150	A	H
	*	5318	100.23	-	-	92.48	34.63	8.27	35.15	341	168	P	V
		5318	92.37	-	-	84.62	34.63	8.27	35.15	341	168	A	V
		5351	54.71	-19.29	74	46.86	34.7	8.3	35.15	341	168	P	V
		5352	39.96	-14.04	54	32.11	34.7	8.3	35.15	341	168	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a		10520	44.06	-24.24	68.3	57.27	37.82	12	63.03	100	360	P	H
CH 52 5260MHz		10520	43.6	-24.7	68.3	56.81	37.82	12	63.03	100	360	P	V
802.11a		10600	42.79	-25.51	68.3	55.84	37.9	12.06	63.01	100	360	P	H
CH 60 5300MHz		10600	44.06	-24.24	68.3	57.11	37.9	12.06	63.01	100	360	P	V
802.11a		10640	43.94	-30.06	74	56.95	37.9	12.09	63	100	360	P	H
CH 64 5320MHz		10640	42.58	-31.42	74	55.59	37.9	12.09	63	100	360	P	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 64 5320MHz	*	5322	102.94	-	-	95.19	34.63	8.27	35.15	215	199	P	H
		5322	95.9	-	-	88.15	34.63	8.27	35.15	215	199	A	H
		5350.5	61.96	-12.04	74	54.11	34.7	8.3	35.15	215	199	P	H
		5350.1	41.21	-12.79	54	33.36	34.7	8.3	35.15	215	199	A	H
	*	5318	103.02	-	-	95.27	34.63	8.27	35.15	336	199	P	V
		5318	96.45	-	-	88.7	34.63	8.27	35.15	336	199	A	V
		5355.4	59.26	-14.74	74	51.41	34.7	8.3	35.15	336	199	P	V
		5350	40.73	-13.27	54	32.88	34.7	8.3	35.15	336	199	A	V
Remark	3. No other spurious found. 4. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT20(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	43.55	-24.75	68.3	56.76	37.82	12	63.03	100	360	P	H
		10520	42.78	-25.52	68.3	55.99	37.82	12	63.03	100	360	P	V
802.11n HT20 CH 60 5300MHz		10600	44.07	-24.23	68.3	57.12	37.9	12.06	63.01	100	360	P	H
		10600	43.76	-24.54	68.3	56.81	37.9	12.06	63.01	100	360	P	V
802.11n HT20 CH 64 5320MHz		10640	42.99	-31.01	74	56	37.9	12.09	63	100	360	P	H
		10640	42.68	-31.32	74	55.69	37.9	12.09	63	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 62 5310MHz		5108.16	51.38	-22.62	74	44.16	34.23	8.1	35.11	140	208	P	H
		5135.52	41.03	-12.97	54	33.74	34.27	8.14	35.12	140	208	A	H
	*	5306	97.21	-	-	89.51	34.6	8.25	35.15	140	208	P	H
		5306	89.97	-	-	82.27	34.6	8.25	35.15	140	208	A	H
		5363.4	57.08	-16.92	74	49.23	34.7	8.3	35.15	140	208	P	H
		5350	44.42	-9.58	54	36.57	34.7	8.3	35.15	140	208	A	H
		5142.56	50.97	-23.03	74	43.65	34.3	8.14	35.12	350	149	P	V
		5102.56	40.89	-13.11	54	33.7	34.2	8.1	35.11	349	149	A	V
	*	5312	97.65	-	-	89.9	34.63	8.27	35.15	349	149	P	V
		5312	89.93	-	-	82.18	34.63	8.27	35.15	349	149	A	V
		5355.1	51.56	-22.44	74	43.71	34.7	8.3	35.15	349	149	P	V
		5350.5	43.37	-10.63	54	35.52	34.7	8.3	35.15	349	149	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11n HT40(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	43.08	-25.22	68.3	56.24	37.83	12.03	63.02	100	360	P	H
		10540	43.21	-25.09	68.3	56.37	37.83	12.03	63.02	100	360	P	V
802.11n HT40 CH 62 5310MHz		10620	42.37	-31.63	74	55.39	37.9	12.09	63.01	100	360	P	H
		10620	43.03	-30.97	74	56.05	37.9	12.09	63.01	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ac VHT80(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5121.12	51.28	-22.72	74	44.03	34.23	8.14	35.12	100	118	P	H
		5101.6	41.93	-12.07	54	34.74	34.2	8.1	35.11	100	118	A	H
	*	5282	92.87	-	-	85.19	34.57	8.25	35.14	100	118	P	H
		5282	85.53	-	-	77.85	34.57	8.25	35.14	100	118	A	H
		5351	58.22	-15.78	74	50.37	34.7	8.3	35.15	100	118	P	H
		5350.7	50.08	-3.92	54	42.23	34.7	8.3	35.15	100	118	A	H
		5115.2	50.97	-23.03	74	43.72	34.23	8.14	35.12	400	190	P	V
		5141.44	41.85	-12.15	54	34.53	34.3	8.14	35.12	400	190	A	V
	*	5298	95.89	-	-	88.19	34.6	8.25	35.15	400	190	P	V
		5298	87.58	-	-	79.88	34.6	8.25	35.15	400	190	A	V
		5352.4	55.05	-18.95	74	47.2	34.7	8.3	35.15	400	190	P	V
		5351.6	44.73	-9.27	54	36.88	34.7	8.3	35.15	400	190	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac		10580	43.79	-24.51	68.3	56.86	37.88	12.06	63.01	100	360	P	H
VHT80 CH 58 5290MHz		10580	43.8	-24.5	68.3	56.87	37.88	12.06	63.01	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a(Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 100 5500MHz		5454.32	54.4	-19.6	74	46.51	34.7	8.36	35.17	129	211	P	H
		5465.36	55.86	-12.44	68.3	47.97	34.7	8.36	35.17	129	211	P	H
		5459.12	40.74	-13.26	54	32.85	34.7	8.36	35.17	129	211	A	H
	*	5502	104.83	-	-	96.9	34.7	8.4	35.17	129	211	P	H
		5502	97.04	-	-	89.11	34.7	8.4	35.17	129	211	A	H
		5452.72	55.18	-18.82	74	43.22	34.7	8.36	31.1	274	167	P	V
		5466.16	56.89	-11.41	68.3	44.89	34.7	8.4	31.1	274	167	P	V
		5458.96	42.3	-11.7	54	30.34	34.7	8.36	31.1	274	167	A	V
	*	5500	100.92	-	-	88.92	34.7	8.4	31.1	274	167	P	V
		5500	93.57	-	-	81.57	34.7	8.4	31.1	274	167	A	V
802.11a CH 140 5700MHz	*	5698	102.31	-	-	94.2	34.7	8.58	35.17	100	207	P	H
		5698	95.26	-	-	87.15	34.7	8.58	35.17	100	207	A	H
		5696	98.65	-	-	90.54	34.7	8.58	35.17	100	244	P	V
	*	5696	91.68	-	-	83.57	34.7	8.58	35.17	100	244	A	V
		5726.44	60.84	-7.46	68.3	52.62	34.77	8.61	35.16	100	207	P	H
		5728.52	59.47	-8.83	68.3	51.25	34.77	8.61	35.16	100	244	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	43.72	-30.28	74	56.38	37.9	12.37	62.93	100	360	P	H
		11000	43.35	-30.65	74	56.01	37.9	12.37	62.93	100	360	P	V
802.11a CH 116 5580MHz		11160	44.35	-29.65	74	56.84	37.9	12.51	62.9	100	360	P	H
		11160	43.54	-30.46	74	56.03	37.9	12.51	62.9	100	360	P	V
802.11a CH 140 5700MHz		11400	43.55	-30.45	74	55.72	38	12.68	62.85	100	360	P	H
		11400	42.75	-31.25	74	54.92	38	12.68	62.85	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5456.24	58.79	-15.21	74	50.9	34.7	8.36	35.17	113	196	P	H
		5463.76	59.34	-8.96	68.3	51.45	34.7	8.36	35.17	113	196	P	H
		5459.76	41.15	-12.85	54	33.26	34.7	8.36	35.17	113	196	A	H
	*	5502	105.77	-	-	97.84	34.7	8.4	35.17	113	196	P	H
		5502	98.79	-	-	90.86	34.7	8.4	35.17	113	196	A	H
		5448.72	51.83	-22.17	74	43.94	34.7	8.36	35.17	122	246	P	V
		5462.8	53.66	-14.64	68.3	45.77	34.7	8.36	35.17	122	246	P	V
		5459.92	39.33	-14.67	54	31.44	34.7	8.36	35.17	122	246	A	V
	*	5502	101.27	-	-	93.34	34.7	8.4	35.17	122	246	P	V
		5502	93.71	-	-	85.78	34.7	8.4	35.17	122	246	A	V
802.11n HT20 CH 140 5700MHz	*	5702	102.11	-	-	93.94	34.73	8.61	35.17	100	206	P	H
		5702	94.6	-	-	86.43	34.73	8.61	35.17	100	206	A	H
		5735.32	57.4	-10.9	68.3	49.15	34.8	8.61	35.16	100	206	P	H
	*	5698	98.59	-	-	90.48	34.7	8.58	35.17	119	257	P	V
		5698	90.88	-	-	82.77	34.7	8.58	35.17	119	257	A	V
		5736.6	59.78	-8.52	68.3	51.53	34.8	8.61	35.16	119	257	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		11000	43.35	-30.65	74	56.01	37.9	12.37	62.93	100	360	P	H
		11000	43.61	-30.39	74	56.27	37.9	12.37	62.93	100	360	P	V
802.11n HT20 CH 116 5580MHz		11160	44.13	-29.87	74	56.62	37.9	12.51	62.9	100	360	P	H
		11160	44.07	-29.93	74	56.56	37.9	12.51	62.9	100	360	P	V
802.11n HT20 CH 140 5700MHz		11400	42.76	-31.24	74	54.93	38	12.68	62.85	100	360	P	H
		11400	42.66	-31.34	74	54.83	38	12.68	62.85	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5456.08	55.6	-18.4	74	47.71	34.7	8.36	35.17	100	210	P	H
		5465.52	54.85	-13.45	68.3	46.92	34.7	8.4	35.17	100	210	P	H
		5459.92	44.16	-9.84	54	36.27	34.7	8.36	35.17	100	210	A	H
		5520	102.3	-	-	94.34	34.7	8.44	35.18	100	210	P	H
		5520	94.83	-	-	86.87	34.7	8.44	35.18	100	210	A	H
		5759.48	51.6	-16.7	68.3	43.28	34.83	8.64	35.15	100	210	P	H
		5455.28	57.28	-16.72	74	49.39	34.7	8.36	35.17	287	192	P	V
		5466	58.76	-9.54	68.3	50.83	34.7	8.4	35.17	287	192	P	V
		5457.52	42.23	-11.77	54	34.34	34.7	8.36	35.17	287	192	A	V
		5512	100.44	-	-	92.48	34.7	8.44	35.18	287	192	P	V
		5512	91.98	-	-	84.02	34.7	8.44	35.18	287	192	P	V
		5762.92	50.96	-17.34	68.3	42.64	34.83	8.64	35.15	287	192	P	V
802.11n HT40 CH 134 5670MHz		5426.64	49.11	-24.89	74	41.21	34.7	8.36	35.16	100	208	P	H
		5468.24	48.51	-19.79	68.3	40.58	34.7	8.4	35.17	100	208	P	H
		5456.24	40.02	-13.98	54	32.13	34.7	8.36	35.17	100	208	A	H
		5666	101.21	-	-	93.12	34.7	8.58	35.19	100	208	P	H
		5666	93.33	-	-	85.24	34.7	8.58	35.19	100	208	P	H
		5734.44	58.07	-10.23	68.3	49.85	34.77	8.61	35.16	100	208	P	H
		5396.08	49.58	-24.42	74	41.72	34.7	8.32	35.16	269	170	P	V
		5461.04	48.67	-19.63	68.3	40.78	34.7	8.36	35.17	269	170	P	V
		5459.44	40.1	-13.9	54	32.21	34.7	8.36	35.17	269	170	A	V
		5664	97.79	-	-	89.7	34.7	8.58	35.19	269	170	P	V
		5664	91.06	-	-	82.97	34.7	8.58	35.19	269	170	P	V
		5726.68	55.26	-13.04	68.3	47.04	34.77	8.61	35.16	269	170	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT40(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	43.68	-30.32	74	56.31	37.9	12.4	62.93	100	360	P	H
		11020	43.13	-30.87	74	55.76	37.9	12.4	62.93	100	360	P	V
802.11n HT40 CH 110 5550MHz		11100	43.39	-30.61	74	55.95	37.9	12.45	62.91	100	360	P	H
		11100	43.04	-30.96	74	55.6	37.9	12.45	62.91	100	360	P	V
802.11n HT40 CH 134 5670MHz		11340	43.08	-30.92	74	55.39	37.93	12.62	62.86	100	360	P	H
		11340	43.12	-30.88	74	55.43	37.93	12.62	62.86	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80(Band Edge @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5458.16	57.06	-16.94	74	49.17	34.7	8.36	35.17	100	208	P	H
		5467.44	58.4	-9.9	68.3	50.47	34.7	8.4	35.17	100	208	P	H
		5458.8	50.05	-3.95	54	42.16	34.7	8.36	35.17	100	208	A	H
	*	5548	99.22	-	-	91.22	34.7	8.48	35.18	100	208	P	H
		5548	92.12	-	-	84.12	34.7	8.48	35.18	100	208	A	H
		5727.96	51.19	-17.11	68.3	42.97	34.77	8.61	35.16	100	208	P	H
		5456.72	55.35	-18.65	74	47.46	34.7	8.36	35.17	340	171	P	V
		5468.88	57.76	-10.54	68.3	49.83	34.7	8.4	35.17	340	171	P	V
		5459.12	48.17	-5.83	54	40.28	34.7	8.36	35.17	340	171	A	V
	*	5522	97.99	-	-	90.03	34.7	8.44	35.18	340	171	P	V
		5522	90.31	-	-	82.35	34.7	8.44	35.18	340	171	A	V
		5753.96	52.32	-15.98	68.3	44	34.83	8.64	35.15	340	171	P	V
802.11ac VHT80 CH 122 5610MHz		5434.16	49.98	-24.02	74	42.09	34.7	8.36	35.17	100	206	P	H
		5465.68	48.55	-19.75	68.3	40.62	34.7	8.4	35.17	100	206	P	H
		5456.88	40.96	-13.04	54	33.07	34.7	8.36	35.17	100	206	A	H
	*	5602	99.53	-	-	91.6	34.6	8.52	35.19	100	206	P	H
		5602	91.71	-	-	83.78	34.6	8.52	35.19	100	206	A	H
		5737.64	52.34	-15.96	68.3	44.09	34.8	8.61	35.16	100	206	P	H
		5361.68	49.18	-24.82	74	41.33	34.7	8.3	35.15	305	171	P	V
		5463.44	48.34	-19.96	68.3	40.45	34.7	8.36	35.17	305	171	P	V
		5452.56	41.29	-12.71	54	33.4	34.7	8.36	35.17	305	171	A	V
	*	5620	96.65	-	-	88.7	34.63	8.52	35.2	305	171	P	V
		5620	89.12	-	-	81.17	34.63	8.52	35.2	305	171	A	V
		5727.64	51.22	-17.08	68.3	43	34.77	8.61	35.16	305	171	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ac VHT80(Harmonic @ 3m)

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		11060	42.78	-31.22	74	55.38	37.9	12.42	62.92	100	360	P	H
		11060	44.11	-29.89	74	56.71	37.9	12.42	62.92	100	360	P	V
802.11ac VHT80 CH 122 5610MHz		11220	43.22	-30.78	74	55.67	37.9	12.54	62.89	100	360	P	H
		11220	42.88	-31.12	74	55.33	37.9	12.54	62.89	100	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												


Emission below 1GHz
WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1+2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		30.97	23.77	-16.23	40	31.21	23.93	0.61	31.98	120	30	P	H
		65.89	17.4	-22.6	40	35.98	12.52	0.83	31.93	-	-	P	H
		98.87	20.68	-22.82	43.5	34.77	16.81	1.03	31.93	-	-	P	H
		178.41	19.13	-24.37	43.5	34.44	15.26	1.35	31.92	-	-	P	H
		292.87	26.13	-19.87	46	37.48	18.9	1.81	32.06	-	-	P	H
		896.21	25.47	-20.53	46	27.57	26.38	3.01	31.49	-	-	P	H
		30.97	26.75	-13.25	40	34.19	23.93	0.61	31.98	-	-	P	V
		45.52	31.66	-8.34	40	46.81	16.07	0.72	31.94	100	230	P	V
		65.89	26.96	-13.04	40	45.54	12.52	0.83	31.93	-	-	P	V
		97.9	25.33	-18.17	43.5	39.62	16.62	1.02	31.93	-	-	P	V
		264.74	17.21	-28.79	46	28.29	19.16	1.76	32	-	-	P	V
		536.34	20.93	-25.07	46	27.21	23.6	2.44	32.32	-	-	P	V
Remark	1. No other spurious found.												
	2. All results are PASS against limit line.												



15E band 2 5250~5350MHz

Note symbol

Fundamental Frequency which can be ignored. However, the level of any

* unwanted emissions shall not exceed the level of the fundamental frequency per 15.209(c).

! Test result is **over limit** line.

P/A **P**eak or **A**verage

H/V **H**orizontal or **V**ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.


Appendix D. Duty Cycle Plots

Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
2	802.11a	98.10	-	-	10Hz
2	5GHz 802.11n HT20	97.72	1.930	0.518	1kHz
2	5GHz 802.11n HT40	95.96	0.950	1.053	1.1kHz
1+2	802.11a	98.11	-	-	10Hz
1+2	5GHz 802.11n HT20	97.72	1.925	0.519	1kHz
1+2	5GHz 802.11n HT40	94.95	0.940	1.064	1.1kHz
1+2	5GHz 802.11acVHT80	86.30	0.252	3.968	4.3kHz




Ant.2

802.11a

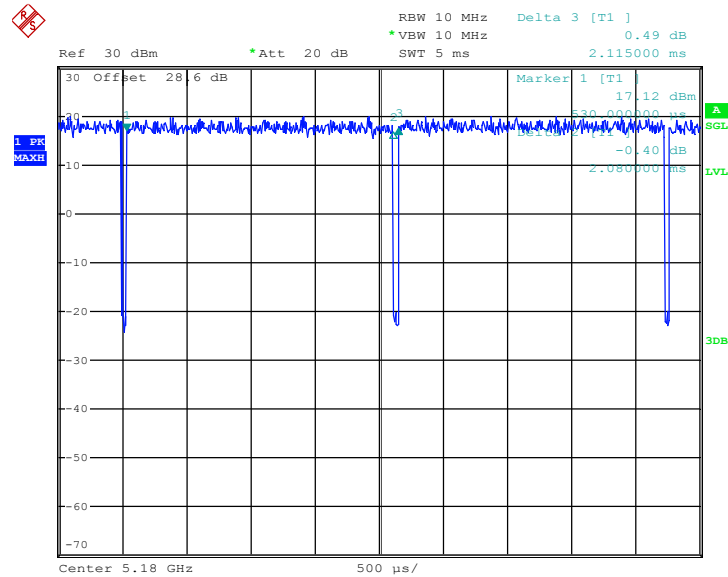


802.11n HT20

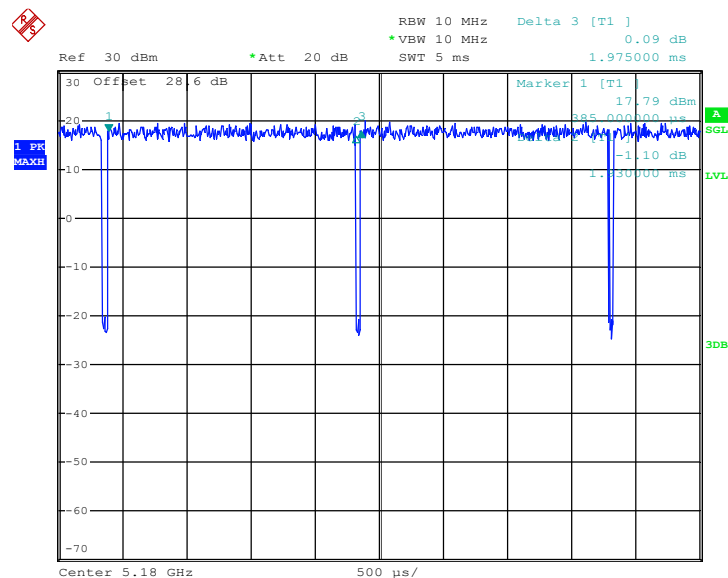




802.11n HT40

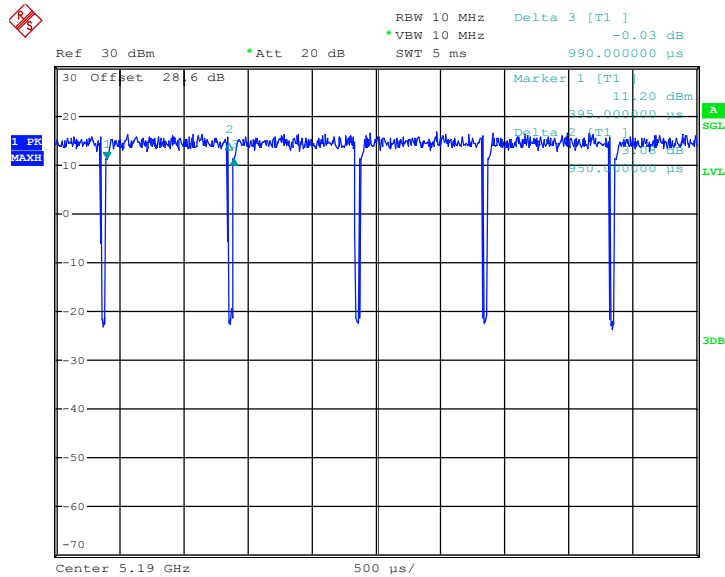




Ant.1+2

802.11a

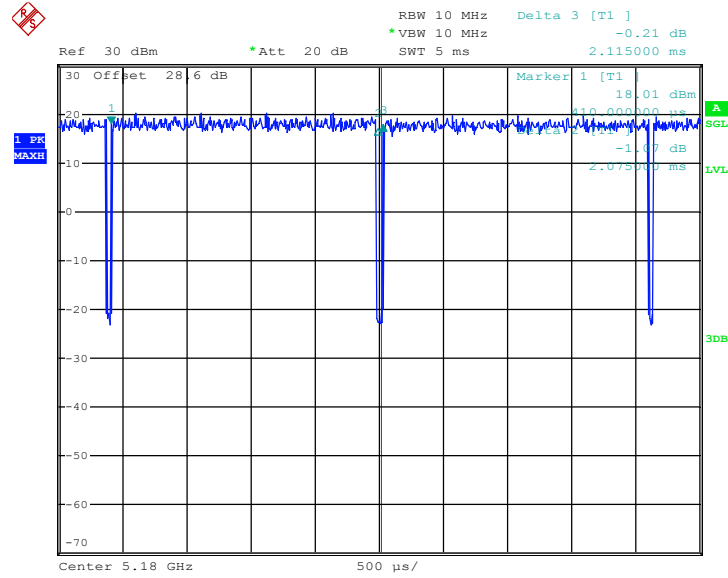


802.11n HT20

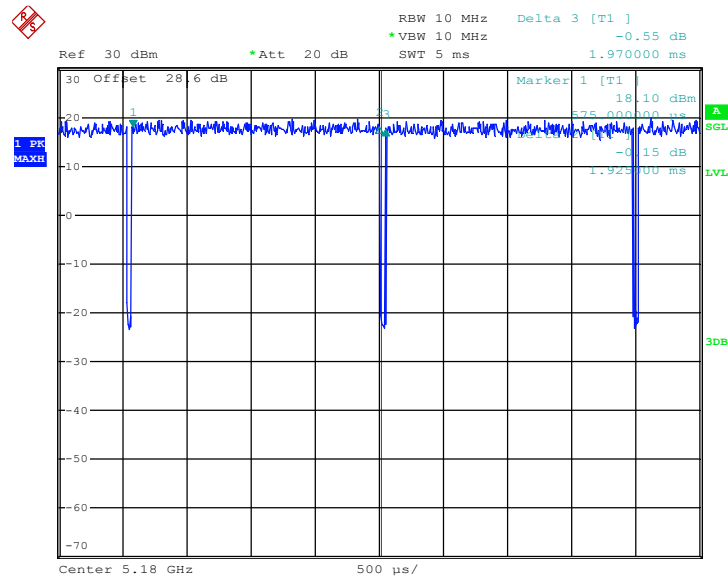



802.11n HT40

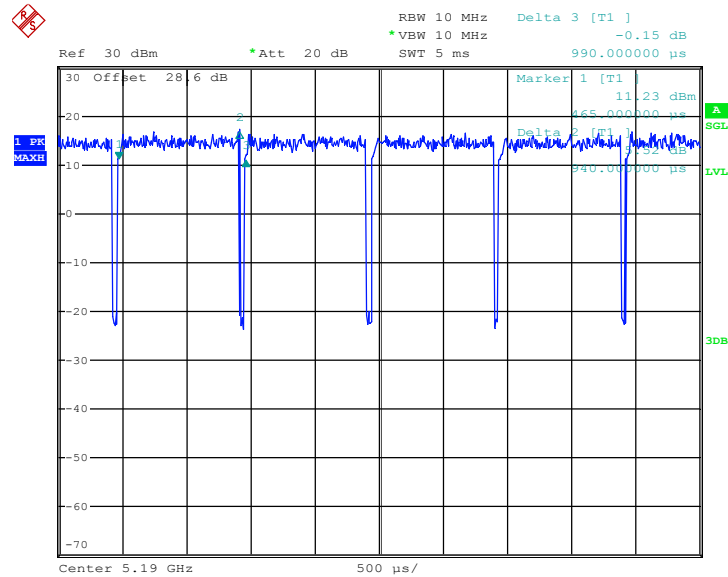

802.11ac VHT80

