


**Conducted Band Edge****WCDMA Band V (RMC 12.2Kbps)****Lowest Band Edge****Highest Band Edge****WCDMA Band II (RMC 12.2Kbps)****Lowest Band Edge****Highest Band Edge**



WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

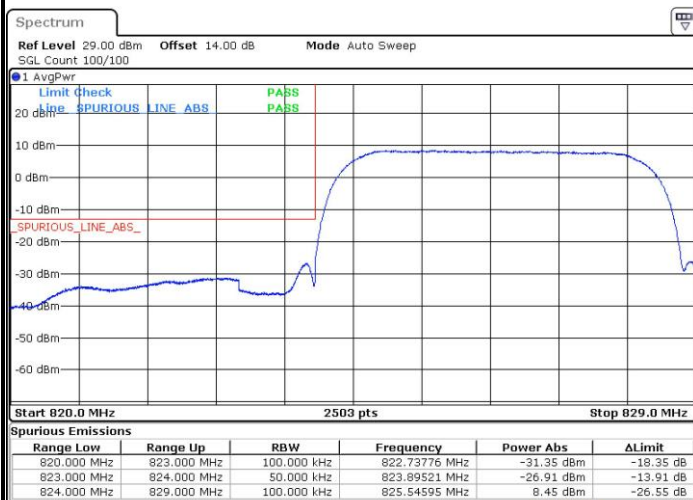

Highest Band Edge






Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

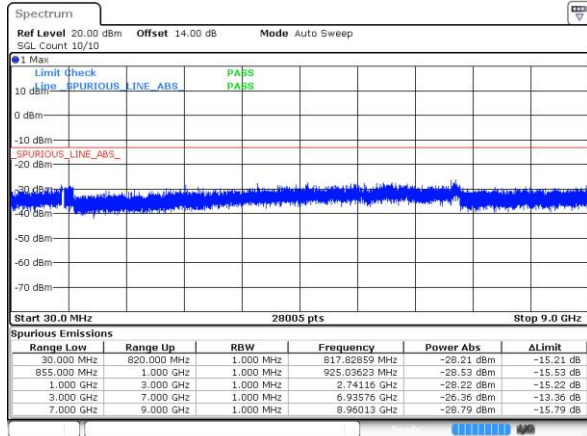

Date: 28 MAY 2022 09:47:41


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

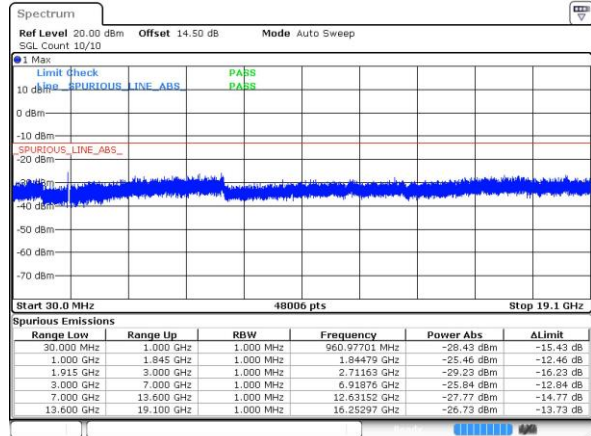


Date: 28 MAY 2022 01:45:24

Middle Channel

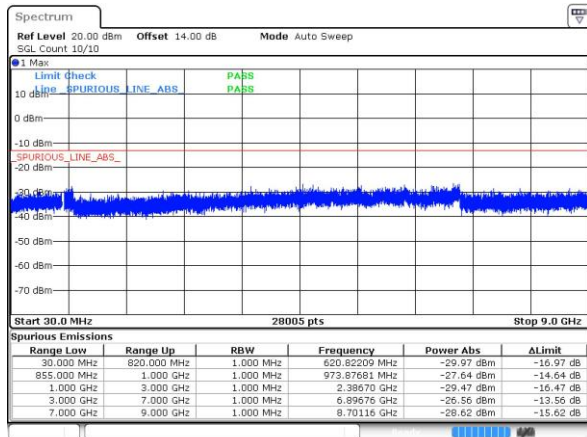


Date: 28 MAY 2022 09:48:51

Middle Channel

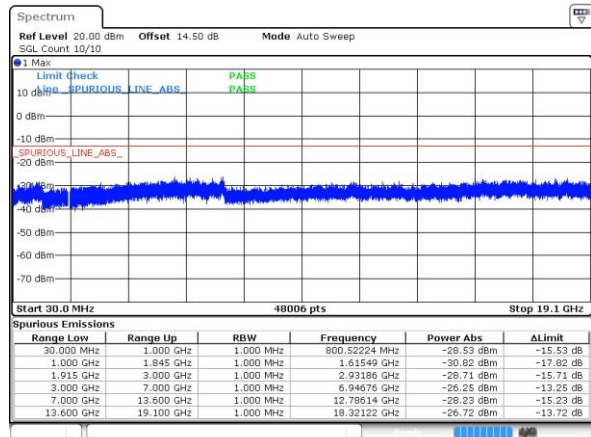


Date: 28 MAY 2022 01:46:07

Highest Channel

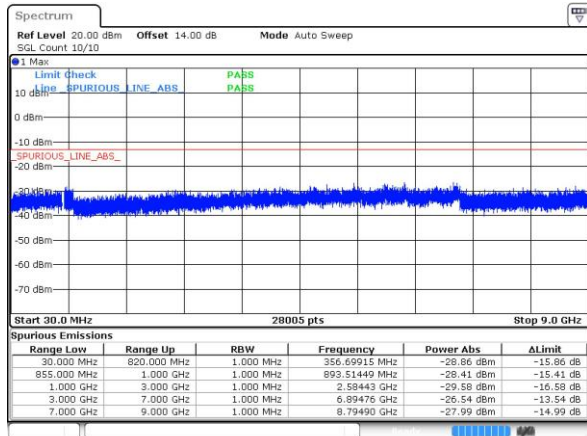

Date: 28 MAY 2022 09:49:40

Highest Channel

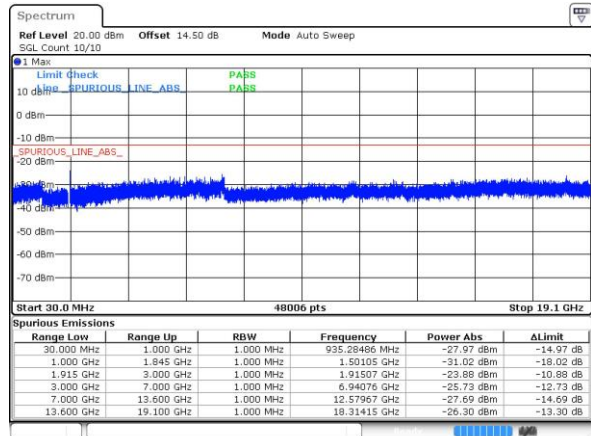


Date: 28 MAY 2022 01:46:47




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

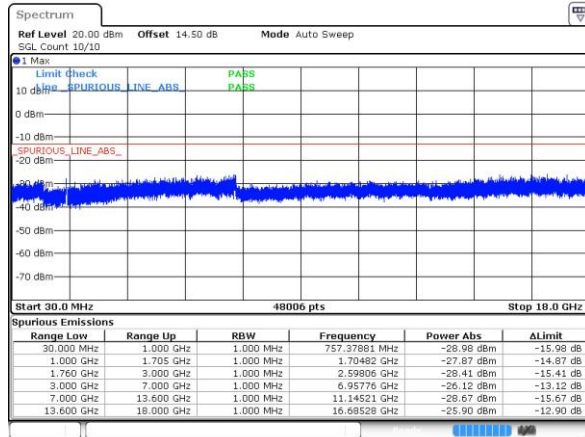

Middle Channel

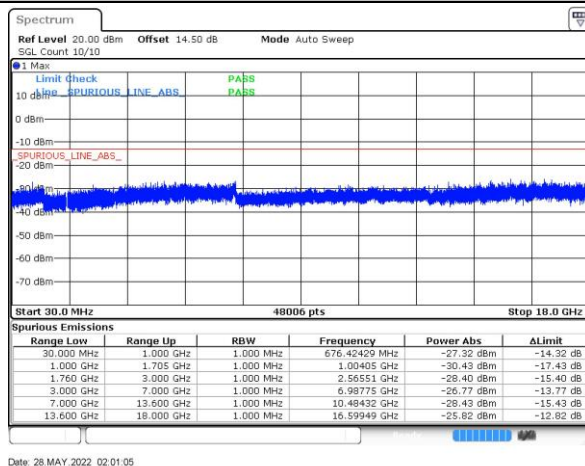

Highest Channel

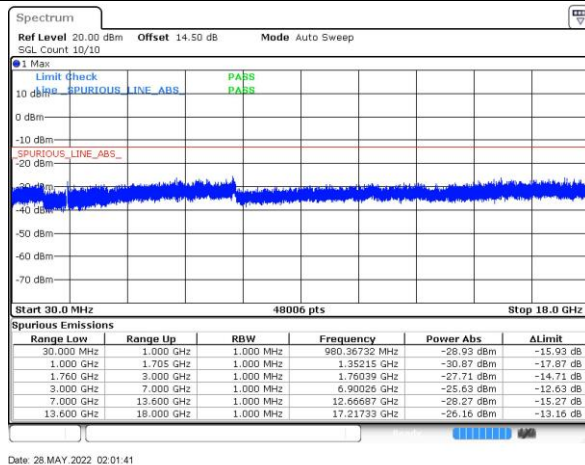

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2KbpsRMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0031	
30	Normal Voltage	0.0044	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0082	
0	Normal Voltage	0.0093	
-10	Normal Voltage	0.0096	
-20	Normal Voltage	0.0066	
-30	Normal Voltage	0.0078	
20	Maximum Voltage	0.0090	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0265	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0001	PASS
40	Normal Voltage	0.0008	
30	Normal Voltage	0.0010	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0013	
0	Normal Voltage	0.0023	
-10	Normal Voltage	0.0036	
-20	Normal Voltage	0.0024	
-30	Normal Voltage	0.0045	
20	Maximum Voltage	0.0051	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0118	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0014	PASS
40	Normal Voltage	0.0003	
30	Normal Voltage	0.0002	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0020	
0	Normal Voltage	0.0013	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0038	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0128	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.6 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Test Engineer :	Zhao hui Liang	Temperature :	22~25℃
		Relative Humidity :	48~52%

GSM850 (GSM) (ANT0)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-65.77	-13	-52.77	-71.85	-69.02	4.00	9.40	H
	2509.2	-63.89	-13	-50.89	-74.04	-67.46	4.88	10.60	H
	3345.6	-64.07	-13	-51.07	-75.90	-69.00	5.52	12.60	H
	1672.8	-66.95	-13	-53.95	-72.75	-70.20	4.00	9.40	V
	2509.2	-63.61	-13	-50.61	-74.09	-67.18	4.88	10.60	V
	3345.6	-63.30	-13	-50.30	-75.51	-68.23	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots) (ANT0)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-66.68	-13	-53.68	-72.76	-69.93	4.00	9.40	H
	2509.2	-63.86	-13	-50.86	-74.01	-67.43	4.88	10.60	H
	3345.6	-63.91	-13	-50.91	-75.74	-68.84	5.52	12.60	H
	1672.8	-67.10	-13	-54.10	-72.90	-70.35	4.00	9.40	V
	2509.2	-63.83	-13	-50.83	-74.31	-67.40	4.88	10.60	V
	3345.6	-63.37	-13	-50.37	-75.58	-68.30	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM) (ANT2)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.80	-13	-48.80	-76.25	-68.55	5.85	12.60	H
	5640	-61.97	-13	-48.97	-78.85	-67.77	7.30	13.10	H
	7520	-56.96	-13	-43.96	-79.26	-60.11	8.35	11.50	H
	3760	-61.09	-13	-48.09	-75.72	-67.84	5.85	12.60	V
	5640	-62.11	-13	-49.11	-78.88	-67.91	7.30	13.10	V
	7520	-56.90	-13	-43.90	-79.08	-60.05	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE 1 Tx slots) (ANT2)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-61.47	-13	-48.47	-75.92	-68.22	5.85	12.60	H
	5640	-61.89	-13	-48.89	-78.77	-67.69	7.30	13.10	H
	7520	-56.94	-13	-43.94	-79.24	-60.09	8.35	11.50	H
	3760	-60.23	-13	-47.23	-74.86	-66.98	5.85	12.60	V
	5640	-62.14	-13	-49.14	-78.91	-67.94	7.30	13.10	V
	7520	-56.82	-13	-43.82	-79	-59.97	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band V(RMC 12.2Kbps) (ANT1)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-66.69	-13	-53.69	-72.77	-69.94	4.00	9.40	H
	2509.2	-64.27	-13	-51.27	-74.42	-67.84	4.88	10.60	H
	3345.6	-63.56	-13	-50.56	-75.39	-68.49	5.52	12.60	H
	1672.8	-66.51	-13	-53.51	-72.31	-69.76	4.00	9.40	V
	2509.2	-63.58	-13	-50.58	-74.06	-67.15	4.88	10.60	V
	3345.6	-63.40	-13	-50.40	-75.61	-68.33	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps) (ANT2)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-62.11	-13	-49.11	-76.56	-68.86	5.85	12.60	H
	5640	-61.98	-13	-48.98	-78.86	-67.78	7.30	13.10	H
	7520	-56.70	-13	-43.70	-79.00	-59.85	8.35	11.50	H
	3760	-61.83	-13	-48.83	-76.46	-68.58	5.85	12.60	V
	5640	-61.75	-13	-48.75	-78.52	-67.55	7.30	13.10	V
	7520	-57.02	-13	-44.02	-79.2	-60.17	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band IV(RMC 12.2Kbps) (ANT2)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-63.32	-13	-50.32	-75.86	-70.17	5.65	12.50	H
	5197.8	-61.57	-13	-48.57	-78.81	-67.24	7.13	12.80	H
	6930.4	-58.94	-13	-45.94	-79.47	-62.34	8.40	11.80	H
	3465.2	-61.61	-13	-48.61	-74.69	-68.46	5.65	12.50	V
	5197.8	-61.51	-13	-48.51	-78.7	-67.18	7.13	12.80	V
	6930.4	-58.82	-13	-45.82	-79.36	-62.22	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.