



APPROVAL SHEET FOR ANTENNA

CUSTOMER: xiaomi

AAC P/N:

CUSTOMER P/N: N7 Antenna

CUSTOMER	APPROVER	CHECKER

AAC ACOUSTIC TECHNOLOGIES HOLDINGS INC.

**Add: AAC Technology Building, NO.18., Xinxi Road, North Hi-Tech
Industrial Park, Nanshan District, Shenzhen, P.R. China 518057**

Tel : 0086 755 26054538

AAC Confidential Information



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE

NO.

Issue: x3

Revision Date: 2023/9/20

Page: 1/22

ME	张明	Check/Appr.	
Package Eng.			
RF	PYS	Check/Appr.	

Date	Issue	Detail changes
2018/3/22	x3	Preliminary

Table of contents

1. Scope
2. Environmental Requirement
3. Electrical Characteristic Measurement Method
4. Pictures of prototype and antenna
5. Matching Circuit
6. Passive Measurement Data
7. Active Measurement Data
8. Antenna measurement spec on RF test jig
9. Mechanical layout and Dimensions
10. Package
11. General Reliability

AAC Confidential Information



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band1

NO.	0	Issue:	x3	Revision Date:	2023/9/20	Page:	2/22
-----	---	--------	----	----------------	-----------	-------	------

1. Scope

This document contains required environmental, electrical characteristic, mechanical, package and reliability test requirements.

2. Environmental Requirement


all components must be free from lead (Pb) and other banned or restricted substances according to customer's requirements.

3. Electrical Characteristic Measurement Method


3.1 Measurement method

To measure the Return Loss and VSWR, Smith Chart, Vector Network Analyzer Agilent E5071C was used. Satimo SG24 Anechoic chamber was used to measure the Efficiency, Gain, TRP and TIS.

3.1.1 Return Loss and VSWR

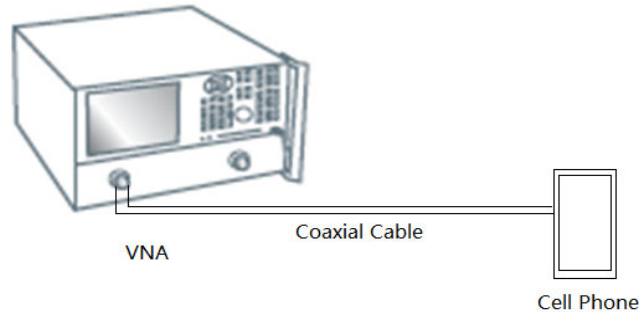


3.1.2 Efficiency, Gain, OTA measurement

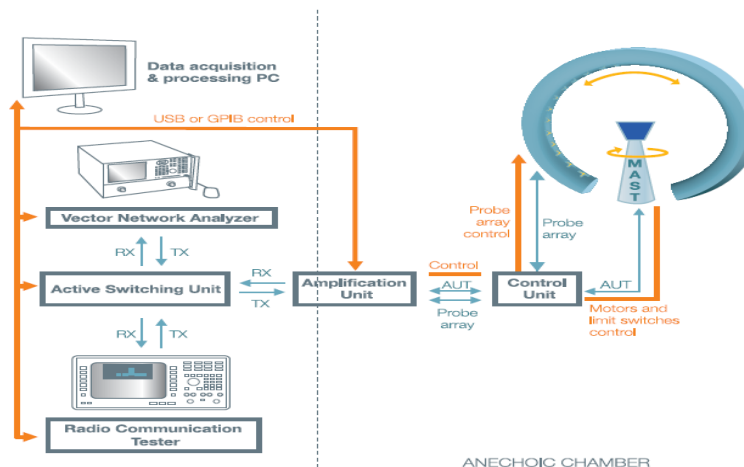




Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band


NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 3/22

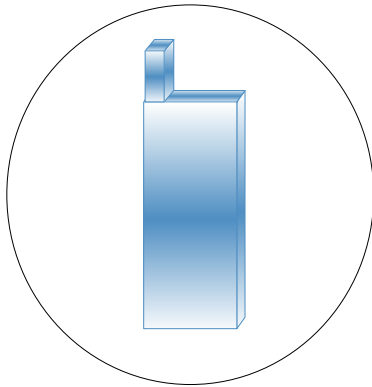


Phi=0deg

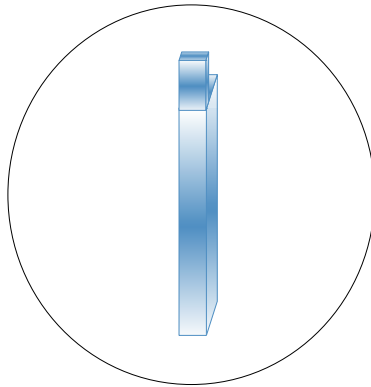

Phi=90deg

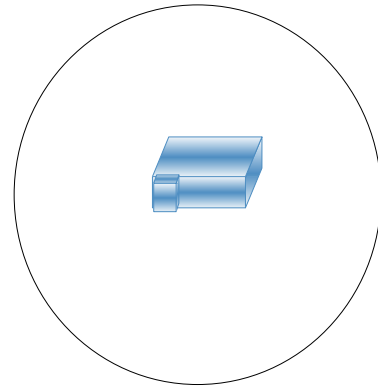

Theta=90deg

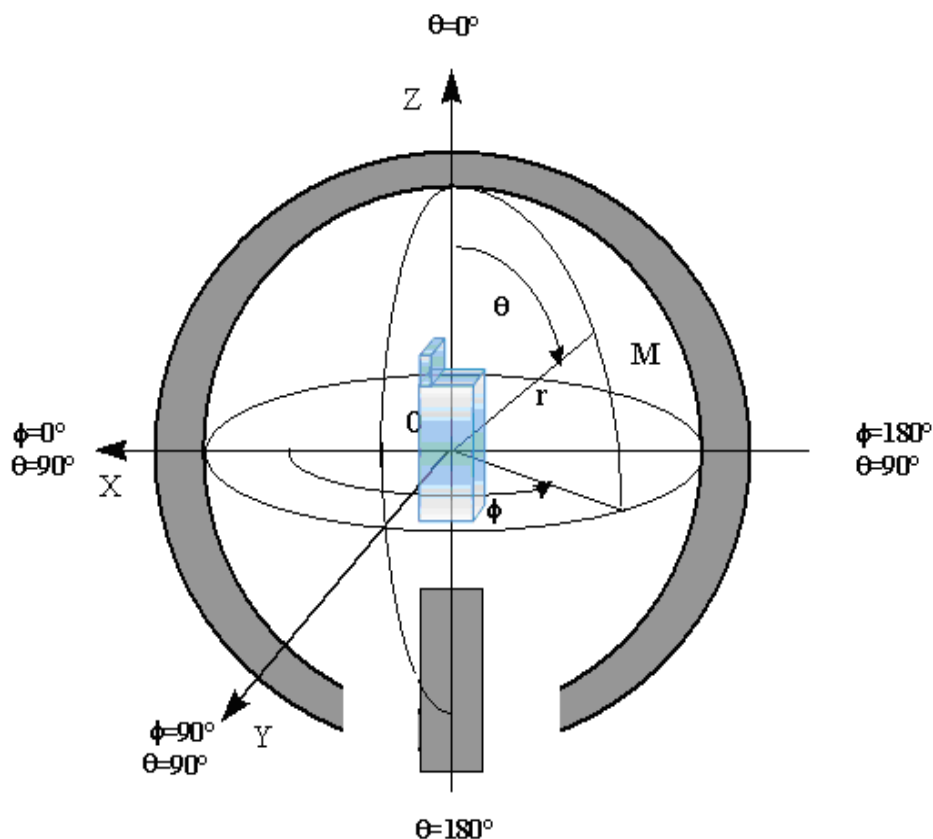


AAC Confidential Information



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band

NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 4/22

AAC designs a special S11 RF test jig for antenna test in mass production line. The antenna with average frequency in line is selected as reference antenna, and the results of the test jig is going to be correlated to the performance in the real phone.

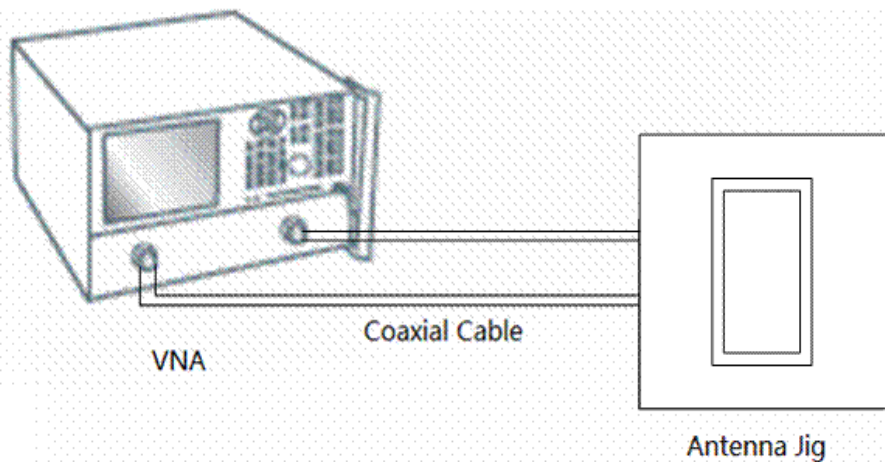

4. Pictures of prototype and antenna environment

Main ant

DIV ant

AAC Confidential Information




Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE b

NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 5/22

GPS/WIFI ant

5. Matching Circuit

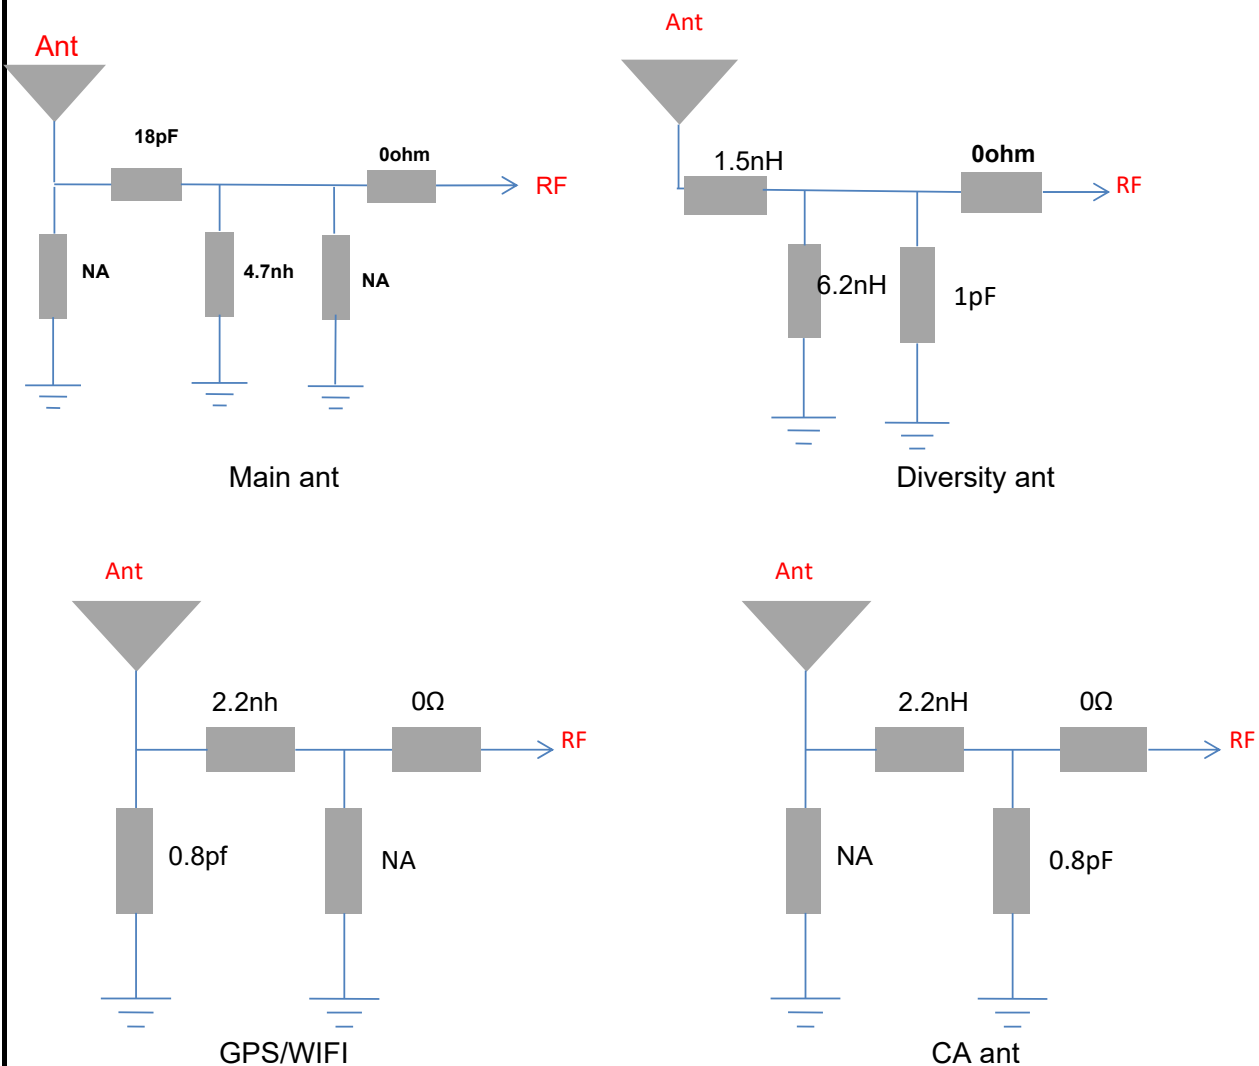


AAC Confidential Information




Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE


NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 7/22

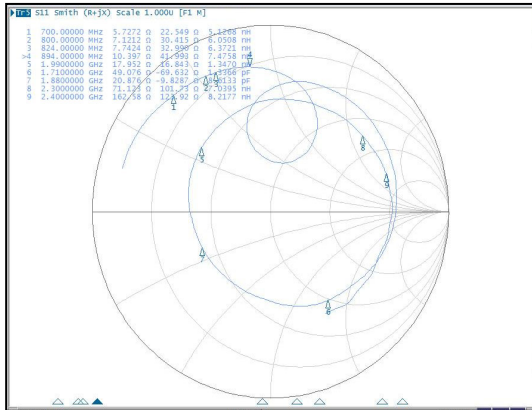


状态1

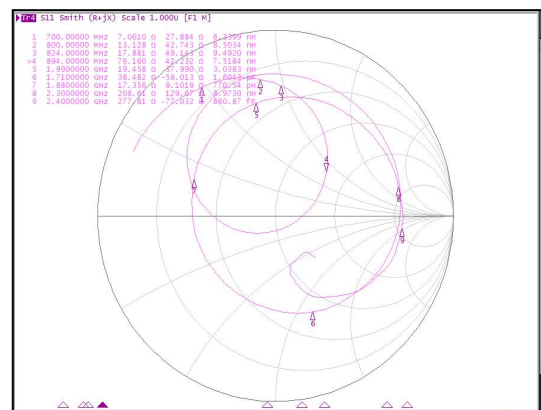


状态2

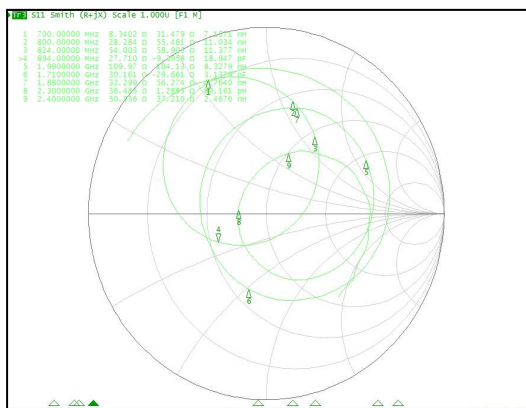

状态3

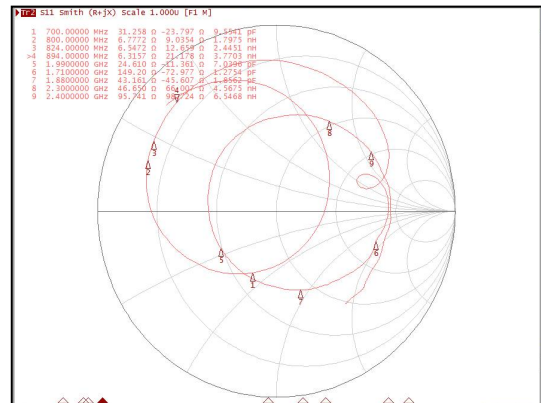

状态4

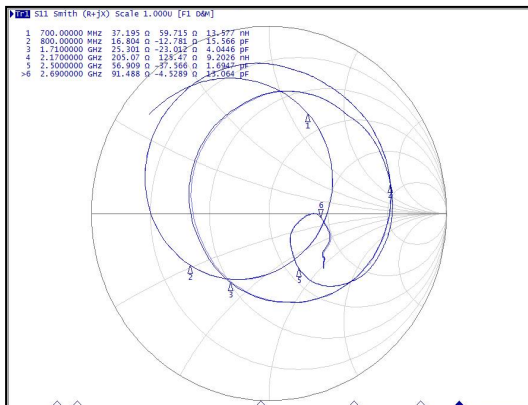

状态5

Fig.2 Smith Chart

AAC Confidential Information



Diversity antenna:GSM900/1800,WCDMA band1,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;

NO.


0

Issue: x3


Revision Date: 2023/9/20

Page: 8/22


6.2 Diversity antenna

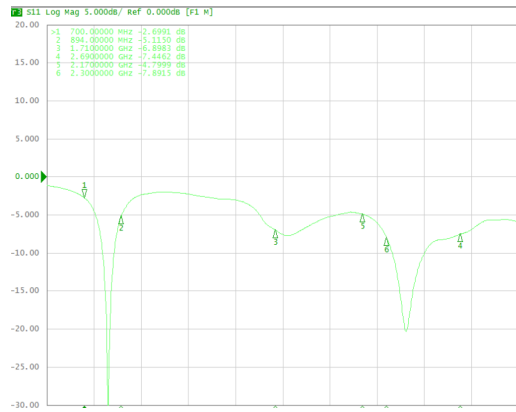


状态1

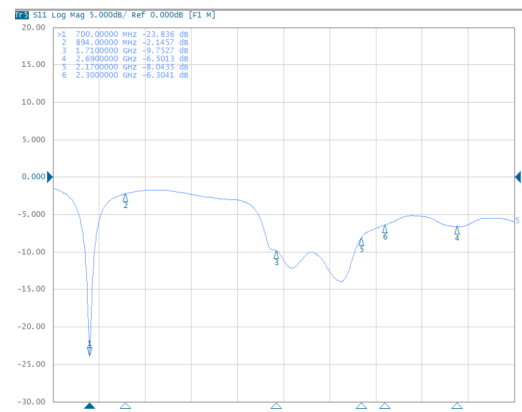

状态2

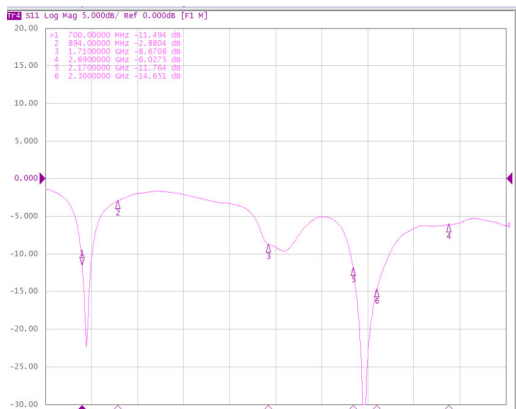

状态3

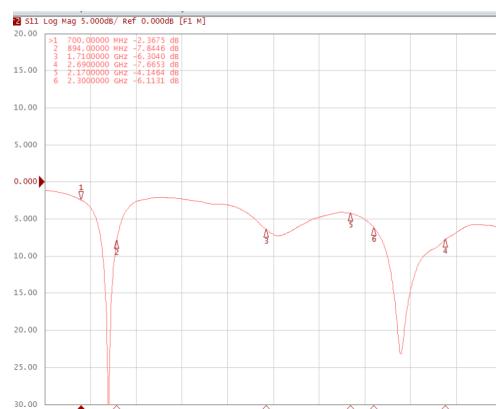

状态4

Fig.1 Return Loss

AAC Confidential Information



Diversity antenna:GSM900/1800,WCDMA band1,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;


NO.

0


Issue: x3

Revision Date: 2023/9/20


Page: 9/22

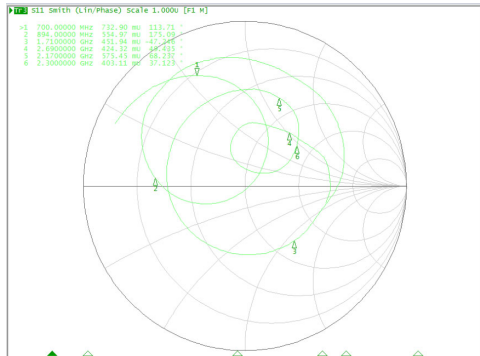


状态1

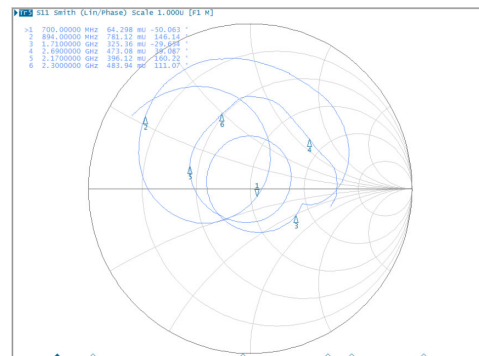

状态2

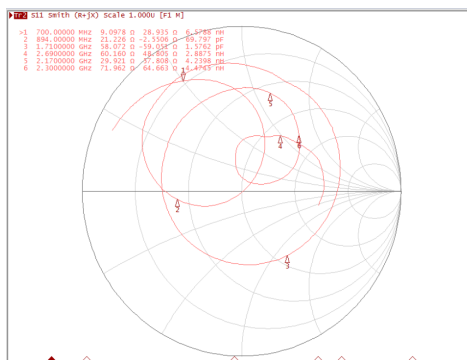

状态3

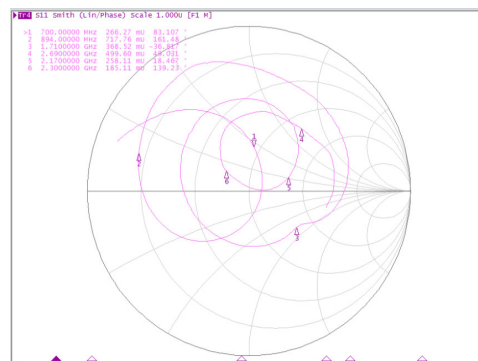

状态4

Fig. 2 Return Loss
smith chart



GPS&WIFI antenna

NO.

0

Issue: x3

Revision Date: 2023/9/20

Page: 10/22

6.3 mimo Ant

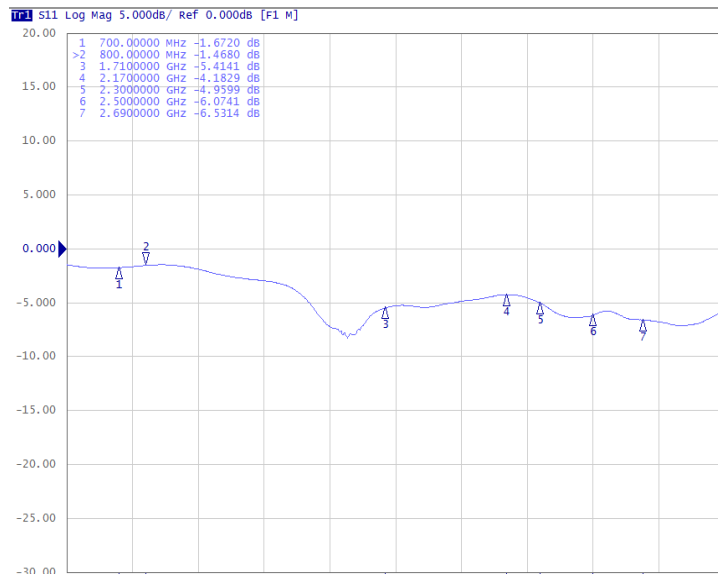


Fig.1 Return Loss

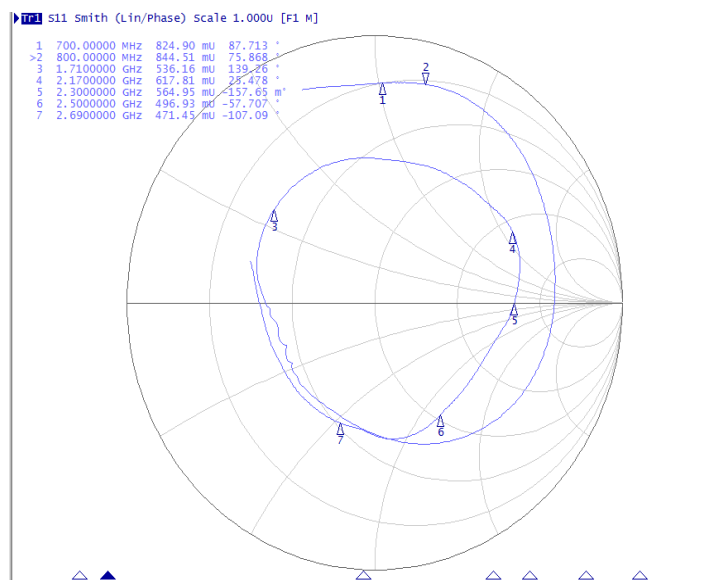


Fig.2 smith chart

AAC Confidential Information



GPS&WIFI antenna

NO.



0

Issue: x3

Revision Date: 2023/9/20

Page: 10/22

6.4 GPS/BT/WIFI Ant

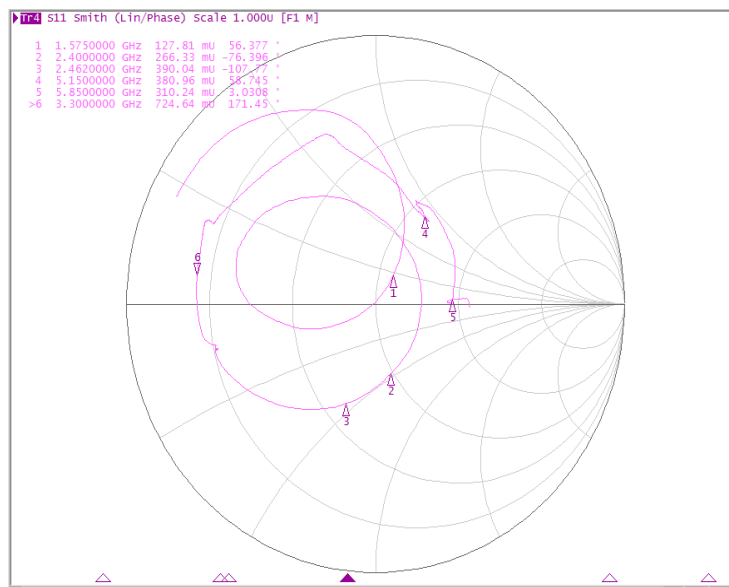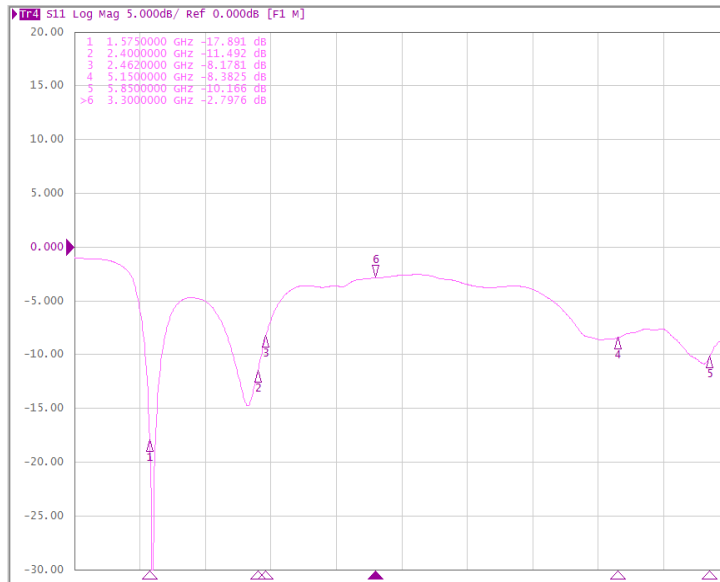

AAC Confidential Information




Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band1/

NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 11/22


6.4 Radiation Pattern

Main ant


720MHz 3D&2D

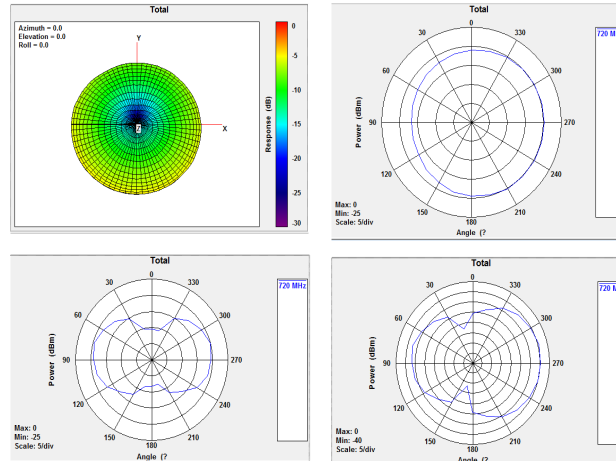

880MHz 3D&2D

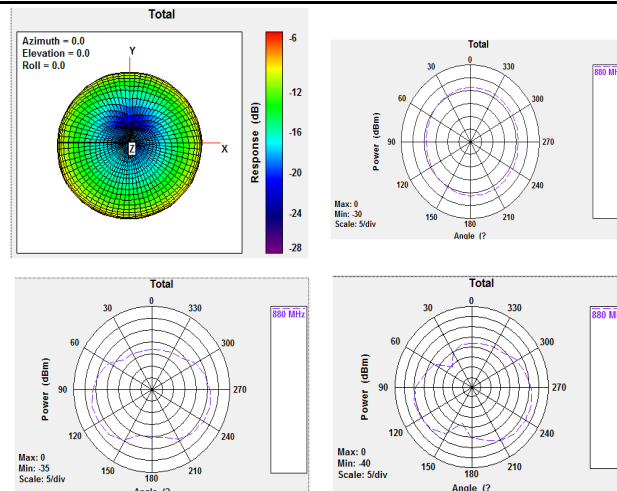

1710MHz 3D&2D

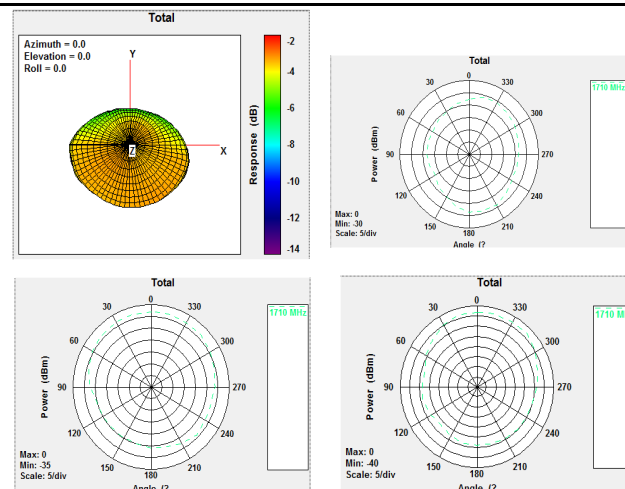

AAC Confidential Information

Diversity antenna:GSM900/1800,WCDMA band1,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;

NO.

0

Issue: x3


Revision Date: 2023/9/20

Page: 12/22


6.4 Radiation Pattern

Main ant

2100MHz 3D3D&2D

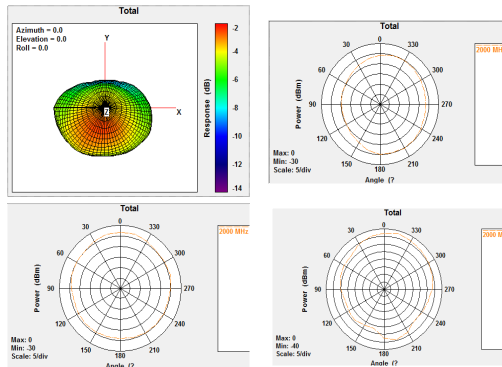

2600MHz 3D3D&2D

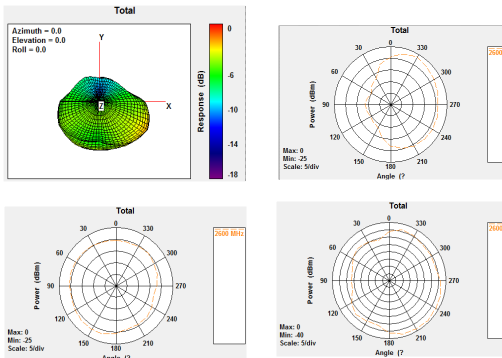


 AAC ELECTRONICS CORP.	Product Specification	P/N	#REF!
--	------------------------------	------------	--------------

Main antenna:GSM850/900/1800/1900,WCDMA band1/2/5/8,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3







NO. 0 Issue: x3 Revision Date: 2023/9/20 Page: 13/22

6.4 Radiation Pattern









Diversity ant

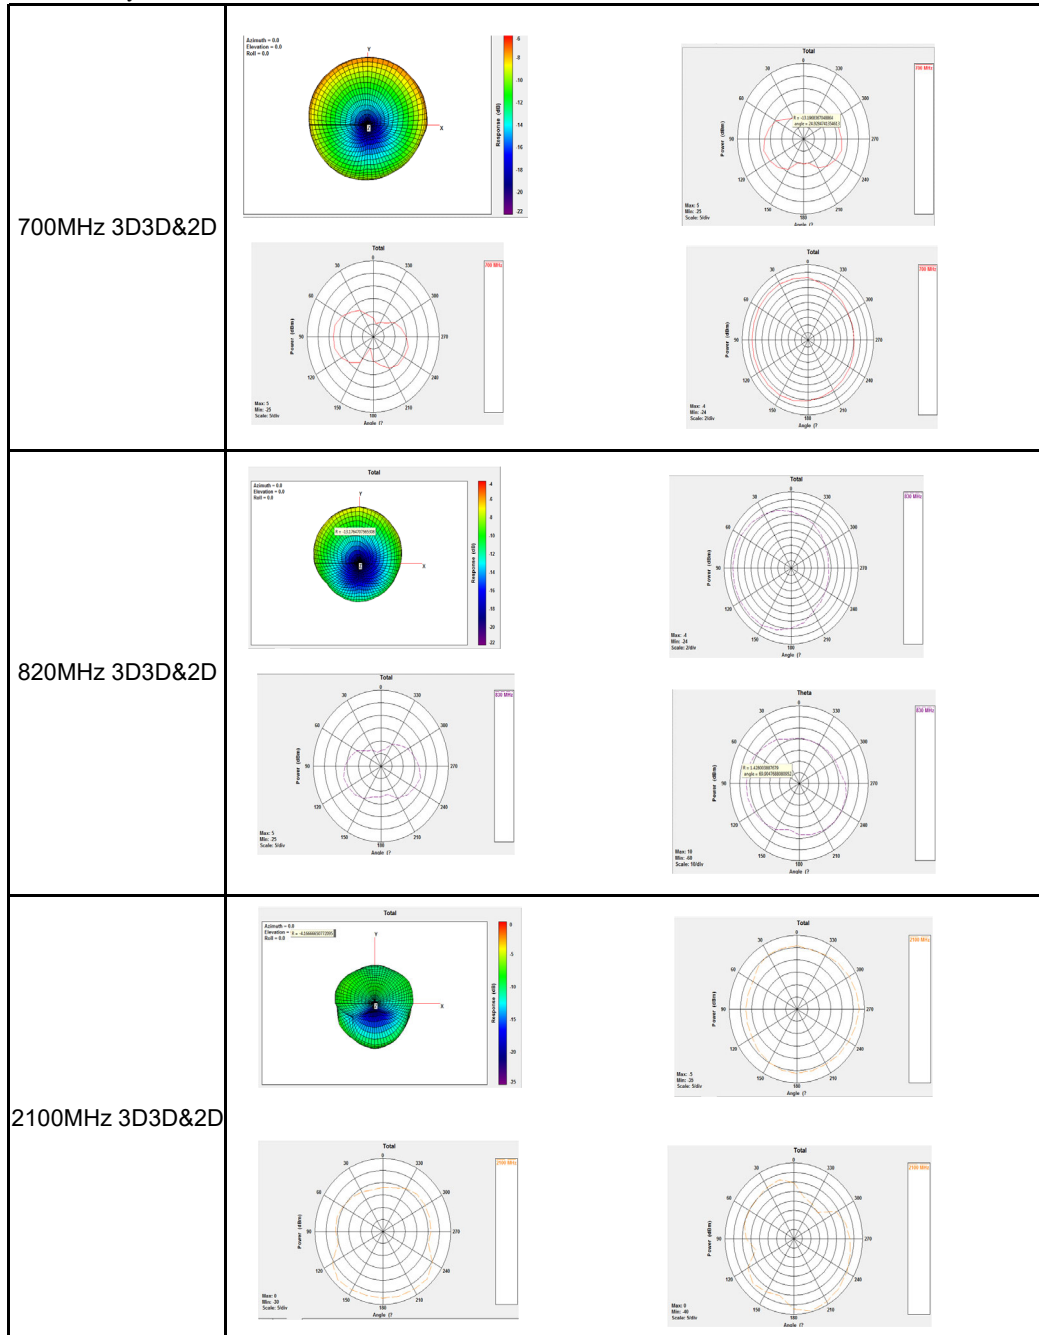













AAC Confidential Information

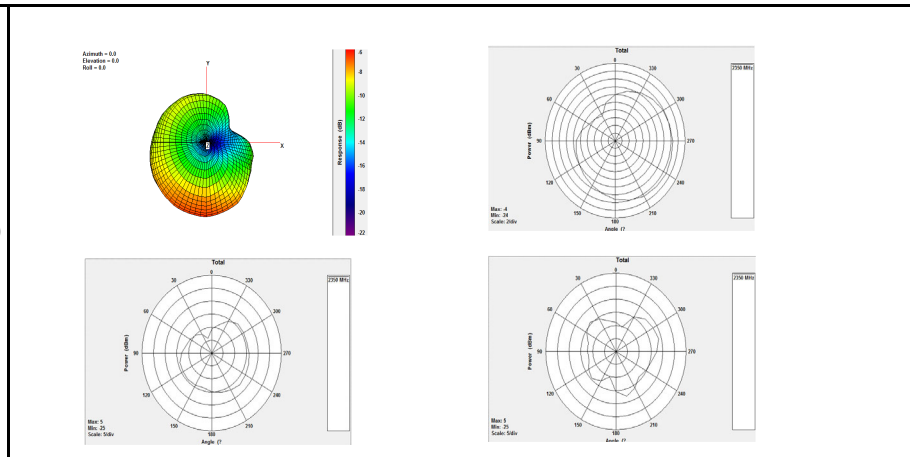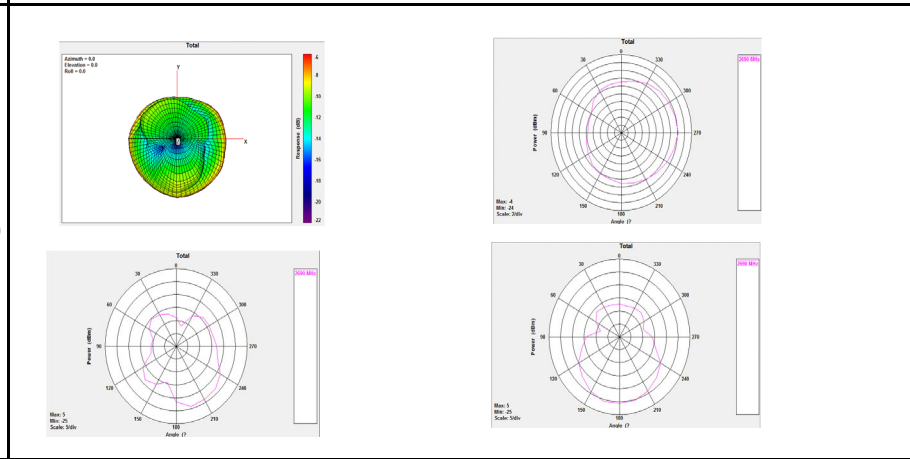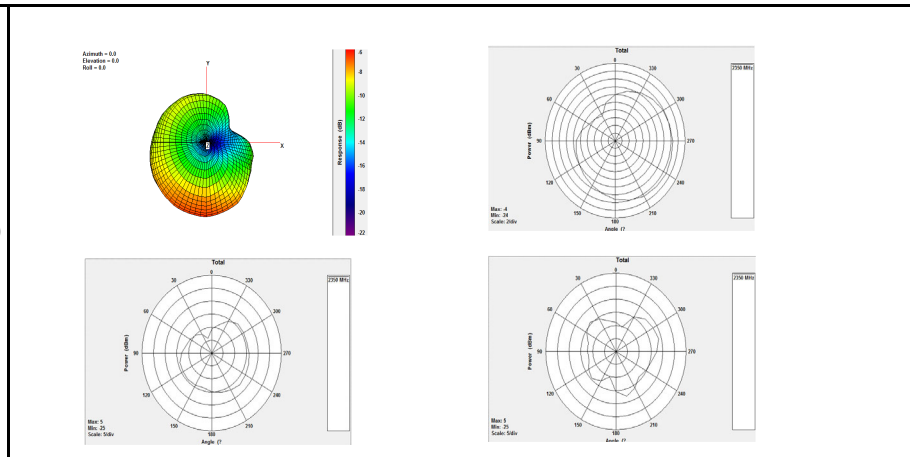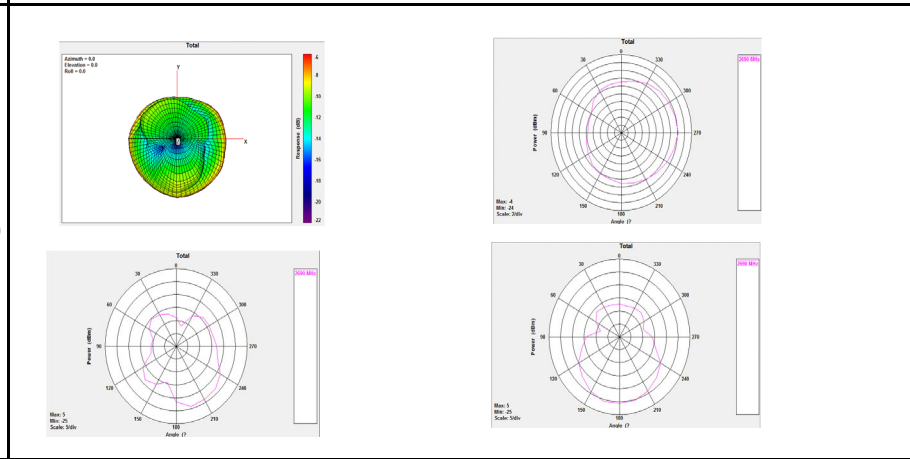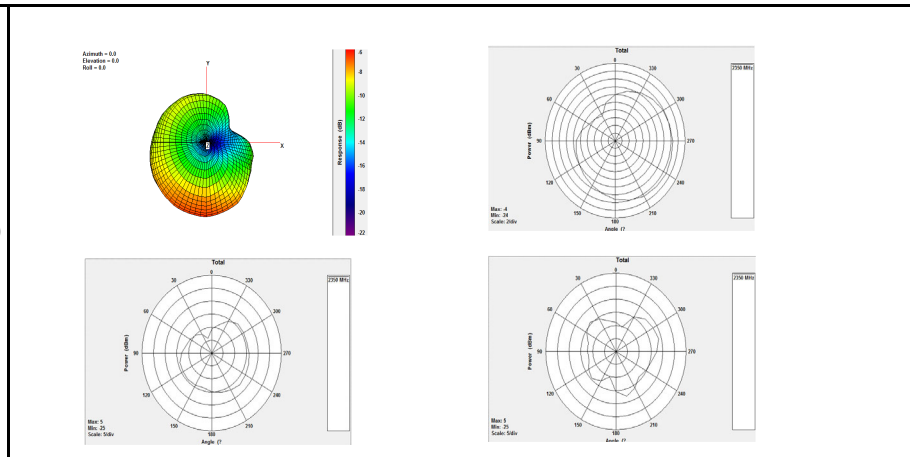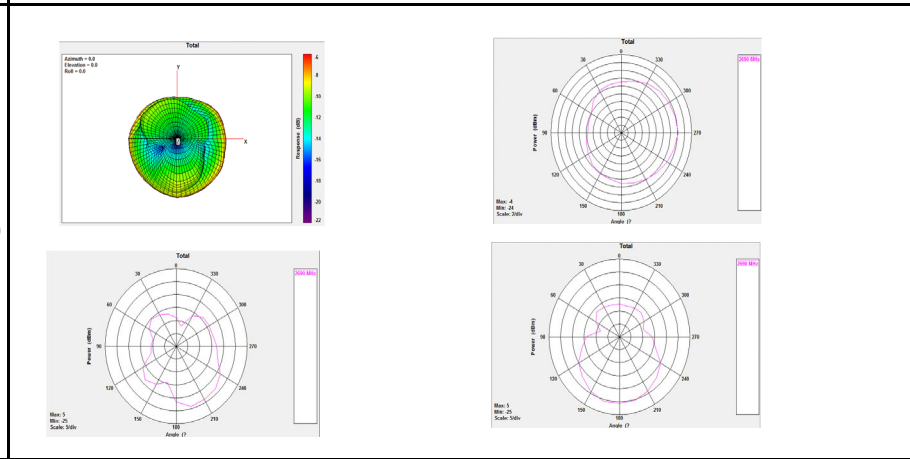 AAC ELECTRONICS CORP.	Product Specification	P/N	#REF!								
Diversity antenna:GSM900/1800,WCDMA band1,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;											
NO. 0	Issue: x3	Revision Date: 2023/9/20	Page: 14/22								
6.4 Radiation Pattern Diversity ant <table border="1"> <tbody> <tr> <td data-bbox="118 622 389 654"> 2350MHz 3D3D&2D </td><td colspan="3" data-bbox="389 409 1303 864">  </td></tr> <tr> <td data-bbox="118 1077 389 1108"> 2690MHz 3D3D&2D </td><td colspan="3" data-bbox="389 864 1303 1321">  </td></tr> </tbody> </table>				2350MHz 3D3D&2D				2690MHz 3D3D&2D			
2350MHz 3D3D&2D											
2690MHz 3D3D&2D											

AAC Confidential Information

 AAC ELECTRONICS CORP.		Product Specification	P/N	#REF!
Diversity antenna:GSM900/1800,WCDMA band1,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;				
NO.	0	Issue: x3	Revision Date: 2023/9/20	Page: 14/22
6.4 Radiation Pattern				
mimo ant				
1810MHz 3D3D&2D	Total Actual: -0.5 Desired: -0.5 Ref: -0.5  Reference (dB) Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0° Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0° Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0°			
	2690MHz 3D3D&2D	Total Actual: -0.5 Desired: -0.5 Ref: -0.5  Reference (dB) Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0° Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0° Total  Power (dBm) Max: 0 Min: -45 Scale: 5dB Angle: 0°		

AAC Confidential Information

 AAC ELECTRONICS CORP.	Product Specification	P/N	#REF!
GPS&WIFI antenna			
NO.	0	Issue: x3	Revision Date: 2023/9/20
Page: 15/22			
6.4 Radiation Pattern			
GPS&wifi ant			
GPS 3D	   		
WIFI 2450MHz	   		
WIFI 5450MHz	   		

 AAC ELECTRONICS CORP.		Product Specification		P/N		SPS1217H04ASM-FPC-09ANT																																																																																																																																																																																																																																																																																																									
Main antenna:GSM850/900/1800/1900,WCDMA band1/2/5/8,TD-SCDMA A/F,TDD-LTE band38/39/40/41,FDD-LTE band1/3/7;																																																																																																																																																																																																																																																																																																															
NO.	0	Issue:	x3	Revision Date	2023/9/20	Page:	16/22																																																																																																																																																																																																																																																																																																								
6.5 Efficiency																																																																																																																																																																																																																																																																																																															
main ant																																																																																																																																																																																																																																																																																																															
<table><tr><td>Freq.</td><td>Eff. (%)</td><td>Eff. (dB)</td><td>peak gain. (dB)</td></tr><tr><td>700</td><td>13%</td><td>-8.87</td><td>-5.57</td></tr><tr><td>710</td><td>14%</td><td>-8.59</td><td>-5.05</td></tr><tr><td>720</td><td>15%</td><td>-8.13</td><td>-4.71</td></tr><tr><td>730</td><td>17%</td><td>-7.65</td><td>-4.23</td></tr><tr><td>740</td><td>19%</td><td>-7.27</td><td>-4.10</td></tr><tr><td>750</td><td>19%</td><td>-7.26</td><td>-4.25</td></tr><tr><td>760</td><td>18%</td><td>-7.45</td><td>-4.43</td></tr><tr><td>770</td><td>17%</td><td>-7.79</td><td>-5.13</td></tr><tr><td>780</td><td>14%</td><td>-8.44</td><td>-5.74</td></tr><tr><td>790</td><td>12%</td><td>-9.19</td><td>-6.26</td></tr><tr><td>800</td><td>10%</td><td>-9.92</td><td>-7.05</td></tr><tr><td>810</td><td>8%</td><td>-10.95</td><td>-7.23</td></tr><tr><td>820</td><td>10%</td><td>-9.97</td><td>-6.43</td></tr><tr><td>830</td><td>12%</td><td>-9.25</td><td>-5.94</td></tr><tr><td>840</td><td>13%</td><td>-8.86</td><td>-5.66</td></tr><tr><td>850</td><td>13%</td><td>-8.71</td><td>-5.65</td></tr><tr><td>860</td><td>13%</td><td>-8.83</td><td>-5.89</td></tr><tr><td>870</td><td>13%</td><td>-8.97</td><td>-5.96</td></tr><tr><td>880</td><td>12%</td><td>-9.28</td><td>-6.77</td></tr><tr><td>890</td><td>11%</td><td>-9.70</td><td>-6.66</td></tr><tr><td>900</td><td>13%</td><td>-8.76</td><td>-5.74</td></tr><tr><td>910</td><td>14%</td><td>-8.60</td><td>-5.62</td></tr><tr><td>920</td><td>14%</td><td>-8.53</td><td>-5.32</td></tr><tr><td>930</td><td>12%</td><td>-9.05</td><td>-5.74</td></tr><tr><td>940</td><td>11%</td><td>-9.59</td><td>-6.09</td></tr><tr><td>950</td><td>10%</td><td>-10.13</td><td>-6.90</td></tr><tr><td>960</td><td>8%</td><td>-10.75</td><td>-7.19</td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td>1710</td><td>23%</td><td>-6.36</td><td>-3.2</td></tr><tr><td>1730</td><td>22%</td><td>-6.54</td><td>-3.3</td></tr><tr><td>1750</td><td>22%</td><td>-6.66</td><td>-3.3</td></tr><tr><td>1770</td><td>23%</td><td>-6.40</td><td>-2.9</td></tr><tr><td>1790</td><td>23%</td><td>-6.32</td><td>-2.8</td></tr><tr><td>1810</td><td>23%</td><td>-6.40</td><td>-2.9</td></tr><tr><td>1830</td><td>23%</td><td>-6.39</td><td>-2.8</td></tr><tr><td>1850</td><td>20%</td><td>-7.07</td><td>-4.1</td></tr></table>				Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)	700	13%	-8.87	-5.57	710	14%	-8.59	-5.05	720	15%	-8.13	-4.71	730	17%	-7.65	-4.23	740	19%	-7.27	-4.10	750	19%	-7.26	-4.25	760	18%	-7.45	-4.43	770	17%	-7.79	-5.13	780	14%	-8.44	-5.74	790	12%	-9.19	-6.26	800	10%	-9.92	-7.05	810	8%	-10.95	-7.23	820	10%	-9.97	-6.43	830	12%	-9.25	-5.94	840	13%	-8.86	-5.66	850	13%	-8.71	-5.65	860	13%	-8.83	-5.89	870	13%	-8.97	-5.96	880	12%	-9.28	-6.77	890	11%	-9.70	-6.66	900	13%	-8.76	-5.74	910	14%	-8.60	-5.62	920	14%	-8.53	-5.32	930	12%	-9.05	-5.74	940	11%	-9.59	-6.09	950	10%	-10.13	-6.90	960	8%	-10.75	-7.19					1710	23%	-6.36	-3.2	1730	22%	-6.54	-3.3	1750	22%	-6.66	-3.3	1770	23%	-6.40	-2.9	1790	23%	-6.32	-2.8	1810	23%	-6.40	-2.9	1830	23%	-6.39	-2.8	1850	20%	-7.07	-4.1	<table><tr><td>Freq.</td><td>Eff. (%)</td><td>Eff. (dB)</td><td>peak gain. (dB)</td></tr><tr><td>1870</td><td>22%</td><td>-6.6</td><td>-3.9</td></tr><tr><td>1890</td><td>23%</td><td>-6.4</td><td>-3.6</td></tr><tr><td>1910</td><td>23%</td><td>-6.3</td><td>-3.1</td></tr><tr><td>1930</td><td>23%</td><td>-6.3</td><td>-2.8</td></tr><tr><td>1950</td><td>24%</td><td>-6.2</td><td>-3.2</td></tr><tr><td>1970</td><td>24%</td><td>-6.3</td><td>-2.9</td></tr><tr><td>1990</td><td>24%</td><td>-6.1</td><td>-2.8</td></tr><tr><td>2010</td><td>26%</td><td>-5.8</td><td>-2.1</td></tr><tr><td>2030</td><td>26%</td><td>-5.9</td><td>-1.9</td></tr><tr><td>2050</td><td>25%</td><td>-5.9</td><td>-2.1</td></tr><tr><td>2070</td><td>24%</td><td>-6.1</td><td>-2.1</td></tr><tr><td>2090</td><td>23%</td><td>-6.3</td><td>-2.1</td></tr><tr><td>2110</td><td>21%</td><td>-6.8</td><td>-2.6</td></tr><tr><td>2130</td><td>20%</td><td>-6.9</td><td>-2.6</td></tr><tr><td>2150</td><td>20%</td><td>-7.0</td><td>-2.8</td></tr><tr><td>2170</td><td>19%</td><td>-7.2</td><td>-3.1</td></tr><tr><td>2300</td><td>25%</td><td>-6.0</td><td>-3.0</td></tr><tr><td>2320</td><td>25%</td><td>-6.0</td><td>-3.2</td></tr><tr><td>2340</td><td>23%</td><td>-6.3</td><td>-3.8</td></tr><tr><td>2360</td><td>22%</td><td>-6.6</td><td>-3.9</td></tr><tr><td>2380</td><td>22%</td><td>-6.6</td><td>-4.2</td></tr><tr><td>2400</td><td>20%</td><td>-6.9</td><td>-4.1</td></tr><tr><td>2500</td><td>27%</td><td>-5.7</td><td>-1.9</td></tr><tr><td>2520</td><td>28%</td><td>-5.5</td><td>-1.5</td></tr><tr><td>2540</td><td>29%</td><td>-5.3</td><td>-1.3</td></tr><tr><td>2560</td><td>30%</td><td>-5.2</td><td>-1.1</td></tr><tr><td>2580</td><td>30%</td><td>-5.2</td><td>-1.2</td></tr><tr><td>2600</td><td>29%</td><td>-5.3</td><td>-1.0</td></tr><tr><td>2620</td><td>30%</td><td>-5.2</td><td>-1.1</td></tr><tr><td>2640</td><td>30%</td><td>-5.2</td><td>-0.7</td></tr><tr><td>2660</td><td>30%</td><td>-5.3</td><td>-0.9</td></tr><tr><td>2680</td><td>30%</td><td>-5.3</td><td>-0.8</td></tr><tr><td>2690</td><td>30%</td><td>-5.28</td><td>-0.82</td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>				Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)	1870	22%	-6.6	-3.9	1890	23%	-6.4	-3.6	1910	23%	-6.3	-3.1	1930	23%	-6.3	-2.8	1950	24%	-6.2	-3.2	1970	24%	-6.3	-2.9	1990	24%	-6.1	-2.8	2010	26%	-5.8	-2.1	2030	26%	-5.9	-1.9	2050	25%	-5.9	-2.1	2070	24%	-6.1	-2.1	2090	23%	-6.3	-2.1	2110	21%	-6.8	-2.6	2130	20%	-6.9	-2.6	2150	20%	-7.0	-2.8	2170	19%	-7.2	-3.1	2300	25%	-6.0	-3.0	2320	25%	-6.0	-3.2	2340	23%	-6.3	-3.8	2360	22%	-6.6	-3.9	2380	22%	-6.6	-4.2	2400	20%	-6.9	-4.1	2500	27%	-5.7	-1.9	2520	28%	-5.5	-1.5	2540	29%	-5.3	-1.3	2560	30%	-5.2	-1.1	2580	30%	-5.2	-1.2	2600	29%	-5.3	-1.0	2620	30%	-5.2	-1.1	2640	30%	-5.2	-0.7	2660	30%	-5.3	-0.9	2680	30%	-5.3	-0.8	2690	30%	-5.28	-0.82												
Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)																																																																																																																																																																																																																																																																																																												
700	13%	-8.87	-5.57																																																																																																																																																																																																																																																																																																												
710	14%	-8.59	-5.05																																																																																																																																																																																																																																																																																																												
720	15%	-8.13	-4.71																																																																																																																																																																																																																																																																																																												
730	17%	-7.65	-4.23																																																																																																																																																																																																																																																																																																												
740	19%	-7.27	-4.10																																																																																																																																																																																																																																																																																																												
750	19%	-7.26	-4.25																																																																																																																																																																																																																																																																																																												
760	18%	-7.45	-4.43																																																																																																																																																																																																																																																																																																												
770	17%	-7.79	-5.13																																																																																																																																																																																																																																																																																																												
780	14%	-8.44	-5.74																																																																																																																																																																																																																																																																																																												
790	12%	-9.19	-6.26																																																																																																																																																																																																																																																																																																												
800	10%	-9.92	-7.05																																																																																																																																																																																																																																																																																																												
810	8%	-10.95	-7.23																																																																																																																																																																																																																																																																																																												
820	10%	-9.97	-6.43																																																																																																																																																																																																																																																																																																												
830	12%	-9.25	-5.94																																																																																																																																																																																																																																																																																																												
840	13%	-8.86	-5.66																																																																																																																																																																																																																																																																																																												
850	13%	-8.71	-5.65																																																																																																																																																																																																																																																																																																												
860	13%	-8.83	-5.89																																																																																																																																																																																																																																																																																																												
870	13%	-8.97	-5.96																																																																																																																																																																																																																																																																																																												
880	12%	-9.28	-6.77																																																																																																																																																																																																																																																																																																												
890	11%	-9.70	-6.66																																																																																																																																																																																																																																																																																																												
900	13%	-8.76	-5.74																																																																																																																																																																																																																																																																																																												
910	14%	-8.60	-5.62																																																																																																																																																																																																																																																																																																												
920	14%	-8.53	-5.32																																																																																																																																																																																																																																																																																																												
930	12%	-9.05	-5.74																																																																																																																																																																																																																																																																																																												
940	11%	-9.59	-6.09																																																																																																																																																																																																																																																																																																												
950	10%	-10.13	-6.90																																																																																																																																																																																																																																																																																																												
960	8%	-10.75	-7.19																																																																																																																																																																																																																																																																																																												
1710	23%	-6.36	-3.2																																																																																																																																																																																																																																																																																																												
1730	22%	-6.54	-3.3																																																																																																																																																																																																																																																																																																												
1750	22%	-6.66	-3.3																																																																																																																																																																																																																																																																																																												
1770	23%	-6.40	-2.9																																																																																																																																																																																																																																																																																																												
1790	23%	-6.32	-2.8																																																																																																																																																																																																																																																																																																												
1810	23%	-6.40	-2.9																																																																																																																																																																																																																																																																																																												
1830	23%	-6.39	-2.8																																																																																																																																																																																																																																																																																																												
1850	20%	-7.07	-4.1																																																																																																																																																																																																																																																																																																												
Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)																																																																																																																																																																																																																																																																																																												
1870	22%	-6.6	-3.9																																																																																																																																																																																																																																																																																																												
1890	23%	-6.4	-3.6																																																																																																																																																																																																																																																																																																												
1910	23%	-6.3	-3.1																																																																																																																																																																																																																																																																																																												
1930	23%	-6.3	-2.8																																																																																																																																																																																																																																																																																																												
1950	24%	-6.2	-3.2																																																																																																																																																																																																																																																																																																												
1970	24%	-6.3	-2.9																																																																																																																																																																																																																																																																																																												
1990	24%	-6.1	-2.8																																																																																																																																																																																																																																																																																																												
2010	26%	-5.8	-2.1																																																																																																																																																																																																																																																																																																												
2030	26%	-5.9	-1.9																																																																																																																																																																																																																																																																																																												
2050	25%	-5.9	-2.1																																																																																																																																																																																																																																																																																																												
2070	24%	-6.1	-2.1																																																																																																																																																																																																																																																																																																												
2090	23%	-6.3	-2.1																																																																																																																																																																																																																																																																																																												
2110	21%	-6.8	-2.6																																																																																																																																																																																																																																																																																																												
2130	20%	-6.9	-2.6																																																																																																																																																																																																																																																																																																												
2150	20%	-7.0	-2.8																																																																																																																																																																																																																																																																																																												
2170	19%	-7.2	-3.1																																																																																																																																																																																																																																																																																																												
2300	25%	-6.0	-3.0																																																																																																																																																																																																																																																																																																												
2320	25%	-6.0	-3.2																																																																																																																																																																																																																																																																																																												
2340	23%	-6.3	-3.8																																																																																																																																																																																																																																																																																																												
2360	22%	-6.6	-3.9																																																																																																																																																																																																																																																																																																												
2380	22%	-6.6	-4.2																																																																																																																																																																																																																																																																																																												
2400	20%	-6.9	-4.1																																																																																																																																																																																																																																																																																																												
2500	27%	-5.7	-1.9																																																																																																																																																																																																																																																																																																												
2520	28%	-5.5	-1.5																																																																																																																																																																																																																																																																																																												
2540	29%	-5.3	-1.3																																																																																																																																																																																																																																																																																																												
2560	30%	-5.2	-1.1																																																																																																																																																																																																																																																																																																												
2580	30%	-5.2	-1.2																																																																																																																																																																																																																																																																																																												
2600	29%	-5.3	-1.0																																																																																																																																																																																																																																																																																																												
2620	30%	-5.2	-1.1																																																																																																																																																																																																																																																																																																												
2640	30%	-5.2	-0.7																																																																																																																																																																																																																																																																																																												
2660	30%	-5.3	-0.9																																																																																																																																																																																																																																																																																																												
2680	30%	-5.3	-0.8																																																																																																																																																																																																																																																																																																												
2690	30%	-5.28	-0.82																																																																																																																																																																																																																																																																																																												

AAC Confidential Information

AAC Confidential Information



Diversity antenna: GSM900/1800, WCDMA band1, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band1/3/7;

NO. 0 Issue: x3 Revision Date 2023/9/20 Page: 17/22


6.5 Efficiency

Diversity ant

Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)
700	11%	-9.5	-6.2
710	12%	-9.2	-5.8
720	13%	-8.8	-5.5
730	14%	-8.5	-5.2
740	14%	-8.5	-5.2
750	13%	-8.7	-5.4
760	13%	-8.9	-5.5
770	13%	-8.8	-5.8
780	13%	-8.8	-6.2
790	12%	-9.2	-6.5
800	11%	-9.6	-6.6
810	12%	-9.3	-6.4
820	12%	-9.0	-5.9
830	13%	-9.0	-5.8
840	12%	-9.1	-5.8
850	12%	-9.1	-5.7
860	12%	-9.2	-5.7
870	11%	-9.5	-5.9
880	11%	-9.7	-5.9
890	11%	-9.5	-6.0
900	13%	-8.9	-5.4
910	13%	-8.9	-5.2
920	12%	-9.1	-5.3
930	12%	-9.2	-5.6
940	11%	-9.5	-5.8
950	10%	-10.0	-6.2
960	9%	-10.3	-6.6
1710	17%	-7.6	-3.0
1730	17%	-7.6	-2.9
1750	17%	-7.7	-3.0
1770	17%	-7.8	-3.2
1790	16%	-7.9	-3.3
1810	17%	-7.7	-3.3
1830	17%	-7.6	-3.4
1850	17%	-7.8	-3.4

Freq.	Eff. (%)	Eff. (dB)	peak gain.
1870	16%	-7.8	-1.2
1890	17%	-7.8	-0.8
1910	17%	-7.7	-0.6
1930	18%	-7.5	-0.4
1950	18%	-7.4	-0.2
1970	18%	-7.4	-0.2
1990	18%	-7.6	-0.3
2010	18%	-7.5	-0.2
2030	18%	-7.5	-0.1
2050	17%	-7.6	-0.2
2070	17%	-7.6	0.0
2090	17%	-7.7	-0.2
2110	16%	-7.9	-0.4
2130	16%	-7.9	-0.4
2150	15%	-8.1	-0.6
2170	15%	-8.2	-0.6
2310	21%	-6.8	-0.7
2330	21%	-6.8	-0.6
2350	22%	-6.7	-0.2
2370	22%	-6.6	-0.2
2390	22%	-6.6	0.0
2410	22%	-6.5	0.1
2430	23%	-6.4	0.4
2450	24%	-6.2	0.9
2470	25%	-6.1	1.1
2490	25%	-5.9	1.3
2510	25%	-6.1	1.2
2530	24%	-6.1	1.3
2550	25%	-6.1	1.5
2570	24%	-6.2	1.2
2590	24%	-6.2	1.1
2610	23%	-6.3	1.1
2630	22%	-6.6	0.9
2650	21%	-6.8	0.8
2670	20%	-7.1	0.5
2690	19%	-7.2	0.5

AAC Confidential Information



P/N

#REF!

NO.	0	Issue:	x3	Revision Date	2023/9/20	Page:	17/22
-----	---	--------	----	---------------	-----------	-------	-------

MIMO ant

Freq.	Eff. (%)	Eff. (dB)	peak gain. (dB)
1800	11%	-9.4	-5.4
1820	12%	-9.1	-5.2
1840	13%	-8.9	-5.0
1860	13%	-8.7	-5.0
1880	14%	-8.5	-4.7
1900	15%	-8.3	-4.5
1920	15%	-8.1	-4.3
1940	16%	-7.9	-3.9
1960	17%	-7.7	-3.8
1980	17%	-7.7	-3.8
2000	17%	-7.7	-3.6
2020	17%	-7.6	-3.5
2040	17%	-7.7	-3.4
2060	17%	-7.7	-3.2
2080	16%	-7.8	-3.2
2100	16%	-7.9	-3.2
2120	17%	-7.8	-3.1
2140	16%	-7.9	-3.2
2160	16%	-7.9	-3.2
2180	17%	-7.7	-3.0
2200	17%	-7.7	-2.8
2220	18%	-7.4	-2.6
2240	19%	-7.1	-2.4
2260	19%	-7.1	-2.3
2280	20%	-7.0	-2.3
2300	20%	-6.9	-2.0
2320	20%	-7.0	-2.3
2340	20%	-6.9	-2.3
2360	21%	-6.8	-2.1
2380	20%	-6.9	-2.5
2400	20%	-7.0	-2.5
2420	19%	-7.2	-2.9
2440	18%	-7.4	-3.4
2460	17%	-7.7	-3.6
2480	17%	-7.7	-3.8
2500	16%	-7.8	-4.0

[illegible]

The information contained in this document is PROPRIENTARY to AAC Inc. and shall not be reproduced or used in part or whole without AAC's written consent.

 AAC ELECTRONICS CORP.		Product Specification			P/N	#REF!
NO.	0	Issue:	x3	Revision Date	2023/9/20	Page: 18/22
6.5 Efficiency						
GPS/BT/WIFI ant						
Frequency/MHZ	Efficiency	Efficiency .	Peak Gain. dB			
1555	26%	-5.81	-0.87			
1560	27%	-5.73	-0.94			
1565	27%	-5.74	-1.07			
1570	27%	-5.73	-1.39			
1575	28%	-5.57	-0.79			
1580	28%	-5.60	-1.18			
1585	26%	-5.81	-1.66			
1590	27%	-5.67	-1.26			
2412	28%	-5.53	0.38			
2417	29%	-5.44	0.57			
2422	29%	-5.33	0.56			
2427	29%	-5.44	0.46			
2432	28%	-5.49	0.38			
2437	27%	-5.62	0.18			
2442	27%	-5.67	-1.26			
2447	26%	-5.86	-1.42			
2452	26%	-5.81	-0.20			
2457	25%	-5.99	-0.67			
2462	25%	-6.09	-0.96			
2467	24%	-6.20	-1.18			
2472	23%	-6.43	-1.60			
5150	19%	-7.13	-1.72			
5200	20%	-6.96	-1.56			
5250	21%	-6.71	-1.51			
5300	22%	-6.57	-1.25			
5350	21%	-6.83	-1.50			
5400	21%	-6.88	-1.83			
5450	21%	-6.79	-1.75			
5500	20%	-7.08	-1.98			
5550	19%	-7.16	-2.58			
5600	20%	-6.94	-2.43			
5650	21%	-6.80	-2.21			
5700	21%	-6.68	-2.20			
5750	23%	-6.44	-1.97			
5800	23%	-6.37	-1.89			
5850	24%	-6.29	-1.79			



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band1/3/7;

NO. 0 Issue: x3 Revision Date 2023/9/20 Page: 19/22

7. Active Measurement Data

Band	channel	TRP	TIS
GSM850	128	23.8	-103.0
	190	24.6	-102.9
	251	24.8	-101.7
GSM900	975	23.7	-103.1
	37	24.8	-102.9
	124	24.8	-101.4
DCS	512	23.6	-105.7
	698	24.8	-105.8
	885	24.2	-104.7
PCS	512	23.9	-105.1
	661	23.6	-105.2
	810	23.1	-103.4

Band	channel	TRP	TIS	Band	channel	TRP	TIS
WCDMA band 1	9612	17.6	-106.1	WCDMA band 4	1312	19.6	-106.5
	9750	17.8	-106.7		1412	18.6	-105.8
	9888	18.1	-105.8		1513	17.5	-104.4
WCDMA band 2	9262	18.1	-107.4				
	9400	18.3	-106.6				
	9538	17.7	-105.6				
WCDMA band 5	4132	15.8	-105.4				
	4183	16.2	-105.6				
	4233	16.3	-105.2				
WCDMA band 8	2712	15.9	-105.8				
	2788	15.9	-105.2				
	2863	16.0	-104.4				

AAC Confidential Information

7.Active Measurement Data

Band	channel	TRP	TIS	Band	channel	TRP	TIS
LTE 38	37850	20.1	-91.1	LTE 40	38750	18.6	-91.0
	38000	19.8	-91.2		39150	18.9	-91.6
	38150	18.7	-92.4		39550	17.9	-91.4
LTE 41	39750	18.6	-90.7				
	40620	18.9	-91.3				
	41490	17.6	-91.7				

Band	channel	TRP	TIS	Band	channel	TRP	TIS
LTE 1	18050	18.3	-94.5	LTE 7	20750	19.4	-94.2
	18300	17.9	-94.2		21100	19.6	-94.8
	18549	18.4	-93.8		21449	18.6	-94.5
LTE 2	18650	18.0	-94.6	LTE 8	21500	14.5	-92.5
	18900	17.8	-94.4		21625	14.9	-92.0
	19150	17.3	-93.9		21750	14.8	-91.5
LTE 3	19250	18.4	-98.0	LTE 28	27260	16.5	-90.7
	19575	18.9	-97.2		27435	16.3	-90.3
	19900	19.0	-95.8		27610	15.3	-91.0
LTE 4	20000	18.0	-91.4				
	20175	18.7	-91.4				
	20350	19.0	-91.5				
LTE 5	20450	15.3	-92.0				
	20525	15.1	-91.3				
	20600	14.3	-91.1				

8. Antenna measurement spec on RF test jig

Test band	Reference frequency(MHz)	Spec(MHz)
MAIN	818/842	± 10
	1719/1772	± 20
	2502/2595	± 20
diversity	1463/1545	± 20
	2124/2209	± 20
GPS&WIFI2.4	1439/1479	± 20
	2229/2335	± 20



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE band1/3/

NO. #REF! Issue: #REF! Revision Date 2023/9/20 Page: 21/22

7. Active Measurement Data

GPS/BT/WIFI ant

Band	channel	TRP	TIS
WIFI G	1	13.6	-69.2
	6	13.8	-69.3
	11	13.7	-68.2
WIFI A	44	11.9	-68.1
	60	12.7	-68.4
	157	11.5	-68.5

8. Antenna measurement spec on RF test jig

Test band	Reference frequency(MHz)	Spec(MHz)
MAIN	818/842	± 10
	1719/1772	± 20
	2502/2595	± 20
diversity	1463/1545	± 20
	2124/2209	± 20
GPS&WIFI2	1439/1479	± 20
	2229/2335	± 20



Main antenna: GSM850/900/1800/1900, WCDMA band1/2/5/8, TD-SCDMA A/F, TDD-LTE band38/39/40/41, FDD-LTE b

NO.

0

Issue: x3

Revision Date: 2023/9/20

Page: 22/22

9. Mechanical Layout and Dimensions

9.1 Antenna holder mechanical layout and dimensions

** RL spec presented in the table is only valid in AAC measurement condition. The measurement result can be different according to measurement conditions such as place, cable, tester and network analyzer etc. If the measurement condition is changed, make sure that reference frequency should be adjusted again by the provided reference antenna.

AAC Confidential Information